

DATE		02/08/2006		Columbia County Building Permit This Permit Expires One Year From the Date of Issue				PERMIT		000024121	
APPLICANT		ROY SMITH				PHONE		935.1429			
ADDRESS		10161		TOPSAIL AVENUE		ENGLEWOOD		FL		34224	
OWNER		JOSEPH MARINOLA				PHONE		935.1429			
ADDRESS		124		SW BOUNDARY WAY		FT. WHITE		FL		32038	
CONTRACTOR		WENDELL CREWS				PHONE		352.351.6100			
LOCATION OF PROPERTY		47-S TO US 27,TR TO UTAH,TL TO ROBERTS RD,TL TO KENTUCKY,TR BOUNDARY,TL AND IT'S THE 1ST. PROPERTY ON R.									
TYPE DEVELOPMENT		M/H/UTILITY				ESTIMATED COST OF CONSTRUCTION				0.00	
HEATED FLOOR AREA						TOTAL AREA		HEIGHT		STORIES	
FOUNDATION						WALLS		ROOF PITCH		FLOOR	
LAND USE & ZONING		A-3				MAX. HEIGHT					
Minimum Set Back Requirments:		STREET-FRONT		30.00		REAR		25.00		SIDE 25.00	
NO. EX.D.U.		0		FLOOD ZONE		XPP		DEVELOPMENT PERMIT NO.			
PARCEL ID		24-6S-15-01438-120				SUBDIVISION		3 RIVERS ESTATES			
LOT		20		BLOCK		5		PHASE		UNIT 23	
						TOTAL ACRES		0.73			
000000965		✓ <i>Ry. Smith</i>									
Culvert Permit No.		Culvert Waiver		Contractor's License Number				Applicant/Owner/Contractor			
WAIVER		06-0097-N		BLK				JTH			
Driveway Connection		Septic Tank Number		LU & Zoning checked by				Approved for Issuance		New Resident	
COMMENTS:		1 FOOT ABOVE ROAD									
		Check # or Cash 9423									
FOR BUILDING & ZONING DEPARTMENT ONLY											
(footer/Slab)											
Temporary Power		Foundation				Monolithic					
		date/app. by				date/app. by		date/app. by			
Under slab rough-in plumbing		Slab				Sheathing/Nailing					
		date/app. by				date/app. by		date/app. by			
Framing		Rough-in plumbing above slab and below wood floor									
		date/app. by						date/app. by			
Electrical rough-in		Heat & Air Duct				Peri. beam (Lintel)					
		date/app. by				date/app. by		date/app. by			
Permanent power		C.O. Final				Culvert					
		date/app. by				date/app. by		date/app. by			
M/H tie downs, blocking, electricity and plumbing						Pool					
		date/app. by				date/app. by		date/app. by			
Reconnection		Pump pole				Utility Pole					
		date/app. by				date/app. by		date/app. by			
M/H Pole		Travel Trailer				Re-roof					
		date/app. by				date/app. by		date/app. by			
BUILDING PERMIT FEE \$		0.00		CERTIFICATION FEE \$		0.00		SURCHARGE FEE \$		0.00	
MISC. FEES \$		200.00		ZONING CERT. FEE \$		50.00		FIRE FEE \$		47.36	
WASTE FEE \$		98.00		FLOOD DEVELOPMENT FEE \$		FLOOD ZONE FEE \$		25.00		CULVERT FEE \$	
								TOTAL FEE		420.36	
INSPECTORS OFFICE						CLERKS OFFICE					
NOTICE: IN ADDITION TO THE REQUIREMENTS OF THIS PERMIT, THERE MAY BE ADDITIONAL RESTRICTIONS APPLICABLE TO THIS PROPERTY THAT MAY BE FOUND IN THE PUBLIC RECORDS OF THIS COUNTY. AND THERE MAY BE ADDITIONAL PERMITS REQUIRED FROM OTHER GOVERNMENTAL ENTITIES SUCH AS WATER MANAGEMENT DISTRICTS, STATE AGENCIES, OR FEDERAL AGENCIES.											
"WARNING TO OWNER: YOUR FAILURE TO RECORD A NOTICE OF COMMENCEMENT MAY RESULT IN YOUR PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR AN ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT."											
This Permit Must Be Prominently Posted on Premises During Construction											
PLEASE NOTIFY THE COLUMBIA COUNTY BUILDING DEPARTMENT AT LEAST 24 HOURS IN ADVANCE OF EACH INSPECTION, IN ORDER THAT IT MAY BE MADE WITHOUT DELAY OR INCONVENIENCE, PHONE 758-1008. THIS PERMIT IS NOT VALID UNLESS THE WORK AUTHORIZED BY IT IS COMMENCED WITHIN 6 MONTHS AFTER ISSUANCE.											
The Issuance of this Permit Does Not Waive Compliance by Permittee with Deed Restrictions.											

called
2/7/06
G

PERMIT APPLICATION / MANUFACTURED HOME INSTALLATION APPLICATION

For Office Use Only (Revised 5-23-03) Zoning Official BLK 0702d Building Official OK JTH 2-6-06
AP# 0601-85 Date Received 1-31-06 By G Permit # 965/24121
Flood Zone X PER RIVER MAP Development Permit N/A Zoning A-3 Land Use Plan Map Category A-3
Comments _____

FEMA Map# _____ Elevation _____ Finished Floor _____ River _____ In Floodway _____
☒ Site Plan with Setbacks Show: ☒ EH Signed Site Plan ☐ EH Release ☐ Well letter ☐ Existing well
☒ Copy of Recorded Deed or Affidavit from land owner ☐ Letter of Authorization from installer

- Property ID # 00-00-00-01438-120 3 Rivers Est. Lot 20, Blk 5 Unit 23 Must have a copy of the property deed
- New Mobile Home ☒ Used Mobile Home _____ Year 2006
- Applicant Joseph Marinola / Roy Smith Phone # 935-1429
- Address 10161 Topsail Ave. Englewood, FL 34224
- Name of Property Owner Joseph Marinola Phone # 935-1429
- 911 Address 124 SW BOUNDARY WAY, FT. WHITE 32038
- Circle the correct power company - FL Power & Light - Clay Electric
(Circle One) - Suwannee Valley Electric - Progress Energy
- Name of Owner of Mobile Home Joseph Marinola Phone # 935-1429
Address 10161 Topsail Ave.
- Relationship to Property Owner OWNER
- Current Number of Dwellings on Property NONE
- Lot Size 230 100 X 324 Total Acreage .730
- Do you: Have an Existing Drive or need a Culvert Permit or a Culvert Waiver (Circle one)
- Is this Mobile Home Replacing an Existing Mobile Home NO
- Driving Directions to the Property Hwy 47 South to Hwy 27 Turn Right
GO TO WALK TURN LEFT GO TO ROBERTS TURN LEFT GO TO KENTUCKY
TURN RIGHT GO TO BOUNDARY TURN LEFT 1ST PAVEMENT RIGHT.
- Name of Licensed Dealer/Installer Wendell Crews Phone # 352/351-6100
- Installers Address 5711 NE 25th Ave Ocala, FL 34479
- License Number TH0000679 Installation Decal # 264149

CK# 9423
CK# 9424

(# 06-0097-N)



Columbia County Property Appraiser

J. Doyle Crews, CFA - Lake City, Florida - 386-758-1083

PARCEL: 00-00-00-01438-120 - VACANT (000000)

LOT 20 BLOCK 5 UNIT 23 THREE RIVERS ESTATES. ORB 839-2416, WD 1012-911.

Name: MARINOLA JOSEPH D & LEONARDA A

Site:

Mail: 10161 TOPSAIL AVE
ENGLEWOOD, FL 34224

Sales Info: 4/30/2004 \$7,000.00 V / U
4/13/2004 \$5,000.00 V / U
5/20/1997 \$7,200.00 V / U

LandVal	\$5,100.00
BldgVal	\$0.00
ApprVal	\$5,100.00
JustVal	\$5,100.00
Assd	\$5,100.00
Exmpt	\$0.00
Taxable	\$5,100.00

0 240 480 720 ft



This information, GIS Map Updated: 8/3/2005, was derived from data which was compiled by the Columbia County Property Appraiser Office solely for the governmental purpose of property assessment. This information should not be relied upon by anyone as a determination of the ownership of property or market value. No warranties, expressed or implied, are provided for the accuracy of the data herein, its use, or its interpretation. Although it is periodically updated, this information may not reflect the data currently on file in the Property Appraiser's office. The assessed values are NOT certified values and therefore are subject to change before being finalized for ad valorem assessment purposes.

@ CAM112M01 S CamaUSA Appraisal System
 1/31/2006 15:06 Legal Description Maintenance
 Year T.Property * PRIOR YEAR * Sel
 2005 R 00-00-00-01438-120

Columbia County
 5100 Land 001 *
 AG 000
 Bldg 000
 Xfea 000

CC
 MARINOLA JOSEPH D & LEONARDA A

5100 TOTAL B

1	LOT 20 BLOCK 5 UNIT 23 THREE	RIVERS ESTATES.	2
3	ORB '839-2416, WD '1012-911,	WD '1013-2768.	4
5			6
7			8
9			10
11			12
13			14
15			16
17			18
19			20
21			22
23			24
25			26
27			28


Mnt '5/04/2004' KYLIE

F1=Task F3=Exit F4=Prompt F10=GoTo PgUp/PgDn F24=More

5

1-384-935-1459

← 100 →

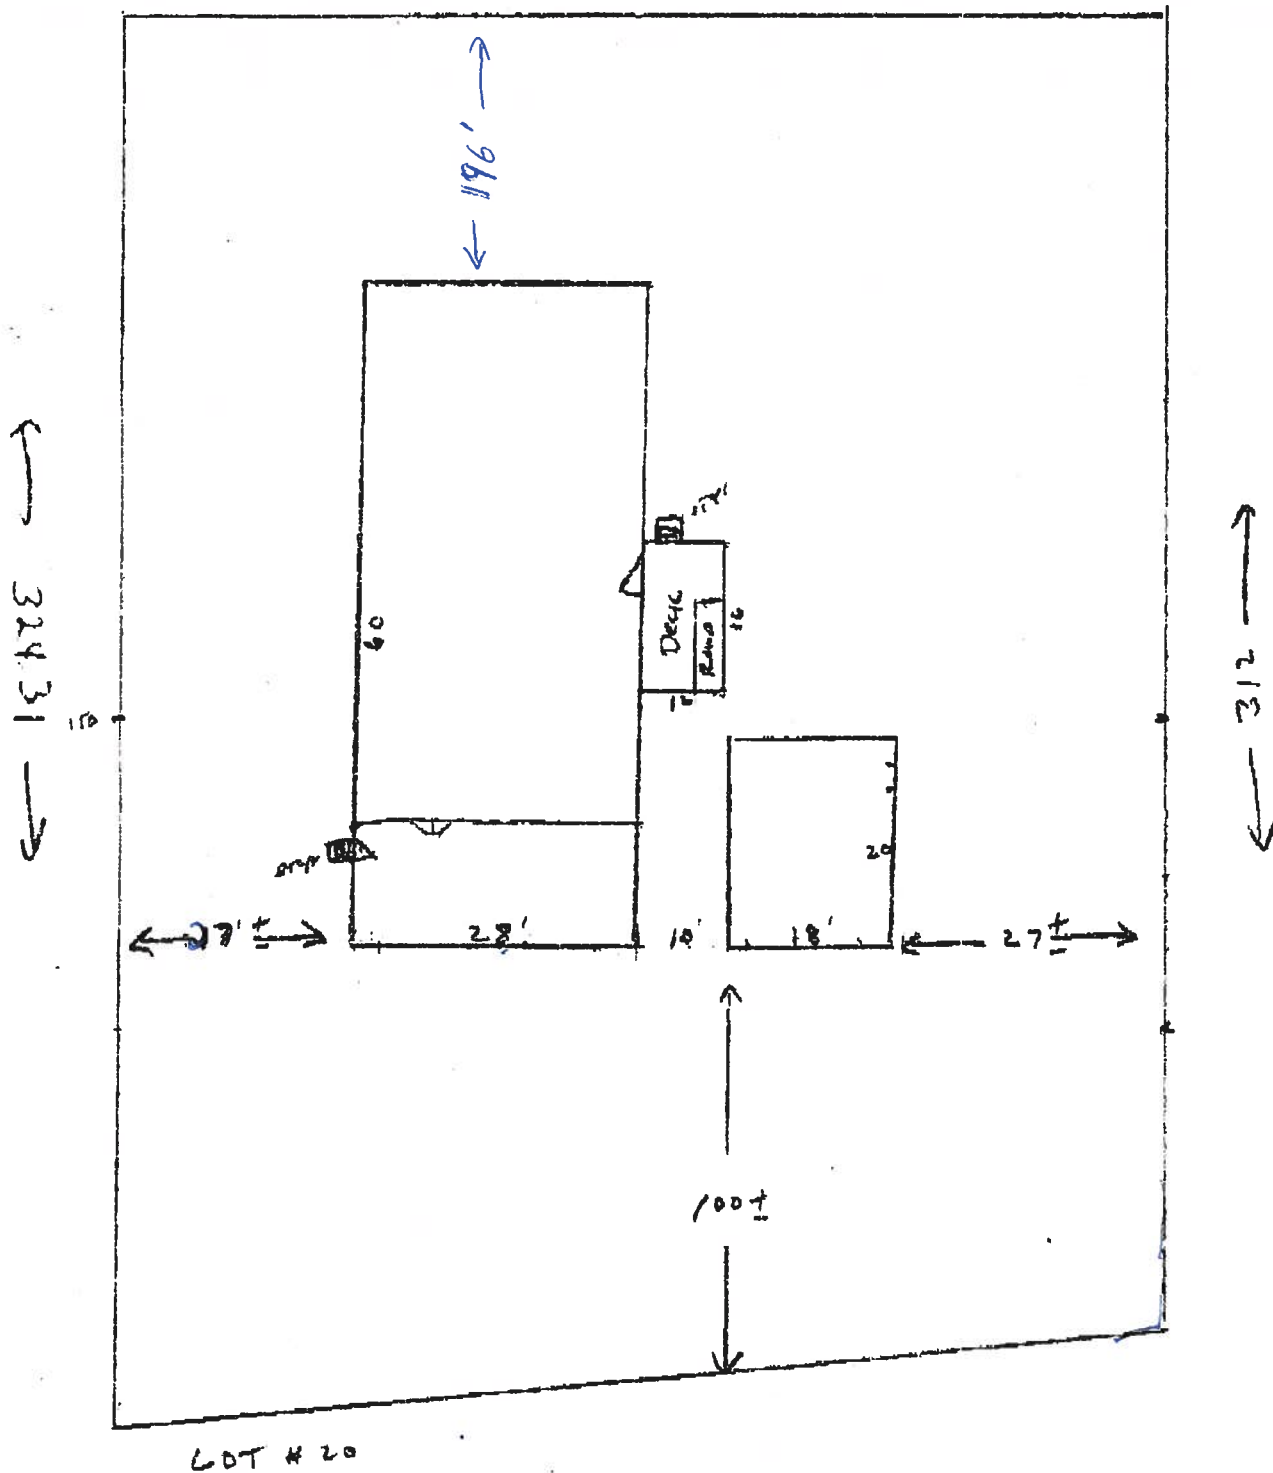

APPROXIMATE NOT TO SCALE


THANK YOU > JOE MARINOLA

**STATE OF FLORIDA
DEPARTMENT OF HEALTH
APPLICATION FOR ONSITE SEWAGE DISPOSAL SYSTEM CONSTRUCTION PERMIT**

Permit Application Number _____

----- PART II - SITEPLAN -----

Scale: Each block represents ^{20'}~~10~~ feet and ^{80'}1 inch = 40 feet.

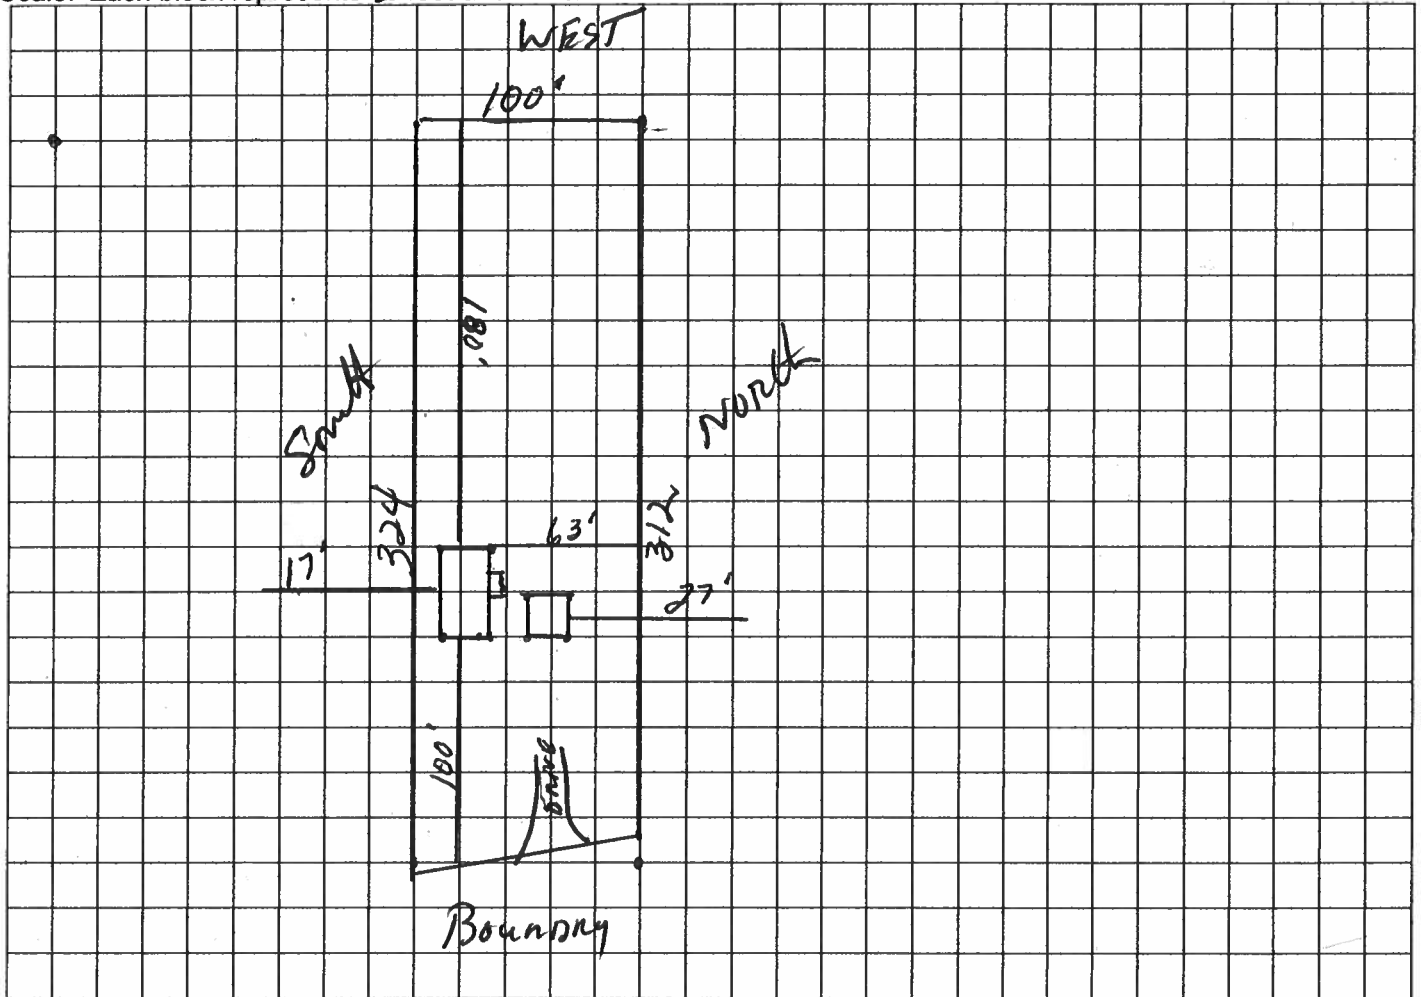

Notes: _____ .74

Site Plan submitted by: _____

Plan Approved _____ Not Approved _____ Date _____

By _____ County Health Department

ALL CHANGES MUST BE APPROVED BY THE COUNTY HEALTH DEPARTMENT

Central Dozer Service, Inc.

5711 NE 25th Ave.

Ocala, FL 34479

352-351-6100 off.

352-351-6103 fax

I, Wendell Crews, license # IH0000629 do hereby grant permission for
Roy Smith to sign and obtain permits in my behalf for
customer Margaret located in Columbia County,
for the purpose of setting up a manufactured home.

Wendell Crews
Wendell Crews

Signed this 26 day of January 2008
by Wendell Crews who is personally known.

Sandra Ellen Hall
Notary Public



SANDRA ELLEN HALL
MY COMMISSION # DD 215170
EXPIRES: June 20, 2007
Bonded thru Budget Notary Services

07/15/2004 11:13

3867582160

BLDG AND ZONING

PAGE 07

PERMIT NUMBER

PERMIT WORKSHEET

page 2 of 2

POCKET PENETROMETER TEST

The pocket penetrometer tests are recorded down to _____ psi or check here to declare 1000 lb. soil ☒ without testing.

X

X

X

POCKET PENETROMETER TESTING METHOD

1. Test the perimeter of the home at 8 locations.
2. Take the reading at the depth of the footer.
3. Using 500 lb. increments, take the lowest reading and round down to that increment.

X

X

X

TORQUE PROBE TEST

The results of the torque probe test is _____ foot pounds or check here if you are declaring 5' anchors without testing. A test showing 275 foot pounds or less will require 4 foot anchors.

Note: A slate approved lateral arm system is being used and 4 ft. anchors are allowed at the sidewall locations. 1 Underlaid 5 ft. anchors are required at all cantilever the points where the torque test reading is 275 or less and where the mobile frame manufacturer may require anchors with 4000 lb. holding capacity.

WCC Installer's initials

ALL TESTS MUST BE PERFORMED BY A LICENSED INSTALLER

Installer Name

Michael Adams

Date Tested

1/26/06

Electrical

Connect electrical conductors between multi-wide units, but not to the main power source. This includes the bonding wire between multi-wide units. Pg. 40

Plumbing

Connect all sewer drains to an existing sewer lap or septic tank. Pg. 39

Connect all potable water supply piping to an existing water meter, water lap, or other independent water supply systems. Pg. 39

Site Preparation

Debris and organic material removed ☒ Seal ☒ Pad ☒ Other ☐

Fastening multi wide units

Floor: Type Fastener: 1/8" Length: 6" Spacing: 24" 24"
Walls: Type Fastener: 3/16" Length: 4" Spacing: 18" 18"
Roof: Type Fastener: 3/16" Length: 1 1/2" Spacing: 24" 24"
For used homes a min. 30 gauge, 6" wide, galvanized metal slip will be centered over the peak of the roof and fastened with galv. roofing nails at 2" on center on both sides of the centerline.

Gasket (weatherstripping) requirement

I understand a properly installed gasket is a requirement of all new and used homes and that condensation, mold, moisture and buckled window walls are a result of a poorly installed or no gasket being installed. I understand a lot of leaks will not serve as a gasket.

Installer's initials

WCC

Type gasket of floor

Installed:

Between Floors: Yes ☒
Between Walls: Yes ☒
Bottom of ridgebeam: Yes ☒

Weatherstripping

The bottomboard will be repaired and/or taped. Yes ☒ Pg. 13
Siding on units is installed to manufacturer's specifications. Yes ☒
Fluepipe chimney installed so as not to allow intrusion of rain water. Yes ☒

Miscellaneous

Skirting to be installed. Yes ☒ No ☐
Dryer vent installed outside of skirting. Yes ☒ N/A
Range downflow vent installed outside of skirting. Yes ☒ N/A
Drain lines supported at 4 foot intervals. Yes ☒
Electrical crossovers protected. Yes ☒
Other: ☐


Installer verifies all information given with this permit worksheet is accurate and true based on the manufacturer's installation instructions and or Rule 15C-1 & 2

Installer Signature

WCC

Date 1/26/06

Handwritten: 2005

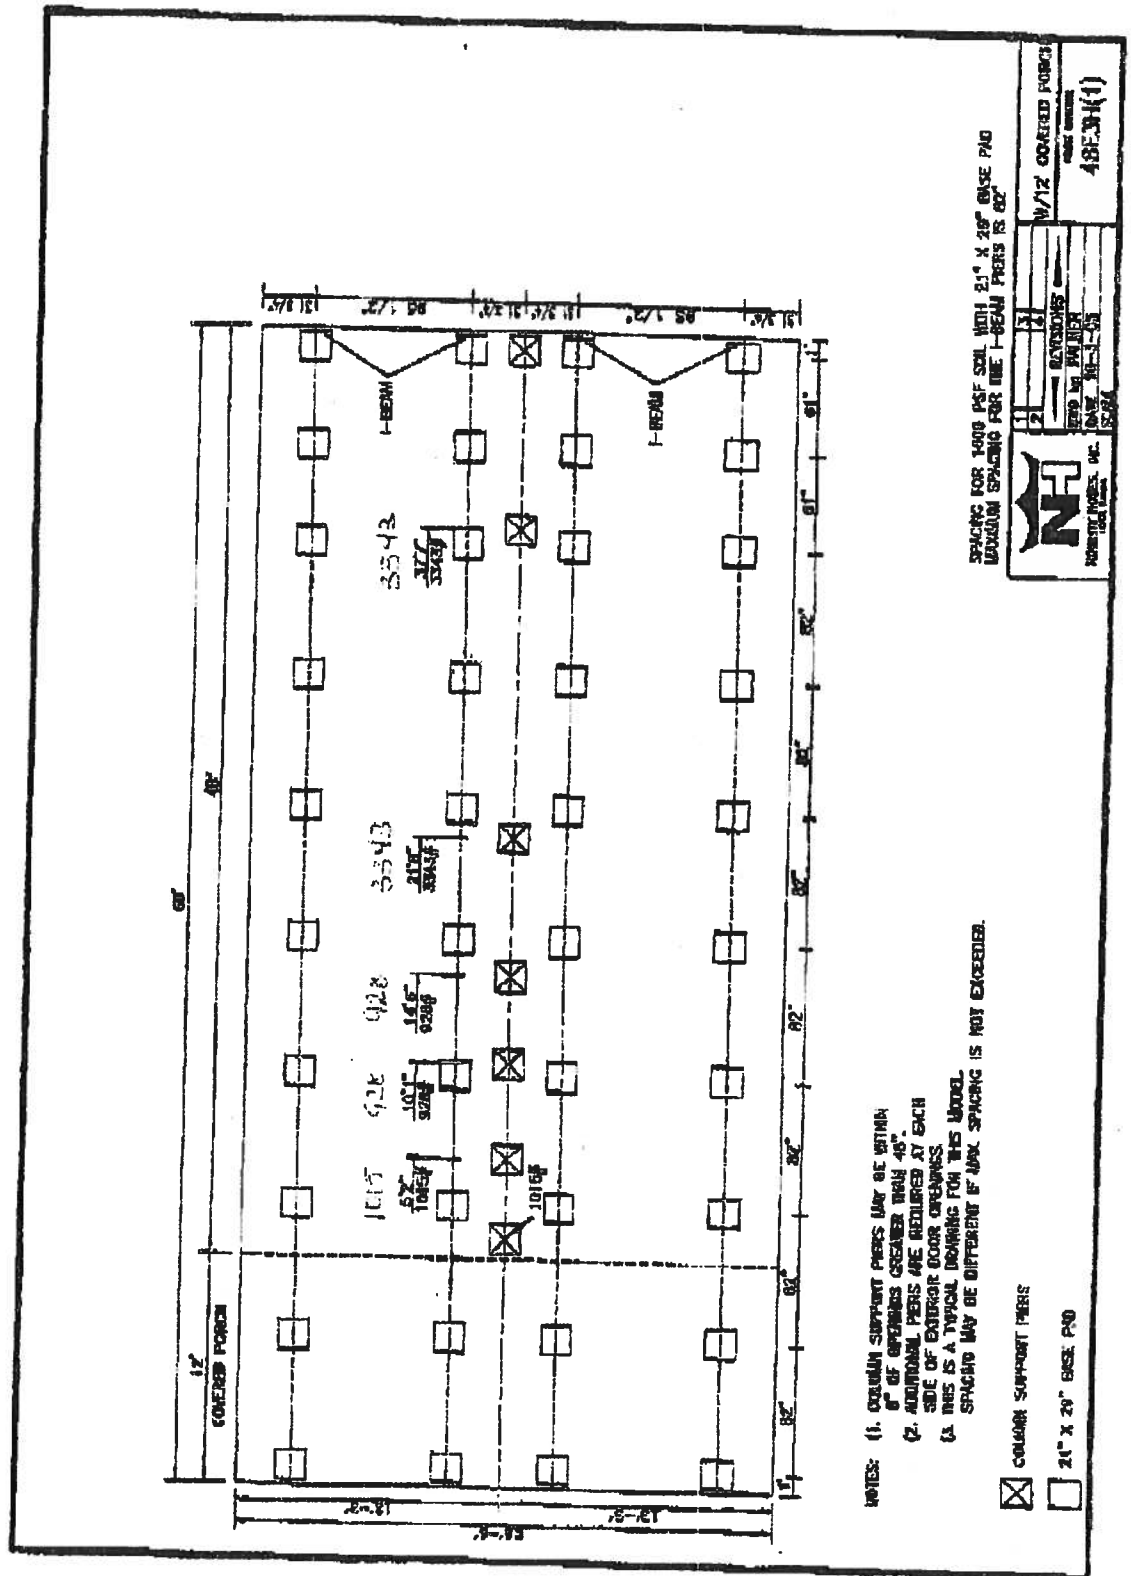

Dependable Well Drilling
2139 NW 50th Street
Bell Fl. 32619
Ph.386-935-3042
Fax.386-935-0087

Jan.30th,2006

We will be drilling a 4" water well for Mr. Marinola. It will have 1H pump with cycle stop & 4" PVC casing.


Thank You

*Dependable Well
Drilling*

Prestige Home Centers

MADE IN
28x60
US 12x28 porch

JEAN

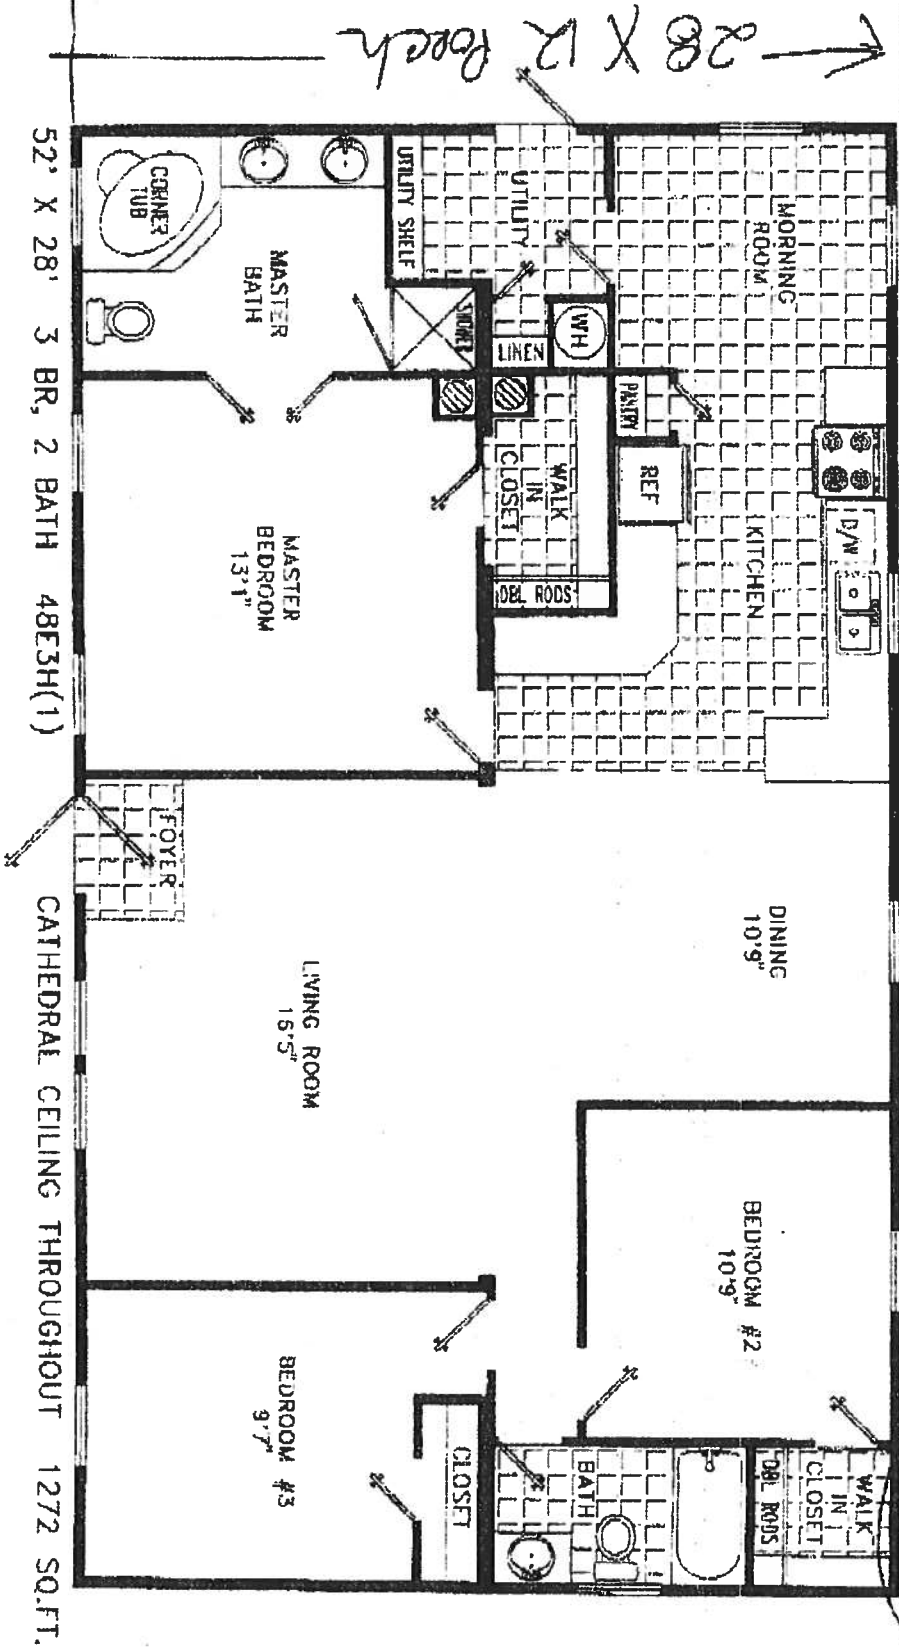

52' X 28' 3 BR, 2 BATH 48E3H(1)

CATHEDRAL CEILING THROUGHOUT 1272 SQ.FT.



*Homes Designed, Built & Serviced
By NOBILITY HOMES*

THE OVERALL LENGTH INCLUDES A HITCH OF APPROXIMATELY FOUR FEET ON ALL HOMES.
MANUFACTURED IN ACCORDANCE WITH STANDARDS DEVELOPED AND ENFORCED BY HUD. DUE TO OUR CARRYING PROGRAM OF PRODUCT IMPROVEMENT, PRICES AND SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. SOME ITEMS SUCH AS TIRTS, RIMS, AXLES, AND TIRES MAY HAVE BEEN RECYCLED AFTER INSPECTION FOR SAFETY AND APPEARANCE. ALL DIMENSIONS ARE NOMINAL.

MARINO/A


**STATE OF FLORIDA
DEPARTMENT OF HEALTH
APPLICATION FOR ONSITE SEWAGE DISPOSAL SYSTEM CONSTRUCTION PERMIT**

Permit Application Number

06-0097N

----- PART II - SITEPLAN -----

Scale: Each block represents ^{20'} 10 feet and ^{6"} 1 inch = 40 feet.

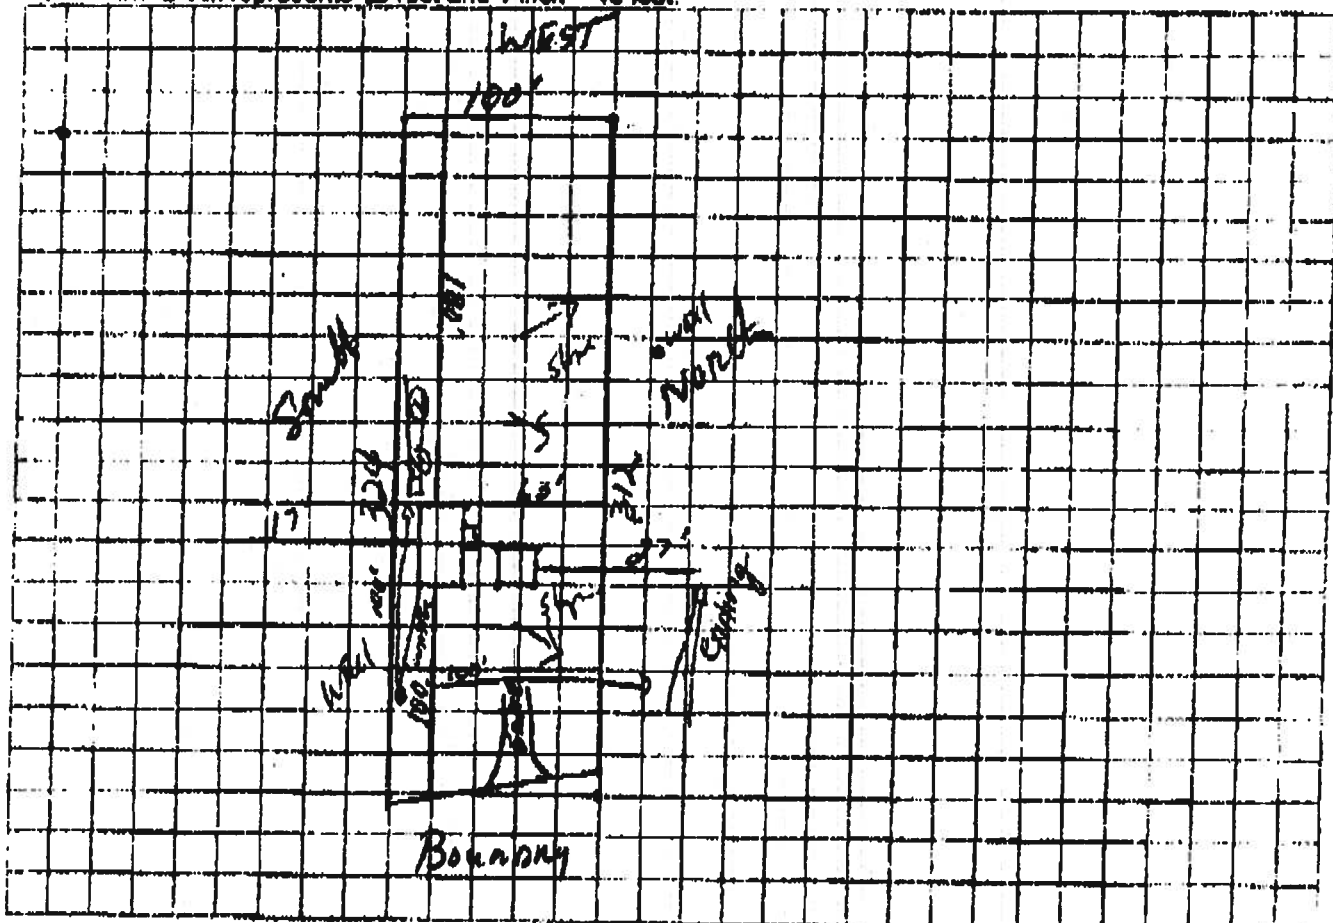

Notes:

*74*Site Plan submitted by: *[Signature]*Plan Approved ☒Not Approved ☐

By

*Sally Maddy ESI COLUMBIA**Agent*

Date

2-2-06

County Health Department

ALL CHANGES MUST BE APPROVED BY THE COUNTY HEALTH DEPARTMENT



Cal-Tech Testing, Inc.

- Engineering
- Geotechnical
- Environmental

Laboratories

P.O. Box 1625 • Lake City, FL 32056-1625 • Tel(386)755-3633 • Fax(386)752-5456
6919 Distribution Ave. S., Unit #5, Jacksonville, FL 32257 • Tel(904)262-4046 • Fax(904)4047
2230 Greensboro Hwy • Quincy, FL 32351 • Tel(850)442-3495 • Fax(850)442-4008

24121

JOB NO.: 06-140

DATE TESTED: 3/8/2006

DATE REPORTED: 3/13/2006

REPORT OF IN-PLACE DENSITY TEST

PROJECT:	Marinola Residence, Ft. White, FL
CLIENT:	Joseph Marinola, 10161 Top Soil Ave., Englewood, FL 34224
GENERAL CONTRACTOR:	Joseph Marinola
EARTHWORK CONTRACTOR:	Joseph Marinola
INSPECTOR:	Clay Allen
ASTM METHOD	SOIL USE
(D-2922) Nuclear	BUILDING FILL
SPECIFICATION REQUIREMENTS: 95%	

TEST NO.	TEST LOCATION	TEST DEPTH	WET DENSITY (lb/ft ³)	MOISTURE PERCENT	DRY DENSITY (lb/ft ³)	PROCTOR TEST NO.	PROCTOR VALUE	% MAXIMUM DENSITY
1	Outer Most NE Corner of Building	0 - 12"	110.1	5.7	104.2	1	108.3	96.2%
2	Outer Most NW Corner of Building	0 - 12"	109.5	5.4	103.9	1	108.3	95.9%
3	Outer Most SE Corner of Building	0 - 12"	109.7	6.0	103.5	1	108.3	95.6%
4	Outer Most SW Corner of Building	0 - 12"	110.4	5.6	104.5	1	108.3	96.5%

REMARKS: The Above Tests Meet Specification Requirements.

PROCTORS				
TEST NO.	SOIL DESCRIPTION	MAXIMUM DRY UNIT WEIGHT (lb/ft ³)	OPT. MOIST.	TYPE
1	Tan Fine Sand	108.3	11.0	MODIFIED (ASTM D-1557)

Respectfully Submitted,
CAL-TECH TESTING, INC.

Linda M. Creamer
President - CEO
SW

Reviewed By:

John C. Dorman, P.E., PhD
Florida Registration No.: 52612

Date: 3/14/06

The test results presented in this report are specific only to the samples tested at the time of testing. The tests were performed in accordance with generally accepted methods and standards. Since material conditions can vary between test locations and change with time, sound judgement should be exercised with regard to the use and interpretation of the data.

