

DATE 06/09/2008

Columbia County Building Permit
This Permit Must Be Prominently Posted on Premises During Construction

PERMIT
000027072

APPLICANT RICHARD KEEN PHONE 386.755.2826
ADDRESS 650 SW MAIN BLVD LAKE CITY FL 32025
OWNER ZACH MOSS PHONE
ADDRESS 265 SE BREAM LOOP LAKE CITY FL 32025
CONTRACTOR JAMES JOHNSTON PHONE 386.365.5999
LOCATION OF PROPERTY 41-S TO C-252, TL TO PEBBLE CREEK TERRACE, TL TO BREAM LOOP, TL
6TH PLACE ON L.
TYPE DEVELOPMENT SFD/UTILITY ESTIMATED COST OF CONSTRUCTION 82500.00
HEATED FLOOR AREA 1170.00 TOTAL AREA 1650.00 HEIGHT 14.11 STORIES 1
FOUNDATION CONC WALLS FRAMED ROOF PITCH 6'12 FLOOR CONC
LAND USE & ZONING RSF-2 MAX. HEIGHT 35
Minimum Set Back Requirments: STREET-FRONT 25.00 REAR 15.00 SIDE 10.00
NO. EX.D.U. 0 FLOOD ZONE X DEVELOPMENT PERMIT NO.

PARCEL ID 15-4S-17-08359-050 SUBDIVISION COUNTRY CREEK
LOT 10 BLOCK PHASE UNIT TOTAL AGRES 0.50

000001605 CRC1328128
Culvert Permit No. Culvert Waiver Contractor's License Number Applicant/Owner/Contractor
18"X32'MITERED BLK JTH N
Driveway Connection Septic Tank Number LU & Zoning checked by Approved for Issuance New Resident

COMMENTS: NOC ON FILE. 1 FOOT ABOVE ROAD.

Check # or Cash 1906

FOR BUILDING & ZONING DEPARTMENT ONLY

(footer/Slab)

Temporary Power date/app. by Foundation date/app. by Monolithic date/app. by
Under slab rough-in plumbing date/app. by Slab date/app. by Sheathing/Nailing date/app. by
Framing date/app. by Rough-in plumbing above slab and below wood floor date/app. by
Electrical rough-in date/app. by Heat & Air Duct date/app. by Peri. beam (Lintel) date/app. by
Permanent power date/app. by C.O. Final date/app. by Culvert date/app. by
M/H tie downs, blocking, electricity and plumbing date/app. by Pool date/app. by
Reconnection date/app. by Pump pole date/app. by Utility Pole date/app. by
M/H Pole date/app. by Travel Trailer date/app. by Re-roof date/app. by

BUILDING PERMIT FEE \$ 415.00 CERTIFICATION FEE \$ 8.25 SURCHARGE FEE \$ 8.25
MISC. FEES \$ 0.00 ZONING CERT. FEE \$ 50.00 FIRE FEE \$ 0.00 WASTE FEE \$
FLOOD DEVELOPMENT FEE \$ FLOOD ZONE FEE \$ 25.00 CULVERT FEE \$ 25.00 TOTAL FEE 531.50
INSPECTORS OFFICE CLERKS OFFICE

NOTICE: IN ADDITION TO THE REQUIREMENTS OF THIS PERMIT, THERE MAY BE ADDITIONAL RESTRICTIONS APPLICABLE TO THIS PROPERTY THAT MAY BE FOUND IN THE PUBLIC RECORDS OF THIS COUNTY. AND THERE MAY BE ADDITIONAL PERMITS REQUIRED FROM OTHER GOVERNMENTAL ENTITIES SUCH AS WATER MANAGEMENT DISTRICTS, STATE AGENCIES, OR FEDERAL AGENCIES.

"WARNING TO OWNER: YOUR FAILURE TO RECORD A NOTICE OF COMMENCEMENT MAY RESULT IN YOUR PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR AN ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT."

EVERY PERMIT ISSUED SHALL BECOME INVALID UNLESS THE WORK AUTHORIZED BY SUCH PERMIT IS COMMENCED WITHIN 180 DAYS AFTER ITS ISSUANCE, OR IF THE WORK AUTHORIZED BY SUCH PERMIT IS SUSPENDED OR ABANDONED FOR A PERIOD OF 180 DAYS AFTER THE TIME THE WORK IS COMMENCED. A VALID PERMIT RECIEVES AN APPROVED INSPECTION EVERY 180 DAYS. WORK SHALL BE CONSIDERED TO BE IN ACTIVE PROGRESS WHEN THE PERMIT HAS RECIEVED AN APPROVED INSPECTION WITHIN 180 DAYS.

The Issuance of this Permit Does Not Waive Compliance by Permittee with Deed Restrictions.

NOTICE OF COMMENCEMENT

TO WHOM IT MAY CONCERN:

The undersigned hereby give notice that improvements will be made to certain real property and in accordance with Chapter 713, Florida Statutes, the following is provided in this Notice of Commencement:

1. Description of Property: Lot 10, of Country Creek, a subdivision according to the plat thereof recorded in Plat Book 4, Page 81, of the Public Records of Columbia County, Florida.
2. General Description of Improvement: Construction of Dwelling
3. Owner Information:
 - a. Name and Address: Zackary L. Moss, 265 SE Bream Loop, Lake City, FL 32025
 - b. Interest in property: Fee Simple
 - c. Name and address of fee simple title holder (if other than Owner): NONE
4. Contractor (name and address): HomeTown Homes LLC, 650 SW Main Blvd, Lake City, FL 32025
5. Surety:
 - a. Name and Address: N/A
 - b. Amount of Bond: N/A
6. LENDER: First Federal Savings Bank of Florida
 4705 West US Highway 90
 PO Box 2029
 Lake City, FL 32056
7. Persons within the State of Florida designated by Owner upon whom notices of other documents may be served as provided in Section 713.13(1)(a)7., Florida Statutes: NONE
8. In addition to himself, Owner designates PAULA HACKER, of FIRST FEDERAL SAVINGS BANK OF FLORIDA at 4705 WEST US HIGHWAY 90 / PO BOX 2029, LAKE CITY, FL 32056, to receive a copy of the Lienor's Notice as provided in Section 713.13(1)(b) Florida Statutes.
8. Expiration date of Notice of Commencement (the expiration date is 1 year from the date of recording unless a different date is specified).

STATE OF FLORIDA, COUNTY OF COLUMBIA
 I HEREBY CERTIFY that the above and foregoing
 is a true copy of the original filed in this office.
 P. DEWITT CASON, CLERK OF COURTS

By Sharon Feagle
 Deputy Clerk
 Date 06-06-2008



*Owner is used for singular or plural as context requires.

Signed, sealed and delivered in the presence:

Donna Cox
 WITNESS Donna Cox
Traci Landry
 WITNESS Traci Landry

Zackary L. Moss
 Zackary L. Moss

STATE OF FLORIDA
 COUNTY OF COLUMBIA

Before me, personally appeared Zackary L. Moss a/k/a Zach Moss, to me known to be the person(s) described in and who executed the foregoing instrument, and they acknowledged to and before me that they executed said instrument for the purpose therein expressed.

Witness my hand and official seal this 5th day of June, 2008.

(SEAL)

Donna Cox
 NOTARY PUBLIC

My Commission Expires:



DONNA COX
 Notary Public, State of Florida
 My Comm. Expires Jan. 16, 2010
 Comm. No. DD 507061
 Bonded Thru Notary Public Underwriters

Columbia County Building Permit Application

For Office Use Only		Application # <u>0801-141</u>	Date Received <u>1/29</u>	By <u>JW</u>	Permit # <u>27072</u>
Zoning Official <u>BLK</u>	Date <u>07.02.08</u>	Flood Zone <u>X</u>	FEMA Map # <u>N/A</u>	Zoning <u>RSF-2</u>	
Land Use <u>R2D</u>	Elevation <u>N/A</u>	MFE <u>Left</u>	River <u>N/A</u>	Plans Examiner <u>OK-TH</u>	Date <u>1-31-08</u>
Comments					
<input checked="" type="checkbox"/> NOC <input checked="" type="checkbox"/> DEH <input type="checkbox"/> Deed or PA <input type="checkbox"/> Site Plan <input type="checkbox"/> State Road Info <input type="checkbox"/> Parent Parcel # _____					
<input type="checkbox"/> Dev Permit # _____ <input type="checkbox"/> In Floodway <input type="checkbox"/> Letter of Authorization from Contractor					
<input type="checkbox"/> Unincorporated area <input type="checkbox"/> Incorporated area <input type="checkbox"/> Town of Fort White <input type="checkbox"/> Town of Fort White Compliance letter					

Septic Permit No. 08-0094N ZICHANO KESW Fax 752-0078

Name Authorized Person Signing Permit James Johnston Phone 365-5999

Address 650 SW Main Blvd LAKE CITY FL 32025

Owners Name Zach MOSS Phone _____

911 Address 265 SE Bream Loop LAKE CITY FL 32025

Contractors Name James Johnston Phone 365-5999

Address 650 SW Main Blvd LAKE CITY FL 32025

Fee Simple Owner Name & Address _____

Bonding Co. Name & Address _____

Architect/Engineer Name & Address Mark Disosway P.O. Box 868 LC. 32056

Mortgage Lenders Name & Address First Federal

Circle the correct power company - FL Power & Light - Clay Elec. - Suwannee Valley Elec. - Progress Energy

Property ID Number 15-45-17-08359-050 Estimated Cost of Construction 100,000⁰⁰

Subdivision Name Country Creek Lot 10 Block _____ Unit _____ Phase _____

Driving Directions 415. to CR 252 turn Left, go to Pebble Creek Terrace turn Left, go to SE Bream Loop turn Left, 6th place on Left

Number of Existing Dwellings on Property 0

Construction of SFD Total Acreage 1/2 Lot Size 115x145

Do you need a Culvert Permit or Culvert Waiver or Have an Existing Drive Total Building Height 14' 11"

Actual Distance of Structure from Property Lines - Front 30 Side 18 Side 32 Rear 87

Number of Stories 1 Heated Floor Area 1170 Total Floor Area 1650 Roof Pitch 6/12

Application is hereby made to obtain a permit to do work and installations as indicated. I certify that no work or installation has commenced prior to the issuance of a permit and that all work be performed to meet the standards of all laws regulating construction in this jurisdiction.

WARNING TO OWNER: YOUR FAILURE TO RECORD A NOTICE OF COMMENCEMENT MAY RESULT IN YOU PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. A NOTICE OF COMMENCEMENT MUST BE RECORDED AND POSTED ON THE JOB SITE BEFORE THE FIRST INSPECTION. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT.

FLORIDA'S CONSTRUCTION LIEN LAW: Protect Yourself and Your Investment

According to Florida Law, those who work on your property or provide materials, and are not paid-in-full, have a right to enforce their claim for payment against your property. This claim is known as a construction lien. If your contractor fails to pay subcontractors or material suppliers or neglects to make other legally required payments, the people who are owed money may look to your property for payment, even if you have paid your contractor in full. This means if a lien is filed against your property, it could be sold against your will to pay for labor, materials or other services which your contractor may have failed to pay.

NOTICE OF RESPONSIBILITY TO BUILDING PERMITEE:

YOU ARE HEREBY NOTIFIED as the recipient of a building permit from Columbia County, Florida, you will be held responsible to the County for any damage to sidewalks and/or road curbs and gutters, concrete features and structures, together with damage to drainage facilities, removal of sod, major changes to lot grades that result in ponding of water, or other damage to roadway and other public infrastructure facilities caused by you or your contractor, subcontractors, agents or representatives in the construction and/or improvement of the building and lot for which this permit is issued. No certificate of occupancy will be issued until all corrective work to these public infrastructures and facilities has been corrected.

OWNERS CERTIFICATION: I hereby certify that all the foregoing information is accurate and all work will be done in compliance with all applicable laws and regulating construction and zoning. I further understand the above written responsibilities in Columbia County for obtaining this Building Permit.

Zach Moss
Owners Signature

CONTRACTORS AFFIDAVIT: By my signature I understand and agree that I have informed and provided this written statement to the owner of all the above written responsibilities in Columbia County for obtaining this Building Permit.


[Signature]
Contractor's Signature (Permitee)

Contractor's License Number CRL 1328128
Columbia County
Competency Card Number _____

Affirmed under penalty of perjury to by the Contractor and subscribed before me this 29 day of Jan 2008.
Personally known X or Produced Identification _____


Carey F. Chandler
State of Florida Notary Signature (For the Contractor)

SEAL:

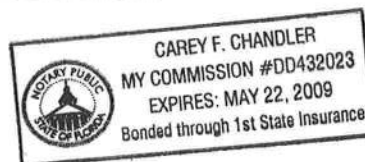

Permit Application Number _____

(Lt. 10 Country Creek)

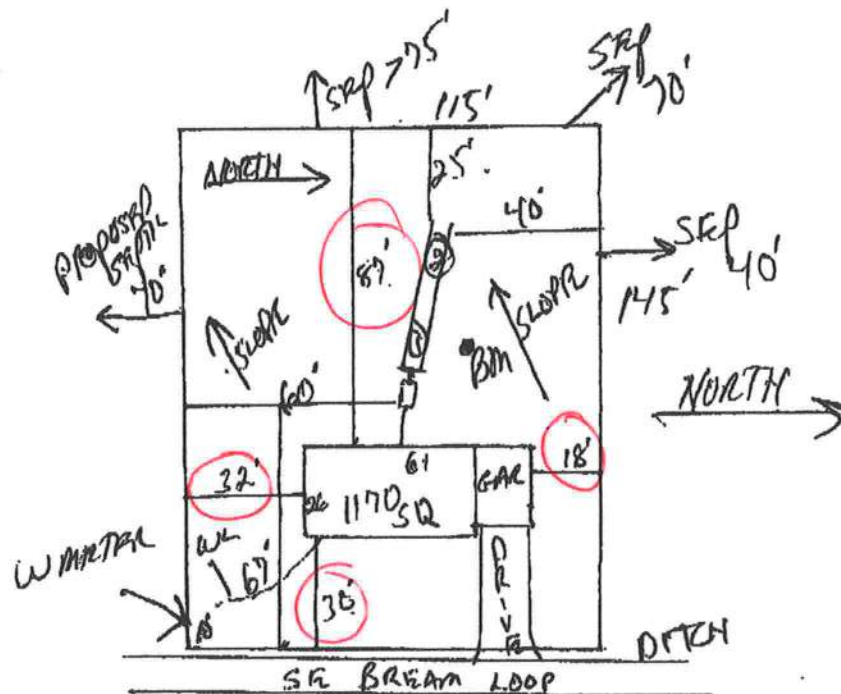

Notes: _____

By _____

Date _____

County Health Department

Page 2 of 4

This Instrument Prepared By:
Michael H. Harrell
Abstract & Title Services, Inc.
283 NW Cole Terrace
Lake City, Florida 32055
AT# 16966

GENERAL WARRANTY DEED

Individual to Individual (or Corporation/LLC)

This Warranty Deed made this 23rd day of January, 2008 by

Carlos Enrique Ruiz, and his wife, Ruth Izules Ruiz

hereinafter called the Grantor, to

Inst:200812001498 Date:1/24/2008 Time:2:03 PM
Doc Stamp-Deed:154.00
✓ DC, P. DeWitt Cason, Columbia County Page 1 of 1

Zach Moss

whose post office address is 650 SW Main Blvd., Lake City, FL 32025, hereinafter called the Grantee.

(Wherever used herein the terms "Grantor" and "Grantee" include all the parties to this instrument and the heirs, legal representatives and assigns of Individuals, and the successors and assigns of Corporation.)

The Grantor, for and in consideration of the sum of \$10.00 and other valuable considerations, receipt whereof is hereby acknowledged, hereby grants, bargains, sells, unto the Grantee all that certain land, situate in Columbia County, Florida, viz: TAX ID: R08359-050 :

Lot 10 of Country Creek, a subdivision according to the plat thereof according to the plat thereof recorded in Plat Book 4, Page 81, of the Public Records of Columbia County, Florida.

Together with all the tenements, hereditaments, and appurtenances thereto belonging or in any ways appertaining.

To have and to hold, the same in fee simple forever.

And the Grantor hereby covenants with said Grantee that the Grantor is lawfully seized of said land in fee simple; that the Grantor has good right and lawful authority to sell and convey said land, and hereby warrants the title to said land and will defend the same against the lawful claims of all persons whomsoever; and that said land is free of all encumbrances except taxes accruing subsequent to December 31, 2007.

In witness whereof, the said Grantor has signed and sealed these presents the day and year first above written.


Cheryl Beatty
WITNESS
Printed Name: Cheryl Beatty
Traci Landry
WITNESS
Printed Name: Traci Landry

Carlos Enrique Ruiz
Carlos Enrique Ruiz
Ruth Izules Ruiz
Ruth Izules Ruiz

State of Florida
County of Columbia

I hereby certify that on this 23rd day of January, 2008, before me, an officer duly authorized to administer oaths and take acknowledgements, personally appeared Carlos Enrique Ruiz, and his wife, Ruth Izules Ruiz, who is personally known to me or produced a drivers license for identification, and known to me to be the person described in and who executed the foregoing instrument, who acknowledged before me that he/she/they executed the same, and an oath was not taken.

(SEAL)



[Signature]
NOTARY PUBLIC

My Commission Expires:

COLUMBIA COUNTY 9-1-1 ADDRESSING / GIS DEPARTMENT

P. O. Box 1787, Lake City, FL 32056-1787

Telephone: (386) 758-1125 * Fax: (386) 758-1365 * E-mail: ron_croft@columbiacountyfla.com

ADDRESS ASSIGNMENT DATA

The Columbia County Board of County Commissioners has passed Ordinance 2001-9, which provides for a uniform numbering system. A copy of this ordinance is available in the Clerk of Court records, located in the courthouse. This new numbering system will increase the efficiency of POLICE, FIRE AND EMERGENCY MEDICAL vehicles responding to calls within Columbia County by immediately identifying the location of the caller.

Residential or Other Structure on Parcel Number:

15-4S-17-08359-050 (LOT 10 COUNTRY CREEK S/D)

Address Assignments:

265 SE BREAM LOOP, LAKE CITY, FL, 32025

Any questions concerning this information should be referred to the Columbia County 9-1-1 Addressing / GIS Department at the address or telephone number above.


08-0094

STATE OF FLORIDA
DEPARTMENT OF HEALTH
APPLICATION FOR ONSITE SEWAGE DISPOSAL SYSTEM CONSTRUCTION PERMIT

Permit Application Number _____

----- PART II - SITEPLAN -----

Scale: 1 inch = 50 feet.

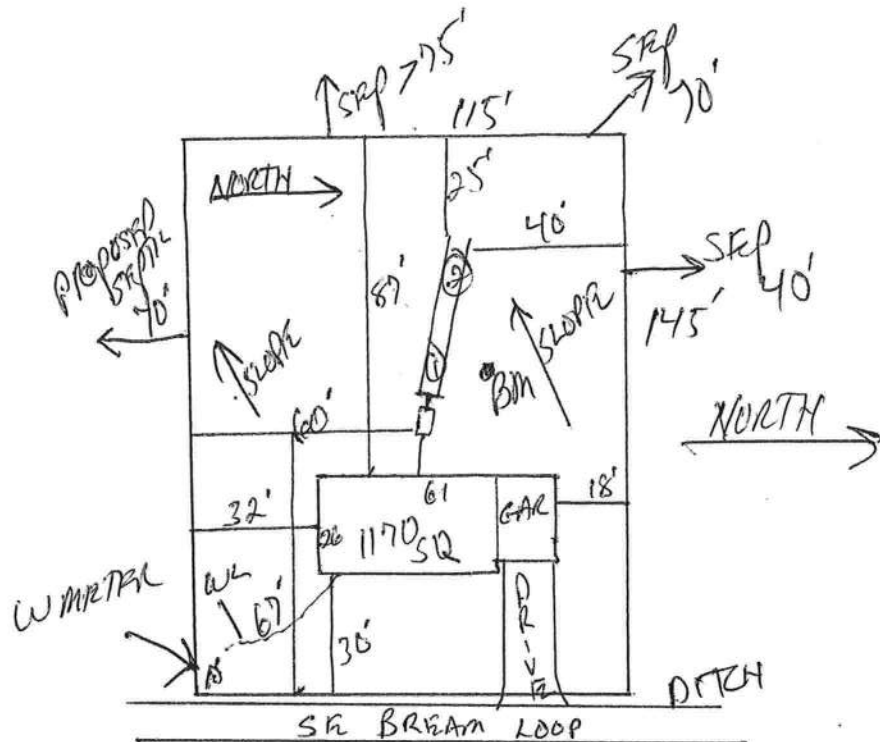

Notes: _____

Site Plan submitted by: Rock D F

MASTER CONTRACTOR

Plan Approved ☒

Not Approved _____

Date 1/23/08

By Mark S Zund

Columbia County Health Department

ALL CHANGES MUST BE APPROVED BY THE COUNTY HEALTH DEPARTMENT

Columbia County Building Department Culvert Permit

Culvert Permit No.
000001605

DATE 06/09/2008 PARCEL ID # 15-4S-17-08359-050
APPLICANT RICHARD KEEN PHONE 386.755.2826
ADDRESS 650 SW MAIN BLVD LAKE CITY FL 32025
OWNER ZACH MOSS PHONE _____
ADDRESS 265 SE BREAM LOOP LAKE CITY FL 32025
CONTRACTOR JAMES JOHNSTON PHONE 386.365.5999
LOCATION OF PROPERTY 41-S TO C-252, TL TO PEBBLE CREEK TERRACE, TL TO BREAM LOOP, TL
6TH PLACE ON L.

SUBDIVISION/LOT/BLOCK/PHASE/UNIT COUNTRY CREEK 10

SIGNATURE

INSTALLATION REQUIREMENTS

☒ X

Culvert size will be 18 inches in diameter with a total length of 32 feet, leaving 24 feet of driving surface. Both ends will be mitered 4 foot with a 4 : 1 slope and poured with a 4 inch thick reinforced concrete slab.

INSTALLATION NOTE: Turnouts will be required as follows:

- a) a majority of the current and existing driveway turnouts are paved, or;
 - b) the driveway to be served will be paved or formed with concrete.
- Turnouts shall be concrete or paved a minimum of 12 feet wide or the width of the concrete or paved driveway, whichever is greater. The width shall conform to the current and existing paved or concreted turnouts.

☐

Culvert installation shall conform to the approved site plan standards.

☐

Department of Transportation Permit installation approved standards.

☐

Other _____

**ALL PROPER SAFETY REQUIREMENTS SHOULD BE FOLLOWED
DURING THE INSTALLATION OF THE CULVERT.**

135 NE Hernando Ave., Suite B-21

Lake City, FL 32055

Phone: 386-758-1008 Fax: 386-758-2160

Amount Paid 25.00



FLORIDA ENERGY EFFICIENCY CODE FOR BUILDING CONSTRUCTION

Florida Department of Community Affairs Residential Whole Building Performance Method A

Project Name:	801212KeenRichard	Builder:	
Address:	Lot: 10, Sub: Country Creek E, Plat:	Permitting Office:	<i>Columbia</i>
City, State:	, FL	Permit Number:	<i>27072</i>
Owner:	Moss, Zack & Brittany Residence	Jurisdiction Number:	<i>221000</i>
Climate Zone:	North		

1. New construction or existing	New	___
2. Single family or multi-family	Single family	___
3. Number of units, if multi-family	1	___
4. Number of Bedrooms	3	___
5. Is this a worst case?	No	___
6. Conditioned floor area (ft²)	1170 ft²	___
7. Glass type ¹ and area: (Label reqd. by 13-104.4.5 if not default)		
a. U-factor:	Description Area	
(or Single or Double DEFAULT)	7a. (Dble Default)	95.0 ft²
b. SHGC:		
(or Clear or Tint DEFAULT)	7b. (Clear)	95.0 ft²
8. Floor types		
a. Slab-On-Grade Edge Insulation	R=0.0, 142.0(p) ft	___
b. N/A		___
c. N/A		___
9. Wall types		
a. Frame, Wood, Exterior	R=13.0, 825.0 ft²	___
b. Frame, Wood, Adjacent	R=13.0, 156.0 ft²	___
c. N/A		___
d. N/A		___
e. N/A		___
10. Ceiling types		
a. Under Attic	R=30.0, 1204.0 ft²	___
b. N/A		___
c. N/A		___
11. Ducts		
a. Sup: Unc. Ret: Unc. AH: Interior	Sup. R=6.0, 125.0 ft	___
b. N/A		___
12. Cooling systems		
a. Central Unit	Cap: 24.0 kBtu/hr	___
	SEER: 13.00	___
b. N/A		___
c. N/A		___
13. Heating systems		
a. Electric Heat Pump	Cap: 24.0 kBtu/hr	___
	HSPF: 7.90	___
b. N/A		___
c. N/A		___
14. Hot water systems		
a. Electric Resistance	Cap: 40.0 gallons	___
	EF: 0.93	___
b. N/A		___
c. Conservation credits		___
(HR-Heat recovery, Solar		
DHP-Dedicated heat pump)		
15. HVAC credits		___
(CF-Ceiling fan, CV-Cross ventilation,		
HF-Whole house fan,		
PT-Programmable Thermostat,		
MZ-C-Multizone cooling,		
MZ-H-Multizone heating)		

Glass/Floor Area: 0.08

Total as-built points: 16782

Total base points: 20279

PASS

I hereby certify that the plans and specifications covered by this calculation are in compliance with the Florida Energy Code.

PREPARED BY: *[Signature]*

DATE: *1-23-09*

I hereby certify that this building, as designed, is in compliance with the Florida Energy Code.

OWNER/AGENT: *[Signature]*

DATE: *1/28/09*

Review of the plans and specifications covered by this calculation indicates compliance with the Florida Energy Code. Before construction is completed this building will be inspected for compliance with Section 553.908 Florida Statutes.

BUILDING OFFICIAL: _____

DATE: _____



¹ Predominant glass type. For actual glass type and areas, see Summer & Winter Glass output on pages 2&4.

SUMMER CALCULATIONS**Residential Whole Building Performance Method A - Details**

ADDRESS: Lot: 10, Sub: Country Creek E, Plat: , , FL,

PERMIT #:

BASE				AS-BUILT							
GLASS TYPES .18 X Conditioned X BSPM = Points Floor Area				Type/SC Overhang Ornt Len Hgt Area X SPM X SOF = Points							
.18	1170.0	20.04	4220.4	Double, Clear	N	1.5	5.5	15.0	19.20	0.93	267.3
				Double, Clear	N	1.5	5.5	20.0	19.20	0.93	356.4
				Double, Clear	S	1.5	5.5	30.0	35.87	0.83	895.4
				Double, Clear	S	8.0	5.5	30.0	35.87	0.48	512.3
				As-Built Total:				95.0		2031.5	
WALL TYPES Area X BSPM = Points				Type		R-Value		Area X SPM		= Points	
Adjacent	156.0	0.70	109.2	Frame, Wood, Exterior		13.0		825.0		1.50 1237.5	
Exterior	825.0	1.70	1402.5	Frame, Wood, Adjacent		13.0		156.0		0.60 93.6	
Base Total:		981.0	1511.7	As-Built Total:				981.0		1331.1	
DOOR TYPES Area X BSPM = Points				Type				Area X SPM		= Points	
Adjacent	20.0	1.60	32.0	Exterior Insulated				20.0		4.10 82.0	
Exterior	40.0	4.10	164.0	Exterior Insulated				20.0		4.10 82.0	
				Adjacent Insulated				20.0		1.60 32.0	
Base Total:		60.0	196.0	As-Built Total:				60.0		196.0	
CEILING TYPES Area X BSPM = Points				Type		R-Value		Area X SPM X SCM		= Points	
Under Attic	1170.0	1.73	2024.1	Under Attic		30.0		1204.0 1.73 X 1.00		2082.9	
Base Total:		1170.0	2024.1	As-Built Total:				1204.0		2082.9	
FLOOR TYPES Area X BSPM = Points				Type		R-Value		Area X SPM		= Points	
Slab	142.0(p)	-37.0	-5254.0	Slab-On-Grade Edge Insulation		0.0		142.0(p) -41.20		-5850.4	
Raised	0.0	0.00	0.0								
Base Total:			-5254.0	As-Built Total:				142.0		-5850.4	
INFILTRATION Area X BSPM = Points								Area X SPM		= Points	
	1170.0	10.21	11945.7					1170.0 10.21		11945.7	

SUMMER CALCULATIONS

Residential Whole Building Performance Method A - Details

ADDRESS: Lot: 10, Sub: Country Creek E, Plat: , , FL,

PERMIT #:

BASE				AS-BUILT						
Summer Base Points: 14643.9				Summer As-Built Points: 11736.9						
Total Summer Points	X System Multiplier	=	Cooling Points	Total Component (System - Points)	X Cap Ratio	X Duct Multiplier (DM x DSM x AHU)	X System Multiplier	X Credit Multiplier	=	Cooling Points
14643.9	0.4266		6247.1	<small>(sys 1: Central Unit 24000 btuh ,SEER/EFF(13.0) Ducts:Unc(S),Unc(R),Int(AH),R6.0(INS)</small> 11737 1.00 (1.09 x 1.147 x 0.91) 0.263 1.000 3505.7 11736.9 1.00 1.138 0.263 1.000 3505.7						

WINTER CALCULATIONS

Residential Whole Building Performance Method A - Details

ADDRESS: Lot: 10, Sub: Country Creek E, Plat: , , FL,

PERMIT #:

BASE				AS-BUILT							
GLASS TYPES .18 X Conditioned X BWPM = Points Floor Area				Type/SC Overhang Ornt Len Hgt Area X WPM X WOF = Points							
.18	1170.0	12.74	2683.0	Double, Clear	N	1.5	5.5	15.0	24.58	1.00	369.8
				Double, Clear	N	1.5	5.5	20.0	24.58	1.00	493.0
				Double, Clear	S	1.5	5.5	30.0	13.30	1.15	457.6
				Double, Clear	S	8.0	5.5	30.0	13.30	3.24	1292.9
				As-Built Total:				95.0		2613.2	
WALL TYPES Area X BWPM = Points				Type		R-Value		Area X WPM = Points			
Adjacent	156.0	3.60	561.6	Frame, Wood, Exterior		13.0		825.0	3.40	2805.0	
Exterior	825.0	3.70	3052.5	Frame, Wood, Adjacent		13.0		156.0	3.30	514.8	
Base Total:				981.0		3614.1		As-Built Total:		981.0 3319.8	
DOOR TYPES Area X BWPM = Points				Type				Area X WPM = Points			
Adjacent	20.0	8.00	160.0	Exterior Insulated				20.0	8.40	168.0	
Exterior	40.0	8.40	336.0	Exterior Insulated				20.0	8.40	168.0	
				Adjacent Insulated				20.0	8.00	160.0	
Base Total:				60.0		496.0		As-Built Total:		60.0 496.0	
CEILING TYPESArea X BWPM = Points				Type		R-Value		Area X WPM X WCM = Points			
Under Attic	1170.0	2.05	2398.5	Under Attic		30.0		1204.0	2.05 X 1.00	2468.2	
Base Total:				1170.0		2398.5		As-Built Total:		1204.0 2468.2	
FLOOR TYPES Area X BWPM = Points				Type		R-Value		Area X WPM = Points			
Slab	142.0(p)	8.9	1263.8	Slab-On-Grade Edge Insulation		0.0		142.0(p)	18.80	2669.6	
Raised	0.0	0.00	0.0								
Base Total:				1263.8		As-Built Total:		142.0		2669.6	
INFILTRATION Area X BWPM = Points								Area X WPM = Points			
1170.0 -0.59 -690.3								1170.0 -0.59 -690.3			

WINTER CALCULATIONS

Residential Whole Building Performance Method A - Details

ADDRESS: Lot: 10, Sub: Country Creek E, Plat: , , FL,

PERMIT #:

BASE				AS-BUILT						
Winter Base Points:		9765.1		Winter As-Built Points:				10876.5		
Total Winter Points	X	System Multiplier	= Heating Points	Total Component (System - Points)	X Cap Ratio	X Duct Multiplier	X System Multiplier	X Credit Multiplier	= Heating Points	
						(DM x DSM x AHU)				
9765.1		0.6274	6126.7	(sys 1: Electric Heat Pump 24000 btuh ,EFF(7.9) Ducts:Unc(S),Unc(R),Int(AH),R6.0 10876.5 1.000 (1.069 x 1.169 x 0.93) 0.432 1.000 5456.2 10876.5 1.00 1.162 0.432 1.000 5456.2						

WATER HEATING & CODE COMPLIANCE STATUS

Residential Whole Building Performance Method A - Details

ADDRESS: Lot: 10, Sub: Country Creek E, Plat: , , FL,

PERMIT #:

BASE					AS-BUILT						
WATER HEATING											
Number of Bedrooms	X	Multiplier	=	Total	Tank Volume	EF	Number of Bedrooms	X	Tank X Ratio	Multiplier X	Credit = Total Multiplier
3		2635.00		7905.0	40.0	0.93	3		1.00	2606.67	1.00 7820.0
					As-Built Total:						7820.0

CODE COMPLIANCE STATUS											
BASE					AS-BUILT						
Cooling Points	+	Heating Points	+	Hot Water Points	=	Total Points	Cooling Points	+	Heating Points	+	Total Points
6247		6127		7905		20279	3506		5456		16782

PASS

Code Compliance Checklist

Residential Whole Building Performance Method A - Details

ADDRESS: Lot: 10, Sub: Country Creek E, Plat: , , FL,

PERMIT #:

6A-21 INFILTRATION REDUCTION COMPLIANCE CHECKLIST

COMPONENTS	SECTION	REQUIREMENTS FOR EACH PRACTICE	CHECK
Exterior Windows & Doors	606.1.ABC.1.1	Maximum: .3 cfm/sq.ft. window area; .5 cfm/sq.ft. door area.	
Exterior & Adjacent Walls	606.1.ABC.1.2.1	Caulk, gasket, weatherstrip or seal between: windows/doors & frames, surrounding wall; foundation & wall sole or sill plate; joints between exterior wall panels at corners; utility penetrations; between wall panels & top/bottom plates; between walls and floor. EXCEPTION: Frame walls where a continuous infiltration barrier is installed that extends from, and is sealed to, the foundation to the top plate.	
Floors	606.1.ABC.1.2.2	Penetrations/openings >1/8" sealed unless backed by truss or joint members. EXCEPTION: Frame floors where a continuous infiltration barrier is installed that is sealed to the perimeter, penetrations and seams.	
Ceilings	606.1.ABC.1.2.3	Between walls & ceilings; penetrations of ceiling plane of top floor; around shafts, chases, soffits, chimneys, cabinets sealed to continuous air barrier; gaps in gyp board & top plate; attic access. EXCEPTION: Frame ceilings where a continuous infiltration barrier is installed that is sealed at the perimeter, at penetrations and seams.	
Recessed Lighting Fixtures	606.1.ABC.1.2.4	Type IC rated with no penetrations, sealed; or Type IC or non-IC rated, installed inside a sealed box with 1/2" clearance & 3" from insulation; or Type IC rated with < 2.0 cfm from conditioned space, tested.	
Multi-story Houses	606.1.ABC.1.2.5	Air barrier on perimeter of floor cavity between floors.	
Additional Infiltration reqts	606.1.ABC.1.3	Exhaust fans vented to outdoors, dampers; combustion space heaters comply with NFPA, have combustion air.	

6A-22 OTHER PRESCRIPTIVE MEASURES (must be met or exceeded by all residences.)

COMPONENTS	SECTION	REQUIREMENTS	CHECK
Water Heaters	612.1	Comply with efficiency requirements in Table 612.1.ABC.3.2. Switch or clearly marked circuit breaker (electric) or cutoff (gas) must be provided. External or built-in heat trap required.	
Swimming Pools & Spas	612.1	Spas & heated pools must have covers (except solar heated). Non-commercial pools must have a pump timer. Gas spa & pool heaters must have a minimum thermal efficiency of 78%.	
Shower heads	612.1	Water flow must be restricted to no more than 2.5 gallons per minute at 80 PSIG.	
Air Distribution Systems	610.1	All ducts, fittings, mechanical equipment and plenum chambers shall be mechanically attached, sealed, insulated, and installed in accordance with the criteria of Section 610. Ducts in unconditioned attics: R-6 min. insulation.	
HVAC Controls	607.1	Separate readily accessible manual or automatic thermostat for each system.	
Insulation	604.1, 602.1	Ceilings-Min. R-19. Common walls-Frame R-11 or CBS R-3 both sides. Common ceiling & floors R-11.	

ENERGY PERFORMANCE LEVEL (EPL) DISPLAY CARD

ESTIMATED ENERGY PERFORMANCE SCORE* = 86.6

The higher the score, the more efficient the home.

Moss, Zack & Brittany Residence, Lot: 10, Sub: Country Creek E, Plat: , , FL,

1. New construction or existing	New	___	12. Cooling systems	
2. Single family or multi-family	Single family	___	a. Central Unit	Cap: 24.0 kBtu/hr
3. Number of units, if multi-family	1	___		SEER: 13.00
4. Number of Bedrooms	3	___	b. N/A	___
5. Is this a worst case?	No	___	c. N/A	___
6. Conditioned floor area (ft ²)	1170 ft ²	___		___
7. Glass type ¹ and area: (Label reqd. by 13-104.4.5 if not default)		___	13. Heating systems	
a. U-factor:	Description Area	___	a. Electric Heat Pump	Cap: 24.0 kBtu/hr
(or Single or Double DEFAULT)	7a. (Dble Default) 95.0 ft ²	___		HSPF: 7.90
b. SHGC:		___	b. N/A	___
(or Clear or Tint DEFAULT)	7b. (Clear) 95.0 ft ²	___	c. N/A	___
8. Floor types		___	14. Hot water systems	
a. Slab-On-Grade Edge Insulation	R=0.0, 142.0(p) ft	___	a. Electric Resistance	Cap: 40.0 gallons
b. N/A	___	___		EF: 0.93
c. N/A	___	___	b. N/A	___
9. Wall types		___	c. Conservation credits	___
a. Frame, Wood, Exterior	R=13.0, 825.0 ft ²	___	(HR-Heat recovery, Solar	___
b. Frame, Wood, Adjacent	R=13.0, 156.0 ft ²	___	DHP-Dedicated heat pump)	___
c. N/A	___	___	15. HVAC credits	___
d. N/A	___	___	(CF-Ceiling fan, CV-Cross ventilation,	___
e. N/A	___	___	HF-Whole house fan,	___
10. Ceiling types		___	PT-Programmable Thermostat,	___
a. Under Attic	R=30.0, 1204.0 ft ²	___	MZ-C-Multizone cooling,	___
b. N/A	___	___	MZ-H-Multizone heating)	___
c. N/A	___	___		___
11. Ducts		___		___
a. Sup: Unc. Ret: Unc. AH: Interior	Sup. R=6.0, 125.0 ft	___		___
b. N/A	___	___		___

I certify that this home has complied with the Florida Energy Efficiency Code For Building Construction through the above energy saving features which will be installed (or exceeded) in this home before final inspection. Otherwise, a new EPL Display Card will be completed based on installed Code compliant features.

Builder Signature: [Signature] Date: 1/28/08

Address of New Home: 265 SE Bream Loop City/FL Zip: Lake city FL 32025



*NOTE: The home's estimated energy performance score is only available through the FLA/RES computer program. This is not a Building Energy Rating. If your score is 80 or greater (or 86 for a US EPA/DOE EnergyStarTM designation), your home may qualify for energy efficiency mortgage (EEM) incentives if you obtain a Florida Energy Gauge Rating. Contact the Energy Gauge Hotline at 321/638-1492 or see the Energy Gauge web site at www.fsec.ucf.edu for information and a list of certified Raters. For information about Florida's Energy Efficiency Code For Building Construction, contact the Department of Community Affairs at 850/487-1824.

¹ Predominant glass type. For actual glass type and areas, see Summer & Winter Glass output on pages 2&4.
EnergyGauge® (Version: FLR2PB v4.1)

WOOD WALL FRAMING CONSTRUCTION FRC CHAPTER 6

- ✓ Stud type, grade, size, wall height and oc spacing for all load bearing or shear walls.
- ✓ Fastener schedule for structural members per table R602.3 (1) are to be shown.
- ✓ Show wood structural panel's sheathing attachment to studs, joist, trusses, rafters and structural members, showing fastener schedule attachment on the edges & intermediate of the areas structural panel sheathing
- ✓ Show all required connectors with a max uplift rating and required number of connectors and oc spacing for continuous connection of structural walls to foundation and roof trusses or rafter systems.
- ✓ Show sizes, type, span lengths and required number of support jack studs, king studs for shear wall opening and girder or header per FRC Table R502.5 (1)
- ✓ Indicate where pressure treated wood will be placed.
- ✓ Show all wall structural panel sheathing, grade, thickness and show fastener schedule for structural panel sheathing edges & intermediate areas
- A detail showing gable truss bracing, wall balloon framing details or/ and wall hinge bracing detail

ROOF SYSTEMS:

- ✓ Truss design drawing shall meet section FRC R802.10 Wood trusses. Include a layout and truss details and be signed and sealed by Fl. Pro. Eng.
- ✓ Show types of connector's assemblies' and resistance uplift rating for all trusses and rafters
- Show gable ends with rake beams showing reinforcement or gable truss and wall bracing details
- ✓ Provide dead load rating of trusses

Conventional Roof Framing Layout Per FRC 802:

- Rafter and ridge beams sizes, span, species and spacing
- Connectors to wall assemblies' include assemblies' resistance to uplift rating.
- Valley framing and support details
- Provide dead load rating of rafter system.

ROOF SHEATHING FRC Table R602,3(2) FRC 803

- ✓ Include all materials which will make up the roof decking, identification of structural panel sheathing, grade, thickness and show fastener schedule for structural panel sheathing on the edges & intermediate areas

ROOF ASSEMBLIES FRC Chapter 9

- ✓ Include all materials which will make up the roof assemblies covering; with Florida Product Approval numbers for each component of the roof assemblies covering.

FCB Chapter 13 Florida Energy Efficiency Code for Building Construction

- ✓ Residential construction shall comply with this code by using the following compliance methods in the FBC Subchapter 13-6, Residential buildings compliance methods. Two of the required forms are to be submitted, showing dimensions condition area equal to the total condition living space area
- ✓ Show the insulation R value for the following areas of the structure: Attic space, Exterior wall cavity and Crawl space (if applicable)

HVAC information shown

- ✓ Manual J sizing equipment or equivalent computation
- ✓ Exhaust fans locations in bathrooms

Plumbing Fixture layout shown

- ✓ All fixtures waste water lines shall be shown on the foundation plan

Electrical layout shown including:

- ✓ Switches, outlets/receptacles, lighting and all required GFCI outlets identified
- ✓ Ceiling fans
- ✓ Smoke detectors
- ✓ Service panel, sub-panel, location(s) and total ampere ratings

**COLUMBIA COUNTY BUILDING DEPARTMENT
RESIDENTIAL MINIMUM PLAN REQUIREMENTS AND CHECKLIST
FOR THE FLORIDA RESIDENTIAL BUILDING CODE 2004 with 2005 & 2006
Supplements and One (1) and Two (2) Family Dwellings**

ALL REQUIREMENTS ARE SUBJECT TO CHANGE

ALL BUILDING PLANS MUST INDICATE COMPLIANCE with the Current FLORIDA BUILDING CODES and the Current FLORIDA RESIDENTIAL CODE. ALL PLANS OR DRAWING SHALL PROVIDED CALCULATIONS AND DETAILS THAT HAVE THE SEAL AND SIGNATURE OF A CERTIFIED ARCHITECT OR ENGINEER REGISTERED IN THE STATE OF FLORIDA, OR ALTERNATE METHODOLOGIES, APPROVED BY THE STATE OF FLORIDA BUILDING COMMISSION FOR ONE- AND-TWO FAMILY DWELLINGS.

FOR DESIGN PURPOSES THE FOLLOWING BASIC WIND SPEEDS ARE PER FIGURE R301.2(4) of the Residential Code (Florida Wind speed map) SHALL BE USED.

WIND SPEED LINE SHALL BE DEFINED AS FOLLOWS: THE CENTERLINE OF INTERSTATE 75.

1. ALL BUILDINGS CONSTRUCTED EAST OF SAID LINE SHALL BE ----- 100 MPH
2. ALL BUILDINGS CONSTRUCTED WEST OF SAID LINE SHALL BE ----- 110 MPH
3. NO AREA IN COLUMBIA COUNTY IS IN A WIND BORNE DEBRIS REGION

GENERAL REQUIREMENTS:

- ✓ Two (2) complete sets of plans containing the following:
- ✓ All drawings must be clear, concise and drawn to scale, details that are not used shall be marked void
- ✓ Condition space (Sq. Ft.) and total (Sq. Ft.) under roof shall be shown on the plans.
- ✓ Designers name and signature shall be on all documents and a licensed architect or engineer, signature and official embossed seal shall be affixed to the plans and documents per FBC 106.1.

Site Plan information including:

- ✓ Dimensions of lot or parcel of land
- ✓ Dimensions of all building set backs
- ✓ Location of all other structures (include square footage of structures) on parcel, existing or proposed well and septic tank and all utility easements.
- ✓ Provide a full legal description of property.

Wind-load Engineering Summary, calculations and any details required:

- ✓ Plans or specifications must meet state compliance with FRC Chapter 3
- ✓ The following information must be shown as per section FRC
- ✓ Basic wind speed (3-second gust), miles per hour
- ✓ Wind importance factor and nature of occupancy
- ✓ Wind exposure – if more than one wind exposure is used, the wind exposure and applicable wind direction shall be indicated
- ✓ The applicable internal pressure coefficient, Components and Cladding The design wind pressure in terms of psf (kN/m²), to be used for the design of exterior component and cladding materials not specifically designed by the registered design professional.

Elevations Drawing including:

- ✓ All side views of the structure
- ✓ Roof pitch
- ✓ Overhang dimensions and detail with attic ventilation
- Location, size and height above roof of chimneys
- Location and size of skylights with Florida Product Approval
- ✓ Number of stories
- ✓ e) Building height from the established grade to the roofs highest peak

Floor Plan including:

- ✓ Dimensioned area plan showing rooms, attached garage, breeze ways, covered porches, deck, balconies and raised floor surfaces located more than 30 inches above the floor or grade
- ✓ All exterior and interior shear walls indicated
- ✓ Shear wall opening shown (Windows, Doors and Garage doors)
- ✓ Emergency escape and rescue opening in each bedroom (net clear opening shown)
- ✓ Safety glazing of glass where needed
- Fireplaces types (gas appliance) (vented or non-vented) or wood burning with Hearth (see chapter 10 of FRC)
- Stairs with dimensions (width, tread and riser and total run) details of guardrails, Handrails (see FRC 311)
- ✓ Plans must show and identify accessibility of bathroom (see FRC 322)

All materials placed within opening or onto/into exterior shear walls, soffits or roofs shall have Florida product approval number and mfg. installation information submitted with the plans (see Florida product approval form)

Foundation Plans Per FRC 403:

- ✓ a) Location of all load-bearing walls footings indicated as standard, monolithic, dimensions, size and type of reinforcing.
- ✓ b) All posts and/or column footing including size and reinforcing
- c) Any special support required by soil analysis such as piling.
- ✓ d) Assumed load-bearing value of soil _____ (psf)
- ✓ e) Location of horizontal and vertical steel, for foundation or walls (include # size and type)

CONCRETE SLAB ON GRADE Per FRC R506

- ✓ Show Vapor retarder (6mil. Polyethylene with joints lapped 6 inches and sealed)
- ✓ Show control joints, synthetic fiber reinforcement or welded fire fabric reinforcement and Supports

PROTECTION AGAINST TERMITES Per FRC 320:

- ✓ Indicate on the foundation plan if soil treatment is used for subterranean termite prevention or submit other approved termite protection methods. Protection shall be provided by registered termiticides

Masonry Walls and Stem walls (load bearing & shear Walls) FRC Section R606

- Show all materials making up walls, wall height, and Block size, mortar type
 - Show all Lintel sizes, type, spans and tie-beam sizes and spacing of reinforcement
- Metal frame shear wall and roof systems shall be designed, signed and sealed by Florida Prof. Engineer or Architect**

Floor Framing System: First and/or second story

- Floor truss package shall including layout and details, signed and sealed by Florida Registered Professional Engineer
- Show conventional floor joist type, size, span, spacing and attachment to load bearing walls, stem walls and/or piers
- Girder type, size and spacing to load bearing walls, stem wall and/or piers
- Attachment of joist to girder
- Wind load requirements where applicable
- Show required under-floor crawl space
- Show required amount of ventilation opening for under-floor spaces
- Show required covering of ventilation opening.
- Show the required access opening to access to under-floor spaces
- Show the sub-floor structural panel sheathing type, thickness and fastener schedule on the edges & intermediate of the areas structural panel sheathing
- Show Draft stopping, Fire caulking and Fire blocking
- Show fireproofing requirements for garages attached to living spaces, per FRC section R309
- Provide live and dead load rating of floor framing systems (psf).

- ✓ On the electrical plans identify the electrical service overcurrent protection device for the main electrical service. This device shall be installed on the exterior of structures to serve as a disconnecting means for the utility company electrical service. Conductors used from the exterior disconnecting means to a panel or sub panel shall have four-wire conductors, of which one conductor shall be used as an equipment ground. Indicate if the utility company service entrance cable will be of the overhead or underground type.
- ✓ Appliances and HVAC equipment and disconnects
- ✓ Arc Fault Circuits (AFCI) in bedrooms
- Notarized Disclosure Statement for Owner Builders
- Notice of Commencement Recorded (in the Columbia County Clerk Office) Notice Of Commencement is required to be filed with the building department Before Any Inspections Will Be Done.

Private Potable Water

- Size of pump motor
- Size of pressure tank
- Cycle stop valve if used

City Water

THE FOLLOWING ITEMS MUST BE SUBMITTED WITH BUILDING PLANS

- ✓ Building Permit Application: A current Building Permit Application form is to be completed and submitted for all residential projects.
- ✓ Parcel Number: The parcel number (Tax ID number) from the Property Appraiser (386) 758-1084 is required. A copy of property deed is also requested.
- ✓ Environmental Health Permit or Sewer Tap Approval: A copy of the Environmental Health permit, existing septic approval or sewer tap approval is required before a building permit can be issued. (386) 758-1058 (Toilet facilities shall be provided for construction workers)
- City Approval: If the project is to be located within the city limits of the Town of Fort White, prior approval is required. The Town of Fort White approval letter is required to be submitted by the owner or contractor to this office when applying for a Building Permit. (386) 497-2321
- Flood Information: All projects within the Floodway of the Suwannee or Santa Fe Rivers shall require permitting through the Suwannee River Water Management District, before submitting application to this office. Any project located within a flood zone where the base flood elevation (100 year flood) has been established shall meet the requirements of Section 8.8 of the Columbia County Land Development Regulations. Any project located within a flood zone where the base flood elevation has not been established (Zone A) shall meet the requirements of Section 8.7 of the Columbia County Land Development Regulations. **CERTIFIED FINISHED FLOOR ELEVATIONS WILL BE REQUIRED ON ANY PROJECT WHERE THE BASE FLOOD ELEVATION (100 YEAR FLOOD) HAS BEEN ESTABLISHED.** A development permit will also be required. The permit cost is \$50.00.
- ✓ Driveway Connection: If the property does not have an existing access to a public road, then an application for a culvert permit (\$25.00) must be made. If the applicant feels that a culvert is not needed, they may apply for a culvert waiver (\$50.00). All culvert waivers are sent to the Columbia County Public Works Department for approval or denial.
- ✓ 911 Address: If the project is located in an area where the 911 address has been issued, then the proper Paper work from the 911 Addressing Departments must be submitted. (386) 758-1125

ALL REQUIRED INFORMATION IS TO BE SUBMITTED FOR REVIEW. NOTIFICATION WILL BE GIVEN WHEN THE APPLICATION AND PLANS ARE APPROVED AND READY TO PERMIT.

**Project Information for: L266128**

Builder: Richard Keen
Address: 342 Beam Circle
... Lake City, FL
County: Columbia
Truss Count: 19
Design Program: MiTek 20/20 6.3
Building Code: FBC2004/TPI2002

Truss Design Load Information:

Gravity: **Wind:**

Roof (psf): 42.0 Wind Standard: ASCE 7-02 Wind Exposure: B
Floor (psf): N/A Wind Speed (mph): 110

Note: See the individual truss drawings for special loading conditions.

Contractor of Record, responsible for structural engineering:

James H. Johnston, III Florida Registered Residential Contractor License No. RR0066976
Address: RT. #15 Box 3693 Lake City, Florida 32024

Truss Design Engineer: Julius Lee, PE Florida P.E. License No. 34869

Address: 1109 Coastal Bay Blvd. Boynton Beach, FL 33435

Notes:

1. Determination as to the suitability of these truss components for the structure is the responsibility of the building designer/engineer of record, as defined in ANSI/TPI 1-2002 Section 2.2
2. The seal date shown on the individual truss component drawings must match the seal date on this index sheet.
3. The Truss Design Engineer's responsibility relative to this structure consists solely of the design of the individual truss components and does not include the design of any additional structural elements including but not limited to continuous lateral bracing elements in the web and chord planes. See Florida Administrative Code 61G15-31.003 sections 3 c) & 5 and Chapter 2 of the National Design Standard for Metal Plate Connected Wood Truss Construction ANSI/TPI 1-2002 for additional information on the responsibilities of the delegated "Truss Design Engineer". Builders FirstSource and Julius Lee, PE do not accept any additional delegations beyond the scope of work described in the referenced documents above.




No.	Drwg. #	Truss ID	Date
1	J1928307	CJ1	1/21/08
2	J1928308	CJ3	1/21/08
3	J1928309	CJ5	1/21/08
4	J1928310	EJ4	1/21/08
5	J1928311	EJ5	1/21/08
6	J1928312	EJ7	1/21/08
7	J1928313	HJ5	1/21/08
8	J1928314	HJ9	1/21/08
9	J1928315	T01	1/21/08
10	J1928316	T02	1/21/08
11	J1928317	T03	1/21/08
12	J1928318	T04	1/21/08
13	J1928319	T05	1/21/08
14	J1928320	T06	1/21/08
15	J1928321	T07	1/21/08
16	J1928322	T08	1/21/08
17	J1928323	T09	1/21/08
18	J1928324	T10	1/21/08
19	J1928325	T11	1/21/08

Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	CJ1	JACK	14	1	J1928307
					Job Reference (optional)

Builders FirstSource, Lake City, FL 32055

6.300 s Feb 15 2006 MiTek Industries, Inc. Fri Jan 18 16:30:34 2008 Page 1

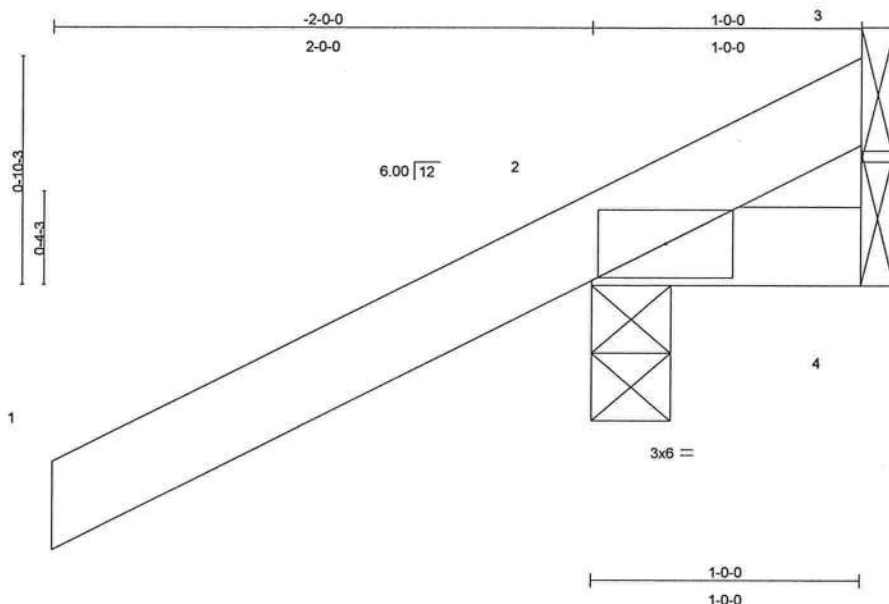

LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plates Increase	1.25	TC 0.28	Vert(LL)	-0.00	2	>999	360	MT20
TCDL 7.0	Lumber Increase	1.25	BC 0.01	Vert(TL)	-0.00	2	>999	240	244/190
BCLL 10.0	* Rep Stress Incr	YES	WB 0.00	Horz(TL)	0.00	3	n/a	n/a	
BCDL 5.0	Code FBC2004/TPI2002		(Matrix)						Weight: 7 lb

LUMBER

TOP CHORD 2 X 4 SYP No.2
BOT CHORD 2 X 4 SYP No.2

BRACING

TOP CHORD Structural wood sheathing directly applied or 1'-0" oc purlins.
BOT CHORD Rigid ceiling directly applied or 10'-0" oc bracing.

REACTIONS (lb/size) 2=256/0-3-8, 4=5/Mechanical, 3=-90/Mechanical
Max Horz 2=87(load case 6)
Max Uplift 2=-286(load case 6), 4=-9(load case 4), 3=-90(load case 1)
Max Grav 2=256(load case 1), 4=14(load case 2), 3=127(load case 6)

FORCES (lb) - Maximum Compression/Maximum Tension

TOP CHORD 1-2=0/47, 2-3=-69/75
BOT CHORD 2-4=0/0

JOINT STRESS INDEX

2 = 0.14

NOTES

- 1) Wind: ASCE 7-02; 110mph (3-second gust); h=12ft; TCDL=4.2psf; BCDL=3.0psf; Category II; Exp B; enclosed; MWFRS gable end zone and C-C Exterior(2) zone; porch left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
- 2) *This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) All bearings are assumed to be SYP No.2 crushing capacity of 565.00 psi
- 4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 286 lb uplift at joint 2, 9 lb uplift at joint 4 and 90 lb uplift at joint 3.

Continued on page 2

Julius Lee
Truss Design Engineer
Florida P.E. No. 24888
1400 Coastal Bay Blvd.
Boynton Beach, FL 33435

January 21, 2008

Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITTEK REFERENCE PAGE MII-7473 BEFORE USE

This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	CJ1	JACK	14	1	J1928307
Job Reference (optional)					

Builders FirstSource, Lake City, FL 32055

6.300 s Feb 15 2006 MiTek Industries, Inc. Fri Jan 18 16:30:34 2008 Page 2

LOAD CASE(S) Standard

Julius Lee
Truss Design Engineer
Florida P.E. No. 34868
1400 Coastal Bay Blvd
Boynton Beach, FL 33435

January 21, 2008

Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 BEFORE USE


This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	CJ3	JACK	14	1	J1928308
Job Reference (optional)					

Builders FirstSource, Lake City, FL 32055

6.300 s Feb 15 2006 MiTek Industries, Inc. Fri Jan 18 16:30:35 2008 Page 1

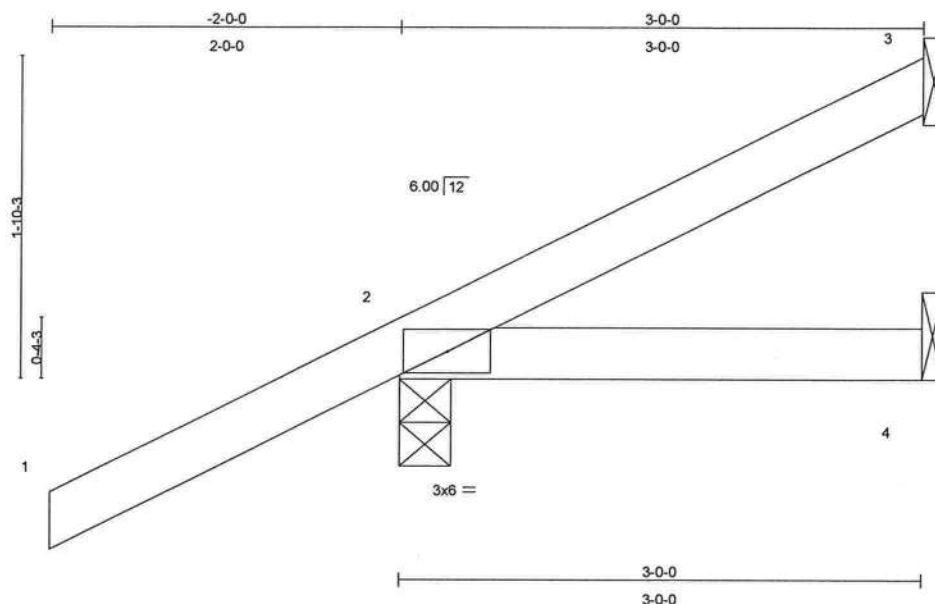

Scale = 1:12.5

LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plates Increase	1.25	TC 0.29	Vert(LL)	0.01	2-4	>999	360	MT20	244/190
TCDL 7.0	Lumber Increase	1.25	BC 0.08	Vert(TL)	-0.01	2-4	>999	240		
BCLL 10.0	* Rep Stress Incr	YES	WB 0.00	Horz(TL)	-0.00	3	n/a	n/a		
BCDL 5.0	Code FBC2004/TPI2002		(Matrix)						Weight: 13 lb	

LUMBER

TOP CHORD 2 X 4 SYP No.2
BOT CHORD 2 X 4 SYP No.2

BRACING

TOP CHORD Structural wood sheathing directly applied or
3-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc
bracing.

REACTIONS (lb/size) 3=31/Mechanical, 2=250/0-3-8, 4=14/Mechanical

Max Horz 2=132(load case 6)

Max Uplift 3=-28(load case 7), 2=-238(load case 6), 4=-27(load case 4)

Max Grav 3=31(load case 1), 2=250(load case 1), 4=42(load case 2)

FORCES (lb) - Maximum Compression/Maximum Tension

TOP CHORD 1-2=0/47, 2-3=-57/7

BOT CHORD 2-4=0/0

JOINT STRESS INDEX

2 = 0.13

NOTES

1) Wind: ASCE 7-02; 110mph (3-second gust); h=12ft; TCDL=4.2psf; BCDL=3.0psf; Category II; Exp B; enclosed; MWFRS gable end zone and C-C Exterior(2) zone; porch left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.

2) *This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.

3) All bearings are assumed to be SYP No.2 crushing capacity of 565.00 psi

4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 28 lb uplift at joint 3, 238 lb uplift at joint 2 and 27 lb uplift at joint 4.

Continued on page 2

Julius Lee
Truss Design Engineer
Florida PE No. 24888
1400 Coastal Bay Blvd
Boynton Beach, FL 33435

January 21, 2008

Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITTEK REFERENCE PAGE MII-7473 BEFORE USE

This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	CJ3	JACK	14	1	J1928308
Job Reference (optional)					

Builders FirstSource, Lake City, FL 32055

6.300 s Feb 15 2006 MiTek Industries, Inc. Fri Jan 18 16:30:35 2008 Page 2

LOAD CASE(S) Standard

Julius Lee
Truss Design Engineer
Florida PE No. 34868
1100 Coastal Bay Blvd
Boynton Beach, FL 33435

January 21, 2008


Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 BEFORE USE
This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	CJ5	JACK	12	1	J1928309
					Job Reference (optional)

Builders FirstSource, Lake City, FL 32055

6.300 s Feb 15 2006 MiTek Industries, Inc. Fri Jan 18 16:30:35 2008 Page 1

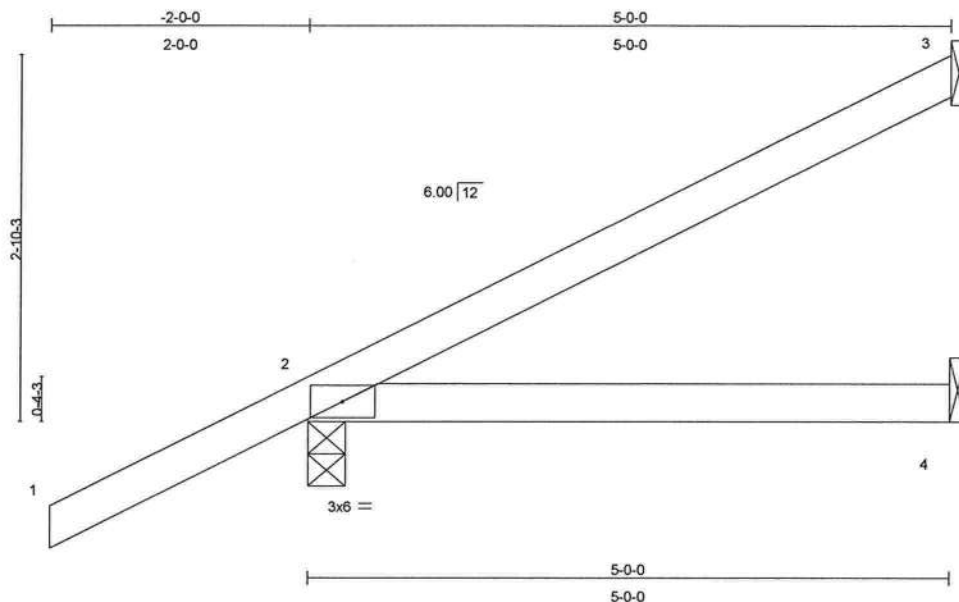

Scale = 1:16.9

LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plates Increase	1.25	TC 0.29	Vert(LL)	0.09	2-4	>663	360	MT20	244/190
TCDL 7.0	Lumber Increase	1.25	BC 0.24	Vert(TL)	-0.05	2-4	>999	240		
BCLL 10.0	* Rep Stress Incr	YES	WB 0.00	Horz(TL)	-0.00	3	n/a	n/a		
BCDL 5.0	Code FBC2004/TPI2002		(Matrix)							
									Weight: 19 lb	

LUMBER

TOP CHORD 2 X 4 SYP No.2
BOT CHORD 2 X 4 SYP No.2

BRACING

TOP CHORD Structural wood sheathing directly applied or 5'-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10'-0-0 oc bracing.

REACTIONS (lb/size) 3=103/Mechanical, 2=295/0-3-8, 4=24/Mechanical
Max Horz 2=178(load case 6)
Max Uplift 3=-87(load case 6), 2=-260(load case 6), 4=-46(load case 4)
Max Grav 3=103(load case 1), 2=295(load case 1), 4=72(load case 2)

FORCES (lb) - Maximum Compression/Maximum Tension

TOP CHORD 1-2=0/47, 2-3=-88/36
BOT CHORD 2-4=0/0

JOINT STRESS INDEX

2 = 0.14

NOTES

- 1) Wind: ASCE 7-02; 110mph (3-second gust); h=12ft; TCDL=4.2psf; BCDL=3.0psf; Category II; Exp B; enclosed; MWFRS gable end zone and C-C Exterior(2) zone; porch left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
- 2) *This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) All bearings are assumed to be SYP No.2 crushing capacity of 565.00 psi
- 4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 87 lb uplift at joint 3, 260 lb uplift at joint 2 and 46 lb uplift at joint 4.

Julius Lee
Truss Design Engineer
Florida PE No. 24866
1100 Coastal Bay Blvd
Boynton Beach, FL 33435

January 21, 2008

Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 BEFORE USE
This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	CJ5	JACK	12	1	J1928309
Job Reference (optional)					

Builders FirstSource, Lake City, FL 32055

6.300 s Feb 15 2006 MiTek Industries, Inc. Fri Jan 18 16:30:35 2008 Page 2

LOAD CASE(S) Standard

Julius Lee
Truss Design Engineer
Florida P.E. No. 24888
1100 Coastal Bay Blvd.
Boynton Beach, FL 33426

January 21, 2008


Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 BEFORE USE
This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	EJ4	JACK	1	1	J1928310
Job Reference (optional)					

Builders FirstSource, Lake City, FL 32055

6.300 s Feb 15 2006 MiTek Industries, Inc. Fri Jan 18 16:30:36 2008 Page 1

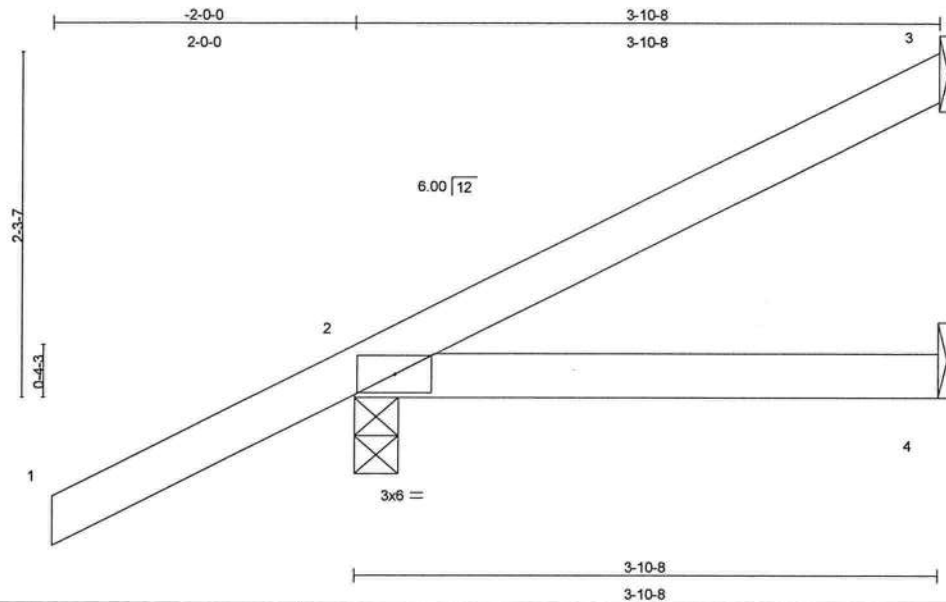

LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plates Increase	1.25	TC 0.29	Vert(LL)	-0.01	2-4	>999	360	MT20
TCDL 7.0	Lumber Increase	1.25	BC 0.10	Vert(TL)	-0.02	2-4	>999	240	244/190
BCLL 10.0	* Rep Stress Incr	YES	WB 0.00	Horz(TL)	-0.00	3	n/a	n/a	
BCDL 5.0	Code FBC2004/TPI2002		(Matrix)						Weight: 16 lb

LUMBER

TOP CHORD 2 X 4 SYP No.2
BOT CHORD 2 X 4 SYP No.2

BRACING

TOP CHORD Structural wood sheathing directly applied or 3-10-8 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (lb/size) 3=65/Mechanical, 2=267/0-3-8, 4=18/Mechanical
Max Horz 2=152(load case 6)
Max Uplift 3=-50(load case 6), 2=-198(load case 6)
Max Grav 3=65(load case 1), 2=267(load case 1), 4=55(load case 2)

FORCES (lb) - Maximum Compression/Maximum Tension

TOP CHORD 1-2=0/47, 2-3=-62/21
BOT CHORD 2-4=0/0

JOINT STRESS INDEX

2 = 0.13

NOTES

- 1) Wind: ASCE 7-02; 110mph (3-second gust); h=12ft; TCDL=4.2psf; BCDL=3.0psf; Category II; Exp B; enclosed; MWFRS gable end zone and C-C Exterior(2) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
- 2) *This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) All bearings are assumed to be SYP No.2 crushing capacity of 565.00 psi
- 4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 50 lb uplift at joint 3 and 198 lb uplift at joint 2.

Julius Lee
Truss Design Engineer
Florida PE No. 24866
1400 Coastal Bay Blvd.
Boynton Beach, FL 33435

January 21, 2008

Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 BEFORE USE
This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	EJ4	JACK	1	1	J1928310
					Job Reference (optional)

Builders FirstSource, Lake City, FL 32055

6.300 s Feb 15 2006 MiTek Industries, Inc. Fri Jan 18 16:30:36 2008 Page 2

LOAD CASE(S) Standard

Julius Lee
Truss Design Engineer
Florida P.E. No. 34868
1400 Coastal Bay Blvd
Boynton Beach, FL 33435

January 21, 2008

Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 BEFORE USE


This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	EJ5	MONO HIP	1	1	J1928311
Job Reference (optional)					

Builders FirstSource, Lake City, FL 32055

6.300 s Apr 19 2006 MiTek Industries, Inc. Mon Jan 21 09:47:08 2008 Page 1

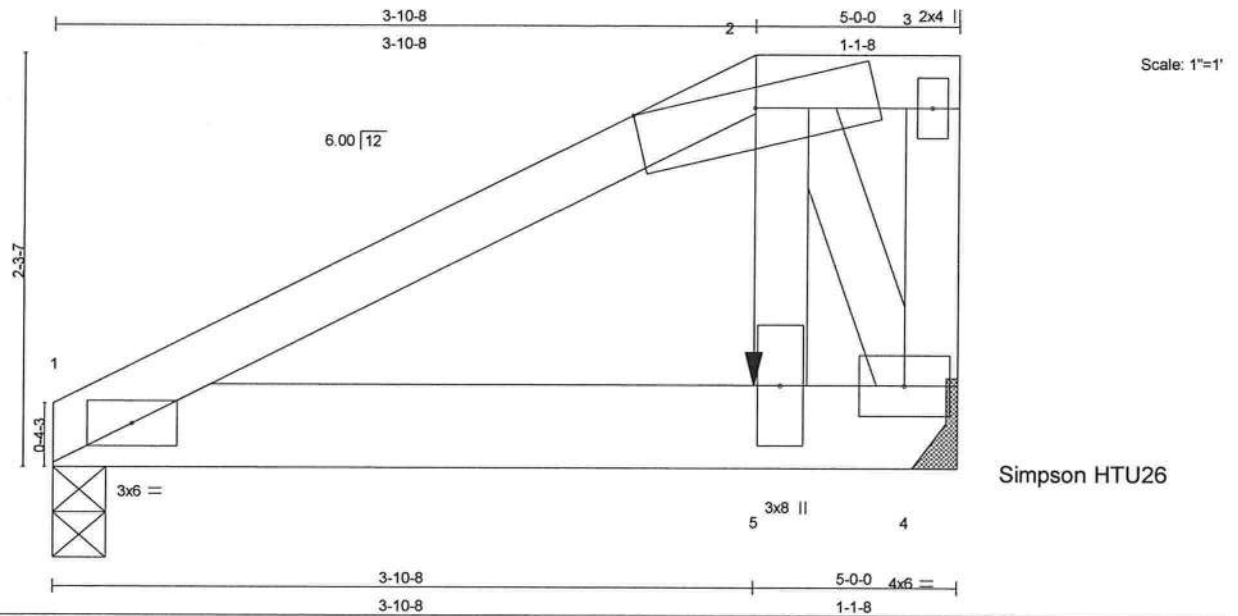

LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plates Increase	1.25	TC 0.21	Vert(LL)	-0.04	1-5	>999	360	MT20	244/190
TCDL 7.0	Lumber Increase	1.25	BC 0.62	Vert(TL)	-0.07	1-5	>832	240		
BCLL 10.0	Rep Stress Incr	NO	WB 0.65	Horz(TL)	0.00	4	n/a	n/a		
BCDL 5.0	Code FBC2004/TPI2002		(Matrix)							
									Weight: 27 lb	

LUMBER

TOP CHORD 2 X 4 SYP No.2
 BOT CHORD 2 X 6 SYP No.1D
 WEBS 2 X 4 SYP No.3

BRACING

TOP CHORD Structural wood sheathing directly applied or 5-0-0 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (lb/size) 1=1365/0-3-8, 4=1448/Mechanical
 Max Horz 1=88(load case 5)
 Max Uplift 1=-661(load case 5), 4=-742(load case 5)

FORCES (lb) - Maximum Compression/Maximum Tension

TOP CHORD 1-2=-890/393, 2-3=-0/0, 3-4=-37/28
 BOT CHORD 1-5=-385/760, 4-5=-459/915
 WEBS 2-5=-983/2035, 2-4=-2000/1004

JOINT STRESS INDEX

1 = 0.38, 2 = 0.88, 3 = 0.02, 4 = 0.65 and 5 = 0.66

NOTES

- 1) Wind: ASCE 7-02; 110mph (3-second gust); h=12ft; TCDL=4.2psf; BCDL=3.0psf; Category II; Exp B; enclosed; MWFRS gable end zone; Lumber DOL=1.60 plate grip DOL=1.60.
- 2) Provide adequate drainage to prevent water ponding.
- 3) *This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) All bearings are assumed to be SYP No.2 crushing capacity of 565.00 psi
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 661 lb uplift at joint 1 and 742 lb uplift at joint 4.

Julius Lee
 Truss Design Engineer
 Florida PE No. 24888
 1100 Coastal Bay Blvd
 Boynton Beach, FL 33435

January 21, 2008

Continued on page 2


Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 BEFORE USE
 This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	EJ7	MONO TRUSS	14	1	J1928312
Job Reference (optional)					

Builders FirstSource, Lake City, FL 32055

6.300 s Apr 19 2006 MiTek Industries, Inc. Mon Jan 21 09:43:19 2008 Page 1

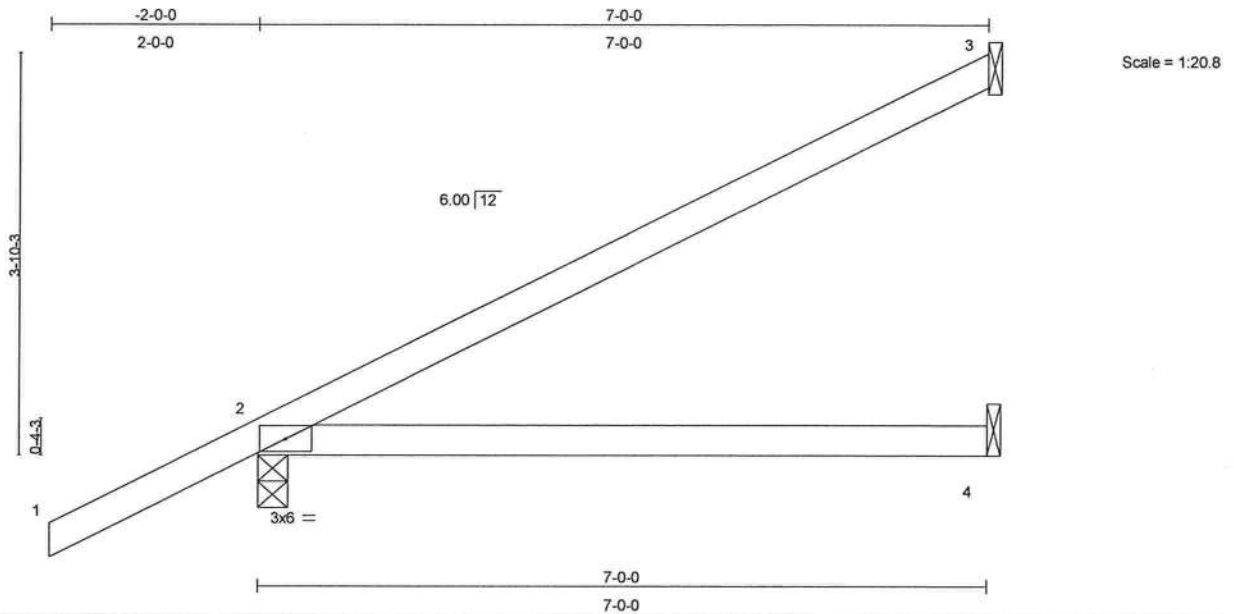

LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plates Increase	1.25	TC 0.50	Vert(LL)	0.33	2-4	>250	360	MT20	244/190
TCDL 7.0	Lumber Increase	1.25	BC 0.45	Vert(TL)	-0.16	2-4	>501	240		
BCLL 10.0	* Rep Stress Incr	YES	WB 0.00	Horz(TL)	-0.00	3	n/a	n/a		
BCDL 5.0	Code FBC2004/TPI2002		(Matrix)							
									Weight: 26 lb	

LUMBER

TOP CHORD 2 X 4 SYP No.2
BOT CHORD 2 X 4 SYP No.2

BRACING

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (lb/size) 3=154/Mechanical, 2=352/0-3-8, 4=45/Mechanical
Max Horz 2=161(load case 6)
Max Uplift 3=-94(load case 6), 2=-224(load case 6), 4=-65(load case 5)
Max Grav 3=154(load case 1), 2=352(load case 1), 4=94(load case 2)

FORCES (lb) - Maximum Compression/Maximum Tension

TOP CHORD 1-2=0/47, 2-3=-131/54
BOT CHORD 2-4=0/0

JOINT STRESS INDEX

2 = 0.58

NOTES

- 1) Wind: ASCE 7-02; 110mph (3-second gust); h=12ft; TCDL=4.2psf; BCDL=3.0psf; Category II; Exp B; enclosed; MWFRS and C-C Exterior(2) zone; porch left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
- 2) *This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) All bearings are assumed to be SYP No.2 crushing capacity of 565.00 psi
- 4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 94 lb uplift at joint 3, 224 lb uplift at joint 2 and 65 lb uplift at joint 4.

LOAD CASE(S) Standard

January 21, 2008

Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITTEK REFERENCE PAGE MII-7473 BEFORE USE
This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



Julius Lee
Truss Design Engineer
Florida PE No. 34868
1400 Coastal Bay Blvd
Boynton Beach, FL 33435

January 21, 2008


Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 BEFORE USE
This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	HJ5	JACK	1	1	J1928313
Job Reference (optional)					

Builders FirstSource, Lake City, FL 32055

6.300 s Feb 15 2006 MiTek Industries, Inc. Fri Jan 18 16:30:37 2008 Page 1

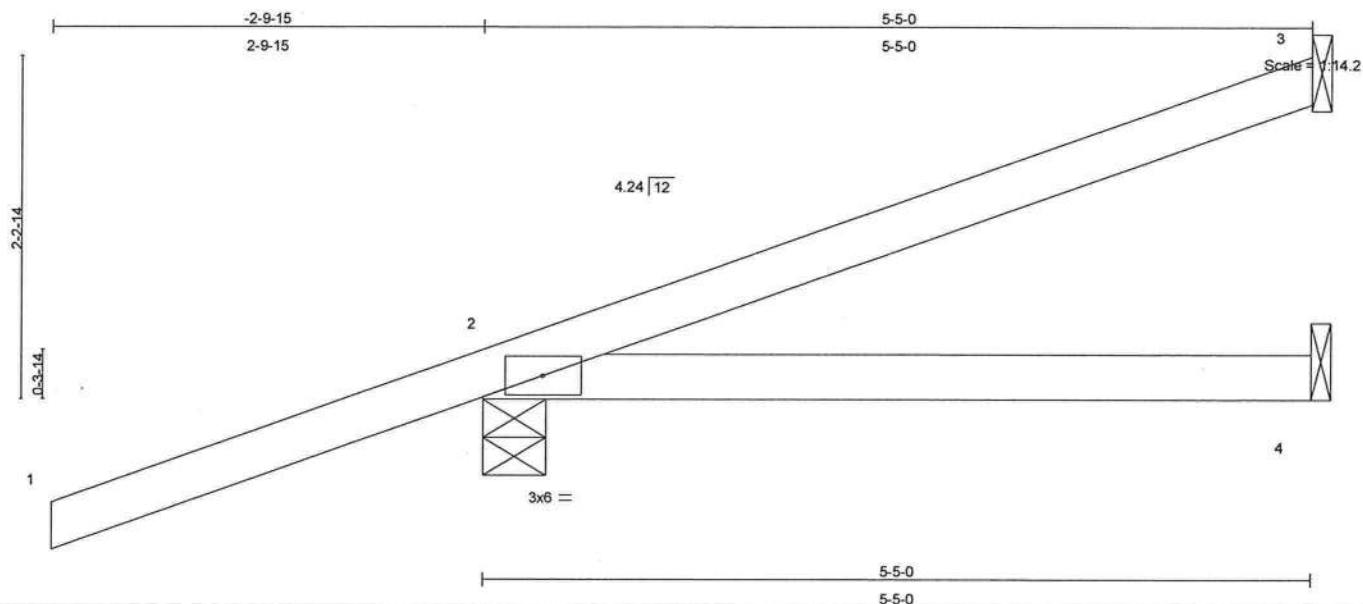

LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plates Increase	1.25	TC 0.53	Vert(LL)	-0.04	2-4	>999	360	MT20	244/190
TCDL 7.0	Lumber Increase	1.25	BC 0.18	Vert(TL)	-0.05	2-4	>999	240		
BCLL 10.0	* Rep Stress Incr	NO	WB 0.00	Horz(TL)	-0.00	3	n/a	n/a		
BCDL 5.0	Code FBC2004/TPI2002		(Matrix)							
									Weight: 21 lb	

LUMBER

TOP CHORD 2 X 4 SYP No.2
BOT CHORD 2 X 4 SYP No.2

BRACING

TOP CHORD Structural wood sheathing directly applied or
5-5-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc
bracing.

REACTIONS (lb/size) 3=75/Mechanical, 2=289/0-4-15, 4=22/Mechanical
Max Horz 2=120(load case 3)
Max Uplift 3=-43(load case 3), 2=-243(load case 3)
Max Grav 3=75(load case 1), 2=289(load case 1), 4=74(load case 2)

FORCES (lb) - Maximum Compression/Maximum Tension

TOP CHORD 1-2=0/50, 2-3=-40/14
BOT CHORD 2-4=0/0

JOINT STRESS INDEX

2 = 0.11

NOTES

- 1) Wind: ASCE 7-02; 110mph (3-second gust); h=12ft; TCDL=4.2psf; BCDL=3.0psf; Category II; Exp B; enclosed; MWFRS gable end zone; Lumber DOL=1.60 plate grip DOL=1.60.
- 2) *This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) All bearings are assumed to be SYP No.2 crushing capacity of 565.00 psi
- 4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 43 lb uplift at joint 3 and 243 lb uplift at joint 2.
- 5) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

Continued on page 2

Julius Lee
Truss Design Engineer
Florida PE No. 34868
1400 Coastal Bay Blvd
Boynton Beach, FL 33435

January 21, 2008

Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 BEFORE USE
This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	HJ5	JACK	1	1	J1928313
Job Reference (optional)					

Builders FirstSource, Lake City, FL 32055

6.300 s Feb 15 2006 MiTek Industries, Inc. Fri Jan 18 16:30:38 2008 Page 2

LOAD CASE(S) Standard

1) Regular: Lumber Increase=1.25, Plate Increase=1.25

Uniform Loads (plf)

Vert: 1-2=-54

Trapezoidal Loads (plf)

Vert: 2=-3(F=26, B=26)-to-3=-71(F=-8, B=-8), 2=-0(F=5, B=5)-to-4=-13(F=-2, B=-2)

Julius Lee
Truss Design Engineer
Florida PE No. 23889
1100 Coastal Bay Blvd.
Boynton Beach, FL 33435

January 21, 2008

Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 BEFORE USE


This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	HJ9	MONO TRUSS	6	1	J1928314
Job Reference (optional)					

Builders FirstSource, Lake City, FL 32055

6.300 s Feb 15 2006 MiTek Industries, Inc. Fri Jan 18 16:30:38 2008 Page 1

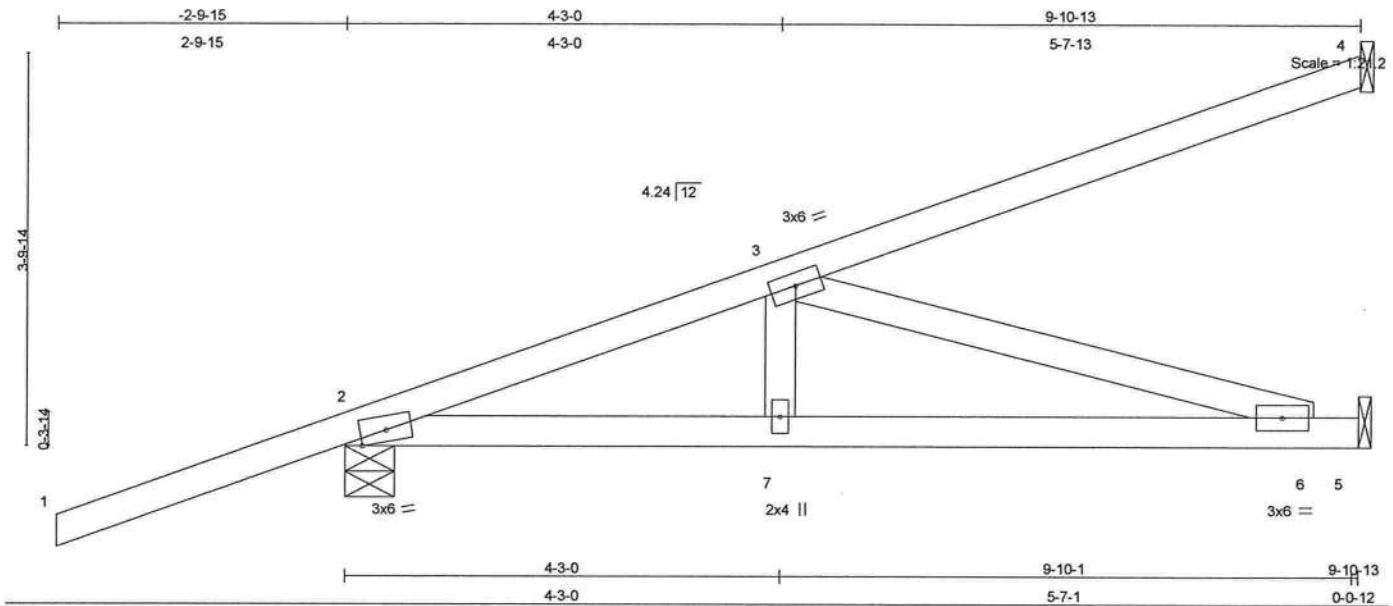

LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plates Increase	1.25	TC 0.61	Vert(LL)	0.10	6-7	>999	360	MT20	244/190
TCDL 7.0	Lumber Increase	1.25	BC 0.40	Vert(TL)	-0.12	6-7	>986	240		
BCLL 10.0	* Rep Stress Incr	NO	WB 0.34	Horz(TL)	0.01	5	n/a	n/a		
BCDL 5.0	Code FBC2004/TPI2002		(Matrix)							
										Weight: 45 lb

LUMBER

TOP CHORD 2 X 4 SYP No.2
BOT CHORD 2 X 4 SYP No.2
WEBS 2 X 4 SYP No.3

BRACING

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 7-11-9 oc bracing.

REACTIONS (lb/size) 4=268/Mechanical, 2=456/0-5-11, 5=218/Mechanical
Max Horz 2=269(load case 3)
Max Uplift 4=-233(load case 3), 2=-401(load case 3), 5=-181(load case 3)

FORCES (lb) - Maximum Compression/Maximum Tension

TOP CHORD 1-2=0/50, 2-3=-647/363, 3-4=-105/65
BOT CHORD 2-7=-535/599, 6-7=-535/599, 5-6=0/0
WEBS 3-7=-94/190, 3-6=-624/557

JOINT STRESS INDEX

2 = 0.77, 3 = 0.22, 6 = 0.17 and 7 = 0.13

NOTES

- 1) Wind: ASCE 7-02; 110mph (3-second gust); h=12ft; TCDL=4.2psf; BCDL=3.0psf; Category II; Exp B; enclosed; MWFRS gable end zone; porch left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60.
- 2) *This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) All bearings are assumed to be SYP No.2 crushing capacity of 565.00 psi
- 4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 233 lb uplift at joint 4, 401 lb uplift at joint 2 and 181 lb uplift at joint 5.

Julius Lee
Truss Design Engineer
Florida PE No. 34886
1400 Coastal Bay Blvd
Boca Raton, FL 33435

Continued on page 2

January 21, 2008

Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITTEK REFERENCE PAGE MII-7473 BEFORE USE
This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	HJ9	MONO TRUSS	6	1	J1928314
Job Reference (optional)					

Builders FirstSource, Lake City, FL 32055

6.300 s Feb 15 2006 MiTek Industries, Inc. Fri Jan 18 16:30:38 2008 Page 2

NOTES

5) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

1) Regular: Lumber Increase=1.25, Plate Increase=1.25

Uniform Loads (plf)

Vert: 1-2=-54

Trapezoidal Loads (plf)

Vert: 2=-3(F=25, B=25)-to-4=-134(F=-40, B=-40), 2=-0(F=5, B=5)-to-5=-25(F=-7, B=-7)

Julius Lane
Truss Design Engineer
Florida P.E. No. 34868
1400 Coastal Bay Blvd
Boynton Beach, FL 33435

January 21, 2008

Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 BEFORE USE

This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	T01	HIP	1	1	J1928315
Job Reference (optional)					

Builders FirstSource, Lake City, FL 32055

6.300 s Feb 15 2006 MiTek Industries, Inc. Fri Jan 18 16:30:39 2008 Page 1

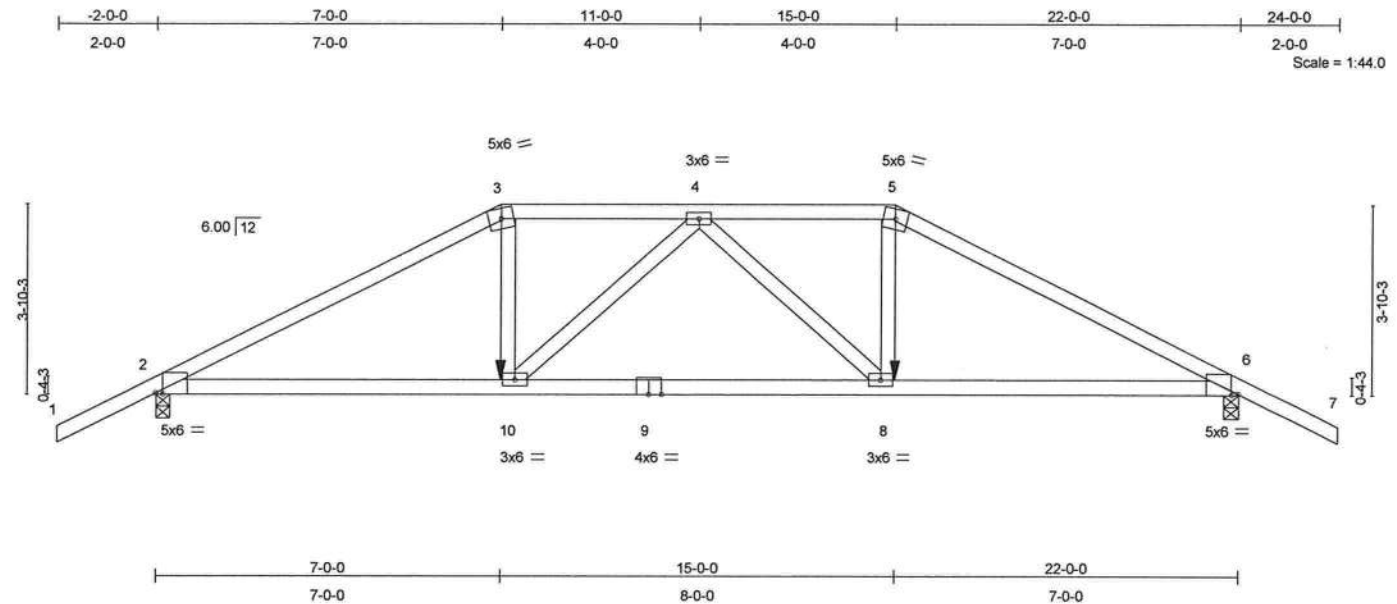


Plate Offsets (X,Y): [2:0-1-11,Edge], [6:0-1-11,Edge]

LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plates Increase	1.25	TC 0.39	Vert(LL)	-0.11	8-10	>999	360	MT20	244/190
TCDL 7.0	Lumber Increase	1.25	BC 0.60	Vert(TL)	-0.32	8-10	>809	240		
BCLL 10.0	* Rep Stress Incr	NO	WB 0.26	Horz(TL)	0.09	6	n/a	n/a		
BCDL 5.0	Code FBC2004/TPI2002		(Matrix)							
Weight: 99 lb										

LUMBER

TOP CHORD 2 X 4 SYP No.2
BOT CHORD 2 X 4 SYP No.2
WEBS 2 X 4 SYP No.3

BRACING

TOP CHORD Structural wood sheathing directly applied or 3-6-5 oc purlins.
BOT CHORD Rigid ceiling directly applied or 7-0-2 oc bracing.

REACTIONS (lb/size) 2=1521/0-3-8, 6=1521/0-3-8
Max Horz 2=-77(load case 6)
Max Uplift 2=-511(load case 5), 6=-511(load case 6)

FORCES (lb) - Maximum Compression/Maximum Tension

TOP CHORD 1-2=0/47, 2-3=-2708/817, 3-4=-2363/765, 4-5=-2363/765, 5-6=-2708/817, 6-7=0/47
BOT CHORD 2-10=-692/2332, 9-10=-808/2589, 8-9=-808/2589, 6-8=-658/2332
WEBS 3-10=-235/822, 4-10=-421/231, 4-8=-421/231, 5-8=-235/822

JOINT STRESS INDEX

2 = 0.67, 3 = 0.67, 4 = 0.35, 5 = 0.67, 6 = 0.67, 8 = 0.52, 9 = 0.84 and 10 = 0.52

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-02; 110mph (3-second gust); h=12ft; TCDL=4.2psf; BCDL=3.0psf; Category II; Exp B; enclosed; MWFRS; Lumber DOL=1.60 plate grip DOL=1.60.
- Provide adequate drainage to prevent water ponding.
- *This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- All bearings are assumed to be SYP No.2 crushing capacity of 565.00 psi

Julius Lee
Truss Design Engineer
Florida P.E. No. 24885
1300 Coastal Bay Blvd
Boynton Beach, FL 33435

January 21, 2008

Continued on page 2

Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITTEK REFERENCE PAGE MII-7473 BEFORE USE
This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	T01	HIP	1	1	J1928315
					Job Reference (optional)

Builders FirstSource, Lake City, FL 32055

6.300 s Feb 15 2006 MiTek Industries, Inc. Fri Jan 18 16:30:39 2008 Page 2

NOTES

- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 511 lb uplift at joint 2 and 511 lb uplift at joint 6.
- 7) Girder carries hip end with 7'-0" end setback.
- 8) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- 1) Regular: Lumber Increase=1.25, Plate Increase=1.25

Uniform Loads (plf)

Vert: 1-3=-54, 3-5=-118(F=-64), 5-7=-54, 2-10=-10, 8-10=-22(F=-12), 6-8=-10

Concentrated Loads (lb)

Vert: 10=-411(F) 8=-411(F)

Julius Lee
Truss Design Engineer
Florida PE No. 34868
1100 Coastal Bay Blvd
Boynton Beach, FL 33435

January 21, 2008

Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 BEFORE USE

This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	T02	HIP	1	1	J1928316
Job Reference (optional)					

Builders FirstSource, Lake City, FL 32055

6.300 s Feb 15 2006 MiTek Industries, Inc. Fri Jan 18 16:30:40 2008 Page 1

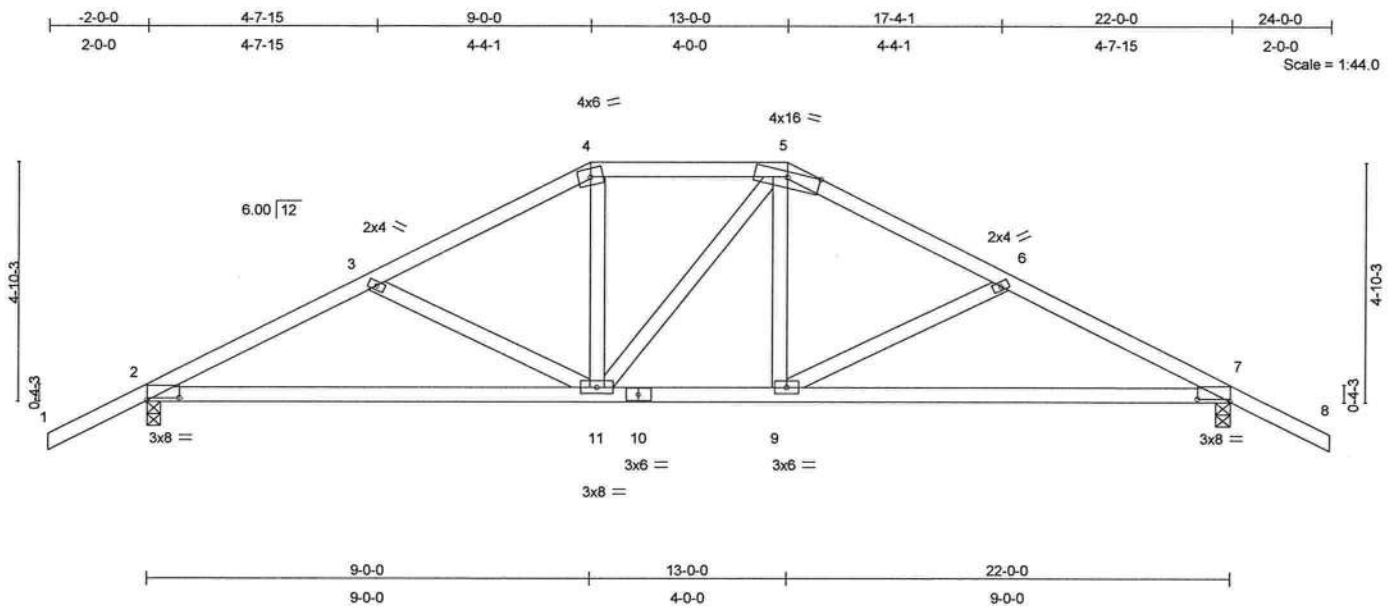


Plate Offsets (X,Y): [2:0-8-0,0-0-10], [7:0-8-0,0-0-10]

LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plates Increase	1.25	TC 0.29	Vert(LL)	-0.15	7-9	>999	360	MT20	244/190
TCDL 7.0	Lumber Increase	1.25	BC 0.38	Vert(TL)	-0.27	7-9	>952	240		
BCLL 10.0	* Rep Stress Incr	YES	WB 0.12	Horz(TL)	0.04	7	n/a	n/a		
BCDL 5.0	Code FBC2004/TPI2002		(Matrix)							
										Weight: 111 lb

LUMBER

TOP CHORD 2 X 4 SYP No.2
BOT CHORD 2 X 4 SYP No.2
WEBS 2 X 4 SYP No.3

BRACING

TOP CHORD Structural wood sheathing directly applied or 5-8-5 oc purlins.
BOT CHORD Rigid ceiling directly applied or 9-8-7 oc bracing.

REACTIONS (lb/size) 2=811/0-3-8, 7=811/0-3-8
Max Horz 2=-89(load case 7)
Max Uplift 2=-237(load case 6), 7=-237(load case 7)

FORCES (lb) - Maximum Compression/Maximum Tension
TOP CHORD 1-2=0/47, 2-3=-1200/638, 3-4=-945/522, 4-5=-802/520, 5-6=-945/522,
6-7=-1200/638, 7-8=0/47
BOT CHORD 2-11=-409/1016, 10-11=-210/801, 9-10=-210/801, 7-9=-409/1016
WEBS 3-11=-246/223, 4-11=-54/236, 5-11=-102/103, 5-9=-54/236, 6-9=-246/223

JOINT STRESS INDEX

2 = 0.68, 3 = 0.33, 4 = 0.41, 5 = 0.56, 6 = 0.33, 7 = 0.68, 9 = 0.34, 10 = 0.43 and 11 = 0.56

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-02; 110mph (3-second gust); h=12ft; TCDL=4.2psf; BCDL=3.0psf; Category II; Exp B; enclosed; MWFRS and C-C Exterior(2) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
- Provide adequate drainage to prevent water ponding.
- *This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.

Julius Lee
Truss Design Engineer
Florida PE No. 34868
1100 Coastal Bay Blvd
Boynton Beach, FL 33435

January 21, 2008

Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITTEK REFERENCE PAGE MII-7473 BEFORE USE
This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	T02	HIP	1	1	J1928316
Job Reference (optional)					

Builders FirstSource, Lake City, FL 32055

6.300 s Feb 15 2006 MiTek Industries, Inc. Fri Jan 18 16:30:40 2008 Page 2

NOTES

- 5) All bearings are assumed to be SYP No.2 crushing capacity of 565.00 psi
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 237 lb uplift at joint 2 and 237 lb uplift at joint 7.

LOAD CASE(S) Standard

Julius Lee
Truss Design Engineer
Florida P.E. No. 24868
1400 Coastal Bay Blvd
Boynton Beach, FL 33435

January 21, 2008

Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 BEFORE USE

This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	T03	COMMON	5	1	J1928317
Job Reference (optional)					

Builders FirstSource, Lake City, FL 32055

6.300 s Apr 19 2006 MiTek Industries, Inc. Mon Jan 21 09:45:17 2008 Page 1

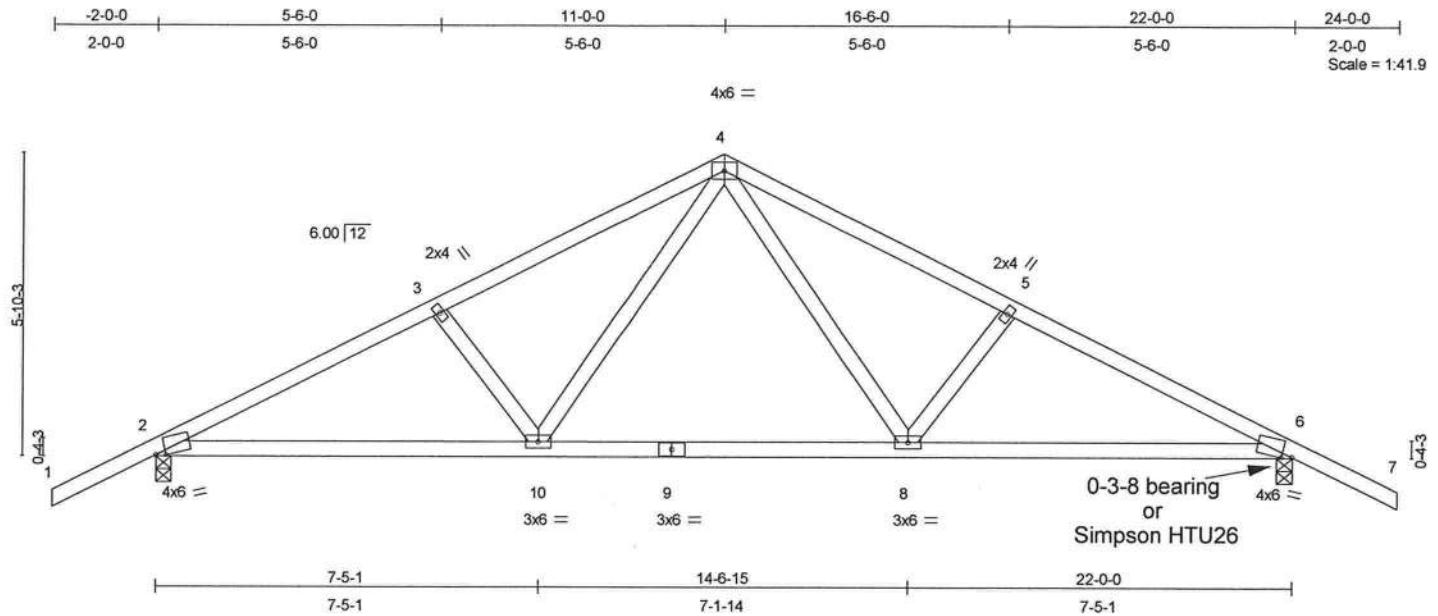


Plate Offsets (X,Y): [2:0-2-5,0-0-9], [6:0-2-5,0-0-9]

LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in (loc)	l/defl	L/d	PLATES	GRIP
TCCL 20.0	Plates Increase	1.25	TC 0.38	Vert(LL)	0.26 8-10	>999	360	MT20	244/190
TCDL 7.0	Lumber Increase	1.25	BC 0.69	Vert(TL)	-0.39 8-10	>667	240		
BCLL 10.0	Rep Stress Incr	NO	WB 0.25	Horz(TL)	0.05 6	n/a	n/a		
BCDL 5.0	Code FBC2004/TPI2002		(Matrix)						
									Weight: 105 lb

LUMBER

TOP CHORD 2 X 4 SYP No.2
BOT CHORD 2 X 4 SYP No.2
WEBS 2 X 4 SYP No.3

BRACING

TOP CHORD Structural wood sheathing directly applied or 4-8-11 oc purlins.
BOT CHORD Rigid ceiling directly applied or 7-7-12 oc bracing.

REACTIONS (lb/size) 2=1025/0-3-8, 6=1025/0-3-8
Max Horz 2=101(load case 6)
Max Uplift 2=-306(load case 6), 6=-306(load case 7)

FORCES (lb) - Maximum Compression/Maximum Tension

TOP CHORD 1-2=0/47, 2-3=-1698/919, 3-4=-1531/903, 4-5=-1531/903, 5-6=-1698/919, 6-7=0/47
BOT CHORD 2-10=-649/1443, 9-10=-339/993, 8-9=-339/993, 6-8=-649/1443
WEBS 3-10=-240/227, 4-10=-322/606, 4-8=-322/606, 5-8=-240/227

JOINT STRESS INDEX

2 = 0.64, 3 = 0.34, 4 = 0.69, 5 = 0.34, 6 = 0.64, 8 = 0.46, 9 = 0.80 and 10 = 0.46

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-02; 110mph (3-second gust); h=12ft; TCDL=4.2psf; BCDL=3.0psf; Category II; Exp B; enclosed; MWFRS and C-C Exterior(2) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
- *This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- All bearings are assumed to be SYP No.2 crushing capacity of 565.00 psi
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 306 lb uplift at joint 2 and 306 lb uplift at joint 6.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

Julius Lee
Truss Design Engineer
Florida P.E. No. 24868
1400 Coastal Bay Blvd
Boynton Beach, FL 33435

January 21, 2008

Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITTEK REFERENCE PAGE MII-7473 BEFORE USE
This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	T03	COMMON	5	1	J1928317
Job Reference (optional)					

Builders FirstSource, Lake City, FL 32055

6.300 s Apr 19 2006 MiTek Industries, Inc. Mon Jan 21 09:45:17 2008 Page 2

LOAD CASE(S) Standard

1) Regular: Lumber Increase=1.25, Plate Increase=1.25

Uniform Loads (plf)

Vert: 1-4=-54, 4-7=-54, 2-10=-10, 8-10=-70(F=-60), 6-8=-10

Julius Lee
Truss Design Engineer
Florida PE No. 24888
1400 Coastal Bay Blvd
Boynton Beach, FL 33435

January 21, 2008

Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 BEFORE USE

This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	T04	SPECIAL	1	1	J1928318
Job Reference (optional)					

Builders FirstSource, Lake City, FL 32055

6.300 s Apr 19 2006 MiTek Industries, Inc. Mon Jan 21 09:48:16 2008 Page 1

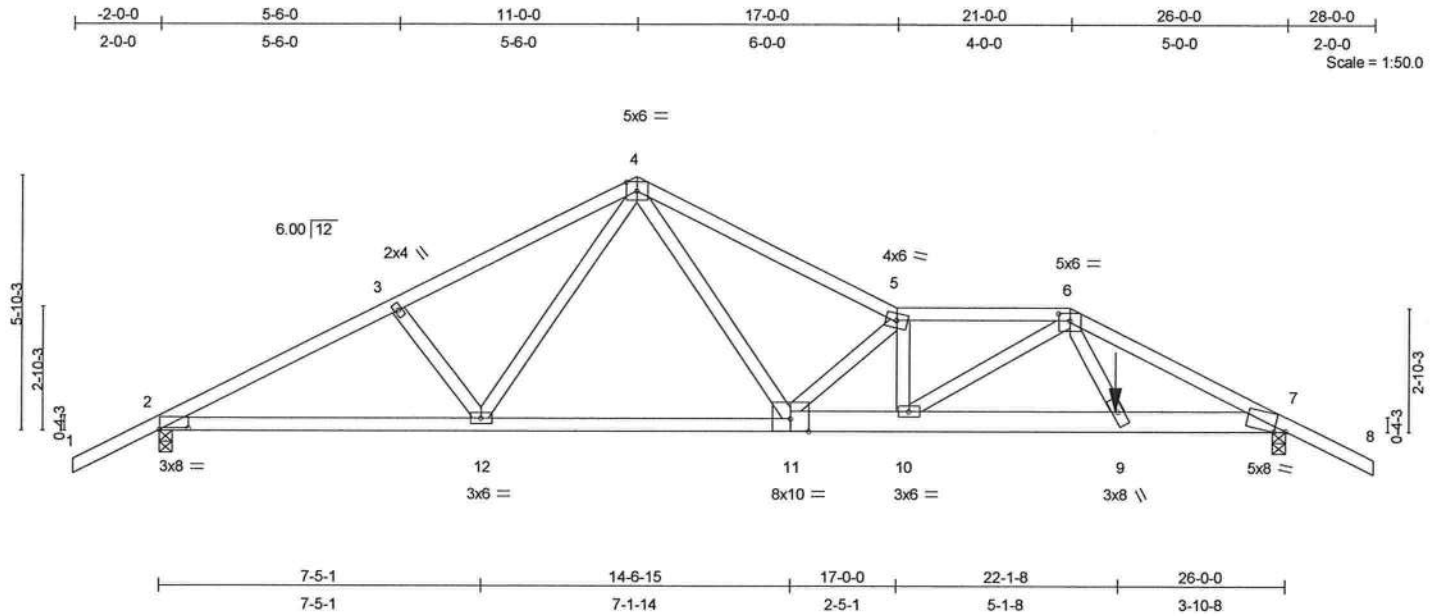


Plate Offsets (X,Y): [2:0-8-0,0-0-6], [6:0-3-0,0-2-0], [7:0-2-15,0-0-14]

LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 20.0	Plates Increase	1.25	TC 0.37	Vert(LL)	-0.25 11-12	>999	360	MT20	244/190
TCDL 7.0	Lumber Increase	1.25	BC 0.63	Vert(TL)	-0.49 11-12	>626	240		
BCLL 10.0	Rep Stress Incr	NO	WB 0.61	Horz(TL)	0.08 7	n/a	n/a		
BCDL 5.0	Code FBC2004/TPI2002		(Matrix)						
Weight: 140 lb									

LUMBER

TOP CHORD 2 X 4 SYP No.2
 BOT CHORD 2 X 4 SYP No.1D *Except*
 7-11 2 X 6 SYP No.1D
 WEBS 2 X 4 SYP No.3

BRACING

TOP CHORD Structural wood sheathing directly applied or 2-9-5
 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 8-9-13 oc bracing.

REACTIONS (lb/size) 2=1390/0-3-8, 7=2365/0-3-8
 Max Horz 2=-102(load case 6)
 Max Uplift 2=-389(load case 5), 7=-682(load case 6)

FORCES (lb) - Maximum Compression/Maximum Tension

TOP CHORD 1-2=0/47, 2-3=-2473/548, 3-4=-2309/554, 4-5=-3151/791, 5-6=-3892/986, 6-7=-4544/1121,
 7-8=0/51
 BOT CHORD 2-12=-481/2131, 11-12=-328/1728, 10-11=-861/3916, 9-10=-727/3284, 7-9=-896/3998
 WEBS 3-12=-227/135, 4-12=-135/553, 4-11=-493/1900, 5-11=-1662/491, 5-10=-438/119,
 6-10=-151/722, 6-9=-398/1585

JOINT STRESS INDEX

2 = 0.78, 3 = 0.34, 4 = 0.83, 5 = 0.86, 6 = 0.89, 7 = 0.88, 9 = 0.45, 10 = 0.42, 11 = 0.76 and 12 = 0.42

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-02; 110mph (3-second gust); h=12ft; TCDL=4.2psf; BCDL=3.0psf; Category II; Exp B; enclosed; MWFRS; Lumber DOL=1.60 plate grip DOL=1.60.
- Provide adequate drainage to prevent water ponding.
- *This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.

Julius Lee
 Truss Design Engineer
 Florida PE No. 34888
 1100 Coastal Bay Blvd
 Boynton Beach, FL 33435

January 21, 2008

5) All bearings are assumed to be SYP No.2 crushing capacity of 565.00 psi

Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITTEK REFERENCE PAGE MII-7473 BEFORE USE
 This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	T04	SPECIAL	1	1	J1928318
Job Reference (optional)					

Builders FirstSource, Lake City, FL 32055

6.300 s Apr 19 2006 MiTek Industries, Inc. Mon Jan 21 09:48:16 2008 Page 2

NOTES

- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 389 lb uplift at joint 2 and 682 lb uplift at joint 7.
7) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- 1) Regular: Lumber Increase=1.25, Plate Increase=1.25
Uniform Loads (plf)
Vert: 1-4=-54, 4-5=-54, 5-6=-54, 6-8=-54, 2-12=-10, 11-12=-70(F=-60), 7-11=-10
Concentrated Loads (lb)
Vert: 9=-1448(F)

Julius Lee
Truss Design Engineer
Florida P.E. No. 34888
1100 Coastal Bay Blvd
Boynton Beach, FL 33435

January 21, 2008

Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 BEFORE USE

This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



Builders FirstSource, Lake City, FL 32055 6.300 s Feb 15 2006 MiTek Industries, Inc. Fri Jan 18 16:30:42 2008 Page 1



LUMBER		BRACING	
TOP CHORD	2 X 4 SYP No.2	TOP CHORD	Structural wood sheathing directly applied or 3-10-1 oc purlins.
BOT CHORD	2 X 4 SYP No.2		
WEBS	2 X 4 SYP No.3	BOT CHORD	Rigid ceiling directly applied or 6-2-1 oc bracing.


JOINT STRESS INDEX
2 = 0.76, 3 = 0.33, 4 = 0.57, 5 = 0.62, 6 = 0.58, 7 = 0.77, 9 = 0.35, 10 = 0.93, 11 = 0.94 and 12 = 0.45

Julius Lee
Truss Design Engineer
Florida PE No. 34888
1109 Coastal Bay Blvd
Boynton Beach, FL 33435

January 21, 2008

Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 BEFORE USE

This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TP 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719

 **Builders**
FirstSource

Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	T05	SPECIAL	1	1	J1928319
Job Reference (optional)					

Builders FirstSource, Lake City, FL 32055

6.300 s Feb 15 2006 MiTek Industries, Inc. Fri Jan 18 16:30:43 2008 Page 2

NOTES

- 4) *This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) All bearings are assumed to be SYP No.2 crushing capacity of 565.00 psi
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 337 lb uplift at joint 2 and 343 lb uplift at joint 7.
- 7) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- 1) Regular: Lumber Increase=1.25, Plate Increase=1.25

Uniform Loads (plf)

Vert: 1-4=-54, 4-5=-54, 5-6=-54, 6-8=-54, 2-12=-10, 11-12=-70(F=-60), 7-11=-10

Julius Lee
Truss Design Engineer
Florida PE No. 34868
1100 Coastal Bay Blvd
Boynton Beach, FL 33435

January 21, 2008

Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 BEFORE USE

This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	T06	SPECIAL	1	1	J1928320
Job Reference (optional)					

Builders FirstSource, Lake City, FL 32055

6.300 s Feb 15 2006 MiTek Industries, Inc. Fri Jan 18 16:30:43 2008 Page 2

NOTES

- 4) *This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) All bearings are assumed to be SYP No.2 crushing capacity of 565.00 psi
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 322 lb uplift at joint 2 and 325 lb uplift at joint 8.
- 7) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- 1) Regular: Lumber Increase=1.25, Plate Increase=1.25
Uniform Loads (plf)

Vert: 1-4=-54, 4-5=-54, 5-6=-54, 6-9=-54, 2-13=-10, 12-13=-70(F=-60), 8-12=-10

Julius Lee
Truss Design Engineer
Florida PE No. 34866
1400 Coastal Bay Blvd.
Boynton Beach, FL 33435

January 21, 2008

Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 BEFORE USE

This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	T07	HIP	2	1	J1928321
Job Reference (optional)					

Builders FirstSource, Lake City, FL 32055

6.300 s Feb 15 2006 MiTek Industries, Inc. Fri Jan 18 16:30:44 2008 Page 1

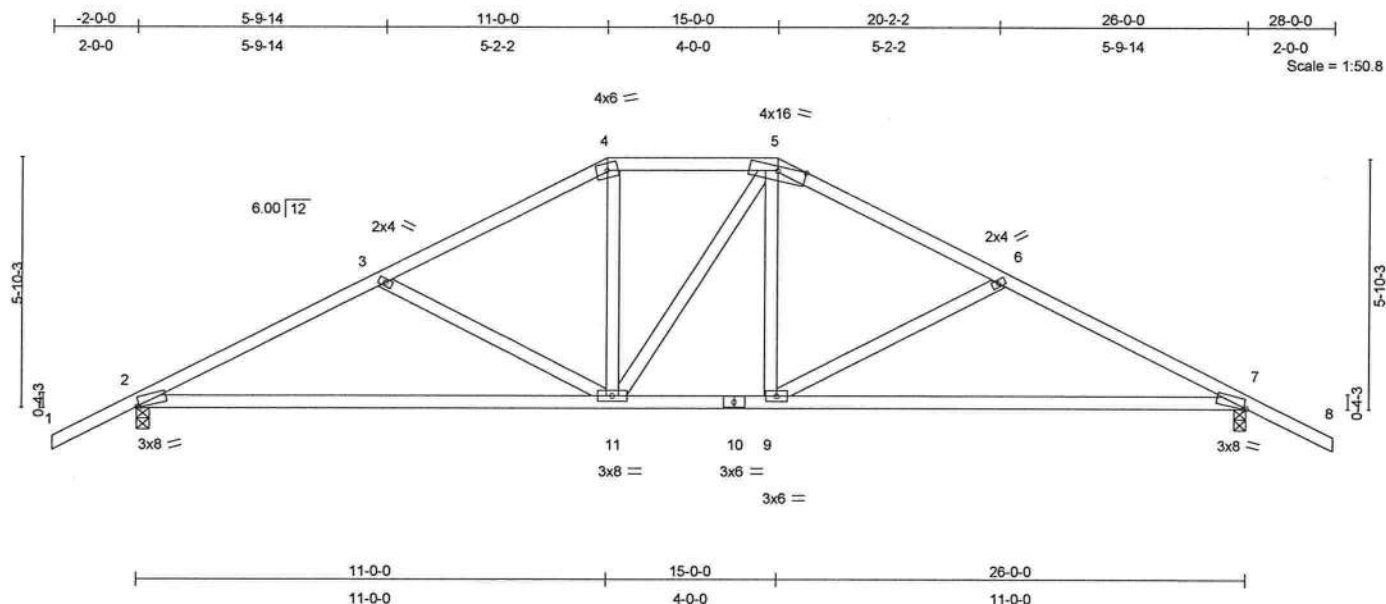


Plate Offsets (X,Y): [2:0-0-10,Edge], [7:0-0-10,Edge]

LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plates Increase	1.25	TC 0.35	Vert(LL)	-0.32	7-9	>968	360	MT20	244/190
TCDL 7.0	Lumber Increase	1.25	BC 0.56	Vert(TL)	-0.58	7-9	>531	240		
BCLL 10.0	* Rep Stress Incr	YES	WB 0.22	Horz(TL)	0.05	7	n/a	n/a		
BCDL 5.0	Code FBC2004/TPI2002		(Matrix)							
									Weight: 131 lb	

LUMBER

TOP CHORD 2 X 4 SYP No.2
BOT CHORD 2 X 4 SYP No.2
WEBS 2 X 4 SYP No.3

BRACING

TOP CHORD Structural wood sheathing directly applied or 5-0-13 oc purlins.
BOT CHORD Rigid ceiling directly applied or 8-6-15 oc bracing.

REACTIONS (lb/size) 2=939/0-3-8, 7=939/0-3-8
Max Horz 2=101(load case 6)
Max Uplift 2=-264(load case 6), 7=-264(load case 7)

FORCES (lb) - Maximum Compression/Maximum Tension

TOP CHORD 1-2=0/47, 2-3=-1438/787, 3-4=-1113/634, 4-5=-939/627, 5-6=-1112/634, 6-7=-1438/787, 7-8=0/47
BOT CHORD 2-11=-530/1221, 10-11=-266/938, 9-10=-266/938, 7-9=-530/1221
WEBS 3-11=-326/300, 4-11=-92/285, 5-11=-126/128, 5-9=-92/285, 6-9=-327/300

JOINT STRESS INDEX

2 = 0.91, 3 = 0.33, 4 = 0.50, 5 = 0.65, 6 = 0.33, 7 = 0.91, 9 = 0.34, 10 = 0.70 and 11 = 0.57

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-02; 110mph (3-second gust); h=12ft; TCDL=4.2psf; BCDL=3.0psf; Category II; Exp B; enclosed; MWFRS and C-C Exterior(2) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
- Provide adequate drainage to prevent water ponding.
- *This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.

Julius Lee
Truss Design Engineer
Florida PE No. 3-8889
1100 Coastal Bay Blvd
Boynton Beach, FL 33435

January 21, 2008

Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITTEK REFERENCE PAGE MII-7473 BEFORE USE
This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 563 D'Onofrio Drive, Madison, WI 53719



Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	T07	HIP	2	1	J1928321
Job Reference (optional)					

Builders FirstSource, Lake City, FL 32055

6.300 s Feb 15 2006 MiTek Industries, Inc. Fri Jan 18 16:30:44 2008 Page 2

NOTES

- 5) All bearings are assumed to be SYP No.2 crushing capacity of 565.00 psi
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 264 lb uplift at joint 2 and 264 lb uplift at joint 7.

LOAD CASE(S) Standard


Julius Lee
Truss Design Engineer
Florida PE No. 34888
1300 Coastal Bay Blvd.
Boynton Beach, FL 33426

January 21, 2008

Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 BEFORE USE
This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



6.300 s Feb 15 2006 MiTek Industries, Inc. Fri Jan 18 16:30:45 2008 Page 1



January 21, 2008

Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	T08	COMMON	11	1	J1928322
Job Reference (optional)					

Builders FirstSource, Lake City, FL 32055

6.300 s Feb 15 2006 MiTek Industries, Inc. Fri Jan 18 16:30:45 2008 Page 2

NOTES

- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 274 lb uplift at joint 2 and 274 lb uplift at joint 6.

LOAD CASE(S) Standard

Julius Lee
Truss Design Engineer
Florida PE No. 21863
1100 Coastal Bay Blvd
Boynton Beach, FL 33435

January 21, 2008

Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 BEFORE USE

This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	T09	HIP	1	1	J1928323
Job Reference (optional)					

Builders FirstSource, Lake City, FL 32055

6.300 s Feb 15 2006 MiTek Industries, Inc. Fri Jan 18 16:30:46 2008 Page 1

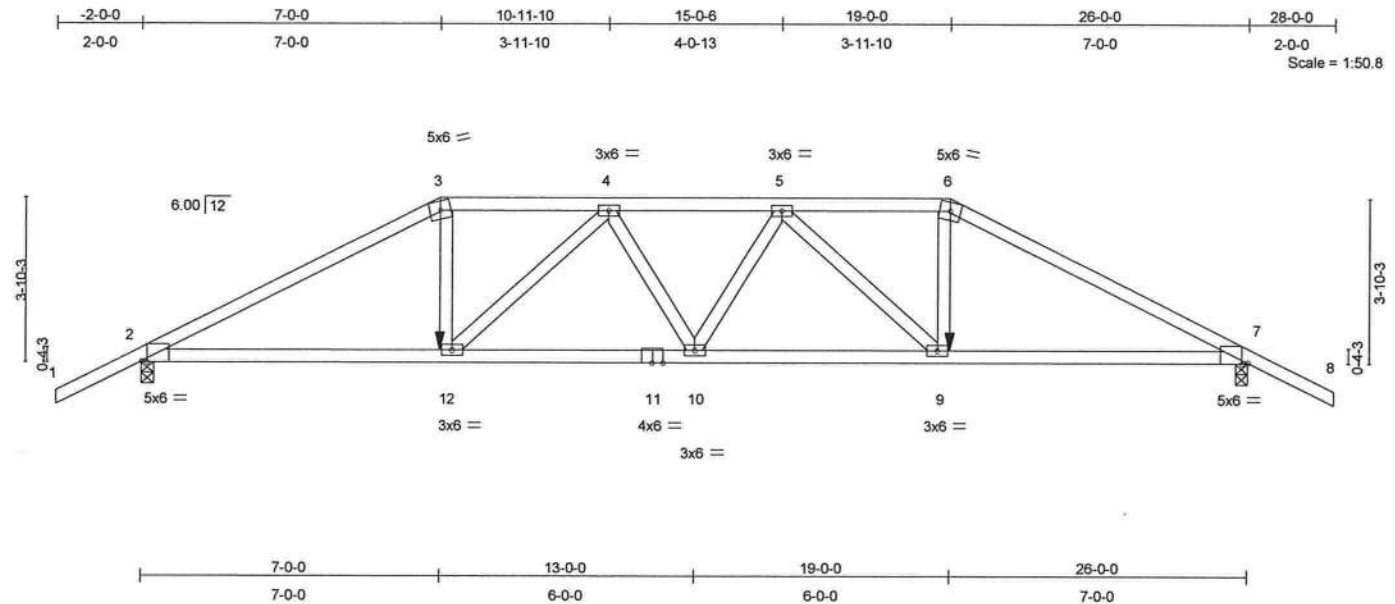


Plate Offsets (X,Y): [2:0-1-11,Edge], [7:0-1-11,Edge]

LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in (loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plates Increase	1.25	TC 0.49	Vert(LL)	-0.19 10	>999	360	MT20	244/190
TCDL 7.0	Lumber Increase	1.25	BC 0.71	Vert(TL)	-0.37 10-12	>829	240		
BCLL 10.0	* Rep Stress Incr	NO	WB 0.42	Horz(TL)	0.14 7	n/a	n/a		
BCDL 5.0	Code FBC2004/TPI2002		(Matrix)						
Weight: 123 lb									

LUMBER

TOP CHORD 2 X 4 SYP No.2
BOT CHORD 2 X 4 SYP No.2
WEBS 2 X 4 SYP No.3

BRACING

TOP CHORD Structural wood sheathing directly applied or 3-1-7 oc purlins.
BOT CHORD Rigid ceiling directly applied or 6-0-12 oc bracing.

REACTIONS (lb/size) 2=1799/0-3-8, 7=1799/0-3-8
Max Horz 2=77(load case 5)
Max Uplift 2=-585(load case 5), 7=-585(load case 6)

FORCES (lb) - Maximum Compression/Maximum Tension

TOP CHORD 1-2=0/47, 2-3=-3302/1037, 3-4=-2903/964, 4-5=-3491/1133, 5-6=-2903/964,
6-7=-3302/1037, 7-8=0/47
BOT CHORD 2-12=-887/2860, 11-12=-1098/3455, 10-11=-1098/3455, 9-10=-1083/3455,
7-9=-854/2860
WEBS 3-12=-334/1094, 4-12=-859/351, 4-10=0/135, 5-10=0/135, 5-9=-859/351,
6-9=-334/1094

JOINT STRESS INDEX

2 = 0.80, 3 = 0.71, 4 = 0.42, 5 = 0.42, 6 = 0.71, 7 = 0.80, 9 = 0.69, 10 = 0.42, 11 = 0.94 and 12 = 0.69

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-02; 110mph (3-second gust); h=12ft; TCDL=4.2psf, BCDL=3.0psf, Category II; Exp B; enclosed; MWFRS; Lumber DOL=1.60 plate grip DOL=1.60.
- Provide adequate drainage to prevent water ponding.

Julius Lee
Truss Design Engineer
Florida P.E. No. 24886
1100 Coastal Bay Blvd
Boynton Beach, FL 33435

Continued on page 2

January 21, 2008

Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 BEFORE USE
This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	T09	HIP	1	1	J1928323
					Job Reference (optional)

Builders FirstSource, Lake City, FL 32055

6.300 s Feb 15 2006 MiTek Industries, Inc. Fri Jan 18 16:30:46 2008 Page 2

NOTES

- 4) *This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) All bearings are assumed to be SYP No.2 crushing capacity of 565.00 psi
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 585 lb uplift at joint 2 and 585 lb uplift at joint 7.
- 7) Girder carries hip end with 7'-0" end setback.
- 8) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- 1) Regular: Lumber Increase=1.25, Plate Increase=1.25
 - Uniform Loads (plf)
 - Vert: 1-3=-54, 3-6=-118(F=-64), 6-8=-54, 2-12=-10, 9-12=-22(F=-12), 7-9=-10
 - Concentrated Loads (lb)
 - Vert: 12=-411(F) 9=-411(F)

Julius Lee
Truss Design Engineer
Florida PE No. 24868
1100 Coastal Bay Blvd
Boynton Beach, FL 33435

January 21, 2008

Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 BEFORE USE

This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	T10	HIP	1	1	J1928324
					Job Reference (optional)

Builders FirstSource, Lake City, FL 32055

6.300 s Feb 15 2006 MiTek Industries, Inc. Fri Jan 18 16:30:47 2008 Page 1

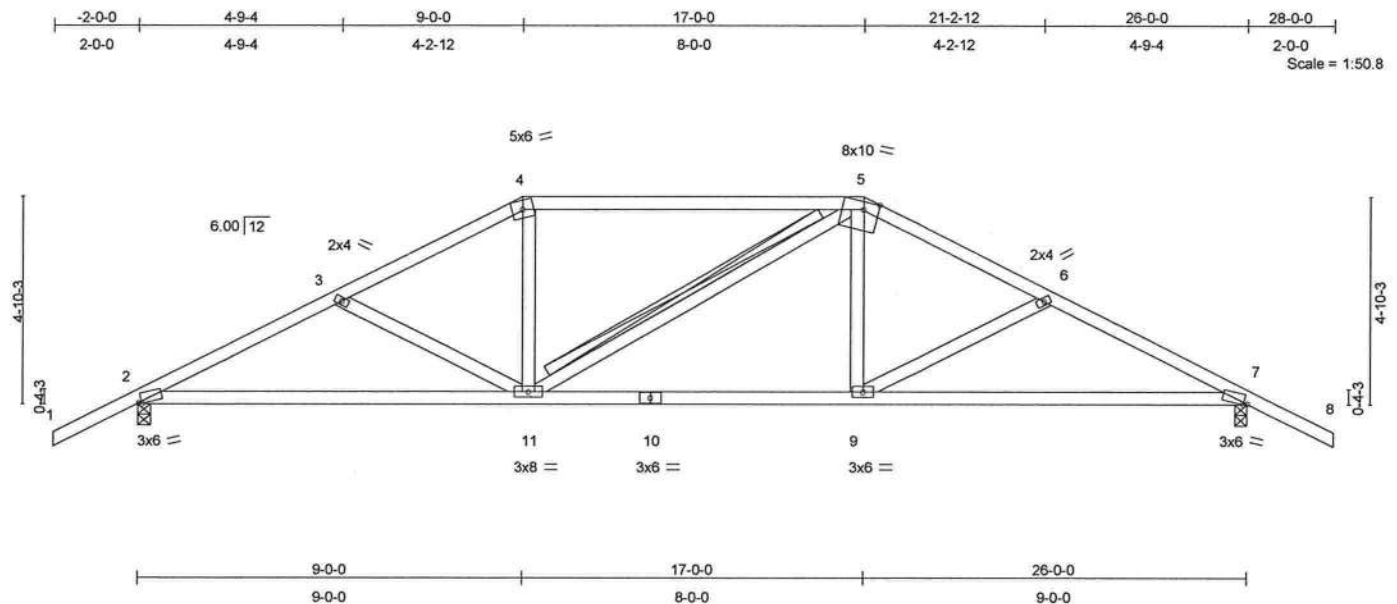


Plate Offsets (X,Y): [2:0-1-1,0-0-7], [5:0-4-3,Edge], [7:0-1-1,0-0-7]

LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plates Increase	1.25	TC 0.45	Vert(LL)	-0.14	7-9	>999	360	MT20	244/190
TCDL 7.0	Lumber Increase	1.25	BC 0.39	Vert(TL)	-0.27	7-9	>999	240		
BCLL 10.0	* Rep Stress Incr	YES	WB 0.09	Horz(TL)	0.05	7	n/a	n/a		
BCDL 5.0	Code FBC2004/TPI2002		(Matrix)							
									Weight: 127 lb	

LUMBER

TOP CHORD 2 X 4 SYP No.2
BOT CHORD 2 X 4 SYP No.2
WEBS 2 X 4 SYP No.3

BRACING

TOP CHORD Structural wood sheathing directly applied or 5-0-13 oc purlins.
BOT CHORD Rigid ceiling directly applied or 8-8-2 oc bracing.
WEBS T-Brace: 2 X 4 SYP No.3 - 5-11
Fasten T and I braces to narrow edge of web with 10d Common wire nails, 9in o.c., with 4in minimum end distance.
Brace must cover 90% of web length.

REACTIONS (lb/size) 2=939/0-3-8, 7=939/0-3-8
Max Horz 2=89(load case 6)
Max Uplift 2=-252(load case 6), 7=-252(load case 7)

FORCES (lb) - Maximum Compression/Maximum Tension
TOP CHORD 1-2=0/47, 2-3=-1456/765, 3-4=-1244/678, 4-5=-1088/669, 5-6=-1244/679, 6-7=-1456/765, 7-8=0/47
BOT CHORD 2-11=-516/1236, 10-11=-360/1088, 9-10=-360/1088, 7-9=-516/1236
WEBS 3-11=-173/177, 4-11=-26/291, 5-11=-121/122, 5-9=-25/291, 6-9=-173/176

JOINT STRESS INDEX

2 = 0.87, 3 = 0.33, 4 = 0.66, 5 = 0.65, 6 = 0.33, 7 = 0.87, 9 = 0.34, 10 = 0.38 and 11 = 0.56

Julius Lee
Truss Design Engineer
Florida P.E. No. 24869
1400 Coastal Bay Blvd
Boynton Beach, FL 33435

Continued on page 2

January 21, 2008

Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITTEK REFERENCE PAGE MII-7473 BEFORE USE
This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	T10	HIP	1	1	J1928324
					Job Reference (optional)

Builders FirstSource, Lake City, FL 32055

6.300 s Feb 15 2006 MiTek Industries, Inc. Fri Jan 18 16:30:47 2008 Page 2

NOTES

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-02; 110mph (3-second gust); h=12ft; TCDL=4.2psf; BCDL=3.0psf; Category II; Exp B; enclosed; MWFRS and C-C Exterior(2) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
- 3) Provide adequate drainage to prevent water ponding.
- 4) *This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) All bearings are assumed to be SYP No.2 crushing capacity of 565.00 psi
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 252 lb uplift at joint 2 and 252 lb uplift at joint 7.

LOAD CASE(S) Standard

Julius Lee
Truss Design Engineer
Florida P.E. No. 34868
1100 Coastal Bay Blvd
Boynton Beach, FL 33435

January 21, 2008

Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 BEFORE USE
This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	T11	HIP	1	1	J1928325
Job Reference (optional)					

Builders FirstSource, Lake City, FL 32055

6.300 s Feb 15 2006 MiTek Industries, Inc. Fri Jan 18 16:30:48 2008 Page 1

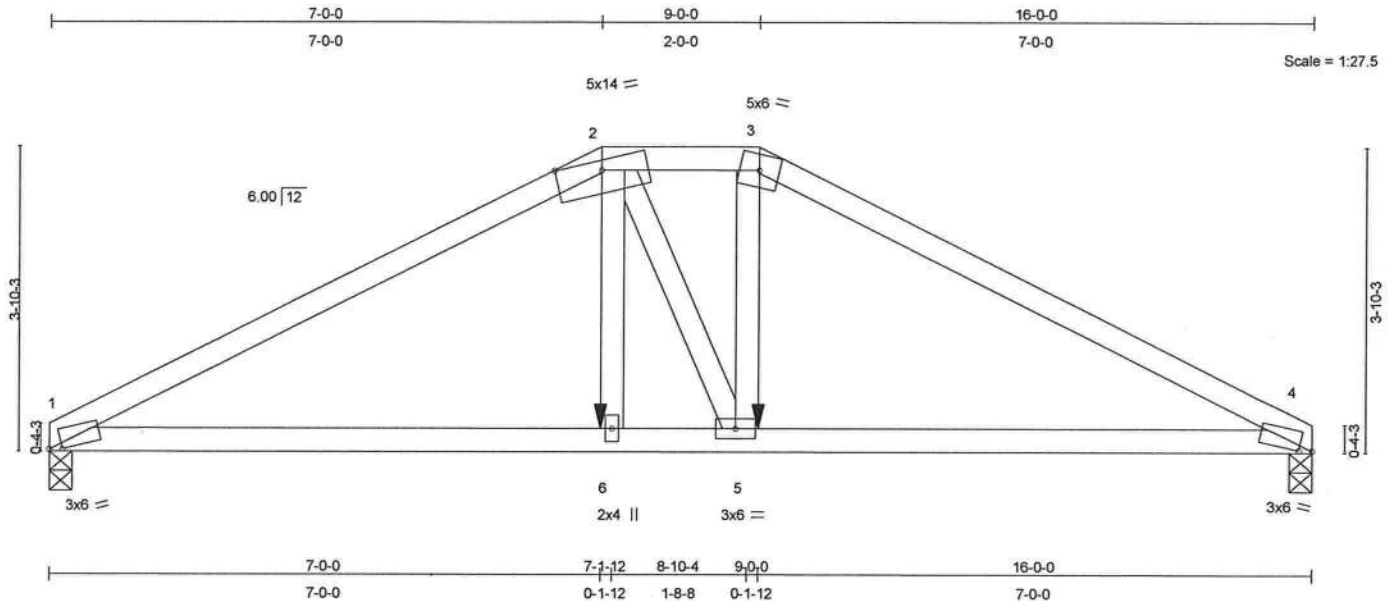


Plate Offsets (X,Y): [1:0-2-0,0-0-7], [4:0-2-0,0-0-7]

LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL 20.0	Plates Increase	1.25	TC 0.45	Vert(LL)	0.14	1-6	>999	360	MT20	244/190
TCDL 7.0	Lumber Increase	1.25	BC 0.51	Vert(TL)	-0.16	1-6	>999	240		
BCLL 10.0	* Rep Stress Incr	NO	WB 0.20	Horz(TL)	0.04	4	n/a	n/a		
BCDL 5.0	Code FBC2004/TPI2002		(Matrix)							
Weight: 65 lb										

LUMBER

TOP CHORD 2 X 4 SYP No.2
BOT CHORD 2 X 4 SYP No.2
WEBS 2 X 4 SYP No.3

BRACING

TOP CHORD Structural wood sheathing directly applied or 4-3-4 oc purlins.
BOT CHORD Rigid ceiling directly applied or 7-1-11 oc bracing.

REACTIONS (lb/size) 1=987/0-3-8, 4=987/0-3-8
Max Horz 1=46(load case 4)
Max Uplift 1=-498(load case 5), 4=-498(load case 6)

FORCES (lb) - Maximum Compression/Maximum Tension
TOP CHORD 1-2=-1825/836, 2-3=-1573/803, 3-4=-1828/838
BOT CHORD 1-6=-721/1550, 5-6=-732/1570, 4-5=-689/1553
WEBS 2-6=-265/505, 3-5=-305/611, 2-5=-177/190

JOINT STRESS INDEX

1 = 0.86, 2 = 0.98, 3 = 0.61, 4 = 0.86, 5 = 0.39 and 6 = 0.36

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-02; 110mph (3-second gust); h=12ft; TCDL=4.2psf; BCDL=3.0psf; Category II; Exp B; enclosed; MWFRS; porch left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60.
- Provide adequate drainage to prevent water ponding.
- *This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- All bearings are assumed to be SYP No.2 crushing capacity of 565.00 psi

Julius Lee
Truss Design Engineer
Florida PE No. 34888
1400 Coastal Bay Blvd
Boynton Beach, FL 33435

Continued on page 2

January 21,2008

Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITTEK REFERENCE PAGE MII-7473 BEFORE USE
This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719



Job	Truss	Truss Type	Qty	Ply	RICHARD KEEN - JOHNSTON RES.
L266128	T11	HIP	1	1	J1928325
					Job Reference (optional)

Builders FirstSource, Lake City, FL 32055

6.300 s Feb 15 2006 MiTek Industries, Inc. Fri Jan 18 16:30:48 2008 Page 2

NOTES

- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 498 lb uplift at joint 1 and 498 lb uplift at joint 4.
- 7) Girder carries hip end with 7'-0" end setback.
- 8) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- 1) Regular: Lumber Increase=1.25, Plate Increase=1.25

Uniform Loads (plf)

Vert: 1-2=-54, 2-3=-118(F=-64), 3-4=-54, 1-6=-10, 5-6=-22(F=-12), 4-5=-10

Concentrated Loads (lb)

Vert: 6=-411(F) 5=-411(F)

Julius Lee
Truss Design Engineer
Florida PE No. 24868
1100 Coastal Bay Blvd
Boynton Beach, FL 33435


January 21, 2008

Warning - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 BEFORE USE
This design is based only upon the parameters shown for an individual building component that is installed and loaded vertically and fabricated with MiTek connectors. Applicability of design parameters and proper incorporation of component into the overall building structure, including all temporary and permanent bracing, is the responsibility of building designer and / or contractor per ANSI / TPI 1 as referenced by the building code. For general guidance regarding storage, delivery, erection and bracing, consult BCSI-1 or HIB-91 Handling Installing and Bracing Recommendation available from the Wood Truss Council of America, 1 WTCA Center, 6300 Enterprise Lane, Madison, WI 53719 or the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719




Symbols

PLATE LOCATION AND ORIENTATION



*Center plate on joint unless dimensions indicate otherwise. Dimensions are in inches. Apply plates to both sides of truss and securely seat.



*For 4 x 2 orientation, locate plates 1/8" from outside edge of truss and vertical web.



*This symbol indicates the required direction of slots in connector plates.

PLATE SIZE

4 X 4


The first dimension is the width perpendicular to slots. Second dimension is the length parallel to slots.

LATERAL BRACING




Indicates location of required continuous lateral bracing.

BEARING



Indicates location of joints at which bearings (supports) occur.

Numbering System

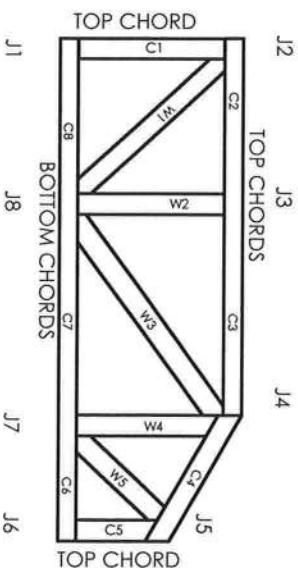

JOINTS AND CHORDS ARE NUMBERED CLOCKWISE AROUND THE TRUSS STARTING AT THE LOWEST JOINT FARTHEST TO THE LEFT.

WEBS ARE NUMBERED FROM LEFT TO RIGHT

CONNECTOR PLATE CODE APPROVALS

BOCA	96-31, 96-67
ICBO	3907, 4922
SBCCI	9667, 9432A
WISC/DLHR	960022-W, 970036-N
NER	561



MITek Engineering Reference Sheet: MII-7473



General Safety Notes



Failure to Follow Could Cause Property Damage or Personal Injury

1. Provide copies of this truss design to the building designer, erection supervisor, property owner and all other interested parties.
2. Cut members to bear tightly against each other.
3. Place plates on each face of truss at each joint and embed fully. Avoid knots and wane at joint locations.
4. Unless otherwise noted, locate chord splices at 1/4 panel length (± 6" from adjacent joint).
5. Unless otherwise noted, moisture content of lumber shall not exceed 19% at time of fabrication.
6. Unless expressly noted, this design is not applicable for use with fire retardant or preservative treated lumber.
7. Camber is a non-structural consideration and is the responsibility of truss fabricator. General practice is to camber for dead load deflection.
8. Plate type, size and location dimensions shown indicate minimum plating requirements.
9. Lumber shall be of the species and size, and in all respects, equal to or better than the grade specified.
10. Top chords must be sheathed or purlins provided at spacing shown on design.
11. Bottom chords require lateral bracing at 10 ft. spacing, or less, if no ceiling is installed, unless otherwise noted.
12. Anchorage and / or load transferring connections to trusses are the responsibility of others unless shown.
13. Do not overload roof or floor trusses with stacks of construction materials.
14. Do not cut or alter truss member or plate without prior approval of a professional engineer.
15. Care should be exercised in handling, erection and installation of trusses.

© 1993 MITek® Holdings, Inc.

ASCE 7-02: 130 MPH WIND SPEED, 15' MEAN HEIGHT, ENCLOSED, I = 1.00, EXPOSURE C

2x4 GABLE VERTICAL BRACE		BRACE		NO BRACES		(1) 1x4 "L" BRACE *		(1) 2x4 "L" BRACE *		(2) 2x4 "L" BRACE **		(1) 2x6 "L" BRACE *		(2) 2x6 "L" BRACE **	
GABLE VERTICAL SPACING	SPECIES	GRADE	BRACE	NO	GROUP A	GROUP B	GROUP A	GROUP B	GROUP A	GROUP B	GROUP A	GROUP B	GROUP A	GROUP B	GROUP B
24" O.C.	SPF	#1 / #2	3' 4"	6' 10"	6' 0"	6' 11"	7' 1"	8' 3"	8' 6"	10' 10"	11' 2"	12' 11"	13' 3"		
	SPF	#3	3' 3"	4' 11"	4' 11"	6' 6"	6' 6"	8' 3"	8' 3"	10' 1"	10' 1"	12' 11"	12' 11"		
	HF	STANDARD	3' 3"	4' 11"	4' 11"	6' 5"	6' 5"	8' 3"	8' 3"	10' 0"	10' 0"	12' 11"	12' 11"		
	SP	#1	3' 3"	5' 10"	6' 3"	6' 11"	7' 5"	8' 3"	8' 11"	10' 10"	11' 6"	12' 11"	13' 11"		
	SP	#2	3' 7"	5' 10"	6' 3"	6' 11"	7' 5"	8' 3"	8' 11"	10' 10"	11' 6"	12' 11"	13' 11"		
16" O.C.	DFL	STANDARD	3' 4"	5' 0"	6' 0"	6' 0"	6' 6"	6' 6"	8' 3"	8' 3"	10' 4"	10' 4"	12' 11"	13' 7"	
	SPF	#1 / #2	3' 10"	6' 8"	6' 10"	7' 11"	8' 1"	9' 5"	9' 8"	12' 6"	12' 6"	14' 0"	14' 0"		
	SPF	#3	3' 9"	6' 0"	6' 0"	7' 11"	8' 1"	9' 5"	9' 5"	12' 4"	12' 4"	14' 0"	14' 0"		
	HF	STANDARD	3' 9"	6' 0"	6' 0"	7' 11"	8' 1"	9' 5"	9' 5"	12' 4"	12' 4"	14' 0"	14' 0"		
	SP	#1	4' 3"	6' 8"	7' 2"	7' 11"	8' 6"	9' 5"	10' 2"	12' 5"	13' 5"	14' 0"	14' 0"		
12" O.C.	DFL	STANDARD	4' 0"	6' 2"	6' 2"	7' 11"	8' 2"	9' 6"	9' 11"	12' 6"	12' 6"	14' 0"	14' 0"		
	SPF	#1 / #2	4' 2"	6' 11"	6' 11"	8' 9"	8' 9"	10' 5"	10' 5"	13' 8"	13' 8"	14' 0"	14' 0"		
	SPF	#3	4' 2"	6' 11"	6' 11"	8' 9"	8' 9"	10' 5"	10' 5"	13' 8"	13' 8"	14' 0"	14' 0"		
	HF	STANDARD	4' 2"	6' 11"	6' 11"	8' 9"	8' 9"	10' 5"	10' 5"	13' 8"	13' 8"	14' 0"	14' 0"		
	SP	#1	4' 8"	7' 4"	7' 11"	8' 9"	9' 5"	10' 5"	11' 2"	13' 8"	14' 0"	14' 0"	14' 0"		

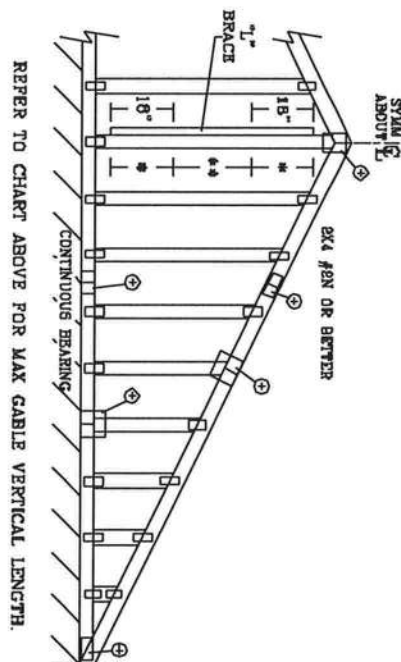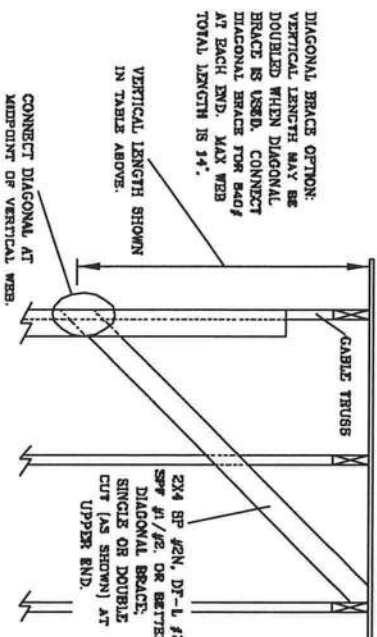

BRACING GROUP SPECIES AND GRADES:			
GROUP A:		GROUP B:	
SPRUCED-PINE-FIR	HEM-FIR	SPRUCED-PINE-FIR	HEM-FIR
#1 / #2	STANDARD	#1 / #2	STANDARD
#3	STUD	#3	STUD
STANDARD	STANDARD	STANDARD	STANDARD

CABLE TRUSS DETAIL NOTES:

LIVE LOAD DEPLETION COEFFICIENT IS 1/240.
 PROVIDE UPLIFT CONNECTIONS FOR 136 PSF OVER CONTINUOUS BEARING (6 PSF TO DEAD LOAD).
 CABLE END SUPPORTS LOAD FROM 4' 0" OUTLEAKERS WITH 8' 0" OVERHANG, OR 12" PLYWOOD OVERHANG.
 ATTACH EACH "L" BRACE WITH 10d NAILS.
 * FOR (1) "L" BRACE: SPACE NAILS AT 8" O.C. IN 18" END ZONES AND 4" O.C. BETWEEN ZONES.
 ** FOR (2) "L" BRACES: SPACE NAILS AT 3" O.C. IN 18" END ZONES AND 8" O.C. BETWEEN ZONES.
 "L" BRACING MUST BE A MINIMUM OF 80% OF WEB MEMBER LENGTH.

CABLE VERTICAL PLATE SIZES	
VERTICAL LENGTH	NO SPLICE
LESS THAN 4' 0"	1x4 OR 2x3
GREATER THAN 4' 0" BUT LESS THAN 11' 6"	2x4
GREATER THAN 11' 6"	2.5x4

* REFER TO COMMON TRUSS DESIGN FOR PEAK, SPLICE, AND HEEL PLATES.



WARNING TRUSSES REQUIRE EXTENSIVE CARE IN FABRICATING, HANDLING, SHIPPING, INSTALLING AND BRACING. REFER TO BSI-1-50 BUILDING COMPONENT SAFETY INFORMATION PUBLISHED BY THE NATIONAL PLATE INSTITUTE, 383 DOWNSIDE DR., SUITE 200, WASHINGTON, VA 22795 AND VITA GOOD TRUSS COUNCIL OF AMERICA, 6300 ENTERPRISE LN, WADSWORTH, VA 22793 FOR SAFETY PRACTICES PRIOR TO PREFABRICATING THESE TRUSSES. UNLESS OTHERWISE INDICATED, TOP CHORD SHALL HAVE PROPERLY ATTACHED STRUCTURAL PANELS AND BOTTOM CHORD SHALL HAVE A PROPERLY ATTACHED RIGID CLIPPING.

JULIUS LEE'S
 CONS. ENGINEERS P.A.
 1465 8TH AVENUE
 DELRAY BEACH, FL 33444-8161

No. 34869
 STATE OF FLORIDA

MAX. TOT. LD. 60 PSF
 MAX. SPACING 24.0"

REF ASCE 7-02-GB13045
 DATE 11/26/03
 DRWG MTKR STD CABLE IS E HT
 -ENG

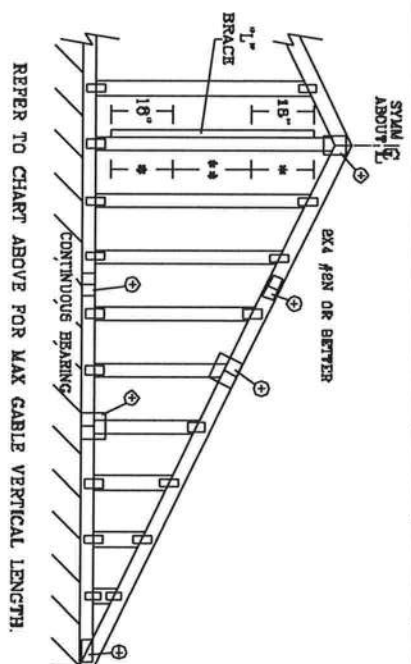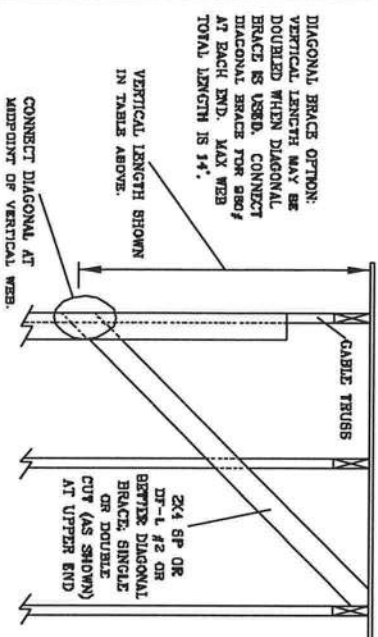

REFER TO CHART ABOVE FOR MAX CABLE VERTICAL LENGTH

CABLE VERTICAL PLATE SIZES	
VERTICAL LENGTH	NO. SPICES
LESS THAN 4' 0"	1X4 OR 2X3
GREATHER THAN 4' 0", BUT LESS THAN 11' 6"	2X4
GREATHER THAN 11' 6"	2.5X4

+ REFERS TO COMMON TRUSS DESIGN FOR
PEAK, SPURCE, AND HELL PLATES.

PLYWOOD OVERHANG.
ATTACH EACH "T" BRACE WITH 10d NAILS.
FOR (1) "T" BRACE: SPACE NAILS AT 8" O.C.
IN 1st END ZONES AND 4" O.C. BETWEEN ZONES
FOR (2) "T" BRACES: SPACE NAILS AT 3" O.C.
IN 1st END ZONES AND 6" O.C. BETWEEN ZONES
T¹ BRACING MUST BE A MINIMUM OF 80% OF WEB
MEMBER LENGTH.

LIVE LOAD DEFLECTION CRITERIA IS $L/240$.
 PROVIDE UPLIFT CONNECTIONS FOR 180 PLF OVER
 CONTINUOUS BEARING (6 PSF TC DEAD LOAD).
 CABLE END SUPPORTS LOAD FROM 4" 0"

CABLE TRUSS DETAIL NOTES:

BRAVING GROUP SPECIES AND GRADES:

GROUP A:	
SPRUCE-PINE-TR #1 / #2 #3 STANDARD	HEM-FIR #2 #3 STANDARD
DOUGLAS FIR-LARCH #3 STUD STANDARD	SOUTHERN PINE #3 STUD STANDARD

GROUP B:	
SOUTHERN PINE #1 #2	HEM-FIR #1 & TR #1
DOUGLAS FIR-LARCH #1 #2	

MECHANICAL, ELECTRICAL, PLUMBING, HEATING, AIR CONDITIONING, AND
ELEVATOR CONTRACTORS. SEE ALSO 2700. SEE ALSO 2800. SEE ALSO 2900.
SEE ALSO 3000. SEE ALSO 3100. SEE ALSO 3200. SEE ALSO 3300. SEE ALSO 3400.
SEE ALSO 3500. SEE ALSO 3600. SEE ALSO 3700. SEE ALSO 3800. SEE ALSO 3900.
SEE ALSO 4000. SEE ALSO 4100. SEE ALSO 4200. SEE ALSO 4300. SEE ALSO 4400.
SEE ALSO 4500. SEE ALSO 4600. SEE ALSO 4700. SEE ALSO 4800. SEE ALSO 4900.
SEE ALSO 5000. SEE ALSO 5100. SEE ALSO 5200. SEE ALSO 5300. SEE ALSO 5400.
SEE ALSO 5500. SEE ALSO 5600. SEE ALSO 5700. SEE ALSO 5800. SEE ALSO 5900.
SEE ALSO 6000. SEE ALSO 6100. SEE ALSO 6200. SEE ALSO 6300. SEE ALSO 6400.
SEE ALSO 6500. SEE ALSO 6600. SEE ALSO 6700. SEE ALSO 6800. SEE ALSO 6900.
SEE ALSO 7000. SEE ALSO 7100. SEE ALSO 7200. SEE ALSO 7300. SEE ALSO 7400.
SEE ALSO 7500. SEE ALSO 7600. SEE ALSO 7700. SEE ALSO 7800. SEE ALSO 7900.
SEE ALSO 8000. SEE ALSO 8100. SEE ALSO 8200. SEE ALSO 8300. SEE ALSO 8400.
SEE ALSO 8500. SEE ALSO 8600. SEE ALSO 8700. SEE ALSO 8800. SEE ALSO 8900.
SEE ALSO 9000. SEE ALSO 9100. SEE ALSO 9200. SEE ALSO 9300. SEE ALSO 9400.
SEE ALSO 9500. SEE ALSO 9600. SEE ALSO 9700. SEE ALSO 9800. SEE ALSO 9900.

JULIUS LEE'S
CONS. ENGINEERS P.A.

1466 SW 4th Avenue
Delray Beach, FL 33444-2161

No: 34869
STATE OF FLORIDA

MAX. TOT. LD. 60 PSF

MAX. SPACING	24.0
--------------	------


REF ASCE7-02-CAB13030

DATE 11/26/03


DWG MITEK STD CABLE 30' E MTN

—ENG

TYPICAL ATTIC TRUSS BRACING

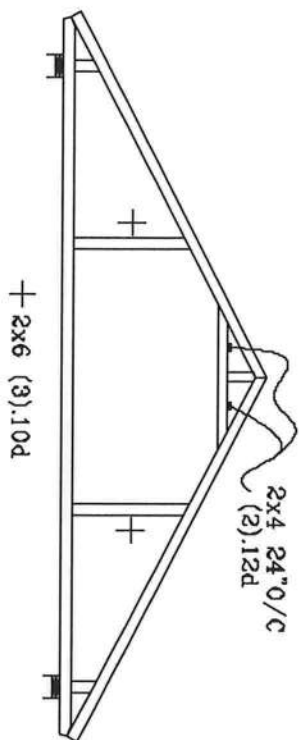


GABLE END TRUSS DETAIL


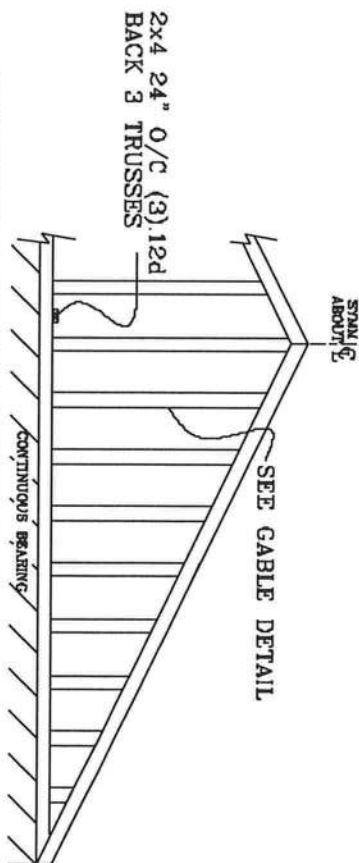


MINIMUM BRACING ON GABLE TRUSS. OTHER PERMANENT BRACING DESIGNS BY ARCHITECT OR BOB

TYPICAL ALTERNATE BRACING DETAIL FOR EXTERIOR FLAT GIRDER TRUSS

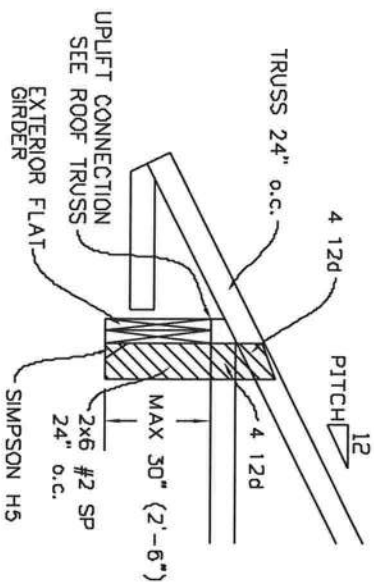

TYPICAL WALL GIRDER VERTICAL WEB BRACING DETAIL

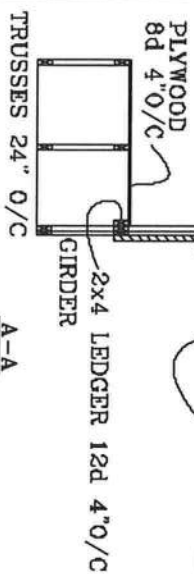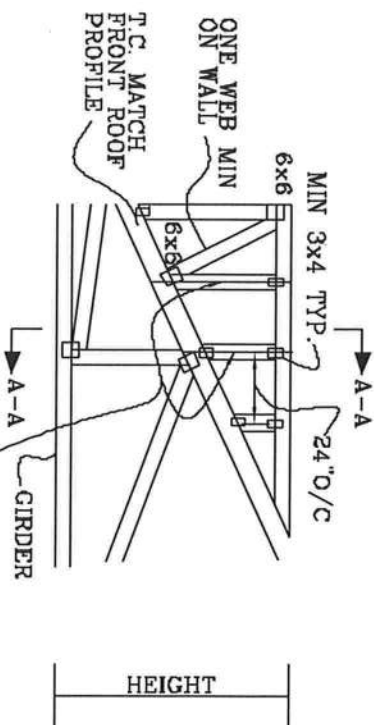

JULIUS LEE'S
CONS. ENGINEERS P.A.
1455 SW 4th AVENUE
DEERBARK BEACH, FL 33444-2161

No: 34866
STATE OF FLORIDA

TOP CHORD 2X4 #2 OR BETTER
BOT CHORD 2X4 #2 OR BETTER
WEBS 2X4 #3 OR BETTER

PIGGYBACK DETAIL

REFER TO SEALED DESIGN FOR DASHED PLATES.

SPACE PIGGYBACK VERTICALS AT 4' OC MAX.

TOP AND BOTTOM CHORD SPLICES MUST BE STAGGERED SO THAT ONE SPLICE IS NOT DIRECTLY OVER ANOTHER.

PIGGYBACK BOTTOM CHORD MAY BE OMITTED. ATTACH VERTICAL WEBS TO TRUSS TOP CHORD WITH 1.5X3 PLATE.

ATTACH PURLINS TO TOP OF FLAT TOP CHORD. IF PIGGYBACK IS SOLID LUMBER OR THE BOTTOM CHORD IS OMITTED, PURLINS MAY BE APPLIED BENEATH THE TOP CHORD OF SUPPORTING TRUSS.

REFER TO ENGINEER'S SEALED DESIGN FOR REQUIRED PURLIN SPACING.

THIS DETAIL IS APPLICABLE FOR THE FOLLOWING WIND CONDITIONS:

110 MPH WIND, 30' MEAN HGT, ASCE 7-02, CLOSED BLDG.



LOCATED ANYWHERE IN ROOF, 1 MI FROM COAST

CAT 1, EXP C, WIND TC DL=5 PSF, WIND BC DL=5 PSF

110 MPH WIND, 30' MEAN HGT, EXP C, WIND TC DL=5 PSF, WIND BC DL=5 PSF

FRONT FACE (E*) PLATES MAY BE OFFSET FROM BACK FACE PLATES AS LONG AS BOTH FACES ARE SPACED 4' OC MAX.

130 MPH WIND, 30' MEAN HGT, ASCE 7-02, CLOSED BLDG, LOCATED ANYWHERE IN ROOF, CAT 1, EXP. C, WIND TC DL=6 PSF, WIND BC DL=6 PSF

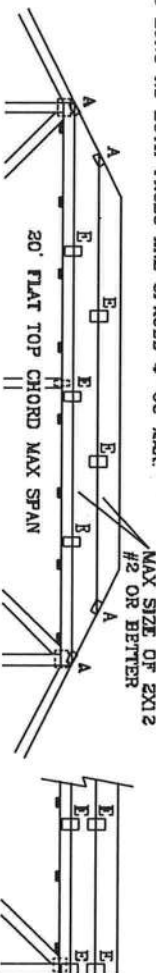

*ATTACH PIGGYBACK WITH 3X6 TRUSS OR ALPINE PIGGYBACK SPECIAL PLATE.

WARNING: TRUSSES REQUIRE EXTREME CARE IN FABRICATING, HANDLING, SHIPPING, INSTALLING AND BRACING. REFER TO BEST PRACTICES FOR TRUSS FABRICATION. THIS DRAWING IS THE PROPERTY OF JULIUS LEE'S CONSULTING ENGINEERS P.A. AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. WITHOUT PERMISSION IN WRITING FROM JULIUS LEE'S CONSULTING ENGINEERS P.A., ALL RIGHTS ARE RESERVED. THIS DRAWING IS NOT TO BE USED FOR ANY OTHER PROJECTS WITHOUT THE WRITTEN PERMISSION OF JULIUS LEE'S CONSULTING ENGINEERS P.A.


JULIUS LEE'S
CONS. ENGINEERS P.A.
1400 SW 4TH AVENUE
DORAV BEACH, FL 33444-2161

No: 34968
STATE OF FLORIDA

JOINT TYPE	SPANS UP TO			
	30'	34'	38'	62'
A	2X4	2.5X4	2.5X4	3X6
B	4X6	6X6	6X6	5X6
C	1.5X3	1.5X4	1.5X4	1.5X4
D	5X4	6X6	6X5	5X6
E	4X6 OR 3X6 TRUSS AT 4' OC, ROTATED VERTICALLY			

ATTACH TRUSS PLATES WITH (8) 0.120" X 1.375" NAILS, OR EQUAL, PER FACE PER PLY. (4) NAILS IN EACH MEMBER TO BE CONNECTED. REFER TO DRAWING 160 TL FOR TRUSS INFORMATION.

WEB LENGTH	WEB BRACING CHART
0' TO 7'9"	NO BRACING
7'9" TO 10'	1X4 "I" BRACE, SAME GRADE, SPECIES AS WEB MEMBER, OR BETTER AND 80% LENGTH OF WEB MEMBER. ATTACH WITH 8d NAILS AT 4' OC.
10' TO 14'	2X4 "I" BRACE, SAME GRADE, SPECIES AS WEB MEMBER, OR BETTER AND 80% LENGTH OF WEB MEMBER. ATTACH WITH 16d NAILS AT 4' OC.

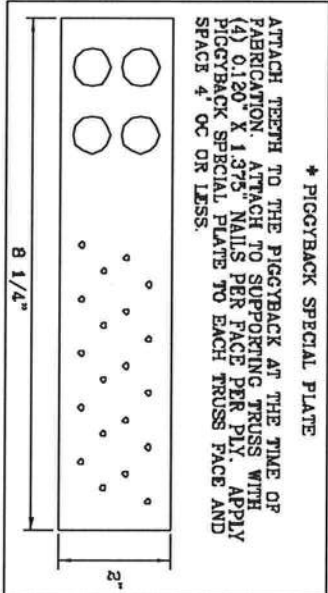

* PIGGYBACK SPECIAL PLATE
ATTACH TEETH TO THE PIGGYBACK AT THE TIME OF FABRICATION. ATTACH TO SUPPORTING TRUSS WITH (4) 0.120" X 1.375" NAILS PER FACE PER PLY. APPLY PIGGYBACK SPECIAL PLATE TO EACH TRUSS FACE AND SPACE 4' OC OR LESS.

MAX LOADING

55 PSF AT
1.33 DUR. FAC.
50 PSF AT
1.25 DUR. FAC.
47 PSF AT
1.15 DUR. FAC.

SPACING 24.0"

REF PIGGYBACK

DATE 09/12/07

DRWCM/TEK STD PIGGY

-ENG JL

THIS DRAWING REPLACES DRAWINGS 634.016 634.017 & 647.045

VALLEY TRUSS DETAIL

TOP CHORD 2X4 SP #2 OR SPF #1/#2 OR BETTER.
BOT CHORD 2X3(*) OR 2X4 SP #2N OR SPF #1/#2 OR BETTER.
WEBS 2X4 SP #3 OR BETTER.

- * 2X3 MAY BE RIPPED FROM A 2X6 (PITCHED OR SQUARE).
 *** ATTACH EACH VALLEY TO EVERY SUPPORTING TRUSS WITH:
 (2) 16d BOX (0.135" X 3.5") NAILS TOE-NAILED FOR
 FBC 2004 110 MPH, ASCE 7-02 110 MPH WIND OR (3) 16d FOR
 ASCE 7-02 130 MPH WIND. 15' MEAN HEIGHT, ENCLOSED
 BUILDING, EXP. C, RESIDENTIAL, WIND TC DL=5 PSP.


UNLESS SPECIFIED ON ENGINEER'S SEALED DESIGN, APPLY 1X4 "I"-BRACE, 80% LENGTH OF WEB, VALLEY WEB, SAME SPECIES AND GRADE OR BETTER, ATTACHED WITH 8d BOX (0.113" X 2.5") NAILS AT 6" OC, OR CONTINUOUS LATERAL BRACING, EQUALLY SPACED, FOR VERTICAL VALLEY WEBS GREATER THAN 7'9".

MAXIMUM VALLEY VERTICAL HEIGHT MAY NOT EXCEED 12'0".


TOP CHORD OF TRUSS BENEATH VALLEY SET MUST BE BRACED WITH:
PROPERLY ATTACHED, RATED SHEATHING APPLIED PRIOR TO VALLEY TRUSS
INSTALLATION

PURLINS AT 24" OC OR AS OTHERWISE SPECIFIED ON ENGINEERS' SEALED DESIGN OR BY VALLEY TRUSSES USED IN LIEU OF PURLIN SPACING AS SPECIFIED ON ENGINEERS' SEALED DESIGN.


CUT FROM 2X6 OR
LARGER AS REQ'D

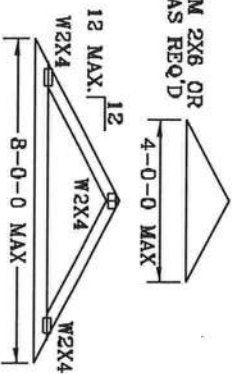


PITCHED CUT
BOTTOM CHORD
VALLEY

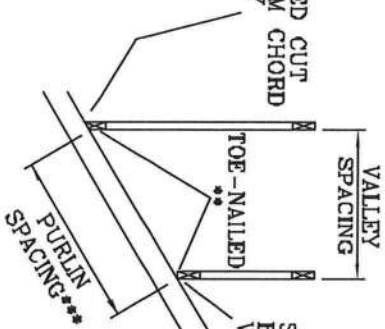


SQUARE CUT
BOTTOM CHORD
VALLEY




OPTIONAL STUB
END DETAIL



OPTIONAL HIP
JOINT DETAIL.

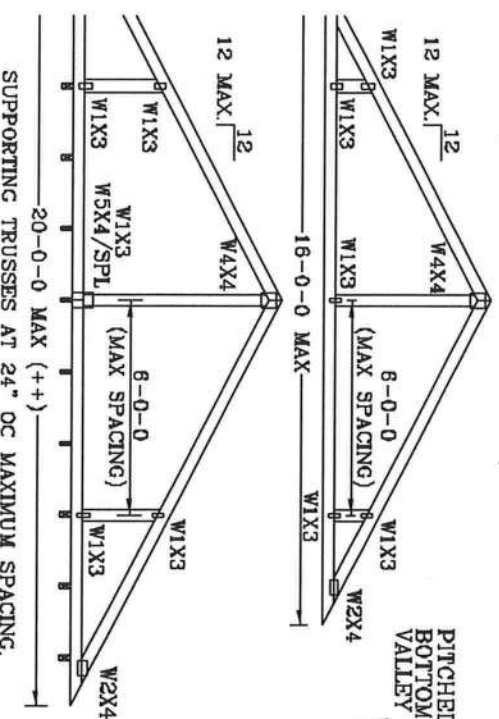

SUPPORTING TRUSSES AT 24" OC MAXIMUM SPACING

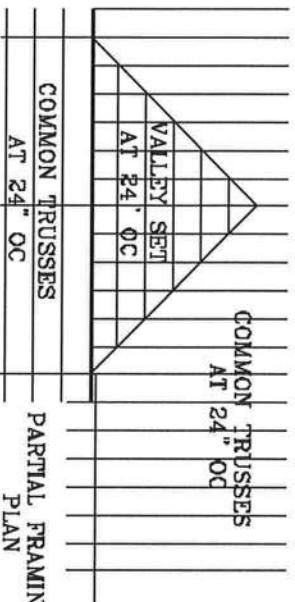

PARTIAL FRAMING PLAN

THIS DRAWING REPLACES DRAWING A105

RESEARCHMEN TESTS REVEAL EXTENSIVE DAMAGE TO FABRICATING, HANDLING, SHIPPING, INSTALLING AND REPAIRING. REFERS TO SECT. 1-10 (BUILDING COMPONENT SAFETY INFORMATION). PUBLISHED BY TPI (TIRE & RIM INSTITUTE), 560 DOWNSIDE DR., SUITE 200, MADISON, WI 53719, AND WIDA (WHEEL TREADS COUNCIL OF AMERICA), 6300 ENTERPRISE BL., SUITE 100, MADISON, WI 53719. FOR SAFETY. PAMPHLETS PRIOR TO PERFORMING THESE FUNCTIONS. THESE OTHERS WILL INDICATE TPI (TIRE & RIM INSTITUTE) SHALL HAVE PROPERTY ATTACHED. STRUCTURAL, PAINT AND BOTTOM CHORD SHALL HAVE A PROPERTY ATTACHED. ATTACHED PROPERTY ATTACHED.

JULIUS LEE'S
CONS. ENGINEERS P.A.

TC LL	20	20	PSF	REF	VALLEY DETAIL
TC DL	7	15	PSF	DATE	11/26/03
BC DL	5	5	PSF	DRWG	VALTRUSS1103
BC LL	0	0	PSF	-ENG	JL

No: 34869
STATE OF FLORIDA

SPACING	24"
DOCKING	1.00

TOE-NAIL DETAIL

TOE-NAILS TO BE DRIVEN AT AN ANGLE OF APPROXIMATELY THIRTY DEGREES WITH THE PIECE AND STARTED APPROXIMATELY ONE-THIRD THE LENGTH OF THE NAIL FROM THE END OF THE MEMBER.

PER ANSI/AF&PA NDS-2001 SECTION 12.4.1 - EDGE DISTANCE, END DISTANCE, SPACING, EDGE DISTANCES, END DISTANCES AND SPACINGS FOR NAILS AND SPIKES SHALL BE SUFFICIENT TO PREVENT SPLITTING OF THE WOOD.



THE NUMBER OF TOE-NAILS TO BE USED IN A SPECIFIC APPLICATION IS DEPENDENT UPON PROPERTIES FOR THE CHORD SIZE, LUMBER SPECIES AND NAIL TYPE. PROPER CONSTRUCTION PRACTICES AS WELL AS GOOD JUDGEMENT SHOULD DETERMINE THE NUMBER OF NAILS TO BE USED.

THIS DETAIL DISPLAYS A TOE-NAILED CONNECTION FOR JACK FRAMING INTO A SINGLE OR DOUBLE PLY SUPPORTING GIRDER.

MAXIMUM VERTICAL RESISTANCE OF 16d (0.162"x3.5") COMMON TOE-NAILS

NUMBER OF TOE-NAILS	SOUTHERN PINE		DOUGLAS FIR-LARCH		HEM-FIR		SPRUCE PINE FIR	
	1 PLY	2 PLYS	1 PLY	2 PLYS	1 PLY	2 PLYS	1 PLY	2 PLYS
2	187#	256#	181#	234#	156#	203#	154#	199#
3	298#	383#	271#	351#	234#	304#	230#	298#
4	394#	511#	361#	468#	312#	406#	307#	397#
5	493#	638#	452#	585#	390#	507#	384#	496#

ALL VALUES MAY BE MULTIPLIED BY APPROPRIATE DURATION OF LOAD FACTOR.

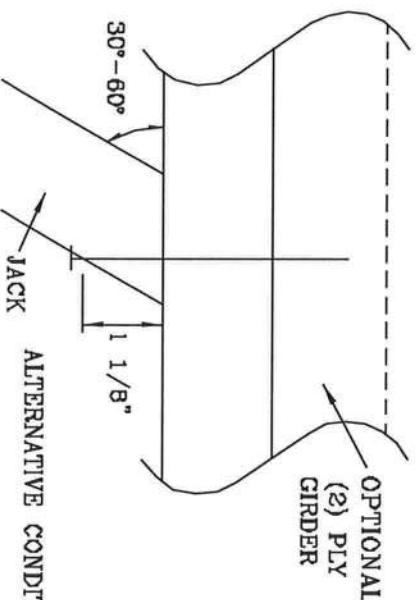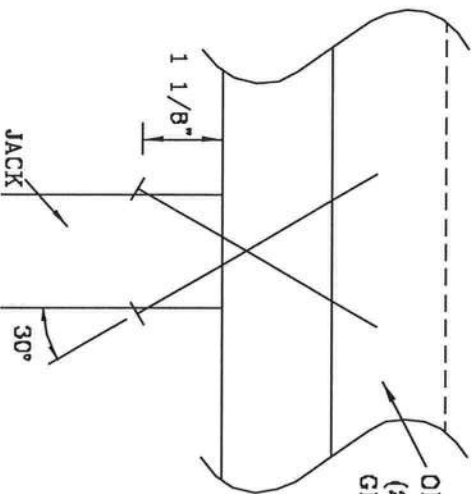

ALTERNATIVE CONDITION

THIS DRAWING REPLACES DRAWING 784040

WARNING: TRUSSES REQUIRE EXTREME CARE IN FABRICATING, HANDLING, SHIPPING, INSTALLING AND BRACING. REFER TO BEST PRACTICES FOR TRUSS SAFETY. FOR ADDITIONAL INFORMATION, CONTACT THE TRUSS BOARD OF AMERICA, 6800 ENTERPRISE LN, MADISON, WI 53719 FOR SAFETY PRACTICES PRIOR TO PERFORMING THESE FUNCTIONS. UNLESS OTHERWISE INDICATED, TOP CHORD SHALL HAVE PROPERLY ATTACHED STRUCTURAL PANELS AND BOTTOM CHORD SHALL HAVE A PROPERLY ATTACHED RIGID CEILING.

JULIUS LEE'S
CONS. ENGINEERS P.A.

1490 SW 4TH AVENUE
DELRAY BEACH, FL 33444-2161

No. 34689
STATE OF FLORIDA

TC LL PSF REF TOE-NAIL

TC DL PSF DATE 09/12/07

BC DL PSF DRWG CANTONAIL1103

BC LL PSF -ENG JL

TOT. LD. PSF


DUR. FAC. 1.00

SPACING

1/2" DIAMETER BOLT SPACING FOR LOAD APPLIED PARALLEL TO GRAIN.

* GRADE AND SPECIES AS SPECIFIED ON THE ALPINE DESIGN.
BOLT HOLES SHALL BE A MINIMUM OF 1/32" TO A MAXIMUM OF 1/16" LARGER THAN BOLT DIAMETER.

TYPICAL LOCATION OF 1/2" DIAMETER THRU BOLTS. BOLT QUANTITIES AS NOTED ON SEALED DESIGN MUST BE APPLIED IN ONE OF THE PATTERNS SHOWN BELOW.
WASHERS REQUIRED UNDER BOLT HEAD AND NUT

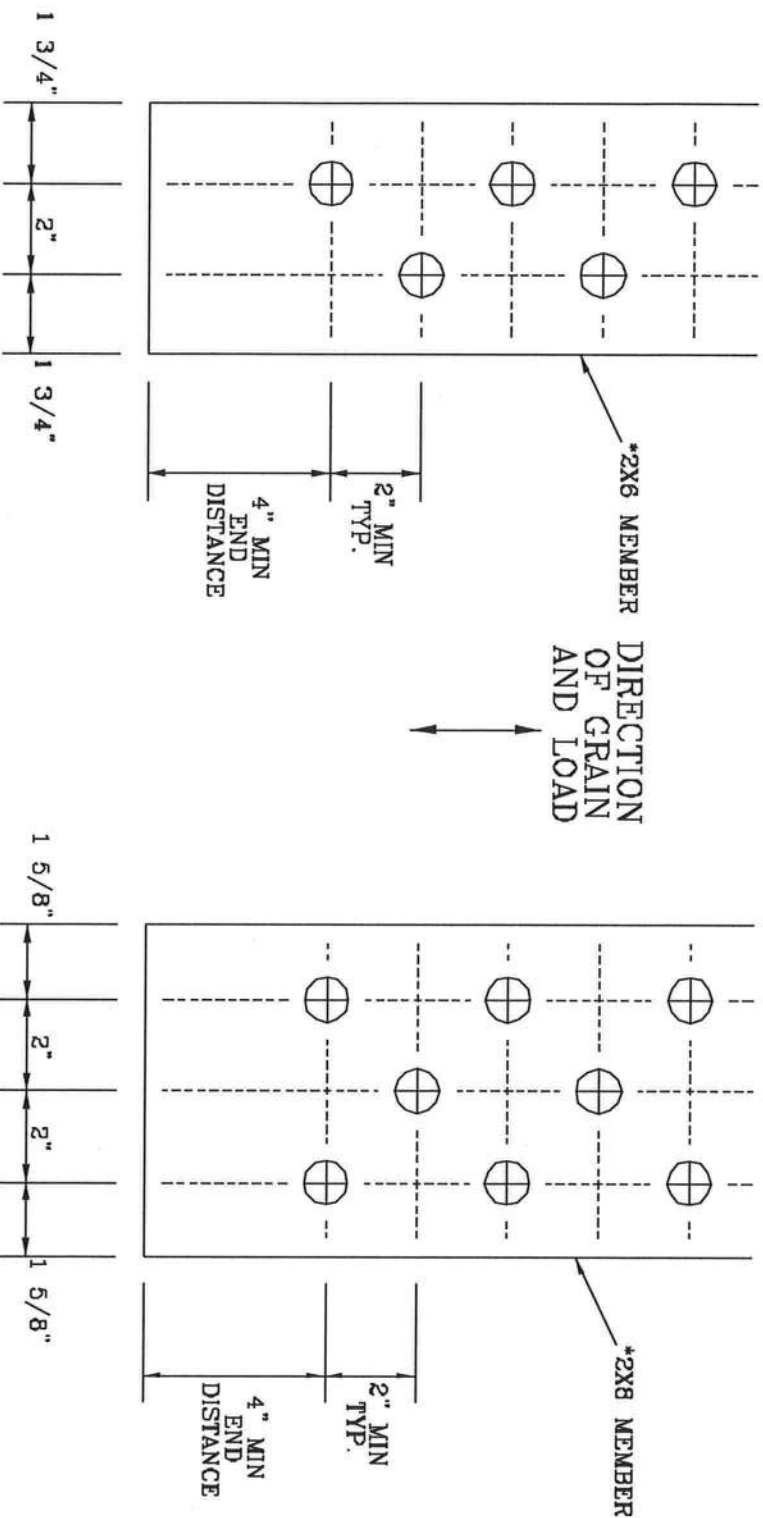

2X6 DETAIL

2X8 DETAIL

THIS DRAWING REPLACES DRAWING A828.016

VARIOUS TRUSSES REQUIRE EXTENSIVE CARE IN FABRICATING, HANDLING, SHIPPING, INSTALLING AND BRACING. REFER TO POST-TO-BUILDING DEPARTMENT SAFETY INFORMATION, PUBLISHED BY THE TRUSS PLATE INSTITUTE, 380 DUNDREDD DR., SUITE 200, MADISON, WI 53719 AND WICA CAVED TRUSS COUNCIL OF AMERICA, 6300 ENTERPRISE LN, MADISON, WI 53719 FOR SAFETY PRACTICES PRIOR TO PERFORMING THESE FUNCTIONS. UNLESS OTHERWISE INDICATED, TOP CHORD SHALL HAVE PROPERLY ATTACHED STRUCTURAL PANELS AND BOTTOM CHORD SHALL HAVE A PROPERLY ATTACHED RIGID CEILING.

JULIUS LEE'S
CONS. ENGINEERS P.A.
1435 BY 4TH AVENUE
DELRAT 62426, FL 33444-2161

No. 34669
STATE OF FLORIDA


TC LL	PSF	REF	BOLT SPACING
TC DL	PSF	DATE	11/26/03
BC DL	PSF	DRWG	CNBOLTSPI103
BC LL	PSF	-ENG	JL
TOT. LD.	PSF		
DUR. FAC.			
SPACING			

11 GAUGE (0.120" X 1.375") NAILS REQUIRED FOR TRULOX
PLATE ATTACHMENT. FILL ROWS COMPLETELY WHERE
SHOWN (Φ).

THIS DETAIL MAY BE USED WITH SO. PINE, DOUGLAS-FIR OR HEM-FIR CHORDS WITH A MINIMUM 1.00 DURATION OF LOAD OR SPRUCE-PINE-FIR CHORDS WITH A MINIMUM 1.15 DURATION OF LOAD. CHORD SIZE OF BOTH TRUSSES MUST EXCEED THE TRULOX PLATE WIDTH.

TRULOX PLATE IS CENTERED ON THE CHORDS AND BENT BETWEEN NAIL ROWS.

REFER TO ENGINEER'S SEALED DESIGN REFERENCING THIS DETAIL FOR LUMBER, PLATES, AND OTHER INFORMATION NOT SHOWN.

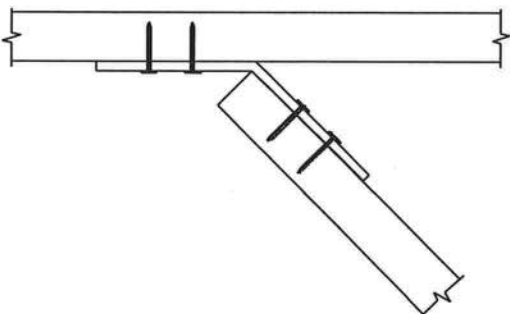

TRULOX PLATE SIZE	REQUIRED NAILS PER TRUSS	MAXIMUM LOAD UP OR DOWN
3x6	9	350#
6x6	15	990#

THIS DRAWING REPLACES DRAWINGS 1.158.989 1.158.989/R
1.154.844 1.152.217 1.152.017 1.159.154 & 1.151.524

3-VAALINK.COM. THESE INCLUDE: EXISTING CASE FABRICATING, HANDING, SHOPPING, INSTALLING AND MAINTENANCE OF ALL CASES (BULDING COMPONENT SAFETY INFORMATION, PUBLISHED BY THE U.S. FIRE PROTECTION ASSOCIATION, 1999). THE COMPANY HAS BEEN A MEMBER OF THE NATIONAL PLATE INSTITUTE, 366 DUNDORF RD., SUITE 200, MALDEN, VT 05759 AND VITA MEDICAL TRUSS COMPANY OF AMERICA, 6300 ENTERPRISE LN, MALDEN, VT 05759 FOR SAFETY PRACTICES PRIOR TO PERFORMING THESE FUNCTIONS. THESE SAFETY INFORMATION, TOP-CORD SHALL HAVE PROPERLY ATTACHED STRUCTURAL PANELS AND BOTTOM CORD SHALL HAVE A PROPERLY ATTACHED RIGID CULING.


JULIUS LEE'S

1455 SW 4th AVENUE
DELRAY BEACH, FL. 33444-2151


REF	TRULOX
DATE	11/26/03
DRWG	CNTRULOX1103
-ENG	JL

No: 34869
STATE OF FLORIDA

STRONG BACK DETAIL SYSTEM-42 OR FLAT TRUSS

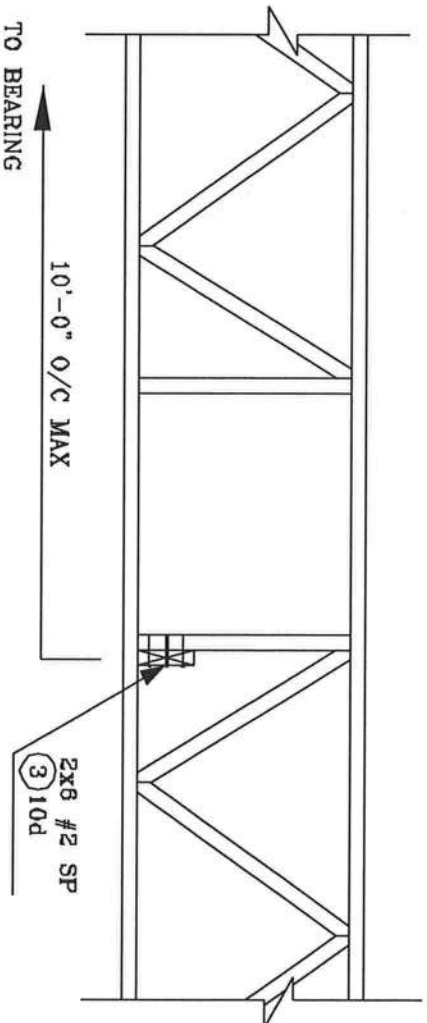

ALTERNATE DETAIL FOR STRONG BACK WITH VERTICAL NOT LINING UP

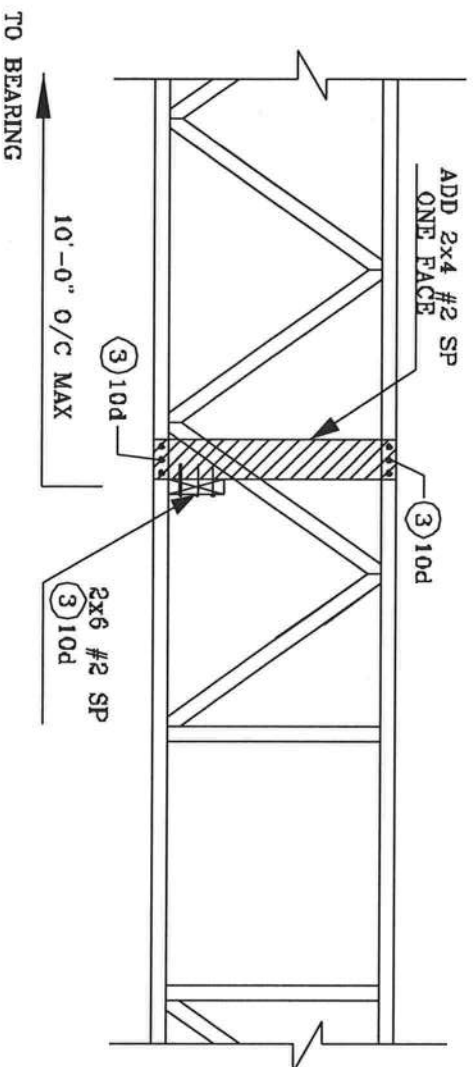

JULIUS LEE'S
CONS. ENGINEERS P.A.
1456 SW 41st AVENUE
DEERBART BEACH, FL 33441-2161

No: 34869
STATE OF FLORIDA

27072



CAL-TECH TESTING, INC.

ENGINEERING & TESTING LABORATORY

P.O. Box 1625, Lake City, FL 32056-1625
4784 Rosselle St. • Jacksonville, FL 32254
2230 Greensboro Hwy., Quincy, FL 32351

Lake City • (386) 755-3633
Fax • (386) 752-5456

Jacksonville • (904) 381-8901
Fax • (904) 381-8902

Quincy • (850) 442-3495
Fax • (850) 442-4008

JOB NO.: 08-311
DATE TESTED: 06-16-08

REPORT OF IN-PLACE DENSITY TEST

ASTM METHOD: ☒ (D-2922) Nuclear ☐ (D-2937) Drive Cylinder ☐ Other

PROJECT: ZACH MOSS RESIDENCE

CLIENT: HOMETOWN HOMES

GENERAL CONTRACTOR: SAC EARTHWORK CONTRACTOR: SAC

SOIL USE (SEE NOTE): _____ SPECIFICATION REQUIREMENTS: _____

TECHNICIAN: S. OSTEEN

MODIFIED (ASTM D-1557): ☒ STANDARD (ASTM D-698): _____

TEST NO.	TEST LOCATION	TEST:	PROCTOR NO.	WET DENS. LBS./CU. FT.	DRY DENS. LBS./CU. FT.	MOIST PERCENT	% MAX. DENS.
		<input checked="" type="checkbox"/> DEPTH <input type="checkbox"/> ELEV. <input type="checkbox"/> LIFT					
1	10' FROM NW CORNER	12"	2	118.0	108.6	8.6	101.5
2	10' FROM SE CORNER	12"	2	123.9	111.9	10.7	104.5
3	CENTER OF PAD	12"	2	119.5	106.1	12.6	99.1

REMARKS: _____

PROCTOR NO.	SOIL DESCRIPTION	PROCTOR VALUE	OPT. MOIST.
2	DAN REGISTER P.T. (TAN SAND W/TRACE OF CLAY/SAND)	107.0	11.2

NOTE: 1. Building Fill 2. Trench Backfill 3. Base Course 4. Subbase/Stabilized Subgrade 5. Embankment 6. Subgrade/Natural Soil 7. Other
The test results presented in this report are specific only to the samples tested at the time of testing. The tests were performed in accordance with generally accepted methods and standards. Since material conditions can vary between test location and change with time, sound judgement should be exercised with regard to the use and interpretation of the data.

Location: Lot 10 Country Creek Project Name: Moss Job

As required by Florida Statute 553.842 and Florida Administrative Code 9B-72, please provide the information and the product approval number(s) on the building components listed below if they will be utilized on the construction project which you are applying for a building permit on or after April 1, 2004. We recommend you contact your local product supplier should you not know the product approval number for any of the applicable listed products. More information about statewide product approval can be obtained at www.floridabuilding.org

Category/Subcategory	Manufacturer	Product Description	Approval Number
A. EXTERIOR DOORS	Masonite International	Metal Ext. Doors	FL 4242-
1. Swinging			
2. Sliding			
3. Sectional			
4. Roll up			
5. Automatic			
6. Other			
B. WINDOWS			
1. Single hung	MI Windows	Single Hung Windows	FL 5108
2. Horizontal Slider			FL 5451
3. Casement			
4. Double Hung			
5. Fixed			FL 5418
6. Awning			
7. Pass-through			
8. Projected			
9. Mullion			
10. Wind Breaker			
11. Dual Action			
12. Other			
C. PANEL WALL			
1. Siding	James Hardie Building Prod.	Masonry Siding	FL 889-R
2. Soffits	KayCan LTD	Aluminum Soffit	FL 4899
3. EIFS			
4. Storefronts			
5. Curtain walls			
6. Wall louver			
7. Glass block			
8. Membrane			FL 3820-R1
9. Greenhouse			
10. Other			
D. ROOFING PRODUCTS			
1. Asphalt Shingles	EIK Corp.	Arch. Asphalt Shingles	FL 586-R2
2. Underlayments	Woodland Ind.	30" Felt	FL 1814-R1
3. Roofing Fasteners			
4. Non-structural Metal Rf			FL 7518.1
5. Built-Up Roofing			
6. Modified Bitumen			
7. Single Ply Roofing Sys			
8. Roofing Tiles			
9. Roofing Insulation			
10. Waterproofing			
11. Wood shingles /shakes			
12. Roofing Slate			

Subcategory (cont.)	Manufacturer	Product Description	Approval Number
Fluid Applied Roof Sys			
Cements-Adhesives - Coatings			FL 1960-R
15. Roof Tile Adhesive			
16. Spray Applied Polyurethane Roof			
17. Other			
E. SHUTTERS			
1. Accordion			
2. Bahama			
3. Storm Panels			
4. Colonial			
5. Roll-up			
6. Equipment			
7. Others			
F. SKYLIGHTS			
1. Skylight			
2. Other			FL 451-R
G. STRUCTURAL COMPONENTS			
1. Wood connector/anchor	Simpson Strong Tie	metal Straps	FL 474-R1
2. Truss plates			
3. Engineered lumber	Georgia Pacific	Eng. Lumber	FL 1008-R2
4. Railing			
5. Coolers-freezers			
6. Concrete Admixtures			
7. Material			
8. Insulation Forms			
9. Plastics			
10. Deck-Roof			
11. Wall			
12. Sheds			
13. Other			
H. NEW EXTERIOR ENVELOPE PRODUCTS			
1.			
2.			

The products listed below did not demonstrate product approval at plan review. I understand that at the time of inspection of these products, the following information must be available to the inspector on the jobsite; 1) copy of the product approval, 2) the performance characteristics which the product was tested and certified to comply with, 3) copy of the applicable manufacturers installation requirements.

I understand these products may have to be removed if approval cannot be demonstrated during inspection

Contractor or Contractor's Authorized Agent Signature

Print Name

Date

Location

Permit # (FOR STAFF USE ONLY)

Residential System Sizing Calculation

Summary

Moss, Zack & Brittany Residence
, FL

Project Title:
801212KeenRichard

Class 3 Rating
Registration No. 0
Climate: North


1/23/2008

Location for weather data: Gainesville - Defaults: Latitude(29) Altitude(152 ft.) Temp Range(M)			
Humidity data: Interior RH (50%) Outdoor wet bulb (77F) Humidity difference(54gr.)			
Winter design temperature	33 F	Summer design temperature	92 F
Winter setpoint	70 F	Summer setpoint	75 F
Winter temperature difference	37 F	Summer temperature difference	17 F
Total heating load calculation	20615 Btuh	Total cooling load calculation	14086 Btuh
Submitted heating capacity	% of calc Btuh	Submitted cooling capacity	% of calc Btuh
Total (Electric Heat Pump)	116.4 24000	Sensible (SHR = 0.75)	178.4 18000
Heat Pump + Auxiliary(0.0kW)	116.4 24000	Latent	150.2 6000
		Total (Electric Heat Pump)	170.4 24000

WINTER CALCULATIONS

Winter Heating Load (for 1170 sqft)


Load component	Load
Window total 95 sqft	3058 Btuh
Wall total 981 sqft	3222 Btuh
Door total 60 sqft	777 Btuh
Ceiling total 1204 sqft	1419 Btuh
Floor total 142 sqft	6200 Btuh
Infiltration 147 cfm	5940 Btuh
Duct loss	0 Btuh
Subtotal	20615 Btuh
Ventilation 0 cfm	0 Btuh
TOTAL HEAT LOSS	20615 Btuh

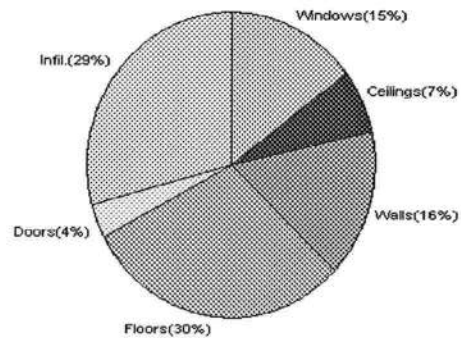

SUMMER CALCULATIONS

Summer Cooling Load (for 1170 sqft)

Load component	Load
Window total 95 sqft	2751 Btuh
Wall total 981 sqft	1956 Btuh
Door total 60 sqft	588 Btuh
Ceiling total 1204 sqft	1994 Btuh
Floor total	0 Btuh
Infiltration 76 cfm	1423 Btuh
Internal gain	1380 Btuh
Duct gain	0 Btuh
Sens. Ventilation 0 cfm	0 Btuh
Total sensible gain	10092 Btuh
Latent gain(ducts)	0 Btuh
Latent gain(infiltration)	2794 Btuh
Latent gain(ventilation)	0 Btuh
Latent gain(internal/occupants/other)	1200 Btuh
Total latent gain	3994 Btuh
TOTAL HEAT GAIN	14086 Btuh

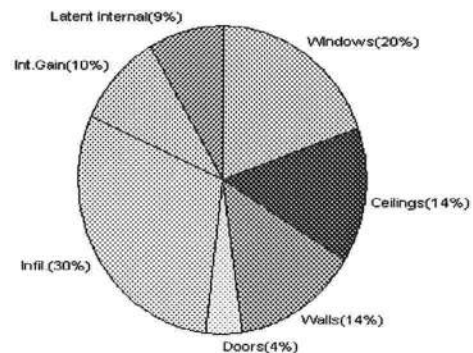

For Florida residences only

EnergyGauge® System Sizing

PREPARED BY: *[Signature]*

DATE: 1-23-08

System Sizing Calculations - Winter

Residential Load - Whole House Component Details

Moss, Zack & Brittany Residence

Project Title:
801212KeenRichard

Class 3 Rating
Registration No. 0
Climate: North

, FL

Reference City: Gainesville (Defaults) Winter Temperature Difference: 37.0 F

1/23/2008

Component Loads for Whole House

Window	Panes/SHGC/Frame/U	Orientation	Area(sqft)	X	HTM=	Load
1	2, Clear, Metal, 0.87	N	15.0		32.2	483 Btuh
2	2, Clear, Metal, 0.87	N	20.0		32.2	644 Btuh
3	2, Clear, Metal, 0.87	S	30.0		32.2	966 Btuh
4	2, Clear, Metal, 0.87	S	30.0		32.2	966 Btuh
Window Total			95(sqft)			3058 Btuh
Walls	Type	R-Value	Area	X	HTM=	Load
1	Frame - Wood - Ext(0.09)	13.0	825		3.3	2709 Btuh
2	Frame - Wood - Adj(0.09)	13.0	156		3.3	512 Btuh
Wall Total			981			3222 Btuh
Doors	Type		Area	X	HTM=	Load
1	Insulated - Adjacent		20		12.9	259 Btuh
2	Insulated - Exterior		20		12.9	259 Btuh
3	Insulated - Exterior		20		12.9	259 Btuh
Door Total			60			777Btuh
Ceilings	Type/Color/Surface	R-Value	Area	X	HTM=	Load
1	Vented Attic/D/Shin)	30.0	1204		1.2	1419 Btuh
Ceiling Total			1204			1419Btuh
Floors	Type	R-Value	Size	X	HTM=	Load
1	Slab On Grade	0	142.0 ft(p)		43.7	6200 Btuh
Floor Total			142			6200 Btuh
Zone Envelope Subtotal:						14675 Btuh
Infiltration	Type	ACH X	Zone Volume		CFM=	
	Natural	0.94	9360		146.6	5940 Btuh
Ductload	Average sealed, R6.0, Supply(Attic), Return(Attic) (DLM of 0.00)					0 Btuh
Zone #1	Sensible Zone Subtotal					20615 Btuh

WHOLE HOUSE TOTALS

	Subtotal Sensible	20615 Btuh
	Ventilation Sensible	0 Btuh
	Total Btuh Loss	20615 Btuh

Manual J Winter Calculations

Residential Load - Component Details (continued)

Moss, Zack & Brittany Residence

Project Title:
801212KeenRichard

Class 3 Rating
Registration No. 0
Climate: North

, FL

Key: Window types (SHGC - Shading coefficient of glass as SHGC numerical value or as clear
(Frame types - metal, wood or insulated metal)
(U - Window U-Factor or 'DEF' for default)
(HTM - ManualJ Heat Transfer Multiplier)

Key: Floor size (perimeter(p) for slab-on-grade or area for all other floor types)

For Florida residences only



System Sizing Calculations - Winter

Residential Load - Room by Room Component Details

Moss, Zack & Brittany Residence

Project Title:
801212KeenRichard

Class 3 Rating
Registration No. 0
Climate: North

, FL

Reference City: Gainesville (Defaults) Winter Temperature Difference: 37.0 F

1/23/2008

Component Loads for Zone #1: Main

Window	Panes/SHGC/Frame/U	Orientation	Area(sqft)	X	HTM=	Load
1	2, Clear, Metal, 0.87	N	15.0		32.2	483 Btuh
2	2, Clear, Metal, 0.87	N	20.0		32.2	644 Btuh
3	2, Clear, Metal, 0.87	S	30.0		32.2	966 Btuh
4	2, Clear, Metal, 0.87	S	30.0		32.2	966 Btuh
Window Total			95(sqft)			3058 Btuh
Walls	Type	R-Value	Area	X	HTM=	Load
1	Frame - Wood - Ext(0.09)	13.0	825		3.3	2709 Btuh
2	Frame - Wood - Adj(0.09)	13.0	156		3.3	512 Btuh
Wall Total			981			3222 Btuh
Doors	Type		Area	X	HTM=	Load
1	Insulated - Adjacent		20		12.9	259 Btuh
2	Insulated - Exterior		20		12.9	259 Btuh
3	Insulated - Exterior		20		12.9	259 Btuh
Door Total			60			777Btuh
Ceilings	Type/Color/Surface	R-Value	Area	X	HTM=	Load
1	Vented Attic/D/Shin)	30.0	1204		1.2	1419 Btuh
Ceiling Total			1204			1419Btuh
Floors	Type	R-Value	Size	X	HTM=	Load
1	Slab On Grade	0	142.0 ft(p)		43.7	6200 Btuh
Floor Total			142			6200 Btuh
Zone Envelope Subtotal:						14675 Btuh
Infiltration	Type	ACH X	Zone Volume		CFM=	
	Natural	0.94	9360		146.6	5940 Btuh
Ductload	Average sealed, R6.0, Supply(Attic), Return(Attic) (DLM of 0.00)					0 Btuh
Zone #1	Sensible Zone Subtotal					20615 Btuh

WHOLE HOUSE TOTALS

	Subtotal Sensible	20615 Btuh
	Ventilation Sensible	0 Btuh
	Total Btuh Loss	20615 Btuh

Manual J Winter Calculations

Residential Load - Component Details (continued)

Moss, Zack & Brittany Residence

Project Title:
801212KeenRichard

Class 3 Rating
Registration No. 0
Climate: North

, FL



Key: Window types (SHGC - Shading coefficient of glass as SHGC numerical value or as clear)

(Frame types - metal, wood or insulated metal)

(U - Window U-Factor or 'DEF' for default)

(HTM - ManualJ Heat Transfer Multiplier)

Key: Floor size (perimeter(p) for slab-on-grade or area for all other floor types)

For Florida residences only

System Sizing Calculations - Summer

Residential Load - Whole House Component Details

Moss, Zack & Brittany Residence

Project Title:
801212KeenRichard

Class 3 Rating
Registration No. 0
Climate: North

, FL

Reference City: Gainesville (Defaults)

Summer Temperature Difference: 17.0 F

1/23/2008

Component Loads for Whole House

Window	Type*	Ornt	Overhang		Window Area(sqft)			HTM		Load	
	Pn/SHGC/U/InSh/ExSh/IS		Len	Hgt	Gross	Shaded	Unshaded	Shaded	Unshaded		
1	2, Clear, 0.87, None,N,N	N	1.5ft.	5.5ft.	15.0	0.0	15.0	29	29	434	Btuh
2	2, Clear, 0.87, None,N,N	N	1.5ft.	5.5ft.	20.0	0.0	20.0	29	29	579	Btuh
3	2, Clear, 0.87, None,N,N	S	1.5ft.	5.5ft.	30.0	30.0	0.0	29	34	869	Btuh
4	2, Clear, 0.87, None,N,N	S	8ft.	5.5ft.	30.0	30.0	0.0	29	34	869	Btuh
Window Total					95 (sqft)					2751 Btuh	
Walls	Type		R-Value/U-Value		Area(sqft)		HTM		Load		
1	Frame - Wood - Ext		13.0/0.09		825.0		2.1		1721 Btuh		
2	Frame - Wood - Adj		13.0/0.09		156.0		1.5		235 Btuh		
Wall Total					981 (sqft)				1956 Btuh		
Doors	Type				Area (sqft)		HTM		Load		
1	Insulated - Adjacent				20.0		9.8		196 Btuh		
2	Insulated - Exterior				20.0		9.8		196 Btuh		
3	Insulated - Exterior				20.0		9.8		196 Btuh		
Door Total					60 (sqft)				588 Btuh		
Ceilings	Type/Color/Surface		R-Value		Area(sqft)		HTM		Load		
1	Vented Attic/DarkShingle		30.0		1204.0		1.7		1994 Btuh		
Ceiling Total					1204 (sqft)				1994 Btuh		
Floors	Type		R-Value		Size		HTM		Load		
1	Slab On Grade		0.0		142 (ft(p))		0.0		0 Btuh		
Floor Total					142.0 (sqft)				0 Btuh		
			Zone Envelope Subtotal:							7289 Btuh	
Infiltration	Type		ACH		Volume(cuft)		CFM=		Load		
	SensibleNatural		0.49		9360		76.4		1423 Btuh		
Internal gain			Occupants		Btuh/occupant		Appliance		Load		
			6		X 230 +		0		1380 Btuh		
Duct load	Average sealed, R6.0, Supply(Attic), Return(Attic)							DGM = 0.00		0.0 Btuh	
			Sensible Zone Load							10092 Btuh	

Manual J Summer Calculations

Residential Load - Component Details (continued)

Moss, Zack & Brittany Residence
, FL

Project Title:
801212KeenRichard

Class 3 Rating
Registration No. 0
Climate: North

1/23/2008

WHOLE HOUSE TOTALS

Whole House Totals for Cooling	Sensible Envelope Load All Zones	10092 Btuh
	Sensible Duct Load	0 Btuh
	Total Sensible Zone Loads	10092 Btuh
	Sensible ventilation	0 Btuh
	Blower	0 Btuh
	Total sensible gain	10092 Btuh
	Latent infiltration gain (for 54 gr. humidity difference)	2794 Btuh
	Latent ventilation gain	0 Btuh
	Latent duct gain	0 Btuh
	Latent occupant gain (6 people @ 200 Btuh per person)	1200 Btuh
	Latent other gain	0 Btuh
	Latent total gain	3994 Btuh
	TOTAL GAIN	14086 Btuh

*Key: Window types (Pn - Number of panes of glass)
(SHGC - Shading coefficient of glass as SHGC numerical value or as clear or tint)
(U - Window U-Factor or 'DEF' for default)
(InSh - Interior shading device: none(N), Blinds(B), Draperies(D) or Roller Shades(R))
(ExSh - Exterior shading device: none(N) or numerical value)
(BS - Insect screen: none(N), Full(F) or Half(H))
(Ornt - compass orientation)



For Florida residences only

System Sizing Calculations - Summer

Residential Load - Room by Room Component Details

Moss, Zack & Brittany Residence

Project Title:
801212KeenRichard

Class 3 Rating
Registration No. 0
Climate: North

, FL

Reference City: Gainesville (Defaults)

Summer Temperature Difference: 17.0 F

1/23/2008

Component Loads for Zone #1: Main

Window	Type*	Ornt	Overhang		Window Area(sqft)			HTM		Load
	Pn/SHGC/U/InSh/ExSh/IS		Len	Hgt	Gross	Shaded	Unshaded	Shaded	Unshaded	
1	2, Clear, 0.87, None,N,N	N	1.5ft.	5.5ft.	15.0	0.0	15.0	29	29	434 Btuh
2	2, Clear, 0.87, None,N,N	N	1.5ft.	5.5ft.	20.0	0.0	20.0	29	29	579 Btuh
3	2, Clear, 0.87, None,N,N	S	1.5ft.	5.5ft.	30.0	30.0	0.0	29	34	869 Btuh
4	2, Clear, 0.87, None,N,N	S	8ft.	5.5ft.	30.0	30.0	0.0	29	34	869 Btuh
Window Total					95 (sqft)					2751 Btuh
Walls	Type	R-Value/U-Value			Area(sqft)		HTM		Load	
1	Frame - Wood - Ext	13.0/0.09			825.0		2.1		1721 Btuh	
2	Frame - Wood - Adj	13.0/0.09			156.0		1.5		235 Btuh	
Wall Total					981 (sqft)					1956 Btuh
Doors	Type				Area (sqft)		HTM		Load	
1	Insulated - Adjacent				20.0		9.8		196 Btuh	
2	Insulated - Exterior				20.0		9.8		196 Btuh	
3	Insulated - Exterior				20.0		9.8		196 Btuh	
Door Total					60 (sqft)					588 Btuh
Ceilings	Type/Color/Surface	R-Value			Area(sqft)		HTM		Load	
1	Vented Attic/DarkShingle	30.0			1204.0		1.7		1994 Btuh	
Ceiling Total					1204 (sqft)					1994 Btuh
Floors	Type	R-Value			Size		HTM		Load	
1	Slab On Grade	0.0			142 (ft(p))		0.0		0 Btuh	
Floor Total					142.0 (sqft)					0 Btuh
	Zone Envelope Subtotal:									7289 Btuh
Infiltration	Type	ACH			Volume(cuft)		CFM=		Load	
	SensibleNatural	0.49			9360		76.4		1423 Btuh	
Internal gain	Occupants			Btuh/occupant			Appliance		Load	
	6			X 230 +			0		1380 Btuh	
Duct load	Average sealed, R6.0, Supply(Attic), Return(Attic)							DGM = 0.00		0.0 Btuh
	Sensible Zone Load									10092 Btuh

Manual J Summer Calculations

Residential Load - Component Details (continued)

Moss, Zack & Brittany Residence
, FL

Project Title:
801212KeenRichard

Class 3 Rating
Registration No. 0
Climate: North

1/23/2008

WHOLE HOUSE TOTALS

Whole House Totals for Cooling	Sensible Envelope Load All Zones	10092 Btuh
	Sensible Duct Load	0 Btuh
	Total Sensible Zone Loads	10092 Btuh
	Sensible ventilation	0 Btuh
	Blower	0 Btuh
	Total sensible gain	10092 Btuh
	Latent infiltration gain (for 54 gr. humidity difference)	2794 Btuh
	Latent ventilation gain	0 Btuh
	Latent duct gain	0 Btuh
	Latent occupant gain (6 people @ 200 Btuh per person)	1200 Btuh
	Latent other gain	0 Btuh
	Latent total gain	3994 Btuh
	TOTAL GAIN	14086 Btuh

*Key: Window types (Pn - Number of panes of glass)
(SHGC - Shading coefficient of glass as SHGC numerical value or as clear or tint)
(U - Window U-Factor or 'DEF' for default)
(InSh - Interior shading device: none(N), Blinds(B), Draperies(D) or Roller Shades(R))
(ExSh - Exterior shading device: none(N) or numerical value)
(BS - Insect screen: none(N), Full(F) or Half(H))
(Ornt - compass orientation)



For Florida residences only

Residential Window Diversity

MidSummer

Moss, Zack & Brittany Residence
, FL

Project Title:
801212KeenRichard


Class 3 Rating
Registration No. 0
Climate: North

1/23/2008

Weather data for: Gainesville - Defaults

Summer design temperature	92 F	Average window load for July	3067 Btuh
Summer setpoint	75 F	Peak window load for July	3705 Btuh
Summer temperature difference	17 F	Excursion limit(130% of Ave.)	3987 Btuh
Latitude	29 North	Window excursion (July)	None

WINDOW Average and Peak Loads

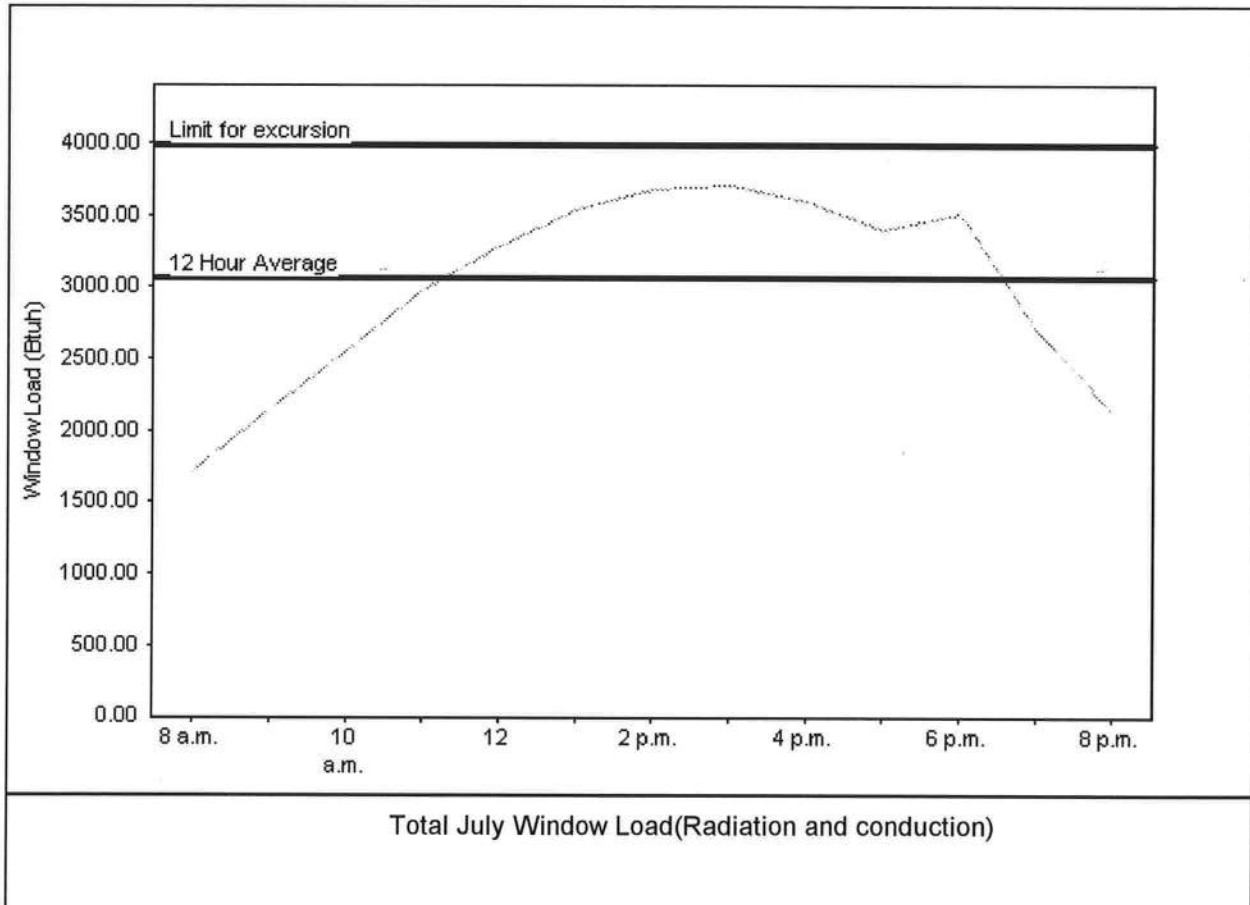

The midsummer window load for this house does not exceed the window load excursion limit.
This house has adequate midsummer window diversity.

EnergyGauge® System Sizing for Florida residences only
PREPARED BY: *[Signature]*
DATE: *1-23-08*

EnergyGauge® FLR2PB v4.1



COLUMBIA COUNTY OFFICIAL CERTIFICATE

OCCUPANCY

COLUMBIA COUNTY, FLORIDA

Department of Building and Zoning Inspection

This Certificate of Occupancy is issued to the below named permit holder for the building and premises at the below named location, and certifies that the work has been completed in accordance with the Columbia County Building Code.

Parcel Number 15-4S-17-08359-050

Building permit No. 000027072

Use Classification SFD/UTILITY

Fire: 12.84

Permit Holder JAMES JOHNSTON

Waste: 33.50

Owner of Building ZACH MOSS

Total: 46.34

Location: 265 SE BREAM LOOP, LAKE CITY, FL 32025

Date: 08/22/2008

Building Inspector

POST IN A CONSPICUOUS PLACE
(Business Places Only)



Notice of Treatment

Applicator: Florida Pest Control & Chemical Co. (www.flapest.com)

Address: 536 SE BAYA RD

City LC Phone _____

Site Location: Subdivision _____

Lot # 10 Block# _____ Permit # 27072

Address 265 SE Bream Loop

Product used

Active Ingredient

% Concentration

☒ Premise Imidacloprid 0.1%

☐ Termidor Fipronil 0.12%

☐ Bora-Care Disodium Octaborate Tetrahydrate 23.0%

Type treatment:

☒ Soil

☐ Wood

Area Treated

Square feet

Linear feet

Gallons Applied

<u>Dwelling/Garage</u>	<u>1522</u>	<u>190</u>	<u>114</u>
_____	_____	_____	_____
_____	_____	_____	_____
_____	_____	_____	_____

As per Florida Building Code 104.2.6 – If soil chemical barrier method for termite prevention is used, final exterior treatment shall be completed prior to final building approval.

If this notice is for the final exterior treatment, initial this line _____.

6/17/08
Date

1000
Time

F254 GUNNY
Print Technician's Name

Remarks: _____

Applicator - White

Permit File - Canary

Permit Holder - Pink

10/05

©