



## HANGER SO (14) HTU26 CHEDULE

TRUSS

TINTED DOTAL

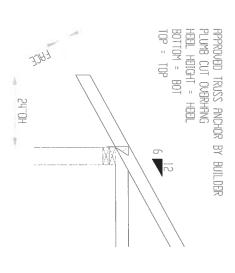

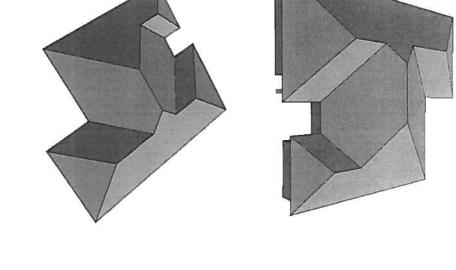

THIS LAYOUT IS THE SOLE SOURCE FOR FABRICATION OF TRUSSES AND VOIDS ALL PREVIOUS ARCHITECTURAL OR OTHER

TRUSS LAYOUTS REVIEW AND APPROVAL OF THIS LAYOUT NOST BE RECEIVED BEFORE ANY TRUSSES WILL BE BUILT VERIFY ALL CONDITIONS TO INSURE AGAINST CHANGES THAT WILL RESULT

IN EXTRA CHARGES TO YOU.

\*FirstSource Builders

Jacksonville
PHONE 904-772-6100 FAX 904-772-1973 Bunnell
HONE 904-437-3349 FAX 904-437-3994

**Sanford** PHONE 407-322-0059 FAX 407-322-5553 Lake City
PHONE 904-755-6894 FAX 904-755-7973

COLUMBIA, FL EMERAID LAKES

DATE: DRAWN BY: JOB #: 06/27/06 AM L2000 PG

8'-0"

BEARING HEIGHT SCHEDULE

**OVERHANG** 2'-0"

ROOF PITCH(S)

NOTES:

1) REFER TO HIB 91 (RECOMMENDATIONS FOR HANDLING INSTALLATION AND TEMPORARY BRACING) REFER TO ENGINEERED DRAWINGS FOR PERMANENT BRACING REQUIRED

2) ALL TRUSSES (INCLUDING TRUSSES UNDER VALLEY FRAMING) MUST DE COMPLETELY DECKED OR REFER TO DETAIL VIOS FOR ALTERNATE BRACING REQUIREMENTS

3) ALL VALLEYS ARE TO BE CONVENTIONALLY FRAMED BY BUILDER 4) ALL TRUSSES ARE DESIGNED FOR 2' o c MAXIMUM SPACING, UNLESS OTHERWISE NOTED

5) ALL WALLS SHOWN ON PLACEMENT PLAN ARE CONSIDERED TO BE LOAD BEARING, UNLESS OTHERWISE NOTED

6) 5742 TRUSSES MUST BE INSTALLED WITH THE TOP BEING UP

7) ALL ROOF TRUSS HANGERS TO BE SIMPSON HUS26 UNLESS OTHERWISE NOTED ALL FLOOR TRUSS HANGERS TO BE SIMPSON THA422 UNLESS OTHERWISE NOTED

8) BEAM/HEADER/LINTEL (HDR) TO BE FURNISHED BY BUILDER

SHOP DRAWING APPROVAL