






CONNECTION DETAIL

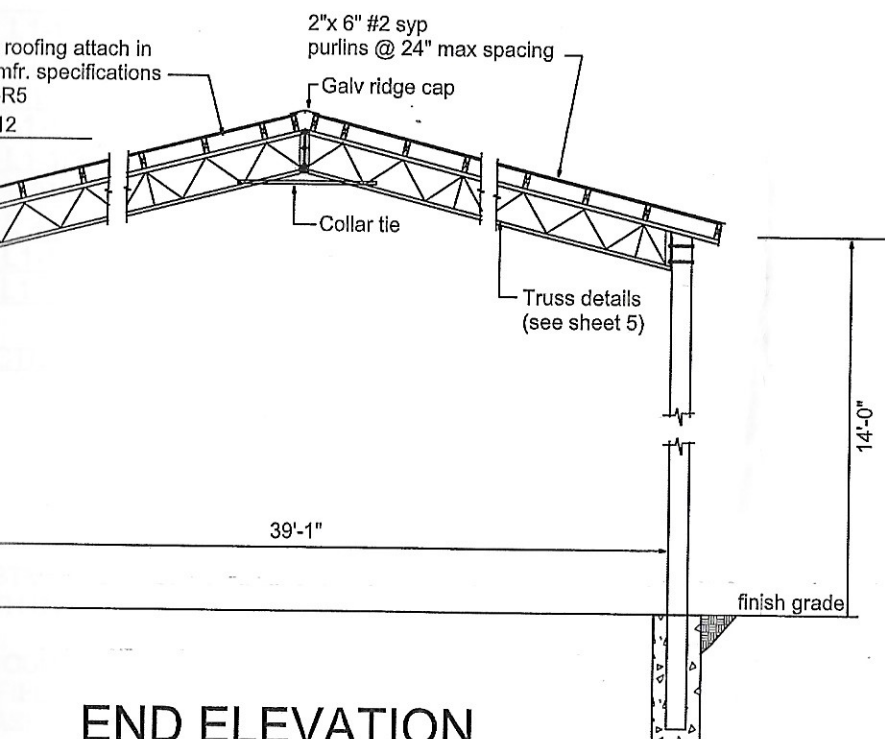


END ELEVATION

NTS


PURLIN CONNECTION DETAIL

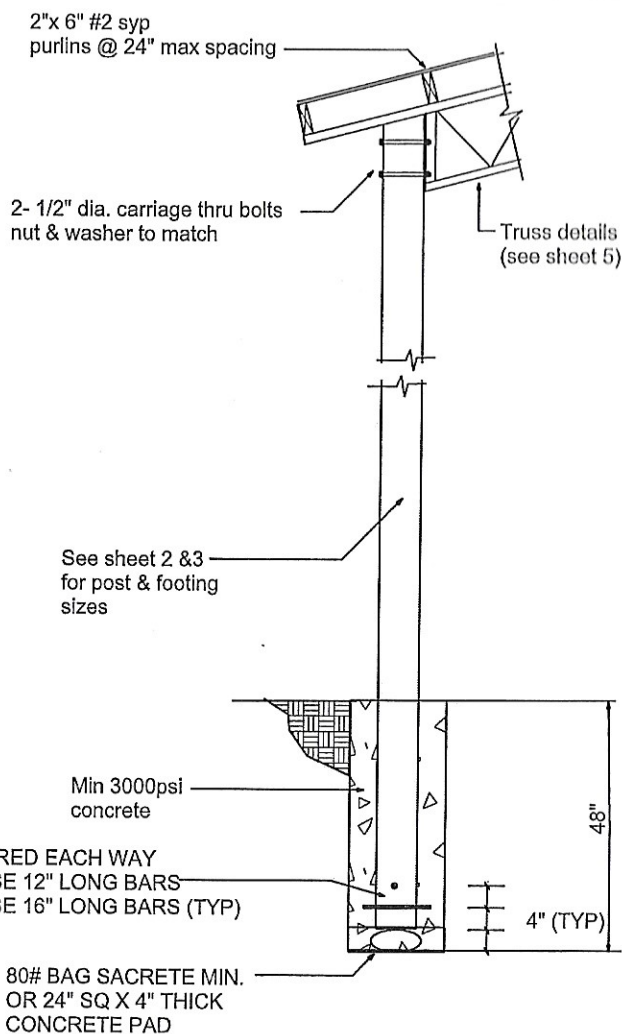


POST FOOTING TO TRUSS DETAIL

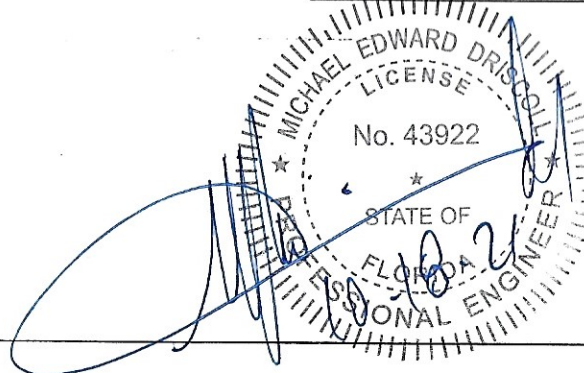


10-18-21
Michael E Driscoll PE
FL Reg # 43922

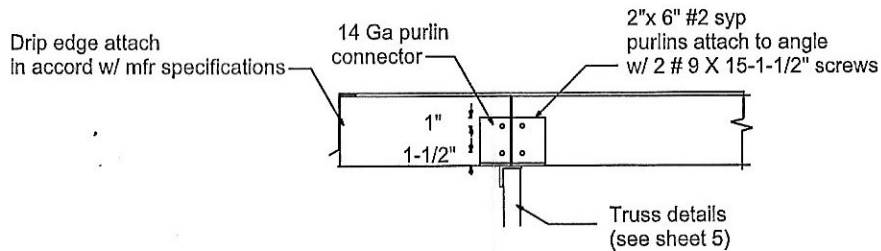

PURLIN CONNECTION DETAIL

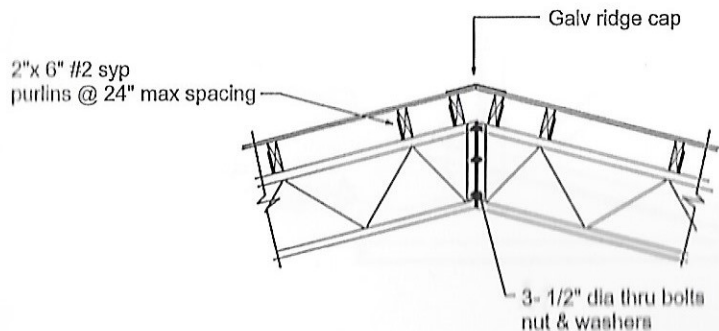

RIDGE CONNECTION DETAIL

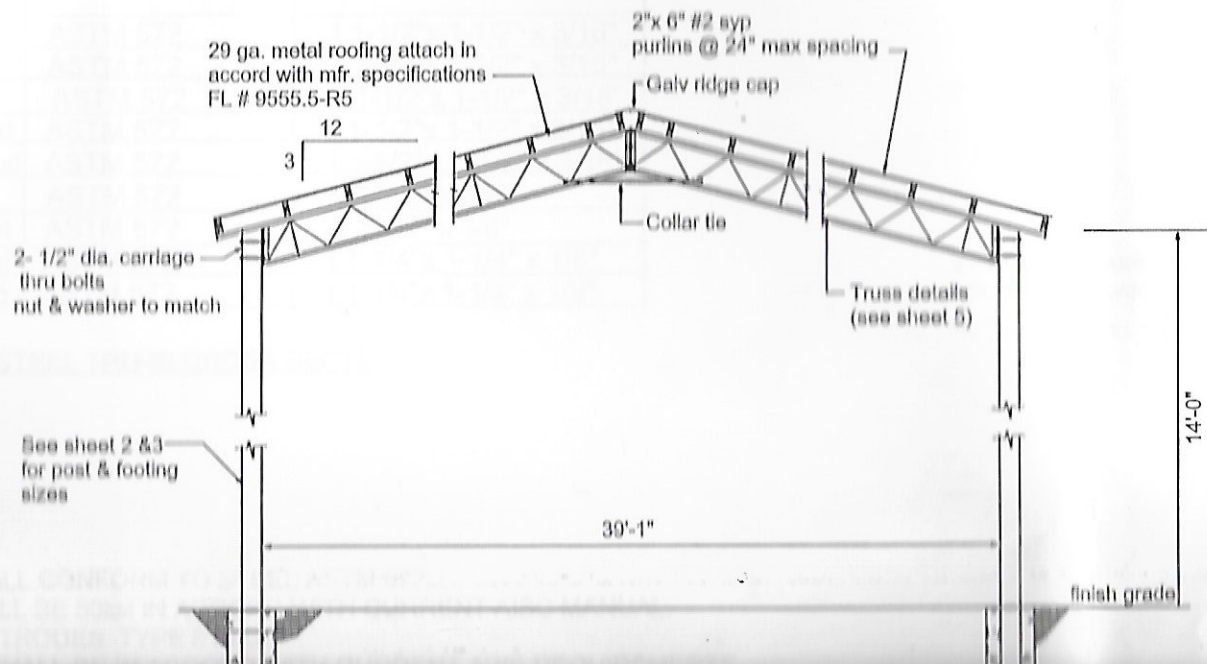

2"x 6" #2 syp
purlins @ 24" max spacing

2- 1/2" dia. carriage thru bolts
nut & washer to match

See sheet 2 & 3
for post & footing
sizes

Min 3000psi
concrete

#5 X 12" BARS CENTERED EACH WAY
FOR 18" DIA HOLES USE 12" LONG BARS
FOR 24" DIA HOLES USE 16" LONG BARS (TYP)

80# BAG SACRETE MIN.
OR 24" SQ X 4" THICK
CONCRETE PAD

POST FOOTING TO

EDWARD DE