



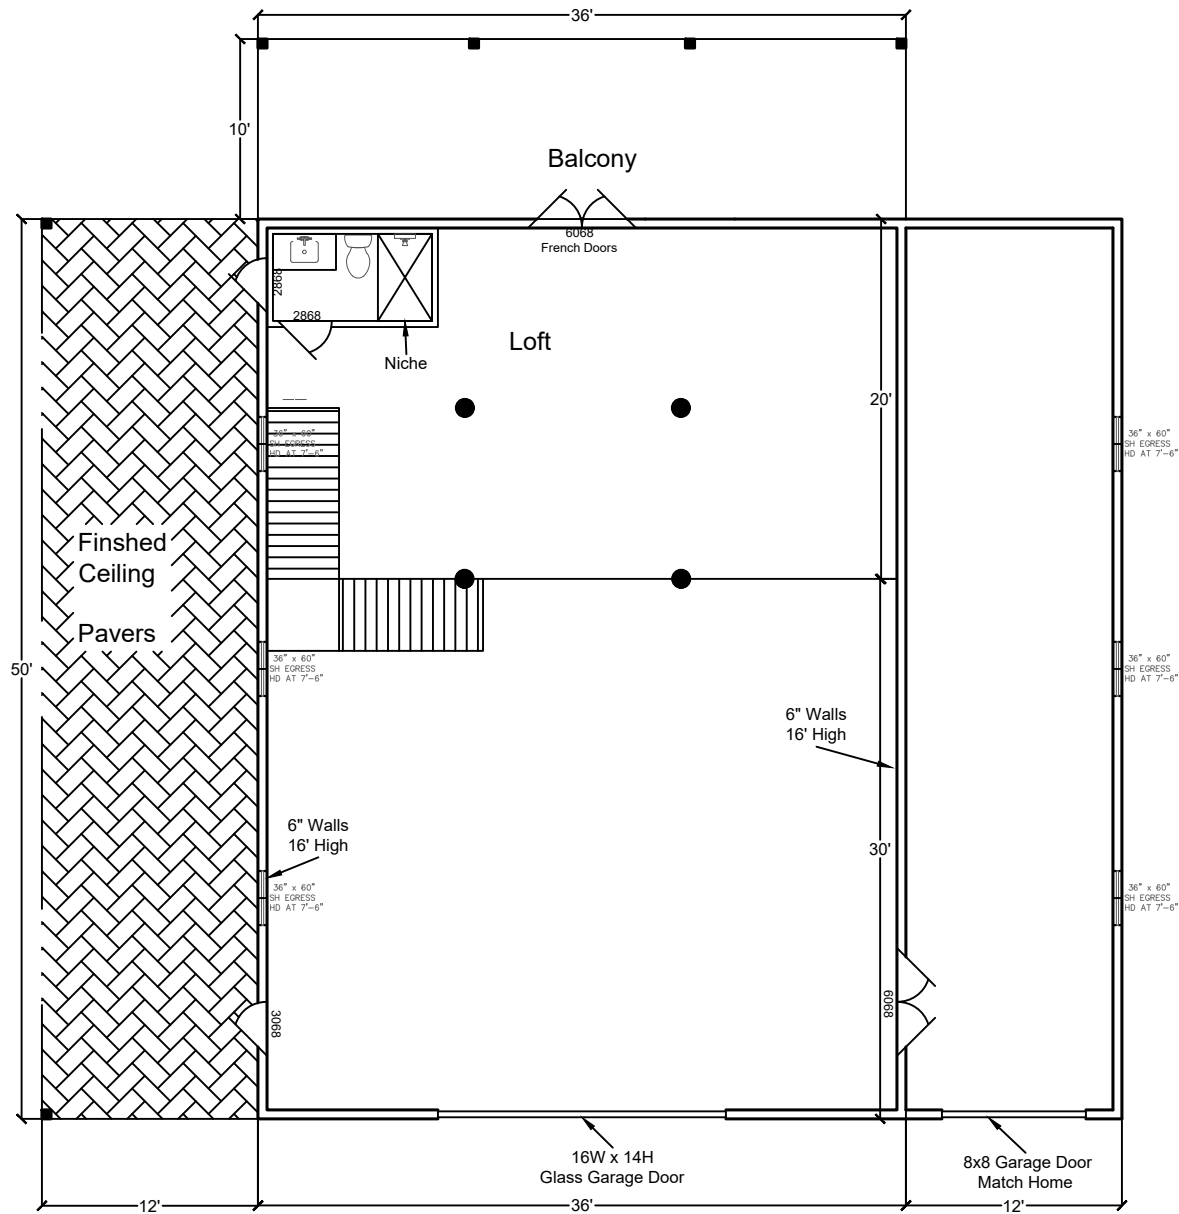

Floor Plan

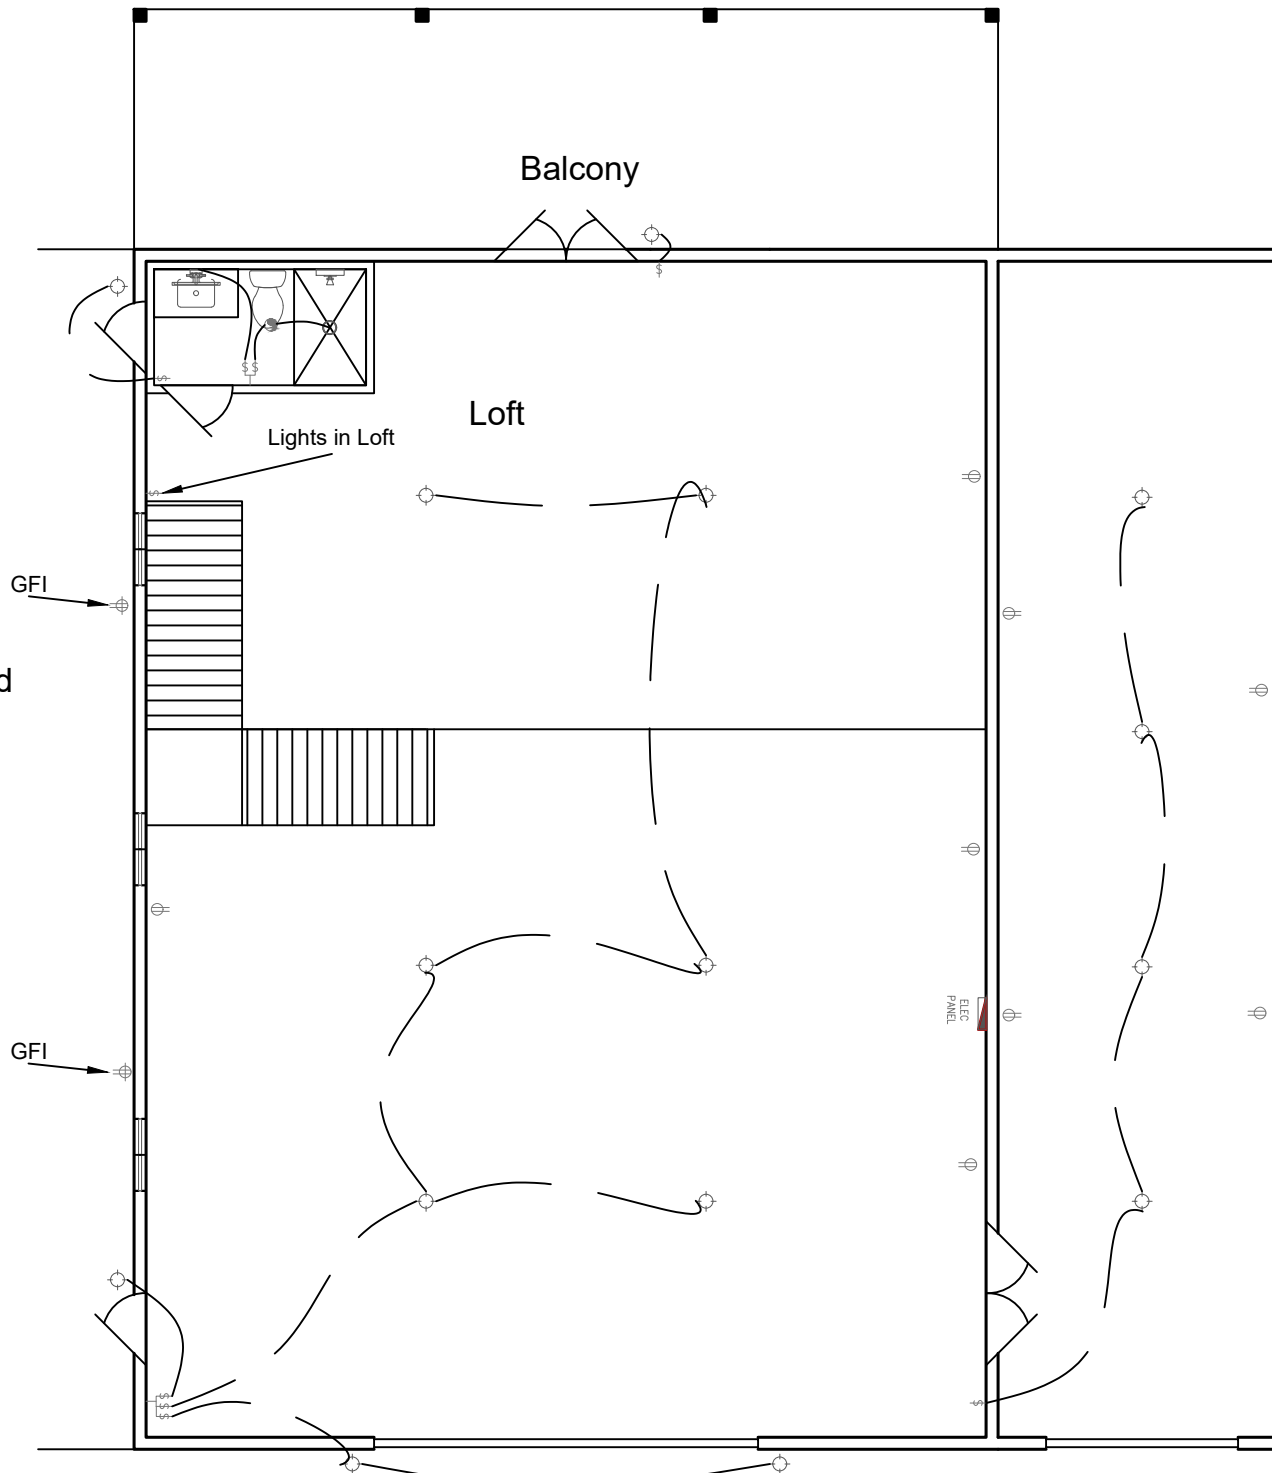

ELECTRICAL LEGEND	
	DUPLEX OUTLET (110V AT 12" OR AS NTD)
	DUPLEX OUTLET (110V AT 39") *
	DUPLEX OUTLET (110V AT 43") *
	DUPLEX OUTLET (110V AT 45") *
	SPLIT DPLX OUTLET (110V AT 12") TOP IS 'HOT'
	WEATHERPROOF DPLX OUTLET (110V AT 12")
	WEATHERPROOF DPLX OUTLET (110V AT 12") - top is 'hot'
	OUTLET w/ USB PORTS(110V AT 12" OR AS NTD)
	220V OUTLET
	RECESS FLOOR OUTLET
	RECESS ceiling OUTLET (110v)
	SPECIAL PURPOSE CONN
	SW SEE ELEC DTL
	3-WAY SW SEE ELEC DTL
	4-WAY SW SEE ELEC DTL
	1-GANG COMBINATION FAN / LIGHT SWITCH
	OCCUPANCY/MOTION DETECTOR SWITCH
	PUSH-BUTTON FOR GARAGE DOOR AT 60"
	DIMMER SW AT 36"
	PUSH-BUTTON DOORBELL
	CLG MNT Lgt FIXTURE
	7" surface mnt 3000k, 1000 Lumen, led fixture
	SURFACE MNT FIXTURE
	WALL MNT FIXTURE
	6" ROUND RECESS 3000K LED RETROFIT TRIM W/OPEN BAFFLE
	6" ROUND RECESS ultra thin led
	4" MINI ROUND RECESS ultra thin led
	4" MINI ROUND RECESS 3000K LED RETROFIT TRIM W/OPEN BAFFLE
	4" MINI ROUND RECESS 3000K LED EYEBALL TRIM
	6" ROUND SLOPE CLG RECESS WITH 3000K LED BULB
	2 1/2" MINI ROUND LED 3000K
	TELEPHONE OUTLET AT 12" OR AS NOTED
	CLG FAN/LIGHT PREWIRE AND SWITCHES
	SMOKE DETECTOR OR COMBO SMOKE & CARBON MONOXIDE DETECTOR PER CODE
	UNDER CAB LED 9"
	UNDER CAB LED 14"
	UNDER CAB LED 22"
	UNDER CAB LED 30"
	24" or 48" CLG MNT 3000k, led fixture
	24" & 36" VANITY LIGHTING (SEE SPECS)
	EXHAUST FAN / LIGHT FIXTURE COMBO
	EXHAUST FAN
	SOFFIT MNT FLOOD LIGHT
	CLG MNT SPEAKER
	CHIMES
	ELEC PANEL
	RETURN AIR grille
	supply diffuser
	linear diffuser - length in inches
	THERMOSTAT
	SECURITY PAD

NOTE: ALL OUTLETS ABOVE COUNTERS SHALL BE MOUNTED HORIZONTALLY

NOTE: ALL 125V, 15 AND 20 AMP OUTLETS TO BE TAMPER-RESISTANT IN AREAS SPECIFIED BY NEC 2014 406.11.


NOTE: ALL EXTERIOR OUTLETS, OUTLETS IN GARAGE, WALL OUTLETS IN KITCHENS AND BATHROOMS AND ALL OUTLETS WITHIN 6'-0" OF A WATER SOURCE SHALL BE G.F.I. ALL NON-GFI OR 220V OUTLETS ARE PROTECTED BY AN ARC-FAULT CIRCUIT INTERRUPTER. ALL HEIGHTS TO CENTERLINE AFF.

NOTE: LIGHTS, FANS, SMOKE DETECTORS, A/C SUPPLIES AND RETURN AIRS TO BE PLACED ON CENTERLINES OF DOORS, WDWs AND HALLWAYS, TYP UNO

NOTE: COMBINATION SMOKE & CARBON MONOXIDE DETECTORS SHALL BE INSTALLED PER NFPA72 CHAPTER 29

NOTE: COORDINATE LOCATION OF ALL REQ. ELECTRICAL, CABLE, AUDIO/VIDEO & DATA RECEPTACLES W/ MOUNTING HARDWARE & MFR. INSTALLATION REQ. FOR ALL FLAT PANEL DISPLAYS.


UPDATED 3/10/2022

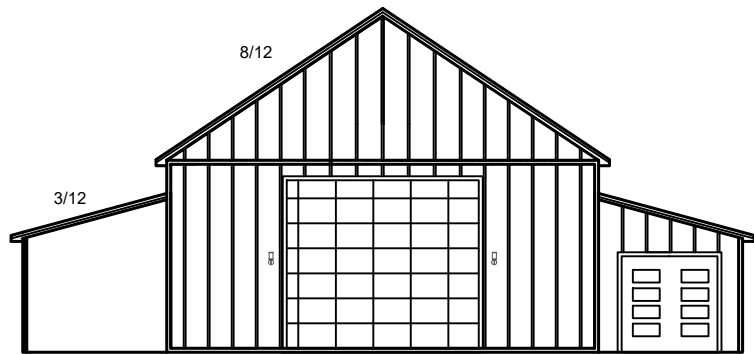


Front Elevation



Rear Elevation

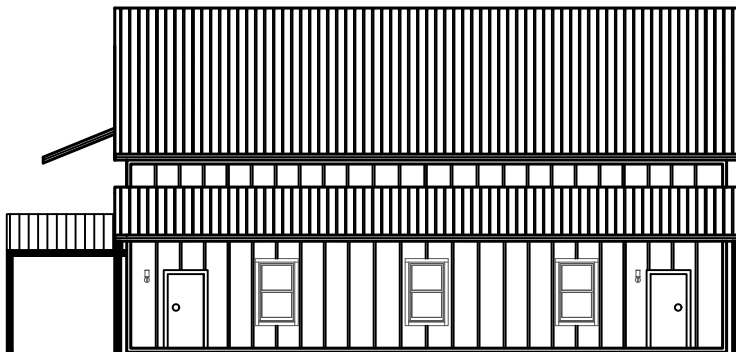

Left Side Elevation

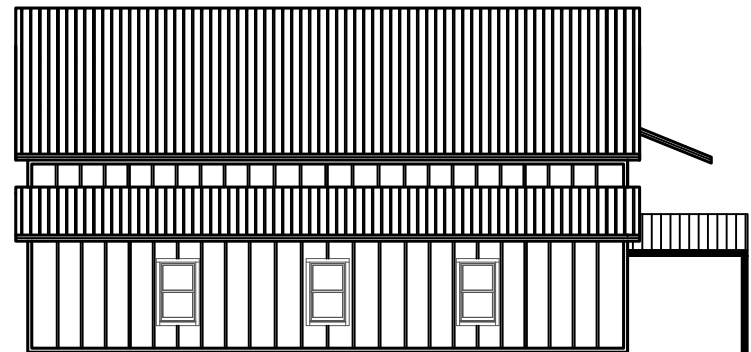

Right Side Elevation