



Product Approval
USER: Public User

Atlas

[Product Approval Menu](#) > [Product or Application Search](#) > [Application List](#) > **Application Detail**

FL #	FL16305-R10												
Application Type	Revision												
Code Version	2020												
Application Status	Approved												
Comments													
Archived	<input type="checkbox"/>												
Product Manufacturer	Atlas Roofing Corporation												
Address/Phone/Email	2000 RiverEdge Parkway Suite 800 Atlanta, GA 30328 (770) 946-4571 mcollins@atlasroofing.com												
Authorized Signature	Meldrin Collins mcollins@atlasroofing.com												
Technical Representative													
Address/Phone/Email													
Quality Assurance Representative													
Address/Phone/Email													
Category	Roofing												
Subcategory	Asphalt Shingles												
Compliance Method	Evaluation Report from a Florida Registered Architect or a Licensed Florida Professional Engineer <input type="checkbox"/> Evaluation Report - Hardcopy Received												
Florida Engineer or Architect Name who developed the Evaluation Report	Zachary R. Priest												
Florida License	PE-74021												
Quality Assurance Entity	PRI Construction Materials Technologies, LLC												
Quality Assurance Contract Expiration Date	12/31/2024												
Validated By	Steven M. Urlich, PE <input checked="" type="checkbox"/> Validation Checklist - Hardcopy Received												
Certificate of Independence	FL16305_R10_COI_ATL13002.10 2020 FBC Eval Shingles final.pdf												
Referenced Standard and Year (of Standard)	<table><tr><th><u>Standard</u></th><th><u>Year</u></th></tr><tr><td>ASTM D 3161</td><td>2016</td></tr><tr><td>ASTM D 3462</td><td>2010</td></tr><tr><td>ASTM D 7158</td><td>2019</td></tr><tr><td>TAS 100</td><td>1995</td></tr><tr><td>TAS 107</td><td>2020</td></tr></table>	<u>Standard</u>	<u>Year</u>	ASTM D 3161	2016	ASTM D 3462	2010	ASTM D 7158	2019	TAS 100	1995	TAS 107	2020
<u>Standard</u>	<u>Year</u>												
ASTM D 3161	2016												
ASTM D 3462	2010												
ASTM D 7158	2019												
TAS 100	1995												
TAS 107	2020												

Equivalence of Product Standards
Certified By

Sections from the Code

Product Approval Method	Method 1 Option D
Date Submitted	02/11/2021
Date Validated	02/11/2021
Date Pending FBC Approval	02/22/2021
Date Approved	04/13/2021

Summary of Products		
FL #	Model, Number or Name	Description
16305.1	Atlas Shingles	Fiberglass reinforced laminated asphalt shingles
Limits of Use Approved for use in HVHZ: Yes Approved for use outside HVHZ: Yes Impact Resistant: N/A Design Pressure: N/A Other: See evaluation report for limits of use		Installation Instructions FL16305_R10_IL_ATL13002.10 2020 FBC Eval Shingles final.pdf Verified By: Zachary R. Priest 74021 Created by Independent Third Party: Yes Evaluation Reports FL16305_R10_AE_ATL13002.10 2020 FBC Eval Shingles final.pdf Created by Independent Third Party: Yes

[Back](#) [Next](#)

[Contact Us](#) :: 2601 Blair Stone Road, Tallahassee FL 32399 Phone: 850-487-1824

The State of Florida is an AA/EEO employer. [Copyright 2007-2013 State of Florida.](#) :: [Privacy Statement](#) :: [Accessibility Statement](#) :: [Refund Statement](#)

Under Florida law, email addresses are public records. If you do not want your e-mail address released in response to a public-records request, do not send electronic mail to this entity. Instead, contact the office by phone or by traditional mail. If you have any questions, please contact 850.487.1395. *Pursuant to Section 455.275(1), Florida Statutes, effective October 1, 2012, licensees licensed under Chapter 455, F.S. must provide the Department with an email address if they have one. The emails provided may be used for official communication with the licensee. However email addresses are public record. If you do not wish to supply a personal address, please provide the Department with an email address which can be made available to the public. To determine if you are a licensee under Chapter 455, F.S., please click [here](#).

Product Approval Accepts:





EVALUATION REPORT

FLORIDA BUILDING CODE 7TH EDITION (2020)

Manufacturer: ATLAS ROOFING CORPORATION
2000 Riveredge Parkway, Suite 800
Atlanta, GA 30328
(770) 612-6267

Issued February 11, 2021

Manufacturing Plants: Hampton, GA
Meridian, MS
Dangerfield, TX
Ardmore, OK
Franklin, OH

Quality Assurance: PRI Construction Materials Technologies, LLC
(QUA9110)

SCOPE

Category: Roofing
Subcategory: Asphalt Shingles
Code Edition: Florida Building Code, 7th Edition (2020) including High-Velocity Hurricane Zones (HVHZ)
Code Sections: 1504.1.1, 1507.2.5, 1507.2.7.1, 1523.6.5.1
Properties: Physical properties, Wind Resistance, Wind Driven Rain

PRODUCT DESCRIPTION

Legend (Ardmore)	ASTM D 3161, Class F fiberglass reinforced, 3-tab asphalt shingle with a dashed, thermally-activated, self-sealing sealant stripe that complies with ASTM D 3462.
GlassMaster® 30 (Ardmore & Hampton)	ASTM D 3161, Class F fiberglass reinforced, 3-tab asphalt shingle with a dashed, thermally-activated, self-sealing sealant stripe that complies with ASTM D 3462.
Tough-Master® 20 (Ardmore & Hampton)	ASTM D 3161, Class F fiberglass reinforced, 3-tab asphalt shingle with a dashed, thermally-activated, self-sealing sealant stripe that complies with ASTM D 3462.
Pro-Cut® Hip & Ridge (Ardmore & Hampton)	ASTM D 3161, Class F fiberglass reinforced, hip and ridge asphalt shingle with a dashed, thermally-activated, self-sealing sealant stripe that complies with ASTM D 3462.
Pro-Cut® Starter Strip (Ardmore & Hampton)	ASTM D 3161, Class F fiberglass reinforced, starter asphalt shingle with a dashed, thermally-activated, self-sealing sealant stripe that complies with ASTM D 3462.
ProLAM™ Architectural (Hampton, Franklin & Meridian)	ASTM D 3161, Class F & ASTM D 7158, Class H fiberglass reinforced, laminated architectural asphalt shingle with a dashed, thermally-activated, self-sealing sealant stripe that complies with ASTM D 3462.
Pinnacle® Pristine, Pinnacle® Pristine Lifetime w/Scotchgard (Dangerfield, Hampton, Franklin & Meridian)	ASTM D 3161, Class F & ASTM D 7158, Class H fiberglass reinforced, laminated architectural asphalt shingle with two, dashed, thermally-activated, self-sealing sealant stripes that complies with ASTM D 3462.
StormMaster® Hip & Ridge (Ardmore)	ASTM D 3161, Class F fiberglass reinforced, hip and ridge modified asphalt shingle with a dashed, thermally-activated, self-sealing sealant stripe that complies with ASTM D 3462.

StormMaster® Shake (Dangerfield)	ASTM D 3161, Class F & ASTM D 7158, Class H fiberglass reinforced, laminated architectural modified asphalt shingle with two, dashed, thermally-activated, self-sealing sealant stripe that complies with ASTM D 3462.
StormMaster® Slate (Ardmore)	ASTM D 3161, Class F & ASTM D 7158, Class H fiberglass reinforced, laminated architectural modified asphalt shingle with two, dashed, thermally-activated, self-sealing sealant stripe that complies with ASTM D 3462.

REFERENCES

Entity	Report No.	Standard	Year
PRI Construction Materials Technologies (TST5878)	ATL-079-02-01	ASTM D 3161	2016
		TAS 107	2020
PRI Construction Materials Technologies (TST5878)	ATL-083-02-01	TAS 100	1995
PRI Construction Materials Technologies (TST5878)	ATL-086-02-01 Rev 1	ASTM D 3462	2010A
PRI Construction Materials Technologies (TST5878)	ATL-104-02-01	ASTM D 3462	2010A
PRI Construction Materials Technologies (TST5878)	ATL-106-02-01	ASTM D 3161	2016
		TAS 107	2020
PRI Construction Materials Technologies (TST5878)	ATL-106-02-01 Rev 1	ASTM D 3161	2016
		TAS 107	2020
PRI Construction Materials Technologies (TST5878)	ATL-107-02-01	TAS 100	1995
PRI Construction Materials Technologies (TST5878)	ATL-107-02-01.1	TAS 100	1995
PRI Construction Materials Technologies (TST5878)	ATL-109-02-01	ASTM D 7158	2019
PRI Construction Materials Technologies (TST5878)	ATL-116-02-01	ASTM D 3462	2010A
PRI Construction Materials Technologies (TST5878)	ATL-118-02-01	ASTM D 3462	2010A
PRI Construction Materials Technologies (TST5878)	ATL-119-02-01	TAS 100	1995
PRI Construction Materials Technologies (TST5878)	ATL-123-02-01	ASTM D 7158	2019
PRI Construction Materials Technologies (TST5878)	ATL-125-02-01	TAS 100	1995
PRI Construction Materials Technologies (TST5878)	ATL-127-02-01 Rev 1	ASTM D 7158	2019
PRI Construction Materials Technologies (TST5878)	ATL-132-02-01	ASTM D 3161	2016
		TAS 107	2020
PRI Construction Materials Technologies (TST5878)	ATL-133-02-01	ASTM D 3161	2016
		TAS 107	2020
PRI Construction Materials Technologies (TST5878)	ATL-135-02-01	ASTM D 3462	2010A
PRI Construction Materials Technologies (TST5878)	ATL-136-02-01	ASTM D 3462	2010A
PRI Construction Materials Technologies (TST5878)	ATL-137-02-01 Rev 1	ASTM D 7158	2019
PRI Construction Materials Technologies (TST5878)	ATL-138-02-01 Rev 1	ASTM D 7158	2019
PRI Construction Materials Technologies (TST5878)	ATL-143-02-01	ASTM D 3161	2016
		TAS 107	2020
PRI Construction Materials Technologies (TST5878)	ATL-144-02-01	ASTM D 3161	2016
		TAS 107	2020
PRI Construction Materials Technologies (TST5878)	ATL-151-02-01	ASTM D 3462	2010A
PRI Construction Materials Technologies (TST5878)	ATL-162-02-01	TAS 100	1995
PRI Construction Materials Technologies (TST5878)	ATL-167-02-01	ASTM D 3161	2016
PRI Construction Materials Technologies (TST5878)	ATL-168-02-01	ASTM D 3161	2016
		TAS 107	2020
PRI Construction Materials Technologies (TST5878)	ATL-169-02-01	ASTM D 3462	2010A
PRI Construction Materials Technologies (TST5878)	ATL-170-02-01	ASTM D 3462	2010A
PRI Construction Materials Technologies (TST5878)	ATL-171-02-01	ASTM D 3462	2010A
PRI Construction Materials Technologies (TST5878)	ATL-172-02-01	ASTM D 3462	2010A
PRI Construction Materials Technologies (TST5878)	ATL-174-02-01	ASTM D 3462	2010A
PRI Construction Materials Technologies (TST5878)	ATL-179-02-01	TAS 100	1995
PRI Construction Materials Technologies (TST5878)	ATL-184-02-01	ASTM D 3161	2016
		TAS 107	2020
PRI Construction Materials Technologies (TST5878)	ATL-185-02-01	ASTM D 7158	2019
PRI Construction Materials Technologies (TST5878)	ATL-186-02-01	TAS 100	1995
PRI Construction Materials Technologies (TST5878)	ATL-187-02-01	ASTM D 3462	2010A
PRI Construction Materials Technologies (TST5878)	ATL-220-02-01	ASTM D 3462	2010A
PRI Construction Materials Technologies (TST5878)	ATL-220-02-02	TAS 100	1995
PRI Construction Materials Technologies (TST5878)	ATL-220-02-03	ASTM D 3161	2016
		TAS 107	2020
PRI Construction Materials Technologies (TST5878)	ATL-220-02-04	ASTM D 7158	2019
PRI Construction Materials Technologies (TST5878)	ATL-221-02-01	ASTM D 3462	2010A
PRI Construction Materials Technologies (TST5878)	ATL-221-02-02	TAS 100	1995
PRI Construction Materials Technologies (TST5878)	ATL-221-02-03	ASTM D 3161	2016
		TAS 107	2020

<u>Entity</u>	<u>Report No.</u>	<u>Standard</u>	<u>Year</u>
PRI Construction Materials Technologies (TST5878)	ATL-221-02-04	ASTM D 7158	2019
PRI Construction Materials Technologies (TST5878)	ATL-222-02-01	ASTM D 3462	2010A
PRI Construction Materials Technologies (TST5878)	ATL-222-02-02	TAS 100	1995
PRI Construction Materials Technologies (TST5878)	ATL-222-02-03	ASTM D 3161	2016
		TAS 107	2020
PRI Construction Materials Technologies (TST5878)	ATL-222-02-04	ASTM D 7158	2019
PRI Construction Materials Technologies (TST5878)	ATL-223-02-01	ASTM D 3462	2010A
PRI Construction Materials Technologies (TST5878)	ATL-223-02-02	TAS 100	1995
PRI Construction Materials Technologies (TST5878)	ATL-223-02-03	ASTM D 3161	2016
		TAS 107	2020
PRI Construction Materials Technologies (TST5878)	ATL-223-02-04	ASTM D 7158	2019
PRI Construction Materials Technologies (TST5878)	ATL-224-02-01	ASTM D 3462	2010A
PRI Construction Materials Technologies (TST5878)	ATL-225-02-01	ASTM D 3462	2010A
PRI Construction Materials Technologies (TST5878)	ATL-225-02-02	TAS 100	1995
PRI Construction Materials Technologies (TST5878)	ATL-225-02-03	ASTM D 3161	2016
		TAS 107	2020
PRI Construction Materials Technologies (TST5878)	ATL-225-02-04	ASTM D 7158	2019
PRI Construction Materials Technologies (TST5878)	117T0021	ASTM D 3462	2010A
PRI Construction Materials Technologies (TST5878)	117T0026	ASTM D 3462	2010A
PRI Construction Materials Technologies (TST5878)	117T0027	TAS 100	1995
PRI Construction Materials Technologies (TST5878)	117T0028	ASTM D 3161	2016
		TAS 107	2020
CREEK Technical Services LLC (ANE11669)	ATL13002.7	Calculations	2018

INSTALLATION

Legend

Basic Wind Speed (V_{ult}):	Max. 194 mph
Basic Wind Speed (V_{asd}):	Max. 150 mph
Deck (HVHZ):	In accordance with FBC requirements; Solidly sheathed min. 19/32 in. plywood or wood plank for new construction; Min. 15/32 in. plywood existing construction.
Deck (Non-HVHZ):	Solidly sheathed in accordance with FBC requirements.
Underlayment:	In accordance with FBC requirements.
Min. slope:	2:12 and in accordance with FBC requirements. Contact the Atlas Roofing Corporation when installing at slope greater than 21:12.
Installation (HVHZ):	Installed with 5-inch exposure in accordance with RAS 115 and manufacturer's published installation instructions. Shingles shall be attached using "6 Nail Pattern" detailed below.
Installation (Non-HVHZ):	Installed with 5-inch exposure in accordance with FBC requirements and manufacturer's published installation instructions. Shingles shall be attached using either "4 Nail Pattern" or "6 Nail Pattern" detailed below.

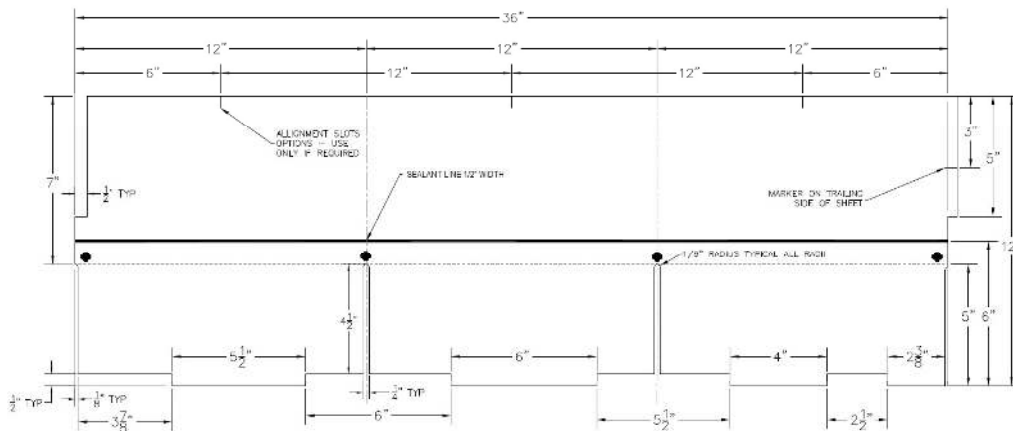


Figure 1. Legend 4 Nail Pattern (Non-HVHZ only)

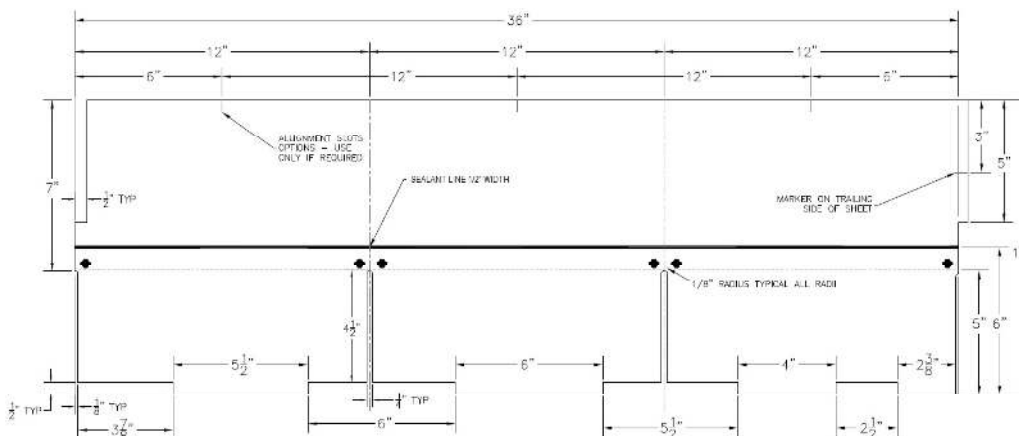


Figure 2. Legend 6 Nail Pattern



**GlassMaster® 30
&
Tough-Master® 20**

Basic Wind Speed (V_{ult}):	Max. 194 mph
Basic Wind Speed (V_{asd}):	Max. 150 mph
Deck (HVHZ):	In accordance with FBC requirements; Solidly sheathed min. 19/32 in. plywood or wood plank for new construction; Min. 15/32 in. plywood existing construction.
Deck (Non-HVHZ):	Solidly sheathed in accordance with FBC requirements.
Underlayment:	In accordance with FBC requirements.
Min. slope:	2:12 and in accordance with FBC requirements. Contact the Atlas Roofing Corporation when installing at slope greater than 21:12.
Installation (HVHZ):	Installed with 5-inch exposure in accordance with RAS 115 and manufacturer's published installation instructions. Shingles shall be attached using "6 Nail Pattern" detailed below.
Installation (Non-HVHZ):	Installed with 5-inch exposure in accordance with FBC requirements and manufacturer's published installation instructions. Shingles shall be attached using either "4 Nail Pattern" or "6 Nail Pattern" detailed below.

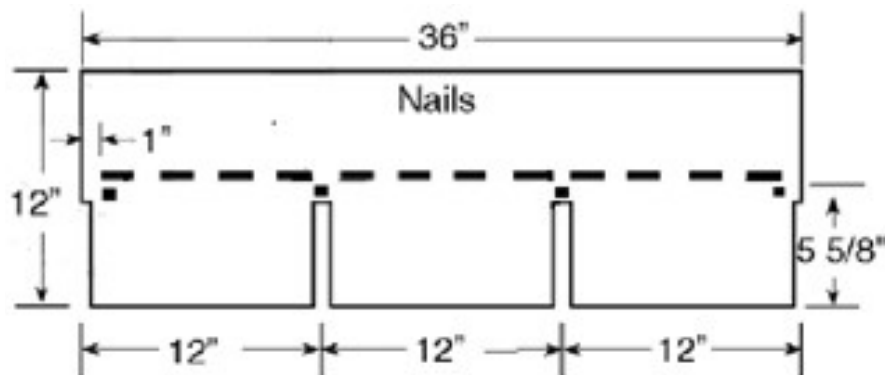


Figure 3. GlassMaster® 30 & Tough-Master® 20 4 Nail Pattern (Non-HVHZ only)

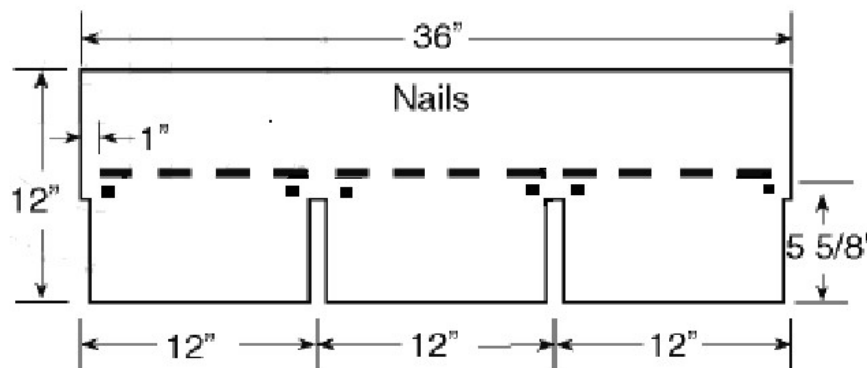


Figure 4. GlassMaster® 30 & Tough-Master® 20 6 Nail Pattern

ProLAM™ Architectural	Basic Wind Speed (V_{ult}):	Max. 194 mph
	Basic Wind Speed (V_{asd}):	Max. 150 mph
	Deck (HVHZ):	In accordance with FBC requirements; Solidly sheathed min. 19/32 in. plywood or wood plank for new construction; Min. 15/32 in. plywood existing construction.
	Deck (Non-HVHZ):	Solidly sheathed in accordance with FBC requirements.
	Underlayment:	In accordance with FBC requirements.
	Min. slope:	2:12 and in accordance with FBC requirements. Contact the Atlas Roofing Corporation when installing at slope greater than 21:12.
	Installation (HVHZ):	Installed with 6 in. exposure in accordance with RAS 115 and manufacturer's published installation instructions. Shingles shall be attached using "6 Nail Pattern" detailed below.
	Installation (Non-HVHZ):	Installed with 6 in. exposure in accordance with FBC requirements and manufacturer's published installation instructions. Shingles shall be attached using either "4 Nail Pattern" or "6 Nail Pattern" detailed below.

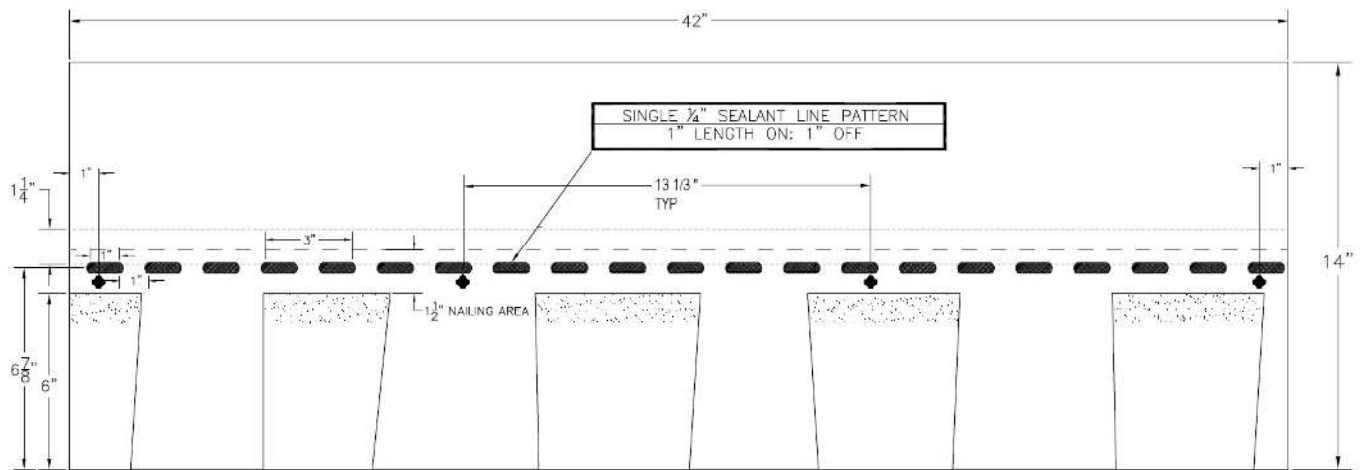


Figure 5. ProLAM™ Architectural Shingle 4 Nail Pattern (non-HVHZ only)

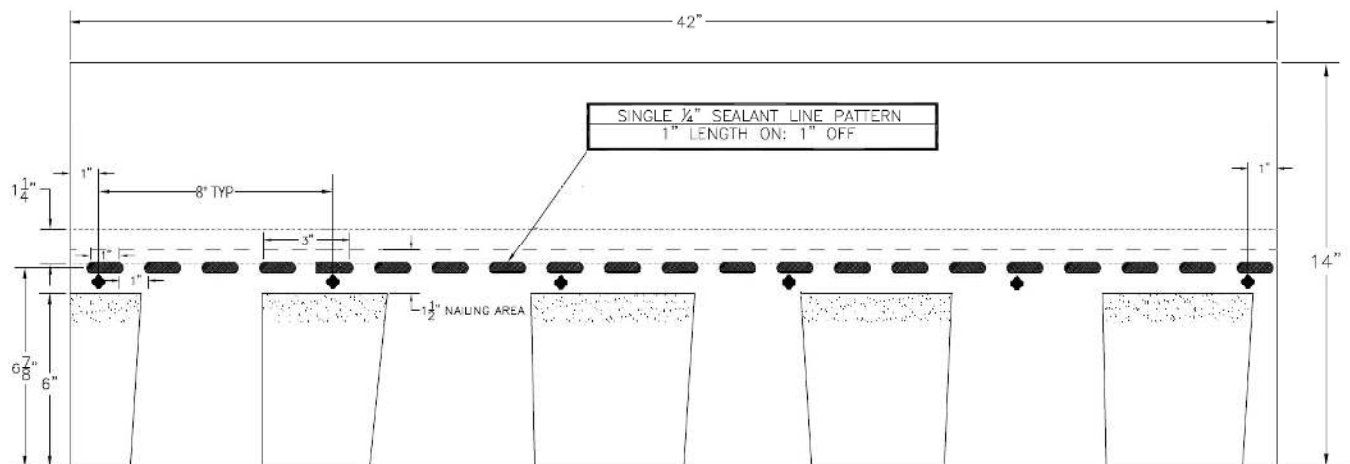


Figure 6. ProLAM™ Architectural Shingle 6 Nail Pattern



**Pinnacle® Pristine
&
StormMaster® Shake**

Basic Wind Speed (V_{ult}):	Max. 194 mph
Basic Wind Speed (V_{asd}):	Max. 150 mph
Deck (HVHZ):	In accordance with FBC requirements; Solidly sheathed min. 19/32 in. plywood or wood plank for new construction; Min. 15/32 in. plywood existing construction.
Deck (Non-HVHZ):	Solidly sheathed in accordance with FBC requirements.
Underlayment:	In accordance with FBC requirements.
Min. slope:	2:12 and in accordance with FBC requirements. Contact the Atlas Roofing Corporation when installing at slope greater than 21:12.
Installation (HVHZ):	Installed with 6 in. exposure in accordance with RAS 115 and manufacturer's published installation instructions. Shingles shall be attached using "6 Nail Pattern" detailed below.
Installation (Non-HVHZ):	Installed with 6 in. exposure in accordance with FBC requirements and manufacturer's published installation instructions. Shingles shall be attached using either "4 Nail Pattern" or "6 Nail Pattern" detailed below.

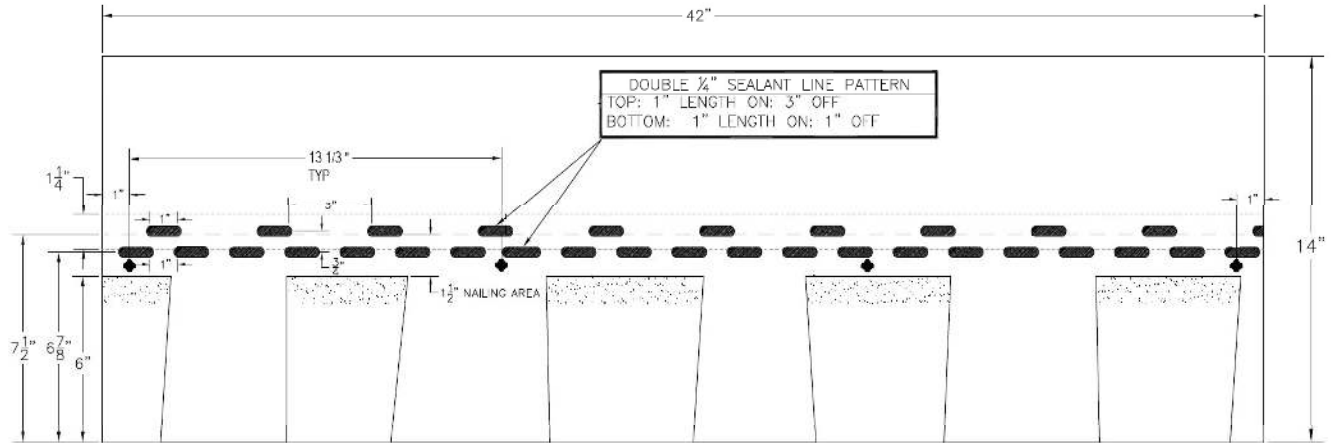


Figure 7. Pinnacle® Pristine and StormMaster® Shake 4 Nail Pattern (Non-HVHZ only)

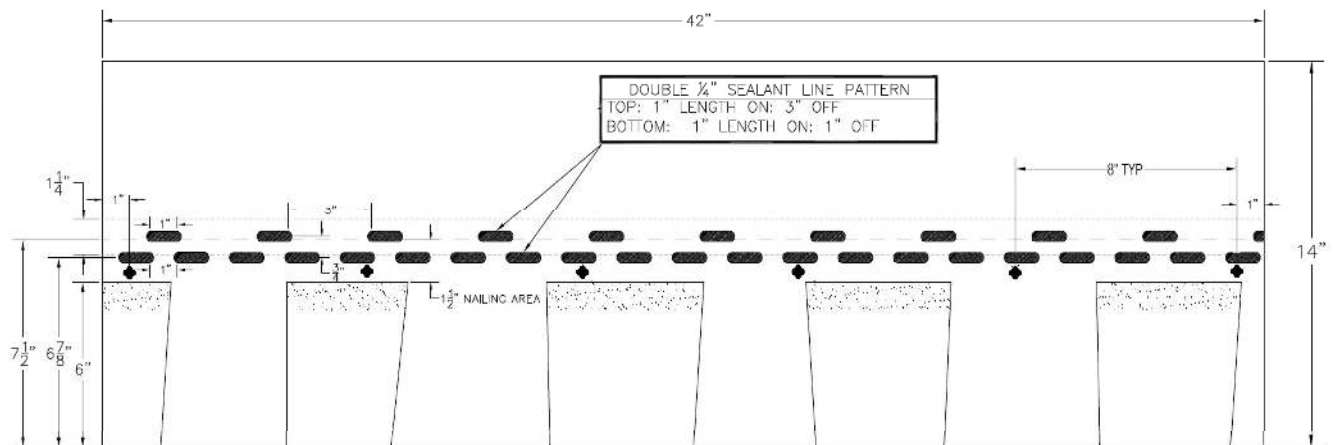


Figure 8. Pinnacle® Pristine and StormMaster® Shake 6 Nail Pattern



StormMaster® Slate

Basic Wind Speed (V_{ult}):	Max. 194 mph
Basic Wind Speed (V_{asd}):	Max. 150 mph
Deck (HVHZ):	In accordance with FBC requirements; Solidly sheathed min. 19/32 in. plywood or wood plank for new construction; Min. 15/32 in. plywood existing construction.
Deck (Non-HVHZ):	Solidly sheathed in accordance with FBC requirements.
Underlayment:	In accordance with FBC requirements.
Min. slope:	2:12 and in accordance with FBC requirements. Contact the Atlas Roofing Corporation when installing at slope greater than 21:12.
Installation (HVHZ):	Installed with 8.5 in. exposure in accordance with RAS 115 and manufacturer's published installation instructions. Shingles shall be attached using "6 Nail Pattern" detailed below.
Installation (Non-HVHZ):	Installed with 8.5 in. exposure in accordance with FBC requirements and manufacturer's published installation instructions. Shingles shall be attached using either "4 Nail Pattern" or "6 Nail Pattern" detailed below.

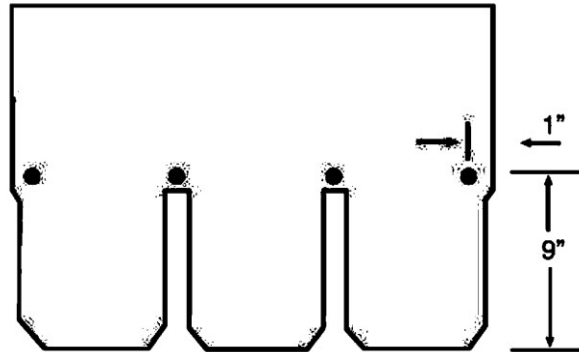


Figure 9. StormMaster® Slate 4 Nail Pattern

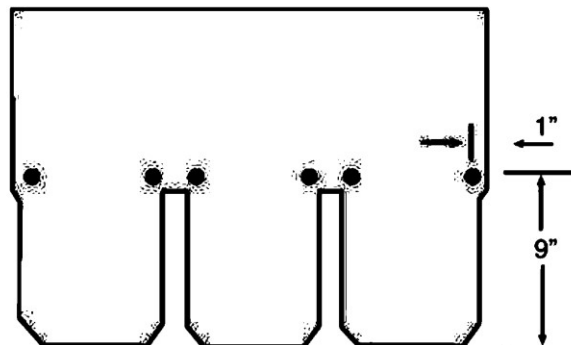


Figure 10. StormMaster® Slate 6 Nail Pattern



Pro-Cut® Starter Strip	Basic Wind Speed (V_{ult}):	Max. 194 mph
	Basic Wind Speed (V_{asd}):	Max. 150 mph
	Deck (HVHZ):	In accordance with FBC requirements; Solidly sheathed min. 19/32 in. plywood or wood plank for new construction; Min. 15/32 in. plywood existing construction.
	Deck (Non-HVHZ):	Solidly sheathed in accordance with FBC requirements.
	Underlayment:	In accordance with FBC requirements.
	Min. slope:	2:12 and in accordance with FBC requirements. Contact the Atlas Roofing Corporation when installing at slope greater than 21:12.
	Installation (HVHZ):	Installed in accordance with RAS 115 and manufacturer's published installation instructions. Shingles shall be attached as shown below.
	Installation (Non-HVHZ):	Installed in accordance with FBC requirements and manufacturer's published installation instructions. Shingles shall be attached as shown below.

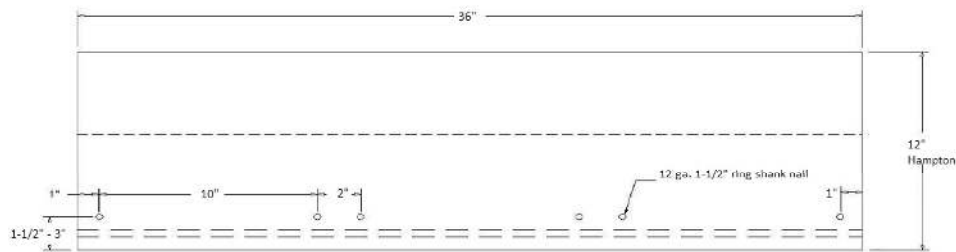


Figure 11. Pro-Cut® Starter Strip



**Pro-Cut® Hip & Ridge
&
StormMaster® Hip &
Ridge**

Basic Wind Speed (V_{ult}):	Max. 194 mph
Basic Wind Speed (V_{asd}):	Max. 150 mph
Deck (HVHZ):	In accordance with FBC requirements; Solidly sheathed min. 19/32 in. plywood or wood plank for new construction; Min. 15/32 in. plywood existing construction.
Deck (Non-HVHZ):	Solidly sheathed in accordance with FBC requirements.
Underlayment:	In accordance with FBC requirements.
Min. slope:	2:12 and in accordance with FBC requirements.
Installation (HVHZ and non-HVHZ):	Installed with 5-5/8 inch exposure in accordance with RAS 115 (HVHZ only) and manufacturer's published installation instructions. The direction of the exposed end shall be away from the prevailing wind.

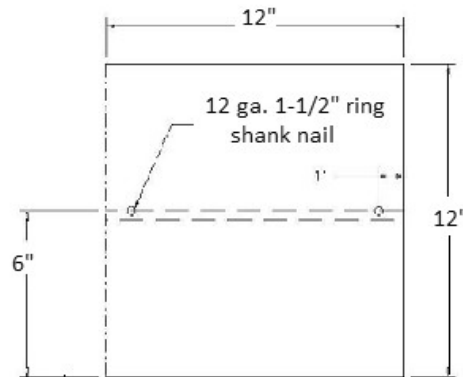


Figure 12. Pro-Cut® Hip & Ridge and StormMaster® Hip & Ridge



LIMITATIONS

- 1) Fire Classification is not within the scope of this evaluation.
- 2) The roof deck and the roof deck attachment information are provided based on testing. FBC requirements for the rational design of the roof deck, including the attachment, are not within the scope of this evaluation.
- 3) The mean roof height shall be restricted to a maximum 33 ft in the HVHZ.
- 4) Classification to ASTM D 7158 applies to exposure B & C with a building mean roof height of 60-ft or less.
- 5) Deck substrates shall be clean, dry, and free from any irregularities and debris. All fasteners in the deck shall be checked for protrusion and corrected prior to underlayment application.
- 6) Shingles shall be installed starting at the eave in horizontal layers such that the laps shed water from the deck.
- 7) Installation of the evaluated products shall comply with this report, the FBC, and the manufacturer's published application instructions. Where discrepancies exist between these sources, the more restrictive and code compliant detail shall prevail.
- 8) All products listed in this report shall be manufactured under a quality assurance program in compliance with Rule 61G20-3.

COMPLIANCE STATEMENT

The products evaluated herein by Zachary R. Priest, P.E. have demonstrated compliance with the Florida Building Code, 7th Edition (2020) including High-Velocity Hurricane Zones (HVHZ) as evidenced in the referenced documents submitted by the named manufacturer.



Digitally signed by Zachary R. Priest

2021.02.11
12:45:39
-05'00'

Zachary R. Priest, P.E.
Florida Registration No. 74021
Organization No. ANE9641

CERTIFICATION OF INDEPENDENCE

CREEK Technical Services, LLC does not have, nor will it acquire, a financial interest in any company manufacturing or distributing products under this evaluation.

CREEK Technical Services, LLC is not owned, operated, or controlled by any company manufacturing or distributing products under this evaluation.

Zachary R. Priest, P.E. does not have, nor will acquire, a financial interest in any company manufacturing or distributing products under this evaluation.

Zachary R. Priest, P.E. does not have, nor will acquire, a financial interest in any other entity involved in the approval process of the product.

END OF REPORT