




BEARING HEIGHT SCHED

8'-0
10'-0

6/12 PITCH

1'-6" OH

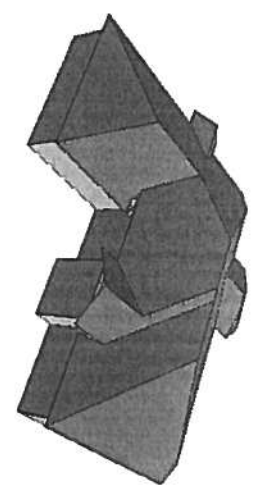

NOTES:

- 1) REFER TO HDB 91 RECOMMENDATIONS FOR HANDLING INSTALLATION AND TEMPORARY BRACING REQUIRED
- 2) ALL TRUSSES (INCLUDING TRUSSES UNDER VALLEY FRAMING) MUST BE COMPLETELY DESIGNED OR REFER TO DETAIL V05 FOR ALTERNATE BRACING REQUIREMENTS
- 3) ALL VALLEYS ARE TO BE CONVENTIONALLY FRAMED BY BUILDER
- 4) ALL TRUSSES ARE DESIGNED FOR 2 o.c. MAXIMUM SPACING. UNLESS OTHERWISE NOTED
- 5) ALL WALLS SHOWN ON PLACEMENT PLAN ARE CONSIDERED TO BE LOAD BEARING. UNLESS OTHERWISE NOTED
- 6) 5/42 TRUSSES MUST BE INSTALLED WITH THE TOP BEING UP
- 7) ALL ROOF TRUSSES HANGERS TO BE SIMPSON HUS-26 UNLESS OTHERWISE NOTED. ALL HUS-26 HANGERS TO BE SIMPSON TRUS-42 UNLESS OTHERWISE NOTED
- 8) BEAMHEADS/INTEL (HDB) TO BE FURNISHED BY BUILDER

SHOP DRAWING APPROVAL

THIS LAYOUT IS THE SOLE SOURCE FOR FABRICATION TRUSSES AND WALLS. ALL PREVIOUS ARCHITECTURAL OR TRUSS LAYOUTS, REVISED AND APPROVAL OF THIS LAYOUT BE RECEIVED BEFORE ANY TRUSSES WILL BE BUILT. VENDOR CONDITIONS TO INSURE AGAINST CHANGES THAT WILL BE IN EXTRA CHARGES TO YOU.

Approved When Shown _____

Approved by _____ Date _____



Builder
Bunnell
PHONE 904-437-3349 FAX 904-437-3349
PHONE 904-772-6100 FAX 904-772-6100
PHONE 904-755-6894 FAX 904-755-6894
PHONE 407-322-0059 FAX 407-322-0059

HUGO ESCALANTE

LOT 31 ROLLING MEADOWS

NICOLAS
SCALE: N.T.S.
DATE: 4/28/06
JRD
L162011