

Maronda Systems

Maronda Systems 4005 Maronda Way Sanford FL 32771 (407) 321-0064 Fax (407) 321-3913
 Engineer/Architect of Record: **Carl Brown P.E.** 258 Southhall Lane, Suite 200 Maitland, FL 32751 FL PE # 56126
 Engineer/Architect of Record: **Scott A Lewkowski P.E.** 258 Southhall Lane, Suite 200 Maitland, FL 32751 FL PE # 78750
 Engineer/Architect of Record: **Thien Bao Duong P.E.** 258 Southhall Lane, Suite 200 Maitland, FL 32751 FL PE # 94452

Design Criteria: TPI Design: Matrix Analysis MiTek software

PLAN JOB #	LOT	ADDRESS	DIV/SUB	MODEL
9FC00701	7-1	TBD SW CADENCE GLEN LAKE CITY, FL 32024	JAW/9FC	WLWF42B/RH

WILLOW F BASE

This structure was designed in accordance with, and meets the requirements of TPI standards and the FLORIDA BUILDING CODE 8thTH EDITION (2023) for 160 M.P.H. Wind Zone. Exposure C Truss loading is in accordance with ASCE 7-22. These trusses are designed for an enclosed building. With risk category II.

The Truss Engineering package for the above referenced site was generated by the Truss Designer/Architect/MiTek.

I, the Delegated Truss Engineer for the above referenced lot Have reviewed the package and confirmed that it matches the physical and structural Parameters found on the set of permit drawings.

Truss ID	Run Date	Drawing Reviewed	Truss ID	Run Date	Drawing Reviewed	No. of Eng. Dwgs:	32
Layout	10/16/23					Roof Loads-	
REACTION SUMMARY	10/16/23					TC Live:	16.0 psf
MII web plate	2021					TC Dead:	7.0 psf
OR1	2009					BC Live:	0.0 psf
ST-4ply Screw	2012					BC Dead:	10.0 psf
VC1	2009					Total	33.0 psf
TN1	2009					DurFac- Lbr:	1.25
MII-Rep01A1	2021					DurFac- Plt:	1.25
MMII-PIGGY-PERP	2019					O.C. Spacing:	24.0"
H12	10/16/23					Floor Loads-	
H13	10/16/23					TC Live:	40.0 psf
H13S	10/16/23					TC Dead:	10.0 psf
H14	10/16/23					BC Live:	0.0 psf
H14S	10/16/23					BC Dead:	5.0 psf
H15	10/16/23					Total	55.0 psf
H15S	10/16/23					DurFac- Lbr:	1.00
H16	10/16/23					DurFac- Plt:	1.00
H16S	10/16/23					O.C. Spacing:	24.0"
HGR11	10/16/23						
J15	10/16/23						
J35	10/16/23						
J55	10/16/23						
J75	10/16/23						
J95	10/16/23						
JGR95	10/16/23						
T18	10/16/23						
V01	10/16/23						
V11	10/16/23						
V13	10/16/23						
V14	10/16/23						
VG10	10/16/23						
VG12	10/16/23						
			INV #	DESC	QNTY		
			050060.0110	JUS26			
			050060.0047	THD28			
			050060.0049	THD28-2			
			050060.0106	HUS26			
			050060.0272	HUS179			
			050060.0058	HJC26	4		
			050060.0312	HJC26-SK60			
			SEAT PLATES		115		
			FLOOR SEAT PLATES				

Making Dreams Come True

TOTAL SOLUTIONS GROUP
258 Southhall Lane, Suite 200
Maitland, Florida 32751
(407) 680 2333
CA No. 9161

100% Employee Owned
myTSGhome.com

CARL A. BROWN, PE - FL # 56126
 SCOTT A. LEWKOWSKI, PE - FL # 78750
 THIEN BAO DUONG, PE - FL # 94452

3-4-25
Sign Date: 03/05/2025

TO THE BEST OF THE ENGINEER'S KNOWLEDGE AND UNDERSTANDING, THE STRUCTURAL PLANS AND SPECIFICATIONS COMPLY WITH THE FLORIDA BUILDING CODE SIGNED AND SEALED FOR THE STRUCTURAL PORTION OF THIS DRAWING.

		EXPOSURE	
TC LIVE	16.000 lb/ft ²	SNOW LOAD	0.00
TC DEAD	7.000 lb/ft ²	LUMBER DOL	1.25
BC LIVE	0.000 lb/ft ²	PLATE DOL	1.25
BC DEAD	10.000 lb/ft ²	WIND	160.0 mph Vasd=124.0 mph
TOTAL	33.0 lb/ft ²	SPACING	24" O.C.


GENERAL TRUSS NOTES:
 1. INFORMATION BASED ON 160.0 MPH WIND LOAD.
 ALL PRESSURES WERE CALCULATED USING MWFRS/C-C HYBRID WIND ASCE 7-22.
 2. PROVIDE TRUSS BRACING PER TRUSS ENGINEERING AND BCSI I-03.



4005 Maronda Way
 Sanford, FL 32771
 (407) 321-0064

TRUSS PLACEMENT PLAN

CUSTOMER: Maronda Systems
Model: WILLOW
ELEVATION: F- BASE
DRAWN BY:
RELEASE DATE: 10/16/23
GARAGE: RIGHT

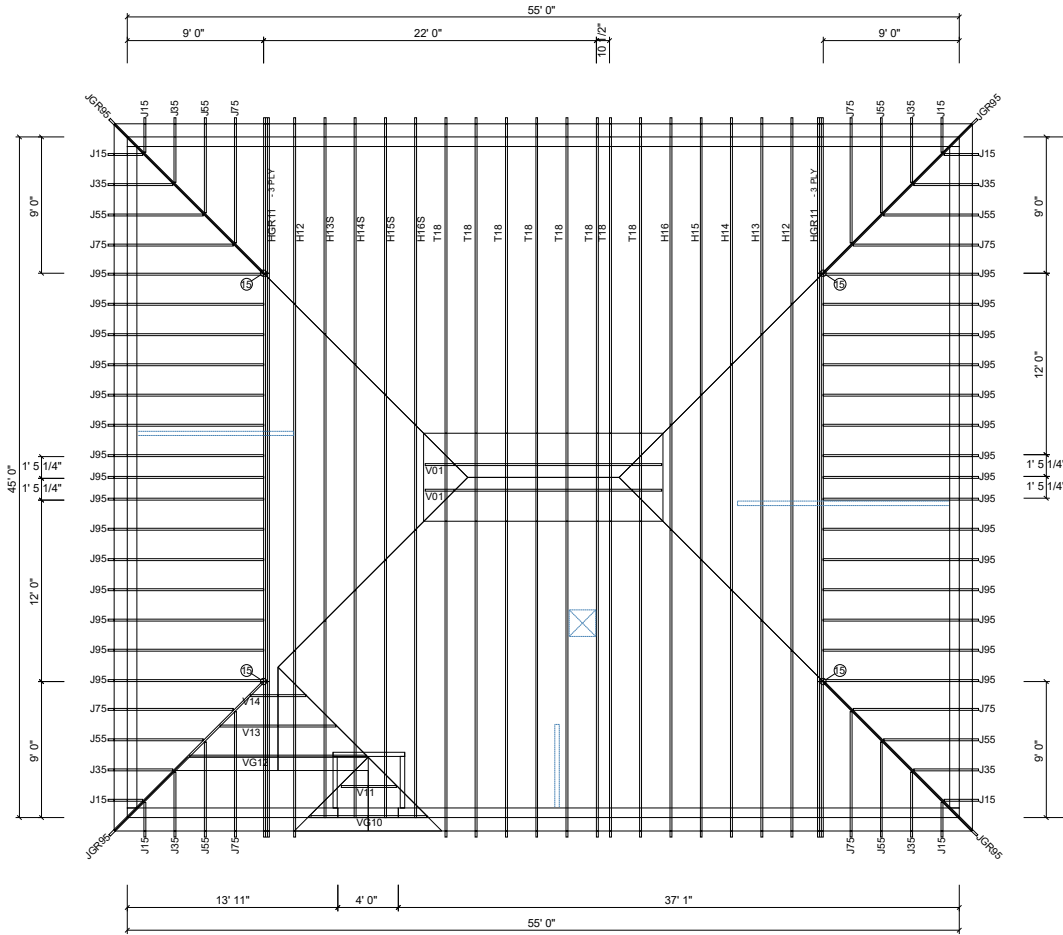

Making Dreams Come True

TOTAL SOLUTIONS GROUP
 258 Southhall Lane, Suite 200
 Maitland, Florida, 32751
 (407) 880-2333
 CA No. 9161

100% Employee Owned
 myTSGHome.com

- CARL A. BROWN, PE - FL # 56126
- SCOTT A. LEWKOWSKI, PE - FL # 78750
- THIEN BAO DUONG, PE - FL # 94452

3-4-25

TO THE BEST OF THE ENGINEER'S KNOWLEDGE AND UNDERSTANDING, THE STRUCTURAL PLANS AND SPECIFICATIONS COMPLY WITH THE FLORIDA BUILDING CODE SIGNED AND SEALED FOR THE STRUCTURAL PORTION OF THIS DRAWING.

FLORIDA:

THIS STRUCTURE WAS DESIGNED IN ACCORDANCE AND MEETS THE REQUIREMENTS OF SECTION R301 OF THE FLORIDA BUILDING CODE 8th EDITION (2023): RESIDENTIAL. ALL CONNECTORS HAVE BEEN CHECKED TO WITHSTAND ALL APPLICABLE LOADS AND DESIGN CRITERIA STATED ON THE COVER SHEET.

DEFINITIONS

- MWF = MAIN WIND FORCE
- C&C = COMPONENTS AND CLADDING
- TOB = TOP OF BEARING
- TC = TOP CHORD
- BC = BOTTOM CHORD
- LL = LIVE LOAD
- DL = DEAD LOAD
- psf = POUNDS PER SQUARE FOOT
- # = POUNDS

LOADS PER FBC & FRC

- * NON-CONCURRENT BC LL 10psf
- CONCURRENT STORAGE BC LL 20 psf

SHEET:

TR1

WILLOW "F" BASE

TC LIVE	16.000 lb/ft ²	EXPOSURE	
TC DEAD	7.000 lb/ft ²	SNOW LOAD	0.00
BC LIVE	0.000 lb/ft ²	LUMBER DOL	1.25
BC DEAD	10.000 lb/ft ²	PLATE DOL	1.25
TOTAL	33.0 lb/ft ²	WIND	160.0 mph Vasd=124.0 mph
		SPACING	24" O.C.
























GENERAL TRUSS NOTES:
 1. INFORMATION BASED ON 160.0 MPH WIND LOAD.
 ALL PRESSURES WERE CALCULATED USING MWFRS/C-C HYBRID WIND ASCE 7-16.
 2. PROVIDE TRUSS BRACING PER TRUSS ENGINEERING AND BCSI I-03.



4005 Maronda Way
 Sanford, FL 32771
 (407) 321-0064

TRUSS PLACEMENT PLAN

CUSTOMER: Maronda Systems
Model: WILLOW
 ELEVATION: F- BASE
 DRAWN BY:
 RELEASE DATE: 10/16/23
 GARAGE: REACTION

Truss	Qty	Span	Ply	Pitch	Truss List		Reactions										
	H12	2	45' 0"	1	5, 5	1541.25 lb -1025.84 lb	1541.25 lb -1025.84 lb										
	H13	1	45' 0"	1	5, 5	1727.65 lb -1022.97 lb	1727.65 lb -1022.97 lb										
	H13S	1	45' 0"	1	5, 5	1728.28 lb -1023.41 lb	1680.55 lb -957.78 lb										
	H14	1	45' 0"	1	5, 5	1731.95 lb -1019.63 lb	1731.95 lb -1019.63 lb										
	H14S	1	45' 0"	1	5, 5	1505.83 lb -925.59 lb	2504.20 lb -1327.91 lb	313.70 lb -592.59 lb									
	H15	1	45' 0"	1	5, 5	1724.35 lb -1015.81 lb	1724.35 lb -1015.81 lb										
	H15S	1	45' 0"	1	5, 5	1508.03 lb -925.07 lb	2413.95 lb -1242.77 lb	278.96 lb -517.45 lb									
	H16	1	45' 0"	1	5, 5	1750.08 lb -1011.52 lb	1753.83 lb -1011.52 lb										
	H16S	1	45' 0"	1	5, 5	1750.71 lb -1011.95 lb	1706.73 lb -946.32 lb										
	HGR11	6	45' 0"	3	5, 5	3849.70 lb -2992.11 lb	3849.71 lb -2992.11 lb										
	J15	8	1' 0"	1	5	123.66 lb -150.18 lb	10.02 lb -2.18 lb	28.47 lb -5.35 lb									
	J35	8	3' 0"	1	5	164.91 lb -135.26 lb	49.86 lb -1.08 lb	53.57 lb -76.85 lb									
	J55	8	5' 0"	1	5	226.14 lb -167.26 lb	98.21 lb -143.72 lb	87.64 lb -3.62 lb									
	J75	8	7' 0"	1	5	290.54 lb -205.19 lb	19.86 lb -44.96 lb	203.99 lb -150.19 lb									
	J95	30	9' 0"	1	5	356.50 lb -239.50 lb	79.68 lb -104.26 lb	230.95 lb -112.32 lb									
	JGR95	4	12' 7 1/4"	1	3, 5, 3, 5	544.26 lb -591.80 lb	46.75 lb -87.93 lb	668.54 lb -601.03 lb									
	T18	8	45' 0"	1	5, 5	1753.55 lb -962.65 lb	1751.02 lb -962.65 lb										
	V01	2	15' 7 11/16"	1	5, 5	43.67 lb -33.87 lb	131.50 lb -77.72 lb	137.20 lb -105.55 lb	131.26 lb -100.45 lb	132.63 lb -102.13 lb	131.01 lb -99.72 lb	139.03 lb -108.34 lb	135.33 lb -77.82 lb	51.20 lb -43.45 lb			
	V11	1	3' 7 7/8"	1	5, 5	114.19 lb -72.96 lb	114.19 lb -72.96 lb										
	V13	1	7' 8"	1	5, 5	70.45 lb -48.09 lb	378.85 lb -213.17 lb	70.45 lb -56.35 lb									
	V14	1	3' 8"	1	5, 5	111.44 lb -71.22 lb	111.44 lb -71.22 lb										
	VG10	1	7' 7 7/8"	1	5, 5	70.73 lb -48.11 lb	384.53 lb -216.60 lb	70.73 lb -56.48 lb									
	VG12	1	11' 8"	1	5, 5	76.78 lb -42.02 lb	241.11 lb -225.47 lb	133.49 lb -26.25 lb	241.11 lb -224.34 lb	76.78 lb -54.99 lb							

FLORIDA:
 THIS STRUCTURE WAS DESIGNED IN ACCORDANCE AND MEETS THE REQUIREMENTS OF SECTION R301 OF THE FLORIDA BUILDING CODE 8th EDITION (2023): RESIDENTIAL. ALL CONNECTORS HAVE BEEN CHECKED TO WITHSTAND ALL APPLICABLE LOADS AND DESIGN CRITERIA STATED ON THE COVER SHEET.

DEFINITIONS
 MWF = MAIN WIND FORCE
 C&C = COMPONENTS AND CLADDING
 TOB = TOP OF BEARING
 TC = TOP CHORD
 BC = BOTTOM CHORD
 LL = LIVE LOAD
 DL = DEAD LOAD
 psf = POUNDS PER SQUARE FOOT
 # = POUNDS


LOADS PER FBC & FRC
 * NON-CONCURRENT BC LL 10psf
 CONCURRENT STORAGE BC LL 20 psf

SHEET:




TR1




1. ALL MATERIAL IS 2x4
2. THIS DETAIL IS APPLICABLE FOR DESIGNS WITH DOLS. OF 1.15 OR 1.25 AND LUMBER SPECIES SP, DF, HF, OR SPF.
3. DETAIL SHALL BE USED FOR CONDITIONS OF A MISSING OR LOOSE CONNECTOR PLATE ONLY.
4. CHORD MATERIAL IS CONTINUOUS THROUGH JOINT, THERE IS NO MAXIMUM CHORD FORCE AND NO SPLICE PERMITTED.
5. REFER TO MITEK DESIGN DRAWING FOR WEB FORCES.



ATTACH 1/2" PLYWOOD OR OSB GUSSET (15/32" RATED SHEATHING 32/16 EXP 1) TO EACH FACE OF TRUSS WITH (0.131" X MIN 2.5") NAILS IN 3 ROWS SPACED @ 4" O.C. NAILS TO BE DRIVEN FROM BOTH FACES. STAGGER SPACING FROM FRONT TO BACK FACE FOR A NET 2" O.C. SPACING IN THE TRUSS. USE 2" MEMBER END DISTANCE.

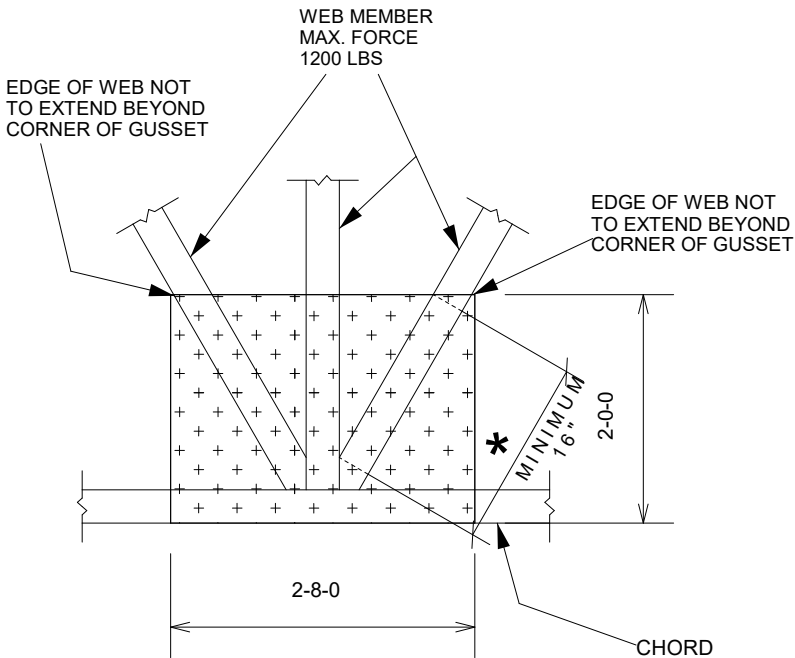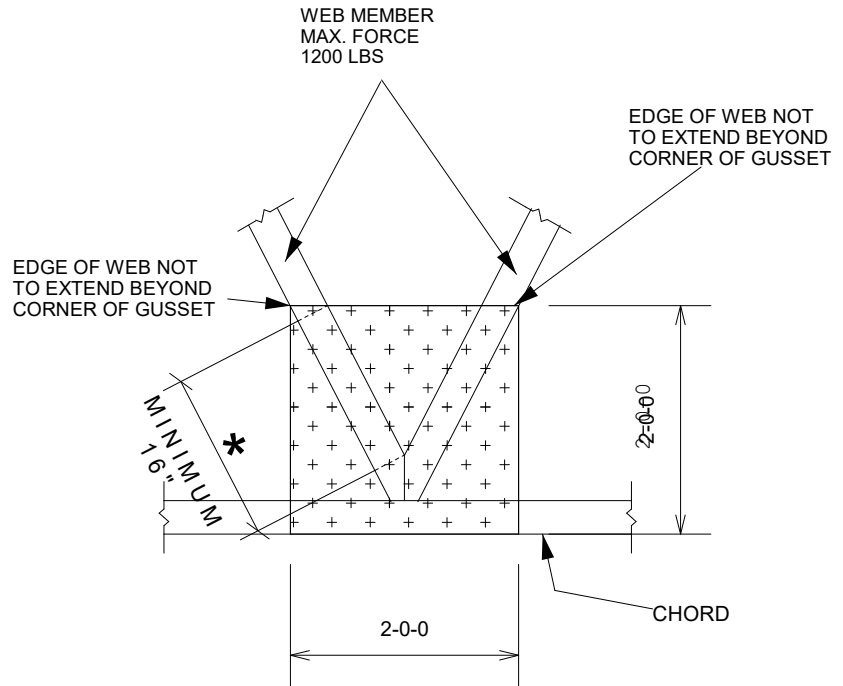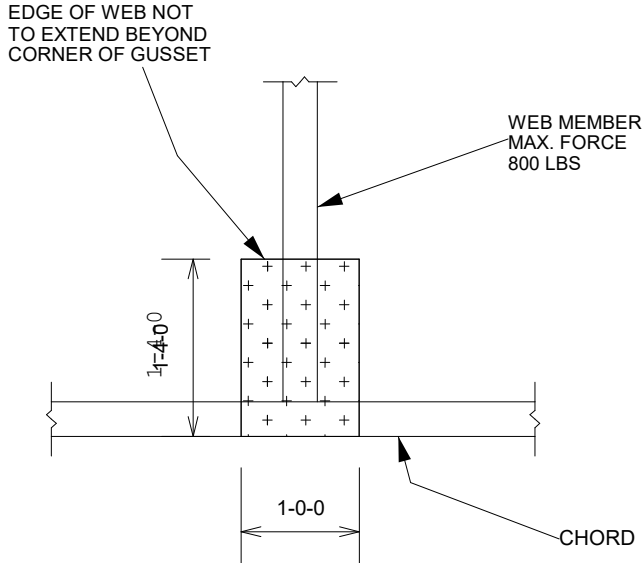

* MEASUREMENT TAKEN AT POINTS WHERE WEB ACHIEVES FULL MEMBER DEPTH (AS MEASURED PERPENDICULAR TO WEB'S SAW-MILLED EDGE)




MiTek USA, Inc.

Four ply girder trusses are to be connected together using the nailing or screw schedule provided by Mitek 20/20 software. In addition to the nailing typically specified, 1/2" dia. bolts are sometimes specified throughout certain chords as indicated on the truss design drawing. In lieu of these bolts, the following wood screws may be used: USP WS6, MiTek Trusslok 6", or equivalent.

These screws are to be installed in two rows spaced 24" o.c. in 2x6 and larger chords (use one row in 2x4 chords) as shown in the detail below.


These connections are intended to provide clamping force to aid in allowing the four ply assembly to act as a unit and are not included in the calculation of ply to ply load transfer.

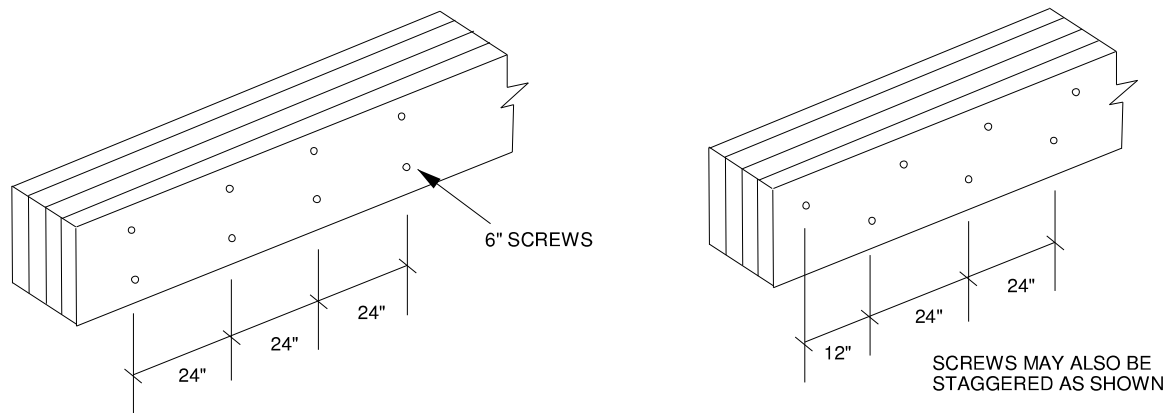

Please note that screws are not required from the back face. However, it is vitally important that the plies are tightly clamped together during the installation of the screws to prevent gaps between the plies.

For trusses where screws are specified for the ply to ply connection instead of nails, the bolts called in the connection notes may be omitted.

NON-BEVELED
BOTTOM CHORD
NO-SHEATHING

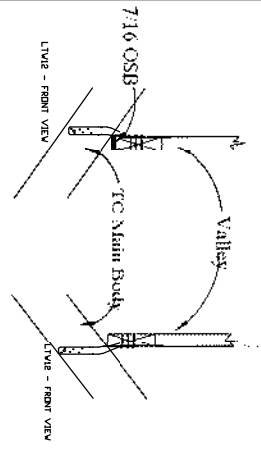


VALLEY CONNECTIONS

(ELEMENTS NOT SHOWN FOR CLARITY)


VALLEY KAT

Notes: Valley trusses can be installed either a top main body roof trusses or a top 7/16 sheathing. Connections of strapping remain the same as illustrated. Valley kats are required when a top main body truss option is utilized.
See truss engineering and standard details for truss bracing requirements. Main body trusses 2'00 perpendicular to valley is considered to be continuous bearing. If sheathing exists under valleys, Sheathing is not required to be continuous See NON BEVELED BOTTOM CHORD Detail

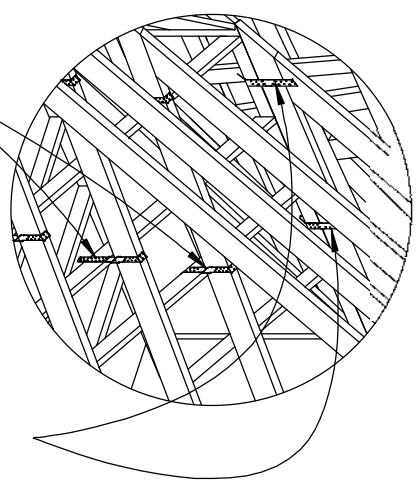


USP / MST1A2 @ 4'0.C. TYP

HIP KAT

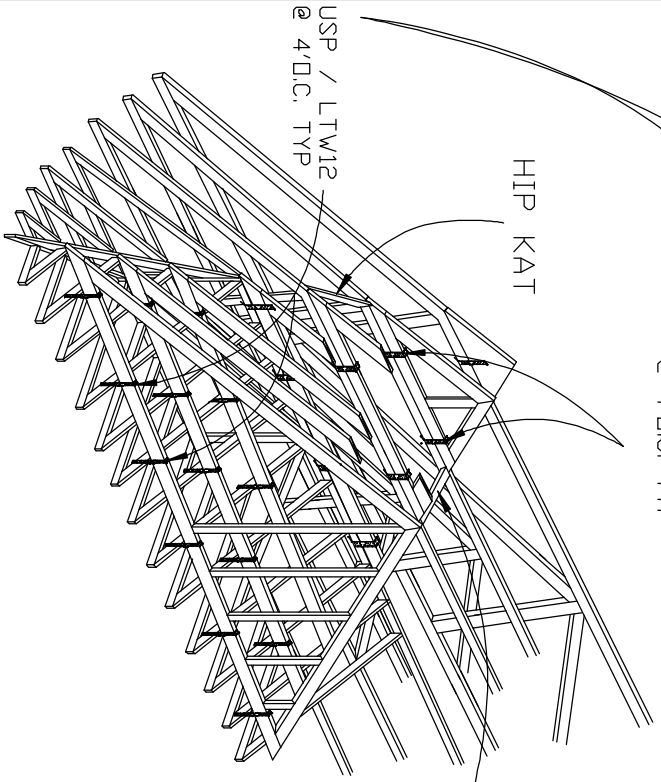

USP / LTM12 @ 4'0.C. TYP


VALLEY KAT

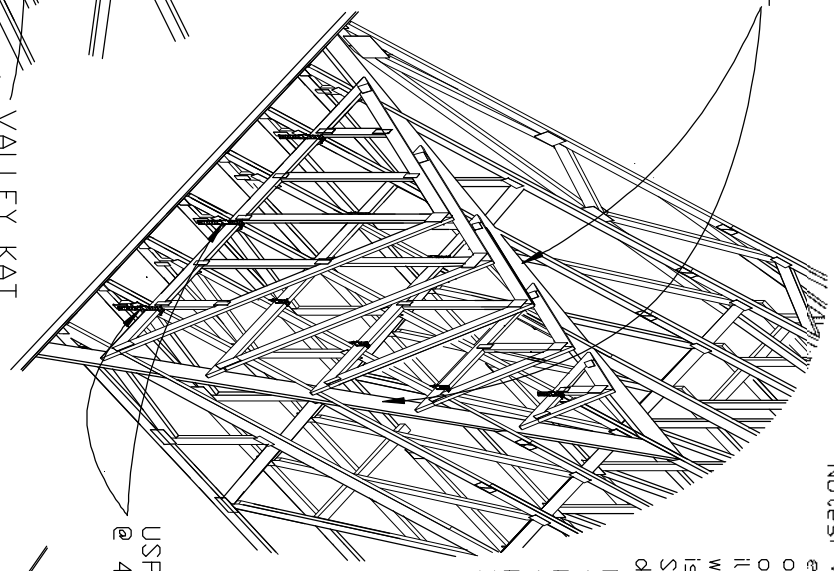

USP / LTM12 @ 4'0.C. TYP

7/16 Sheathing

USP / LTM12 @ 4'0.C. TYP

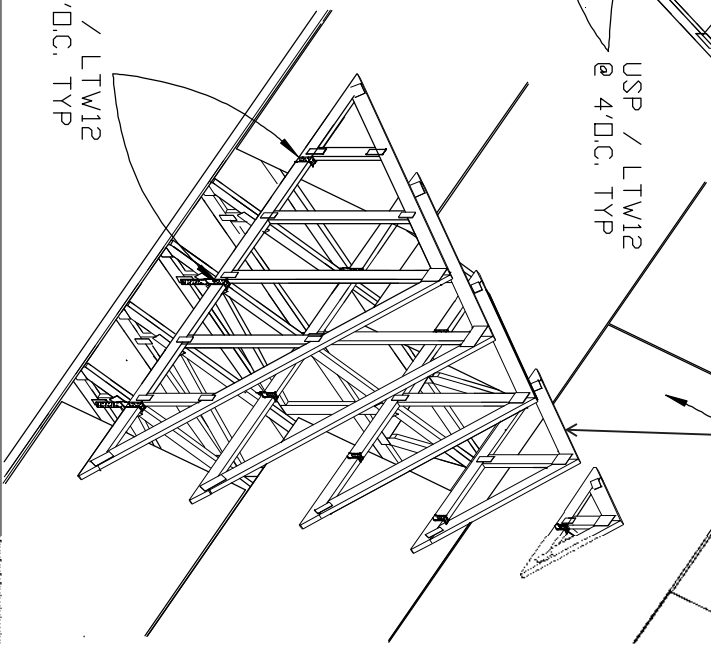

NO.	REVISIONS

© 2009 MARONDA HOMES

Maronda Homes

11111 W. WILSON AVE. SUITE 1000, WASHINGTON, DC 20007

TRUSS DETAILS

VALLEY CONNECTIONS

DRAWN BY: **J.FESSIA** CAPACT:




RELEASE DATE: **12/7/09**

SHEET

VCI

TOE-NAILED CONNECTIONS AT BEARING LOCATIONS

TYPICAL CORNER FRAMING

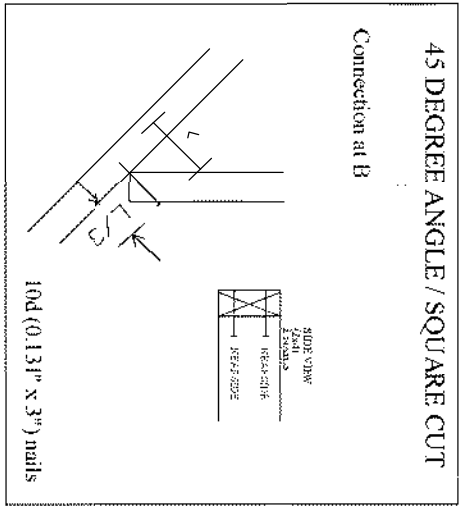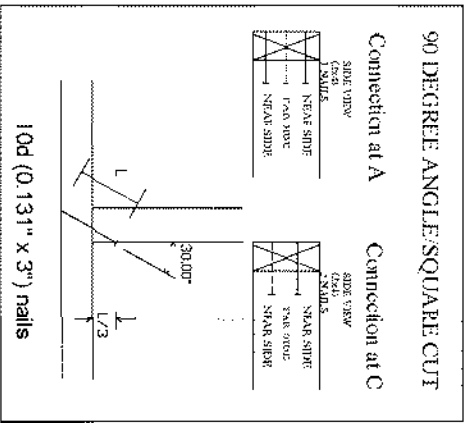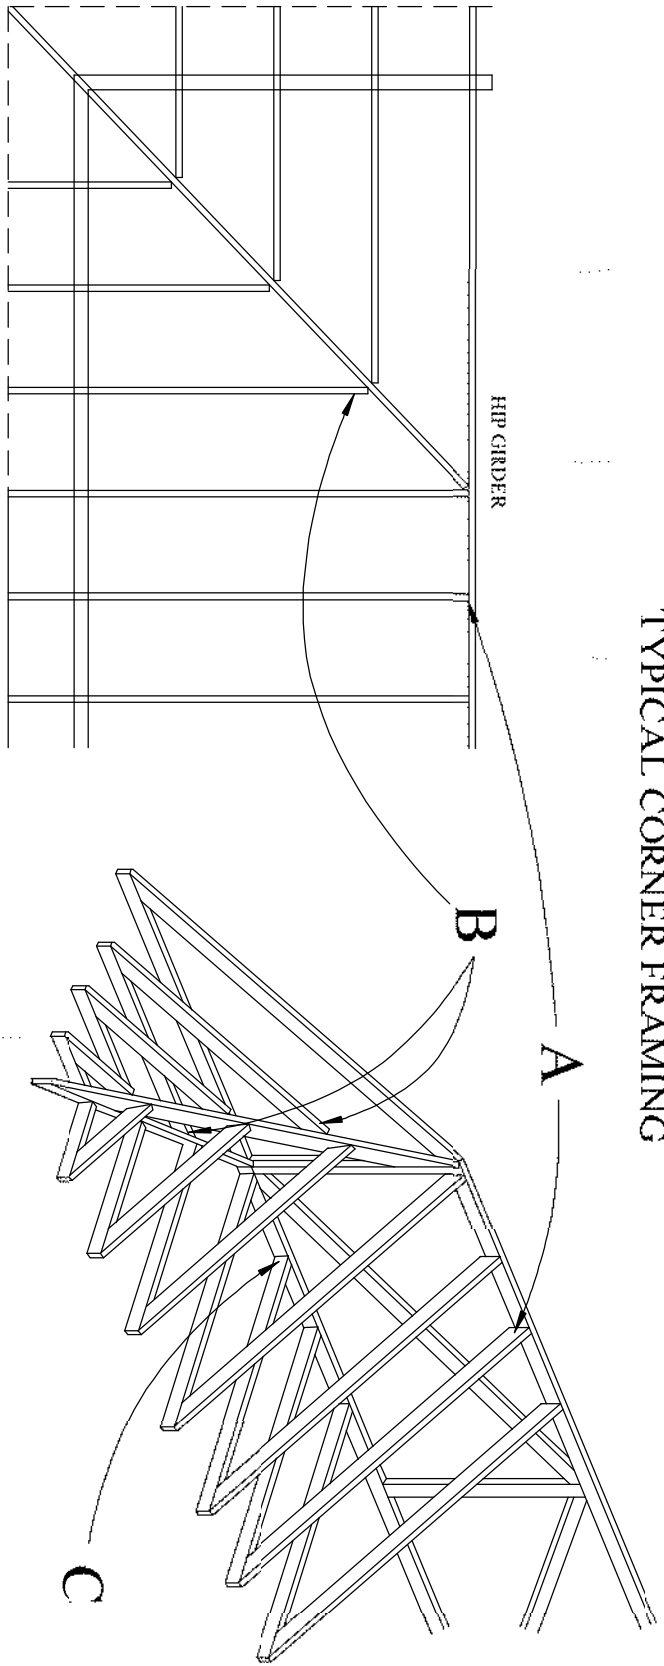

CONNECTION VALUES:

	GRAVITY	UPLIFT
(3)10D	320	385
(3)16D	355	462

Wind loading: Basic wind speed is 160 MPH U.L.T. (24 ASD)

- Exposure category B or C
- Occupancy category II
- 4.8 psf top chord dead load
- 4.2 psf bottom chord dead load
- 25' roof height
- MITERS gable end zone
- Enclosed building (Cand. D)
- PRGR-10, TR-07, ASCE 7-10
- Duration of load is 1.60
- L = NAEL LENGTH



TRUSS DETAILS
TOE-NAILED CONNECTIONS
 DRAWN BY: GARAGE
 RELEASE DATE: 2/9/09

SHEET: **TN1**




TOTAL NUMBER OF NAILS EACH SIDE OF BREAK *		X INCHES	MAXIMUM FORCE (lbs) 15% LOAD DURATION							
			SP		DF		SPF		HF	
2x4	2x6		2x4	2x6	2x4	2x6	2x4	2x6	2x4	2x6
20	30	24"	1706	2559	1561	2342	1320	1980	1352	2028
26	39	30"	2194	3291	2007	3011	1697	2546	1738	2608
32	48	36"	2681	4022	2454	3681	2074	3111	2125	3187
38	57	42"	3169	4754	2900	4350	2451	3677	2511	3767
44	66	48"	3657	5485	3346	5019	2829	4243	2898	4347

* DIVIDE EQUALLY FRONT AND BACK

ATTACH 2x SCAB OF THE SAME SIZE AND GRADE AS THE BROKEN MEMBER TO EACH FACE OF THE TRUSS (CENTER ON BREAK OR SPLICE) WITH 10d (0.131" X 3") NAILS (TWO ROWS FOR 2x4, THREE ROWS FOR 2x6) SPACED 4" O.C. AS SHOWN. STAGGER NAIL SPACING FROM FRONT FACE AND BACK FACE FOR A NET 0-2-0 O.C. SPACING IN THE MAIN MEMBER. USE A MIN. 0-3-0 MEMBER END DISTANCE.

THE LENGTH OF THE BREAK (C) SHALL NOT EXCEED 12". (C=PLATE LENGTH FOR SPLICE REPAIRS)
 THE MINIMUM OVERALL SCAB LENGTH REQUIRED (L) IS CALCULATED AS FOLLOWS:
 $L = (2) X + C$

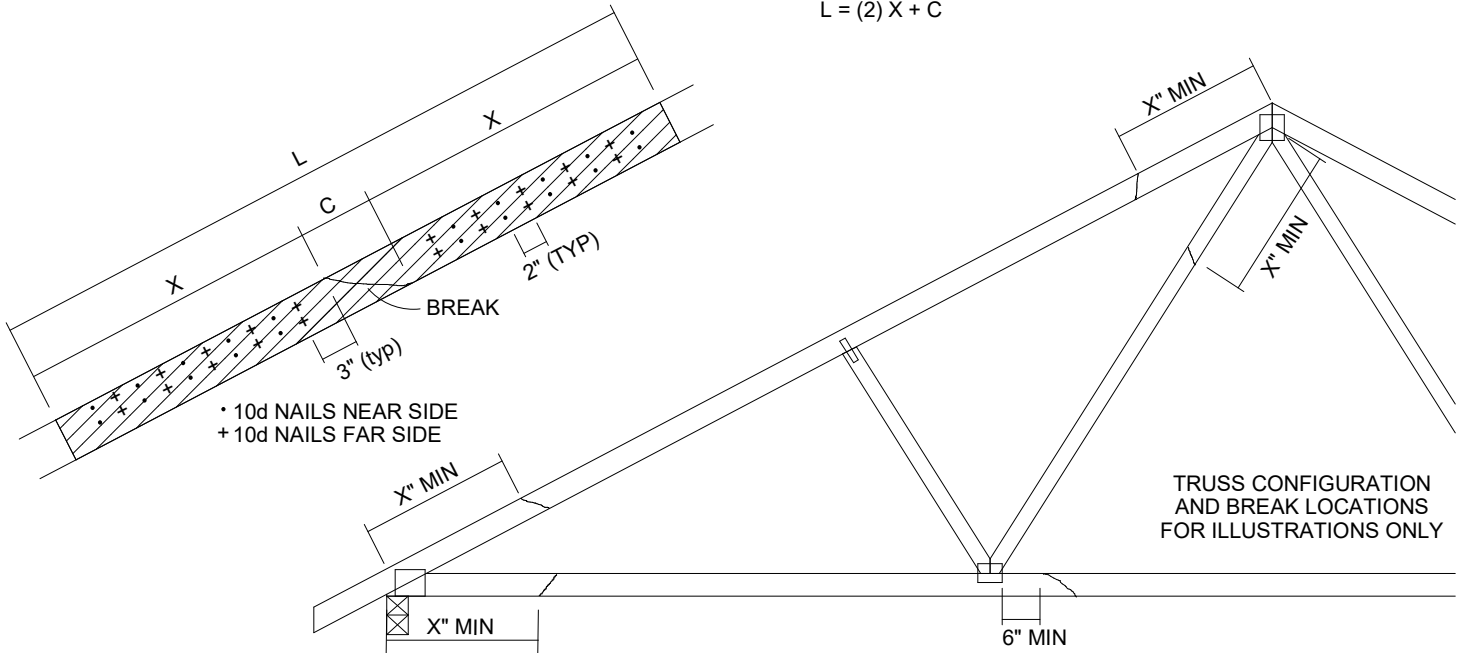


THE LOCATION OF THE BREAK MUST BE GREATER THAN OR EQUAL TO THE REQUIRED X DIMENSION FROM ANY PERIMETER BREAK OR HEEL JOINT AND A MINIMUM OF 6" FROM ANY INTERIOR JOINT (SEE SKETCH ABOVE)

DO NOT USE REPAIR FOR JOINT SPLICES

NOTES:

1. THIS REPAIR DETAIL IS TO BE USED ONLY FOR THE APPLICATION SHOWN. THIS REPAIR DOES NOT IMPLY THAT THE REMAINING PORTION OF THE TRUSS IS UNDAMAGED. THE ENTIRE TRUSS SHALL BE INSPECTED TO VERIFY THAT NO FURTHER REPAIRS ARE REQUIRED. WHEN THE REQUIRED REPAIRS ARE PROPERLY APPLIED, THE TRUSS WILL BE CAPABLE OF SUPPORTING THE LOADS INDICATED.
2. ALL MEMBERS MUST BE RETURNED TO THEIR ORIGINAL POSITIONS BEFORE APPLYING REPAIR AND HELD IN PLACE DURING APPLICATION OF REPAIR.
3. THE END DISTANCE, EDGE DISTANCE AND SPACING OF NAILS SHALL BE SUCH AS TO AVOID UNUSUAL SPLITTING OF THE WOOD.
4. WHEN NAILING THE SCABS, THE USE OF A BACKUP WEIGHT IS RECOMMENDED TO AVOID LOOSENING OF THE CONNECTOR PLATES AT THE JOINTS OR SPLICES.
5. THIS REPAIR IS TO BE USED FOR SINGLE PLY TRUSSES IN THE 2x ORIENTATION ONLY.
6. THIS REPAIR IS LIMITED TO TRUSSES WITH NO MORE THAN THREE BROKEN MEMBERS.




MAX MEAN ROOF HEIGHT = 30 FEET
 BUILDING CATEGORY II
 WIND EXPOSURE B or C
 WIND DESIGN PER ASCE 7-98, ASCE 7-02, ASCE 7-05 100 MPH (MWFRS)
 WIND DESIGN PER ASCE 7-10, ASCE 7-16 125 MPH (MWFRS)
 DURATION OF LOAD INCREASE
 FOR WIND LOADS: 1.60

DETAIL IS NOT APPLICABLE FOR TRUSSES
 TRANSFERRING DRAG LOADS (SHEAR TRUSSES).
 ADDITIONAL CONSIDERATIONS BY BUILDING
 ENGINEER/DESIGNER ARE REQUIRED.

THIS DETAIL SHALL BE ONLY USED FOR RESISTING A VERTICAL WIND UPLIFT
 UP TO 140 LBS MAXIMUM AT EACH CONNECTION POINT. BUILDING DESIGNER
 IS RESPONSIBLE FOR THE LOAD EXCEEDING THIS LIMITATION AND/OR IN
 OTHER DIRECTIONS.

PIGGY-BACK TRUSS
 (CROSS-SECTION VIEW)
 Refer to actual truss design drawing for
 additional piggyback truss information.

ATTACH PIGGYBACK TRUSS
 TO BASE TRUSS WITH
 (2) - 16d (0.131" X 3.5") NAILS
 TOENAILED.

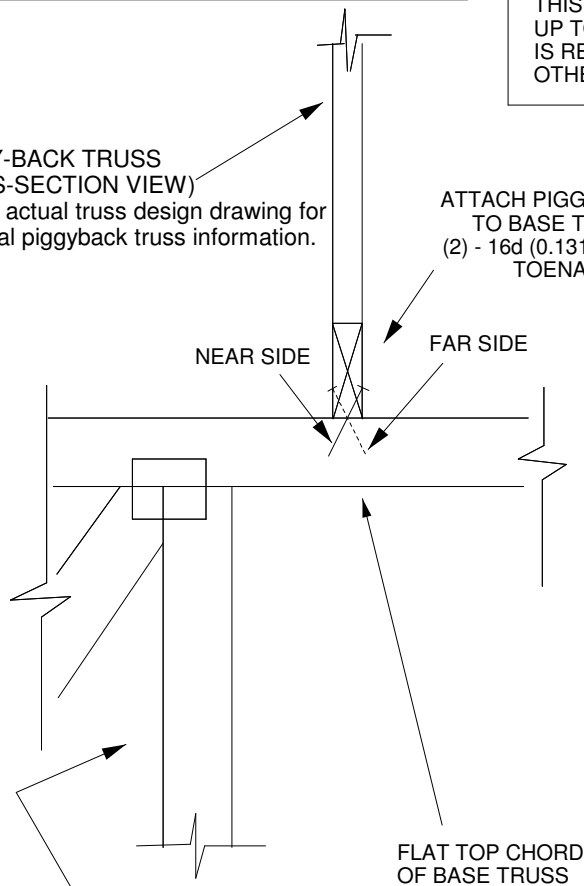

BASE TRUSS (SIDE VIEW)
 Refer to actual truss design drawing
 for additional base truss information.

NOTES FOR TRUSS:

1. THIS DETAIL IS VALID FOR ONE-PLY PIGGYBACK TRUSS ONLY;
2. THE CHORD MEMBER OF PIGGYBACK AND BASE TRUSSES MUST BE SOUTHERN PINE OR DOUGLAS FIR-LARCH LUMBER;
3. THE SPACING OF PIGGYBACK TRUSSES AND BASE TRUSSES IS 2 FT OR LESS;
4. THE PIGGYBACK TRUSSES SHOULD BE PERPENDICULAR TO BASE TRUSSES.
5. PIGGYBACK TRUSS MAY NOT CANTILEVER OVER BASE TRUSS OR HAVE AN OVERHANG WHICH WILL CREATE A HIGHER UPLIFT AT CONNECTING POINT.

NOTES FOR TOE-NAIL:

1. TOE-NAILS SHALL BE DRIVEN AT AN ANGLE OF 30 DEGREES WITH THE MEMBER AND STARTED 1/3 THE LENGTH OF THE NAIL FROM THE MEMBER END AS SHOWN.
2. THE END DISTANCE, EDGE DISTANCE, AND SPACING OF NAILS SHALL BE SUCH AS TO AVOID UNUSUAL SPLITTING OF THE WOOD.

Job Willow F	Truss H12	Truss Type Hip	Qty 2	Ply 1	Willow F Base Job Reference (optional)
-----------------	--------------	-------------------	----------	----------	-------------------------------------------

Maronda Homes, Sanford, user

Run: 8.72 S Aug 20 2023 Print: 8.730 S Apr 25 2024 MiTek Industries, Inc. Tue Aug 13 13:48:28

Page: 1

ID:nRapK1xTJVz47kiwyYZJkQzMDRc-WYVvEZN?Qj1DqQvn0WBXA?8?JbNlwYxy2xxhwFyoFsh

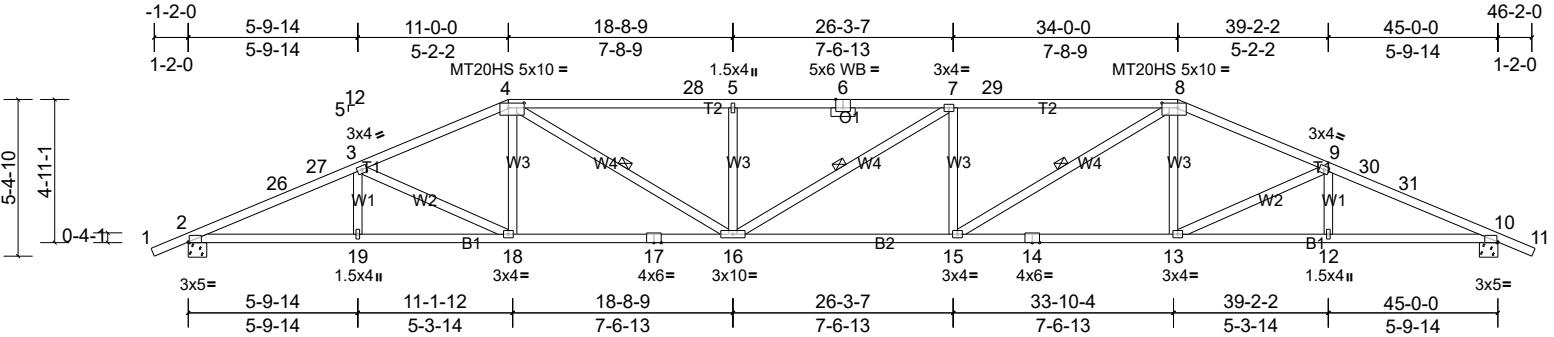


Plate Offsets (X, Y): [2:0-0-6,Edge], [4:0-6-8,0-2-0], [6:0-3-0,Edge], [8:0-6-8,0-2-0], [10:0-0-6,Edge]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	16.0	Plate Grip DOL	1.25	TC	0.88	Vert(LL)	0.69	15-16	>783	240	MT20HS 187/143
TCDL	7.0	Lumber DOL	1.25	BC	0.98	Vert(CT)	-0.74	15-16	>731	180	MT20 244/190
BCLL	0.0*	Rep Stress Incr	YES	WB	0.29	Horz(CT)	0.22	10	n/a	n/a	
BCDL	10.0	Code	FRC2023/TPI2014	Matrix-MS							Weight: 228 lb FT = 20%

LUMBER

TOP CHORD 2x4 SP No.2 *Except* T2:2x4 SP No.1D
 BOT CHORD 2x4 SP No.2
 WEBS 2x4 SP No.2
 OTHERS 2x4 SP No.2

BRACING

TOP CHORD Structural wood sheathing directly applied.
 BOT CHORD Rigid ceiling directly applied or 2-2-0 oc bracing.
 WEBS 1 Row at midpt 4-16, 7-16, 8-15

REACTIONS (lb/size) 2=1541/0-7-10, (min. 0-1-13), 10=1541/0-7-10, (min. 0-1-13)
 Max Horiz 2=-157 (LC 17)
 Max Uplift 2=-1026 (LC 12), 10=-1026 (LC 13)

MiTek recommends that Stabilizers and required cross bracing be installed during truss erection, in accordance with Stabilizer Installation guide.

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 2-26=-3385/2133, 26-27=-3338/2134, 3-27=-3314/2142, 3-4=-2960/2002, 4-28=-3569/2574, 5-28=-3569/2574, 5-6=-3569/2574, 6-7=-3569/2574, 7-29=-3568/2574, 8-29=-3568/2574, 8-9=-2960/2002, 9-30=-3314/2143, 30-31=-3338/2135, 10-31=-3385/2134
 BOT CHORD 2-19=-2004/3086, 18-19=-2004/3086, 17-18=-1662/2698, 16-17=-1662/2698, 15-16=-2330/3568, 14-15=-1632/2698, 13-14=-1632/2698, 12-13=-1855/3085, 10-12=-1855/3085
 WEBS 4-18=-115/419, 4-16=-813/1104, 5-16=-374/507, 7-16=-324/325, 7-15=-415/513, 8-15=-813/1102, 8-13=-115/419, 3-18=-461/457, 9-13=-460/458

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-22; Vult=160mph (3-second gust) Vasd=124mph; TCDL=4.2psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) exterior (2) zone and C-C Zone3 -1-2-11 to 3-3-5, Zone1 3-3-5 to 11-0-0, Zone2 11-0-0 to 17-4-6, Zone1 17-4-6 to 34-0-0, Zone2 34-0-0 to 40-4-6, Zone1 40-4-6 to 46-2-11 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- All plates are MT20 plates unless otherwise indicated.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 1026 lb uplift at joint 10 and 1026 lb uplift at joint 2.

LOAD CASE(S) Standard

Job Willow F	Truss H13	Truss Type Hip	Qty 1	Ply 1	Willow F Base Job Reference (optional)
-----------------	--------------	-------------------	----------	----------	-------------------------------------------

Maronda Homes, Sanford, user

Run: 8.72 S Aug 20 2023 Print: 8.730 S Apr 25 2024 MiTek Industries, Inc. Tue Aug 13 13:48:29

Page: 1

ID:OLlpUtjzJedmKdtkggOSFzMDWk-WYyVvEZN?Qj1DqQvn0WBXA?81KbPjwVey2xxhwFyoFsh

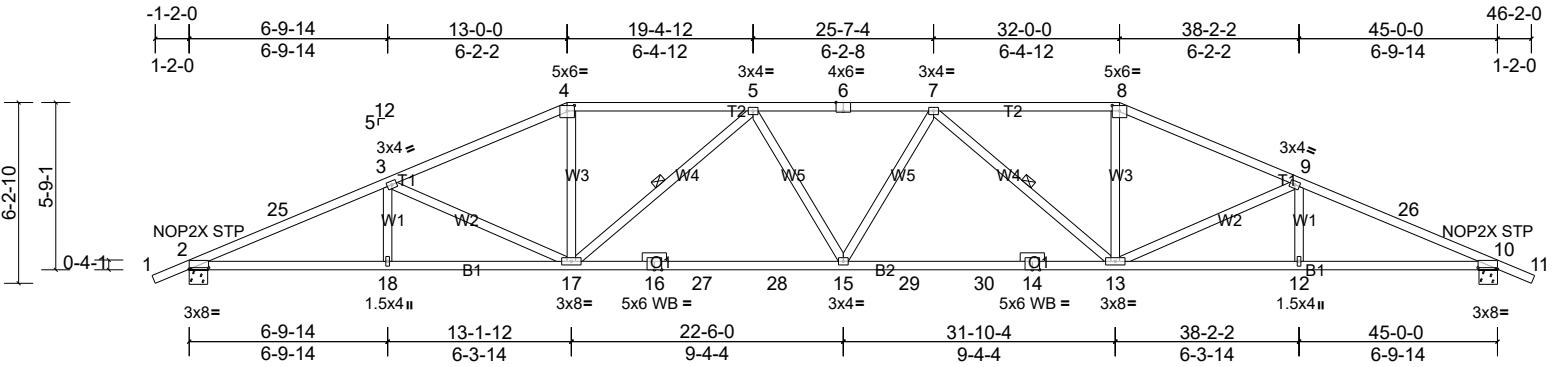


Plate Offsets (X, Y): [2:0-8-0,0-0-10], [4:0-3-0,0-2-4], [6:0-3-0,Edge], [8:0-3-0,0-2-4], [10:0-8-0,0-0-10]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	16.0	Plate Grip DOL	1.25	TC	0.75	Vert(LL)	0.53	15	>999	240	MT20	244/190
TCDL	7.0	Lumber DOL	1.25	BC	0.89	Vert(CT)	-0.81	15-17	>671	180		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.50	Horz(CT)	0.19	10	n/a	n/a		
BCDL	10.0	Code	FRC2023/TPI2014	Matrix-MS								
											Weight: 228 lb	FT = 20%

LUMBER

TOP CHORD 2x4 SP No.2
 BOT CHORD 2x4 SP No.1D
 WEBS 2x4 SP No.2
 OTHERS 2x4 SP No.2

BRACING

TOP CHORD Structural wood sheathing directly applied or 2-5-10 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 4-7-9 oc bracing.
 WEBS 1 Row at midpt 5-17, 7-13

REACTIONS (lb/size) 2=1541/0-7-10, (min. 0-1-12), 10=1541/0-7-10, (min. 0-1-12)
 Max Horiz 2=182 (LC 12)
 Max Uplift 2=-1023 (LC 12), 10=-1023 (LC 13)
 Max Grav 2=1728 (LC 2), 10=1728 (LC 2)

MiTek recommends that Stabilizers and required cross bracing be installed during truss erection, in accordance with Stabilizer Installation guide.

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 2-25=-3777/2097, 3-25=-3747/2108, 3-4=-3201/1825, 4-5=-2934/1747, 5-6=-3562/2104, 6-7=-3562/2104,
 7-8=-2934/1747, 8-9=-3201/1825, 9-26=-3747/2109, 10-26=-3777/2097
 BOT CHORD 2-18=-1985/3460, 17-18=-1985/3460, 16-17=-1868/3448, 16-27=-1868/3448, 27-28=-1868/3448, 15-28=-1868/3448,
 15-29=-1859/3448, 29-30=-1859/3448, 14-30=-1859/3448, 13-14=-1859/3448, 12-13=-1804/3460, 10-12=-1804/3460
 WEBS 3-17=-609/585, 4-17=-398/997, 5-17=-756/551, 5-15=-131/381, 7-15=-131/381, 7-13=-756/551, 8-13=-398/997,
 9-13=-609/586

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-22; Vult=160mph (3-second gust) Vasd=124mph; TCDL=4.2psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) exterior (2) zone and C-C Zone3 -1-2-11 to 3-3-5, Zone1 3-3-5 to 13-0-0, Zone2 13-0-0 to 19-4-12, Zone1 19-4-12 to 32-0-0, Zone2 32-0-0 to 38-2-2, Zone1 38-2-2 to 46-2-11 zone; cantilever left and right exposed ; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- All plates are MT20 plates unless otherwise indicated.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 1023 lb uplift at joint 2 and 1023 lb uplift at joint 10.

LOAD CASE(S) Standard

Job Willow F	Truss H13S	Truss Type Hip	Qty 1	Ply 1	Willow F Base Job Reference (optional)
-----------------	---------------	-------------------	----------	----------	-------------------------------------------

Maronda Homes, Sanford, user

Run: 8.72 S Aug 20 2023 Print: 8.730 S Apr 25 2024 MiTek Industries, Inc. Tue Aug 13 13:48:29

Page: 1

ID:JxcSo1k58XNg7NXstQCeuZMD6q-_36HSuOdB194SaUzaDimjDhCx_kyfyI5GbgEThyoFSG

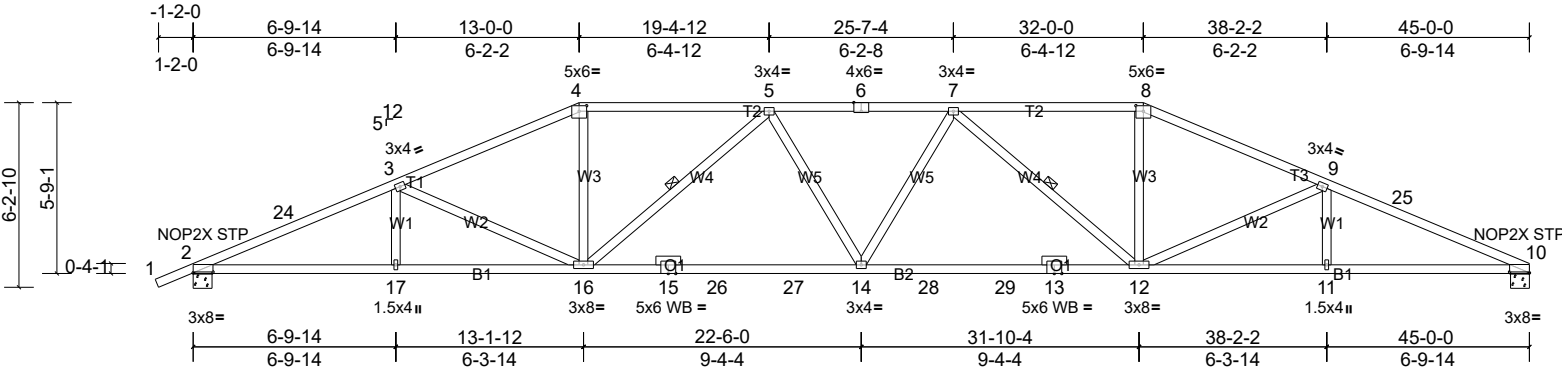


Plate Offsets (X, Y): [2:0-8-0,0-0-6], [4:0-3-0,0-2-4], [6:0-3-0,Edge], [8:0-3-0,0-2-4], [10:0-8-0,0-0-6]

Loading	(psf)	Spacing	2-0-0	CSI	0.76	DEFL	in (loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	16.0	Plate Grip DOL	1.25	TC	0.76	Vert(LL)	0.53	14	>999	240	MT20	244/190
TCDL	7.0	Lumber DOL	1.25	BC	0.89	Vert(CT)	-0.81	12-14	>670	180		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.51	Horz(CT)	0.19	10	n/a	n/a		
BCDL	10.0	Code	FRC2023/TPI2014	Matrix-MS								
											Weight: 226 lb	FT = 20%

LUMBER

TOP CHORD 2x4 SP No.2
 BOT CHORD 2x4 SP No.1D
 WEBS 2x4 SP No.2
 OTHERS 2x4 SP No.2

BRACING

TOP CHORD Structural wood sheathing directly applied or 2-5-0 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 4-7-6 oc bracing.
 WEBS 1 Row at midpt 5-16, 7-12

REACTIONS (lb/size) 2=1542/0-7-10, (min. 0-1-12), 10=1484/0-7-10, (min. 0-1-11)
 Max Horiz 2=198 (LC 12)
 Max Uplift 2=-1023 (LC 12), 10=-958 (LC 13)
 Max Grav 2=1728 (LC 2), 10=1681 (LC 2)

MiTek recommends that Stabilizers and required cross bracing be installed during truss erection, in accordance with Stabilizer Installation guide.

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 2-24=-3778/2098, 3-24=-3749/2109, 3-4=-3202/1827, 4-5=-2935/1749, 5-6=-3564/2109, 6-7=-3564/2109,
 7-8=-2937/1754, 8-9=-3205/1833, 9-25=-3740/2127, 10-25=-3788/2115
 BOT CHORD 2-17=-2002/3461, 16-17=-2002/3461, 15-16=-1889/3450, 15-26=-1889/3450, 26-27=-1889/3450, 14-27=-1889/3450,
 14-28=-1880/3451, 28-29=-1880/3451, 13-29=-1880/3451, 12-13=-1880/3451, 11-12=-1852/3470, 10-11=-1852/3470
 WEBS 3-16=-609/585, 4-16=-399/998, 8-12=-400/999, 9-12=-617/600, 5-16=-757/553, 5-14=-133/381, 7-14=-131/381,
 7-12=-756/551

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-22; Vult=160mph (3-second gust) Vasd=124mph; TCDL=4.2psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) exterior (2) zone and C-C Zone3 -1-2-11 to 3-3-5, Zone1 3-3-5 to 13-0-0, Zone2 13-0-0 to 19-4-12, Zone1 19-4-12 to 32-0-0, Zone2 32-0-0 to 38-2-2, Zone1 38-2-2 to 45-0-0 zone; cantilever left and right exposed ; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- All plates are MT20 plates unless otherwise indicated.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 958 lb uplift at joint 10 and 1023 lb uplift at joint 2.

LOAD CASE(S) Standard

Job Willow F	Truss H14	Truss Type Hip	Qty 1	Ply 1	Willow F Base Job Reference (optional)
-----------------	--------------	-------------------	----------	----------	-------------------------------------------

Maronda Homes, Sanford, user

Run: 8.72 S Aug 20 2023 Print: 8.730 S Apr 25 2024 MiTek Industries, Inc. Tue Aug 13 13:48:29

Page: 1

ID:E25wo2xHgc0E9IxeXSgXmKzMDaf-_36HSuOdB194SaUzaDimjDhAv_kyful5GbgETHyoFsG

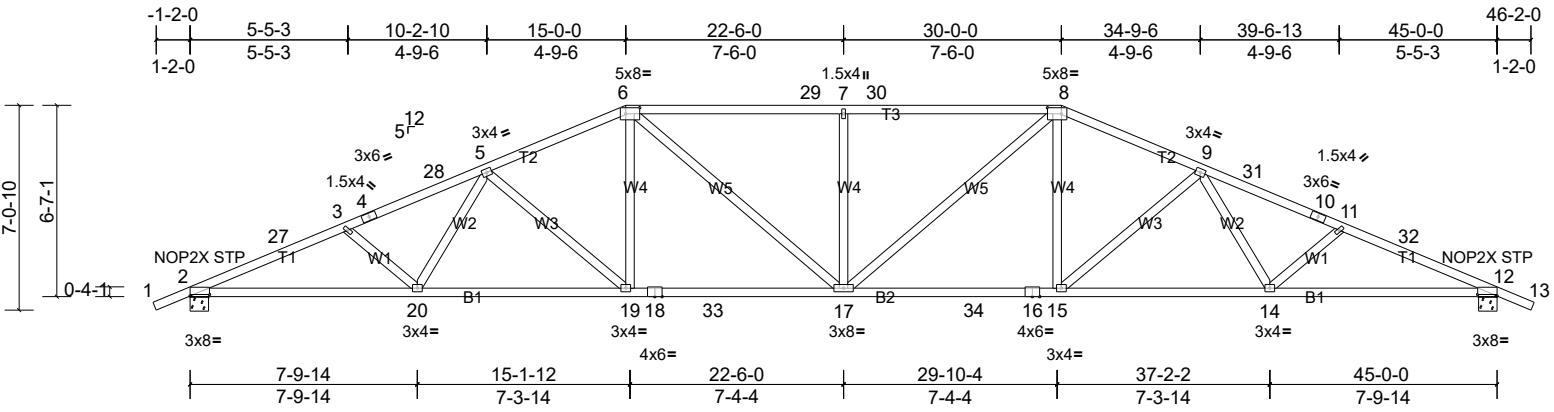


Plate Offsets (X, Y): [2:0-8-0,0-0-10], [6:0-5-12,0-2-8], [8:0-5-12,0-2-8], [12:0-8-0,0-0-10]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	16.0	Plate Grip DOL	1.25	TC	0.89	Vert(LL)	0.47	17	>999	240	MT20 244/190
TCDL	7.0	Lumber DOL	1.25	BC	0.89	Vert(CT)	-0.66	17-19	>821	180	
BCLL	0.0*	Rep Stress Incr	YES	WB	0.73	Horz(CT)	0.19	12	n/a	n/a	
BCDL	10.0	Code	FRC2023/TPI2014	Matrix-MS							Weight: 238 lb FT = 20%

LUMBER

TOP CHORD 2x4 SP No.2
 BOT CHORD 2x4 SP No.1D *Except* B2:2x4 SP No.2
 WEBS 2x4 SP No.2

BRACING

TOP CHORD Structural wood sheathing directly applied.
 BOT CHORD Rigid ceiling directly applied or 4-7-8 oc bracing.

REACTIONS (lb/size) 2=1541/0-7-10, (min. 0-1-12), 12=1541/0-7-10, (min. 0-1-12)
 Max Horiz 2=208 (LC 12)
 Max Uplift 2=-1020 (LC 12), 12=-1020 (LC 13)
 Max Grav 2=1732 (LC 2), 12=1732 (LC 2)

MiTek recommends that Stabilizers and required cross bracing be installed during truss erection, in accordance with Stabilizer Installation guide.

FORCES

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 2-27=-3808/2151, 3-27=-3777/2159, 3-4=-3658/2000, 4-28=-3622/2006, 5-28=-3609/2014, 5-6=-3000/1687, 6-29=-3105/1845, 7-29=-3105/1845, 7-30=-3105/1845, 8-30=-3105/1845, 8-9=-3000/1687, 9-31=-3609/2014, 10-31=-3622/2006, 10-11=-3657/2000, 11-32=-3777/2159, 12-32=-3808/2151
 BOT CHORD 2-20=-2077/3498, 19-20=-1710/3120, 18-19=-1330/2750, 18-33=-1330/2750, 17-33=-1330/2750, 17-34=-1249/2750, 16-34=-1249/2750, 15-16=-1249/2750, 14-15=-1536/3120, 12-14=-1869/3498
 WEBS 6-19=-250/634, 6-17=-454/559, 7-17=-398/543, 8-17=-454/559, 8-15=-250/634, 3-20=-247/371, 5-20=-184/459, 5-19=-511/512, 9-15=-511/512, 9-14=-185/459, 11-14=-247/371

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-22; Vult=160mph (3-second gust) Vasd=124mph; TCDL=4.2psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) exterior (2) zone and C-C Zone3 -1-2-11 to 3-3-5, Zone1 3-3-5 to 15-0-0, Zone2 15-0-0 to 21-4-6, Zone1 21-4-6 to 30-0-0, Zone2 30-0-0 to 36-4-6, Zone1 36-4-6 to 46-2-11 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- All plates are MT20 plates unless otherwise indicated.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 1020 lb uplift at joint 12 and 1020 lb uplift at joint 2.

LOAD CASE(S) Standard

Job Willow F	Truss H14S	Truss Type Hip	Qty 1	Ply 1	Willow F Base Job Reference (optional)
-----------------	---------------	-------------------	----------	----------	-------------------------------------------

Maronda Homes, Sanford, user

Run: 8.72 S Aug 20 2023 Print: 8.730 S Apr 25 2024 MiTek Industries, Inc. Tue Aug 13 13:48:29

Page: 1

ID:ye?6ekYa3M1qQEuu9YjM9yzMD8l-_36HSuOdB194SaUzaDimjDhBl_kyfqY5GbgETHyoFSg

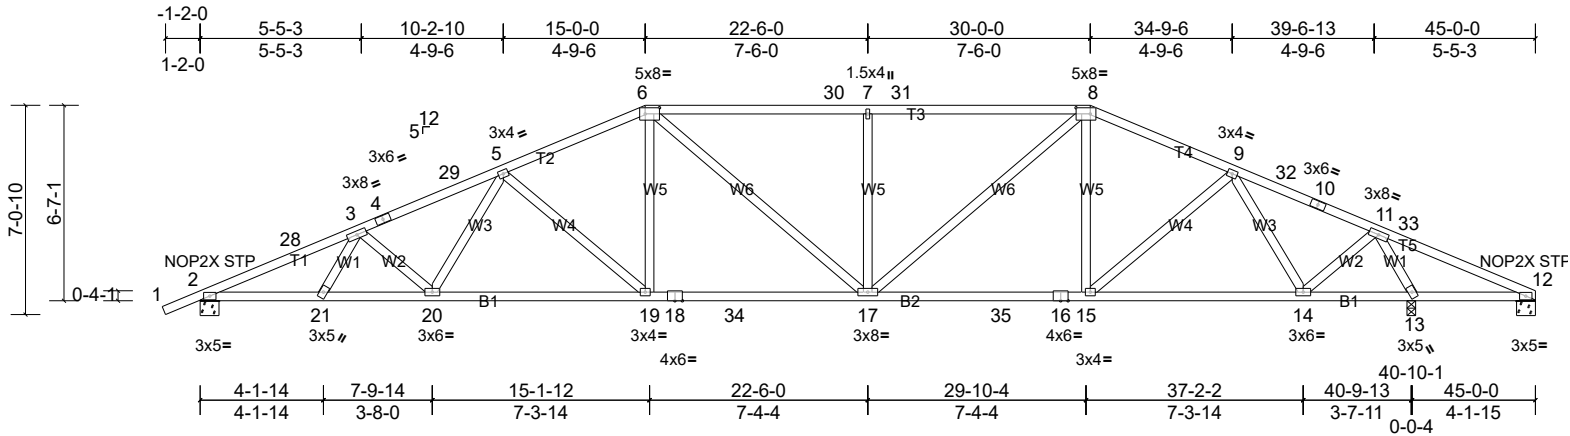


Plate Offsets (X, Y): [6:0-5-12,0-2-8], [8:0-5-12,0-2-8]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	16.0	Plate Grip DOL	1.25	TC	0.80	Vert(LL)	0.31	19	>999	240	MT20 244/190
TCDL	7.0	Lumber DOL	1.25	BC	0.89	Vert(CT)	-0.45	17-19	>999	180	
BCLL	0.0*	Rep Stress Incr	YES	WB	0.97	Horz(CT)	0.13	13	n/a	n/a	
BCDL	10.0	Code	FRC2023/TPI2014	Matrix-MS							Weight: 243 lb FT = 20%

LUMBER

TOP CHORD 2x4 SP No.2
 BOT CHORD 2x4 SP No.2
 WEBS 2x4 SP No.2

BRACING

TOP CHORD Structural wood sheathing directly applied or 2-11-14 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 4-2-13 oc bracing.

REACTIONS (lb/size) 2=1344/0-7-10, (min. 0-1-12), 12=-507/0-7-10, (min. 0-1-8),
 13=2190/0-3-8, (min. 0-2-15)
 Max Horiz 2=223 (LC 16)
 Max Uplift 2=-926 (LC 12), 12=-593 (LC 2), 13=-1328 (LC 9)
 Max Grav 2=1506 (LC 2), 12=314 (LC 12), 13=2504 (LC 2)

MiTek recommends that Stabilizers and required cross bracing be installed during truss erection, in accordance with Stabilizer Installation guide.

FORCES

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 2-28=-3308/1894, 3-28=-3277/1902, 3-4=-3060/1765, 4-29=-3026/1771, 5-29=-2417/1414,
 6-30=-2297/1450, 7-30=-2297/1450, 7-31=-2297/1450, 8-31=-2297/1450, 8-9=-1850/1097, 9-32=-840/607,
 10-32=-848/600, 10-11=-889/593, 11-33=-909/1859, 12-33=-921/1815
 BOT CHORD 2-21=-1858/3031, 20-21=-1869/2985, 19-20=-1503/2577, 18-19=-1121/2212, 18-34=-1121/2212, 17-34=-1121/2212,
 17-35=-740/1674, 16-35=-740/1674, 15-16=-740/1674, 14-15=-603/1279, 13-14=-458/283, 12-13=-1676/894
 WEBS 6-19=-249/636, 6-17=-275/264, 7-17=-398/543, 8-17=-601/862, 5-19=-505/515, 3-20=-283/364, 5-20=-193/443,
 9-15=-219/586, 9-14=-1018/641, 11-14=-679/1597, 11-13=-2632/1429

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-22; Vult=160mph (3-second gust) Vasd=124mph; TCDL=4.2psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) exterior (2) zone and C-C Zone3 -1-2-11 to 3-3-5, Zone1 3-3-5 to 15-0-0, Zone2 15-0-0 to 21-4-6, Zone1 21-4-6 to 30-0-0, Zone2 30-0-0 to 36-4-6, Zone1 36-4-6 to 45-0-0 zone; cantilever left and right exposed ; end vertical left and right exposed; porch right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- All plates are MT20 plates unless otherwise indicated.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 593 lb uplift at joint 12, 926 lb uplift at joint 2 and 1328 lb uplift at joint 13.

LOAD CASE(S) Standard

Job Willow F	Truss H15	Truss Type Hip	Qty 1	Ply 1	Willow F Base Job Reference (optional)
-----------------	--------------	-------------------	----------	----------	-------------------------------------------

Maronda Homes, Sanford, user

Run: 8.72 S Aug 20 2023 Print: 8.730 S Apr 25 2024 MiTek Industries, Inc. Tue Aug 13 13:48:30

Page: 1

ID:HmHBPgTOAQmP89BOxX?9NpzMdcY-SGgfEPfyLHx3j398xD?FQDPsO3POOMEVEQn?8yoF5f

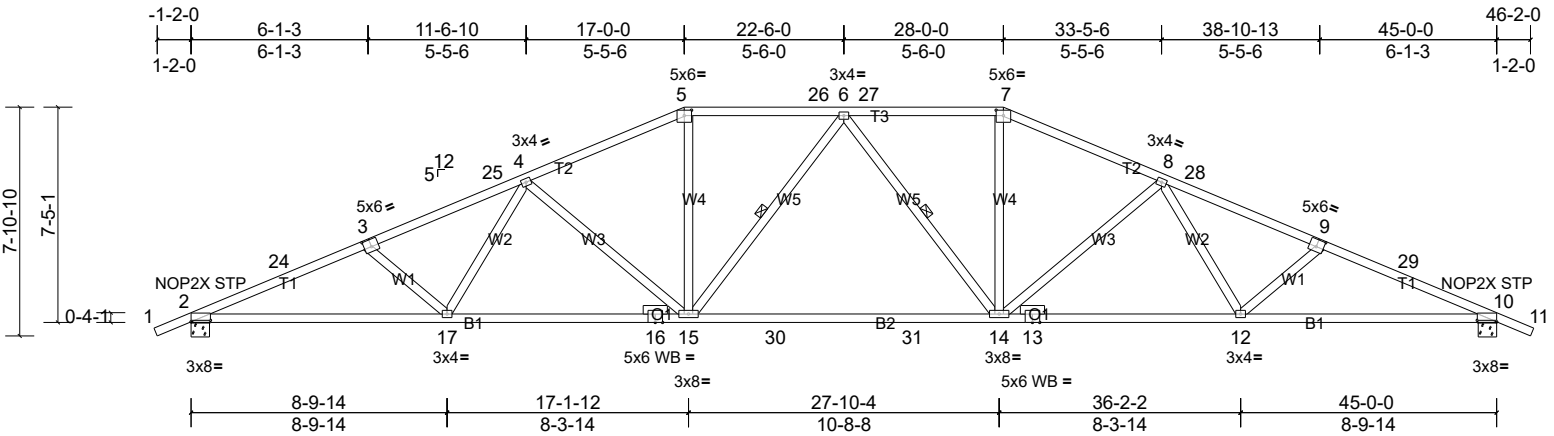


Plate Offsets (X, Y): [2:0-8-0,0-0-10], [3:0-3-0,0-3-0], [5:0-3-0,0-2-4], [7:0-3-0,0-2-4], [9:0-3-0,0-3-0], [10:0-8-0,0-0-10]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in (loc)	l/defl	L/d	PLATES	GRIP		
TCLL (roof)	16.0	Plate Grip DOL	1.25	TC	0.62	Vert(LL)	-0.57	14-15	>946	240	MT20	244/190
TCDL	7.0	Lumber DOL	1.25	BC	0.94	Vert(CT)	-1.00	14-15	>540	180		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.55	Horz(CT)	0.17	10	n/a	n/a		
BCDL	10.0	Code	FRC2023/TPI2014	Matrix-MS								Weight: 238 lb FT = 20%

LUMBER

TOP CHORD 2x4 SP No.2
 BOT CHORD 2x4 SP No.1D
 WEBS 2x4 SP No.2
 OTHERS 2x4 SP No.2

BRACING

TOP CHORD Structural wood sheathing directly applied or 2-4-9 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 2-2-0 oc bracing.
 WEBS 1 Row at midpt 6-15, 6-14

REACTIONS (lb/size) 2=1541/0-7-10, (min. 0-1-12), 10=1541/0-7-10, (min. 0-1-12)
 Max Horiz 2=234 (LC 12)
 Max Uplift 2=-1016 (LC 12), 10=-1016 (LC 13)
 Max Grav 2=1724 (LC 2), 10=1724 (LC 2)

MiTek recommends that Stabilizers and required cross bracing be installed during truss erection, in accordance with Stabilizer Installation guide.

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 2-24=-3729/2106, 3-24=-3699/2115, 3-25=-3562/1961, 4-25=-3491/1970, 4-5=-2821/1610, 5-26=-2581/1555, 6-26=-2581/1555, 6-27=-2581/1555, 7-27=-2581/1555, 7-8=-2821/1610, 8-28=-3491/1971, 9-28=-3562/1962, 9-29=-3699/2116, 10-29=-3729/2106
 BOT CHORD 2-17=-2049/3423, 16-17=-1637/2998, 15-16=-1637/2998, 15-30=-1218/2666, 30-31=-1218/2666, 14-31=-1218/2666, 13-14=-1474/2998, 12-13=-1474/2998, 10-12=-1816/3423
 WEBS 3-17=-280/414, 4-17=-234/518, 4-15=-576/607, 5-15=-359/881, 6-15=-308/369, 6-14=-308/369, 7-14=-359/881, 8-14=-576/607, 8-12=-235/518, 9-12=-280/415

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-22; Vult=160mph (3-second gust) Vasd=124mph; TCDL=4.2psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) exterior (2) zone and C-C Zone3 -1-2-11 to 3-3-5, Zone1 3-3-5 to 17-0-0, Zone2 17-0-0 to 23-4-6, Zone1 23-4-6 to 28-0-0, Zone2 28-0-0 to 34-4-6, Zone1 34-4-6 to 46-2-11 zone; cantilever left and right exposed ; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- All plates are MT20 plates unless otherwise indicated.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 1016 lb uplift at joint 2 and 1016 lb uplift at joint 10.

LOAD CASE(S) Standard

Job Willow F	Truss H15S	Truss Type Hip	Qty 1	Ply 1	Willow F Base Job Reference (optional)
-----------------	---------------	-------------------	----------	----------	-------------------------------------------

Maronda Homes, Sanford, user

Run: 8.72 S Aug 20 2023 Print: 8.730 S Apr 25 2024 MiTek Industries, Inc. Tue Aug 13 13:48:30

Page: 1

ID:0?Hwako746zpEbnJ?R9fbazMDDb-SGgffEPFyLHx3j398xD?FQDPLO3iONGEVEQn?8yoFsF

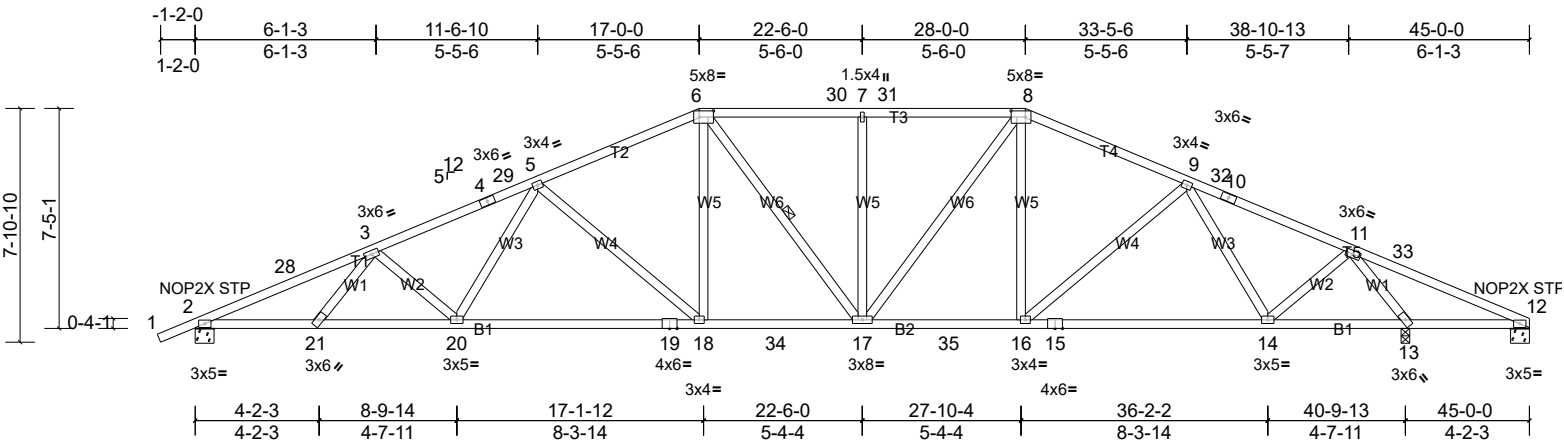


Plate Offsets (X, Y): [6:0-5-12,0-2-8], [8:0-5-12,0-2-8], [9:0-0-0,0-0-0], [11:0-0-0,0-0-0]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	16.0	Plate Grip DOL	1.25	TC	0.59	Vert(LL)	0.31	18-20	>999	240	MT20	244/190
TCDL	7.0	Lumber DOL	1.25	BC	0.92	Vert(CT)	-0.52	18-20	>948	180		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.62	Horz(CT)	0.13	13	n/a	n/a		
BCDL	10.0	Code	FRC2023/TPI2014	Matrix-MS								Weight: 252 lb FT = 20%

LUMBER

TOP CHORD 2x4 SP No.2
 BOT CHORD 2x4 SP No.2
 WEBS 2x4 SP No.2

BRACING

TOP CHORD Structural wood sheathing directly applied or 2-10-13 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 2-2-0 oc bracing.
 WEBS 1 Row at midpt 6-17

REACTIONS (lb/size) 2=1351/0-7-10, (min. 0-1-12), 12=-442/0-7-10, (min. 0-1-8),
 13=2118/0-3-8, (min. 0-2-14)
 Max Horiz 2=249 (LC 12)
 Max Uplift 2=-925 (LC 12), 12=-517 (LC 2), 13=-1243 (LC 13)
 Max Grav 2=1508 (LC 2), 12=279 (LC 12), 13=2414 (LC 2)

MiTek recommends that Stabilizers and required cross bracing be installed during truss erection, in accordance with Stabilizer Installation guide.

FORCES

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 2-28=-3315/1874, 3-28=-3277/1883, 3-4=-2995/1719, 4-29=-2938/1723, 5-29=-2921/1728, 5-6=-2237/1330,
 6-30=-2018/1304, 7-30=-2018/1304, 7-31=-2018/1304, 8-31=-2018/1304, 8-9=-1886/1144, 9-32=-1190/790,
 10-32=-1196/787, 10-11=-1264/774, 11-33=-811/1693, 12-33=-825/1647
 BOT CHORD 2-21=-1856/3028, 20-21=-1864/2947, 19-20=-1440/2472, 18-19=-1440/2472, 18-34=-990/2037, 17-34=-990/2037,
 17-35=-690/1703, 16-35=-690/1703, 15-16=-717/1486, 14-15=-717/1486, 12-13=-1520/820
 WEBS 6-18=-307/684, 7-17=-286/388, 8-17=-456/576, 3-20=-322/423, 5-20=-217/523, 5-18=-594/604, 9-16=-91/372,
 9-14=-733/521, 11-14=-493/1309, 11-13=-2762/1513

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-22; Vult=160mph (3-second gust) Vasd=124mph; TCDL=4.2psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) exterior (2) zone and C-C Zone3 -1-2-11 to 3-3-5, Zone1 3-3-5 to 17-0-0, Zone2 17-0-0 to 23-4-6, Zone1 23-4-6 to 28-0-0, Zone2 28-0-0 to 34-4-6, Zone1 34-4-6 to 45-0-0 zone; cantilever left and right exposed ; end vertical left and right exposed; porch right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- All plates are MT20 plates unless otherwise indicated.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 517 lb uplift at joint 12, 925 lb uplift at joint 2 and 1243 lb uplift at joint 13.

LOAD CASE(S) Standard

Job Willow F	Truss H16	Truss Type Hip	Qty 1	Ply 1	Willow F Base Job Reference (optional)
-----------------	--------------	-------------------	----------	----------	-------------------------------------------

Maronda Homes, Sanford, user

Run: 8.72 S Aug 20 2023 Print: 8.730 S Apr 25 2024 MiTek Industries, Inc. Tue Aug 13 13:48:30

Page: 1

ID:fxQngRO?XuJDCNwciGS7CkzMDhp-SGffEPFYLHx3j398xD?FQDM2O4LOR1EVEQn?8yoFsF

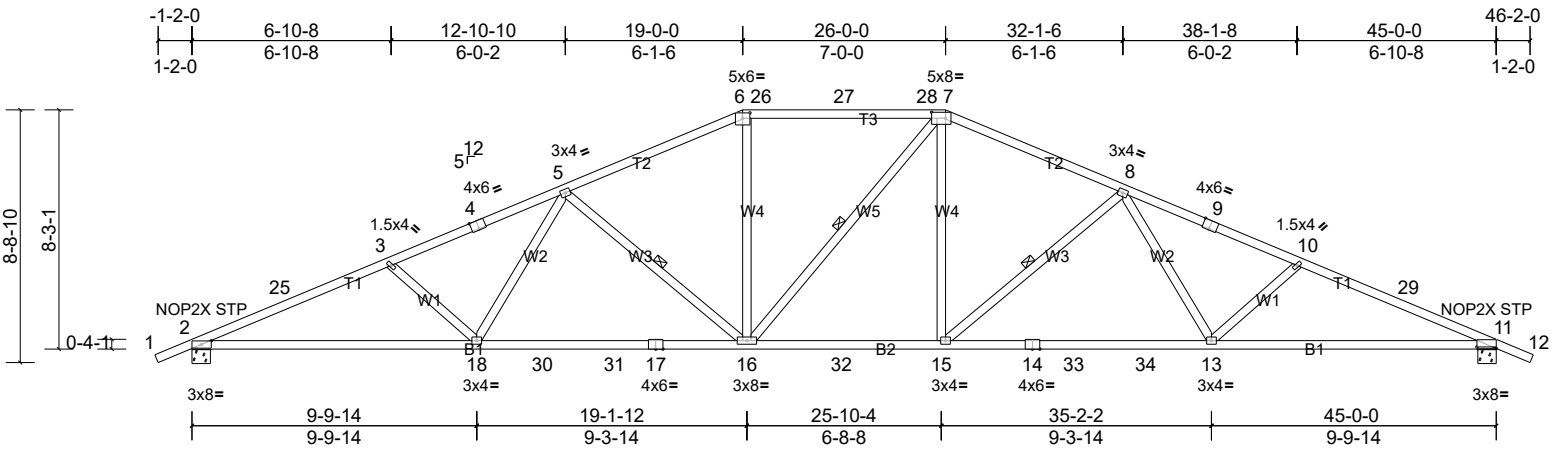


Plate Offsets (X, Y): [2:0-4-2,0-1-8], [4:0-3-0,Edge], [6:0-3-0,0-2-4], [7:0-5-12,0-2-8], [9:0-3-0,Edge], [11:0-8-0,0-0-10]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	16.0	Plate Grip DOL	1.25	TC	0.80	Vert(LL)	0.40	15-16	>999	240	MT20	244/190
TCDL	7.0	Lumber DOL	1.25	BC	0.88	Vert(CT)	-0.70	13-15	>776	180		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.38	Horz(CT)	0.17	11	n/a	n/a		
BCDL	10.0	Code	FRC2023/TPI2014	Matrix-MS								Weight: 234 lb FT = 20%

LUMBER

TOP CHORD 2x4 SP No.2
 BOT CHORD 2x4 SP No.1D
 WEBS 2x4 SP No.2

BRACING

TOP CHORD Structural wood sheathing directly applied or 2-2-0 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 4-6-6 oc bracing.
 WEBS 1 Row at midpt 7-16, 5-16, 8-15

REACTIONS (lb/size) 2=1541/0-7-10, (min. 0-1-12), 11=1541/0-7-10, (min. 0-1-12)
 Max Horiz 2=259 (LC 12)
 Max Uplift 2=-1012 (LC 12), 11=-1012 (LC 13)
 Max Grav 2=1750 (LC 2), 11=1754 (LC 2)

MiTek recommends that Stabilizers and required cross bracing be installed during truss erection, in accordance with Stabilizer Installation guide.

FORCES

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-25=-3770/2071, 3-25=-3741/2083, 3-4=-3576/1894, 4-5=-3529/1904, 5-6=-2655/1548, 6-26=-2421/1505, 26-27=-2421/1505, 27-28=-2421/1505, 7-28=-2421/1505, 7-8=-2665/1548, 8-9=-3539/1905, 9-10=-3586/1894, 10-29=-3750/2083, 11-29=-3779/2072
 BOT CHORD 2-18=-2037/3458, 18-30=-1563/2933, 30-31=-1563/2933, 17-31=-1563/2933, 16-17=-1563/2933, 16-32=-1011/2430, 15-32=-1011/2430, 14-15=-1405/2942, 14-33=-1405/2942, 33-34=-1405/2942, 13-34=-1405/2942, 11-13=-1778/3467
 WEBS 6-16=-273/761, 7-15=-344/777, 3-18=-321/477, 5-18=-251/661, 5-16=-696/673, 8-15=-696/673, 8-13=-252/661, 10-13=-321/477

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-22; Vult=160mph (3-second gust) Vasd=124mph; TCDL=4.2psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) exterior (2) zone and C-C Zone3 -1-2-11 to 3-3-5, Zone1 3-3-5 to 19-0-0, Zone2 19-0-0 to 25-4-6, Zone1 25-4-6 to 26-0-0, Zone2 26-0-0 to 32-1-6, Zone1 32-1-6 to 46-2-11 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- All plates are MT20 plates unless otherwise indicated.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 1012 lb uplift at joint 2 and 1012 lb uplift at joint 11.

LOAD CASE(S) Standard

Job Willow F	Truss H16S	Truss Type Hip	Qty 1	Ply 1	Willow F Base Job Reference (optional)
-----------------	---------------	-------------------	----------	----------	-------------------------------------------

Maronda Homes, Sanford, user

Run: 8.72 S Aug 20 2023 Print: 8.730 S Apr 25 2024 MiTek Industries, Inc. Tue Aug 13 13:48:30

Page: 1

ID: ?QEfsQnJfv6eSR0dle5GzMDMf-SGgffEPfYLHx3j398xD?FQDM2O4BOR1EVEQn?8yoFsf

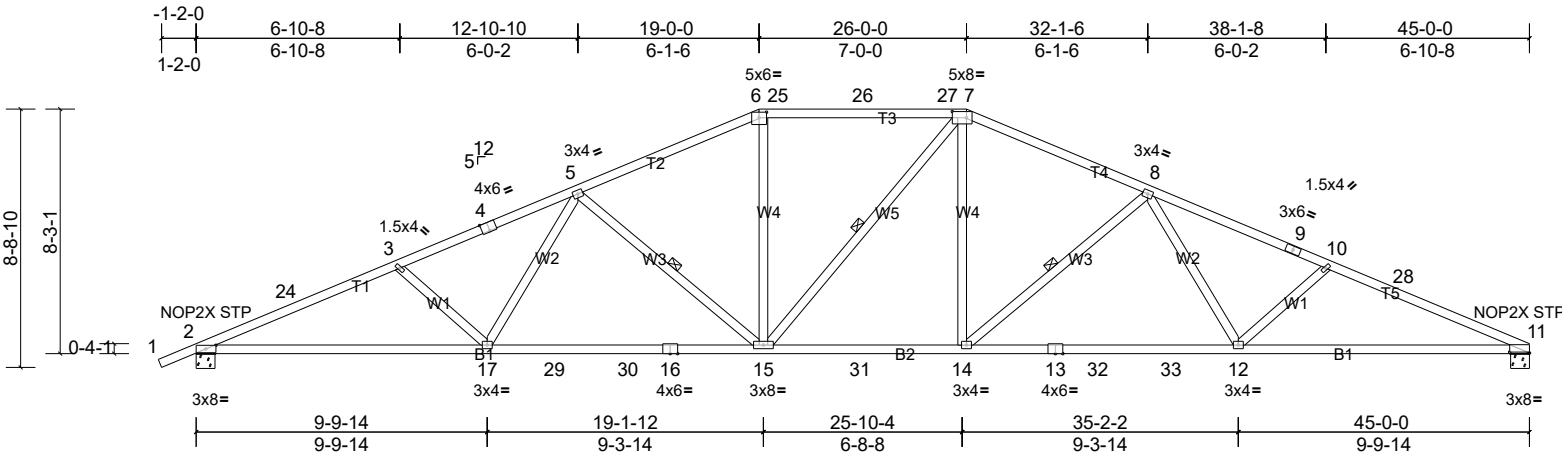


Plate Offsets (X, Y): [2:0-4-2,0-1-8], [4:0-3-0,Edge], [6:0-3-0,0-2-4], [7:0-5-12,0-2-8], [11:0-8-0,0-0-6]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in (loc)	l/defl	L/d	PLATES	GRIP		
TCLL (roof)	16.0	Plate Grip DOL	1.25	TC	0.80	Vert(LL)	0.40	14-15	>999	240	MT20	244/190
TCDL	7.0	Lumber DOL	1.25	BC	0.89	Vert(CT)	-0.69	12-14	>778	180		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.38	Horz(CT)	0.17	11	n/a	n/a		
BCDL	10.0	Code	FRC2023/TPI2014	Matrix-MS								Weight: 232 lb FT = 20%

LUMBER

TOP CHORD 2x4 SP No.2
 BOT CHORD 2x4 SP No.1D
 WEBS 2x4 SP No.2

BRACING

TOP CHORD Structural wood sheathing directly applied or 2-2-0 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 4-6-2 oc bracing.
 WEBS 1 Row at midpt 7-15, 5-15, 8-14

REACTIONS (lb/size) 2=1542/0-7-10, (min. 0-1-12), 11=1484/0-7-10, (min. 0-1-12)
 Max Horiz 2=275 (LC 12)
 Max Uplift 2=-1012 (LC 12), 11=-946 (LC 13)
 Max Grav 2=1751 (LC 2), 11=1707 (LC 2)

MiTek recommends that Stabilizers and required cross bracing be installed during truss erection, in accordance with Stabilizer Installation guide.

FORCES

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-24=-3772/2072, 3-24=-3742/2084, 3-4=-3578/1895, 4-5=-3531/1905, 5-6=-2657/1556, 6-25=-2422/1512, 25-26=-2422/1512, 26-27=-2422/1512, 7-27=-2422/1512, 7-8=-2667/1550, 8-9=-3546/1917, 9-10=-3593/1899, 10-28=-3741/2098, 11-28=-3788/2087
BOT CHORD 2-17=-2053/3460, 17-29=-1580/2935, 29-30=-1580/2935, 16-30=-1580/2935, 15-16=-1580/2935, 15-31=-1036/2432, 14-31=-1036/2432, 13-14=-1433/2946, 13-32=-1433/2946, 32-33=-1433/2946, 12-33=-1433/2946, 11-12=-1824/3476
WEBS 6-15=-274/762, 7-14=-346/778, 3-17=-321/477, 5-17=-251/661, 5-15=-696/673, 8-14=-698/677, 8-12=-260/666, 10-12=-321/483

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-22; Vult=160mph (3-second gust) Vasd=124mph; TCDL=4.2psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) exterior (2) zone and C-C Zone3 -1-2-11 to 3-3-5, Zone1 3-3-5 to 19-0-0, Zone2 19-0-0 to 25-4-6, Zone1 25-4-6 to 26-0-0, Zone2 26-0-0 to 32-1-6, Zone1 32-1-6 to 45-0-0 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- All plates are MT20 plates unless otherwise indicated.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 1012 lb uplift at joint 2 and 946 lb uplift at joint 11.

LOAD CASE(S) Standard

Job	Truss	Truss Type	Qty	Ply	WILLOW F
Willow F - Base	HGR11	Hip Girder	2	3	Job Reference (optional)

Maronda Homes, Sanford, Michael Feightner

Run: 8.81 S Aug 19 2024 Print: 8.810 S Aug 19 2024 MiTek Industries, Inc. Mon Oct 21 06:44:12

Page: 1

ID:taJcHvbrkoY0uOy0H2_g6czMDOB_yL8eKGB41sRtVGiApaZCa8p8GiFPDfagG?0M0yRHW2

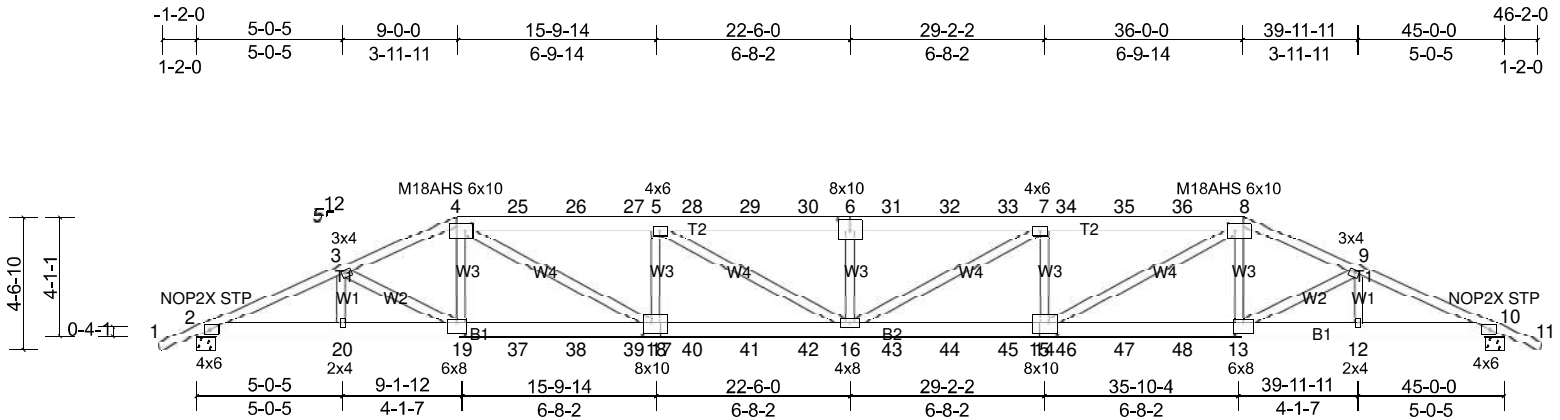


Plate Offsets (X, Y): [4:0-2-12,0-3-0], [6:0-5-0,0-4-8], [8:0-2-12,0-3-0], [13:0-3-8,0-4-8], [15:0-3-8,0-4-8], [17:0-3-8,0-4-8], [19:0-3-8,0-4-8]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	16.0	Plate Grip DOL	1.25	TC	0.65	Vert(LL)	0.95	16-18	>569	240	M18AHS 186/179
TCDL	7.0	Lumber DOL	1.25	BC	0.82	Vert(CT)	-0.75	16-18	>721	180	MT20 244/190
BCLL	0.0*	Rep Stress Incr	NO	WB	0.32	Horz(CT)	-0.20	10	n/a	n/a	
BCDL	10.0	Code	FRC2023/TPI2014	Matrix-MS							Weight: 855 lb FT = 20%

LUMBER

TOP CHORD 2x4 SP No.2 *Except* T2:2x6 SP No.2
 BOT CHORD 2x6 SP No.2
 WEBS 2x4 SP No.2

BRACING

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 8-3-13 oc bracing.

REACTIONS (lb/size) 2=3850/0-7-10, (min. 0-1-8), 10=3850/0-7-10, (min. 0-1-8)
 Max Horiz 2=129 (LC 8)
 Max Uplift 2=3633 (LC 8), 10=3633 (LC 9)

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 2-3=-9460/8966, 3-4=-9318/8964, 4-25=-12294/11933, 25-26=-12296/11933, 26-27=-12296/11934, 5-27=-12297/11935,
 5-28=-13488/13078, 28-29=-13488/13078, 29-30=-13488/13078, 6-30=-13488/13078, 6-31=-13488/13078,
 31-32=-13488/13078, 32-33=-13488/13078, 7-33=-13488/13078, 7-34=-12298/11934, 34-35=-12296/11934,
 35-36=-12295/11933, 8-36=-12294/11933, 8-9=-9318/8964, 9-10=-9460/8964
 BOT CHORD 2-20=-8282/8709, 19-20=-8282/8709, 19-37=-8194/8639, 37-38=-8194/8639, 38-39=-8194/8639, 18-39=-8194/8639,
 17-18=-11740/12295, 17-40=-11740/12295, 40-41=-11740/12295, 41-42=-11740/12295, 16-42=-11740/12295,
 16-43=-11730/12295, 43-44=-11730/12295, 44-45=-11730/12295, 15-45=-11730/12295, 14-15=-11730/12295,
 14-46=-8152/8639, 46-47=-8152/8639, 47-48=-8152/8639, 13-48=-8152/8639, 12-13=-8152/8709, 10-12=-8152/8709
 WEBS 4-19=-1201/1396, 8-13=-1201/1396, 3-19=-311/454, 9-13=-311/453, 5-18=-1229/1451, 4-18=-4071/4204,
 5-16=-1421/1399, 6-16=-428/667, 7-16=-1422/1399, 7-14=-1229/1451, 8-14=-4071/4204

NOTES

- 3-ply truss to be connected together with 10d (0.131"x3") nails as follows:
 Top chords connected as follows: 2x4 - 1 row at 0-9-0 oc, 2x6 - 2 rows staggered at 0-9-0 oc.
 Bottom chords connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc.
 Web connected as follows: 2x4 - 1 row at 0-9-0 oc, Except member 4-19 2x4 - 1 row at 0-6-0 oc, Except member 8-13 2x4 - 1 row at 0-6-0 oc.
- All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-22; Vult=160mph (3-second gust) Vasd=124mph; TC DL=4.2psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) exterior (2) zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- All plates are MT20 plates unless otherwise indicated.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 3633 lb uplift at joint 10 and 3633 lb uplift at joint 2.

Job	Truss	Truss Type	Qty	Ply	WILLOW F - OPT. 10x20 PORCH
Willow F - Base	HGR11	Hip Girder	4	3	Job Reference (optional)

10) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 169 lb down and 220 lb up at 9-0-0, 49 lb down and 113 lb up at 11-0-12, 49 lb down and 113 lb up at 13-0-12, 49 lb down and 113 lb up at 15-0-12, 49 lb down and 113 lb up at 17-0-12, 49 lb down and 113 lb up at 19-0-12, 49 lb down and 113 lb up at 21-0-12, 49 lb down and 113 lb up at 22-6-0, 49 lb down and 113 lb up at 23-11-4, 49 lb down and 113 lb up at 25-11-4, 49 lb down and 113 lb up at 27-11-4, 49 lb down and 113 lb up at 29-11-4, 49 lb down and 113 lb up at 31-11-4, and 49 lb down and 113 lb up at 33-11-4, and 169 lb down and 220 lb up at 36-0-0 on top chord, and 832 lb down and 845 lb up at 9-0-0, 191 lb down and 173 lb up at 11-0-12, 191 lb down and 173 lb up at 13-0-12, 191 lb down and 173 lb up at 15-0-12, 191 lb down and 173 lb up at 17-0-12, 191 lb down and 173 lb up at 19-0-12, 191 lb down and 173 lb up at 21-0-12, 191 lb down and 173 lb up at 22-6-0, 191 lb down and 173 lb up at 23-11-4, 191 lb down and 173 lb up at 25-11-4, 191 lb down and 173 lb up at 27-11-4, 191 lb down and 173 lb up at 29-11-4, 191 lb down and 173 lb up at 31-11-4, and 191 lb down and 173 lb up at 33-11-4, and 832 lb down and 845 lb up at 35-11-4 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.

LOAD CASE(S) Standard

1) Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25

Uniform Loads (lb/ft)

Vert: 1-4=-46, 4-8=-46, 8-11=-46, 2-10=-20

Concentrated Loads (lb)

Vert: 4=-15 (F), 8=-15 (F), 19=-832 (F), 13=-832 (F), 16=-191 (F), 6=-34 (F), 25=-34 (F), 26=-34 (F), 27=-34 (F), 28=-34 (F), 29=-34 (F), 30=-34 (F), 31=-34 (F), 32=-34 (F), 33=-34 (F), 34=-34 (F), 35=-34 (F), 36=-34 (F), 37=-191 (F), 38=-191 (F), 39=-191 (F), 40=-191 (F), 41=-191 (F), 42=-191 (F), 43=-191 (F), 44=-191 (F), 45=-191 (F), 46=-191 (F), 47=-191 (F), 48=-191 (F)


Job Willow F	Truss J15	Truss Type Jack-Open	Qty 8	Ply 1	Willow F Base Job Reference (optional)
-----------------	--------------	-------------------------	----------	----------	-------------------------------------------

Maronda Homes, Sanford, user

Run: 8.73 S Apr 25 2024 Print: 8.730 S Apr 25 2024 MiTek Industries, Inc. Tue Aug 13 13:48:31

Page: 1

ID:CUjPntskKCbEiIOBkJ1r40vaXyppwH-wSE1taPuJePohteLhelEoemgSodj7zCOKu9LXayoFsE



12
5

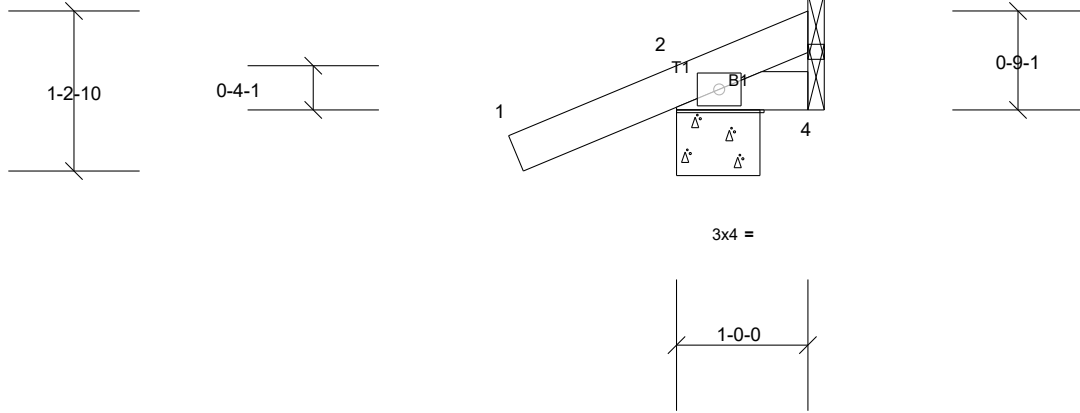


Plate Offsets (X, Y): [2:0-1-14,0-0-2]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	16.0	Plate Grip DOL	1.25	TC	0.25	Vert(LL)	0.00	7	>999	240	MT20	244/190
TCDL	7.0	Lumber DOL	1.25	BC	0.04	Vert(CT)	0.00	7	>999	180		
BCLL	0.0*	Rep Stress Incr	NO	WB	0.00	Horz(CT)	0.00	4	n/a	n/a		
BCDL	10.0	Code	FRC2023/TPI2014	Matrix-MP							Weight: 5 lb	FT = 20%

LUMBER

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2

BRACING

TOP CHORD
BOT CHORD

Structural wood sheathing directly applied or 1-0-0 oc purlins.
Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (lb/size) 2=124/0-7-10, (min. 0-1-8), 3=3/ Mechanical, (min. 0-1-8),
4=-5/ Mechanical, (min. 0-1-8)
Max Horiz 2=60 (LC 10)
Max Uplift 2=-150 (LC 6), 3=-2 (LC 10), 4=-5 (LC 1)
Max Grav 2=124 (LC 1), 3=10 (LC 6), 4=28 (LC 6)

MiTek recommends that Stabilizers and required cross bracing be installed during truss erection, in accordance with Stabilizer Installation guide.

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES

- 1) Wind: ASCE 7-22; Vult=160mph (3-second gust) Vasd=124mph; TCDL=4.2psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) exterior (2) zone and C-C Zone3 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) All plates are MT20 plates unless otherwise indicated.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 2 lb uplift at joint 3, 150 lb uplift at joint 2 and 5 lb uplift at joint 4.

LOAD CASE(S) Standard

Job Willow F	Truss J35	Truss Type Jack-Open	Qty 8	Ply 1	Willow F Base Job Reference (optional)
-----------------	--------------	-------------------------	----------	----------	-------------------------------------------

Maronda Homes, Sanford, user

Run: 8.73 S Apr 25 2024 Print: 8.730 S Apr 25 2024 MiTek Industries, Inc. Tue Aug 13 13:48:31

Page: 1

ID:CUptNsKCbEiOBk1r40vaXyppwH-wSE1taPujePohteLhelEoemgSoch7zCoku9LXayoFsE

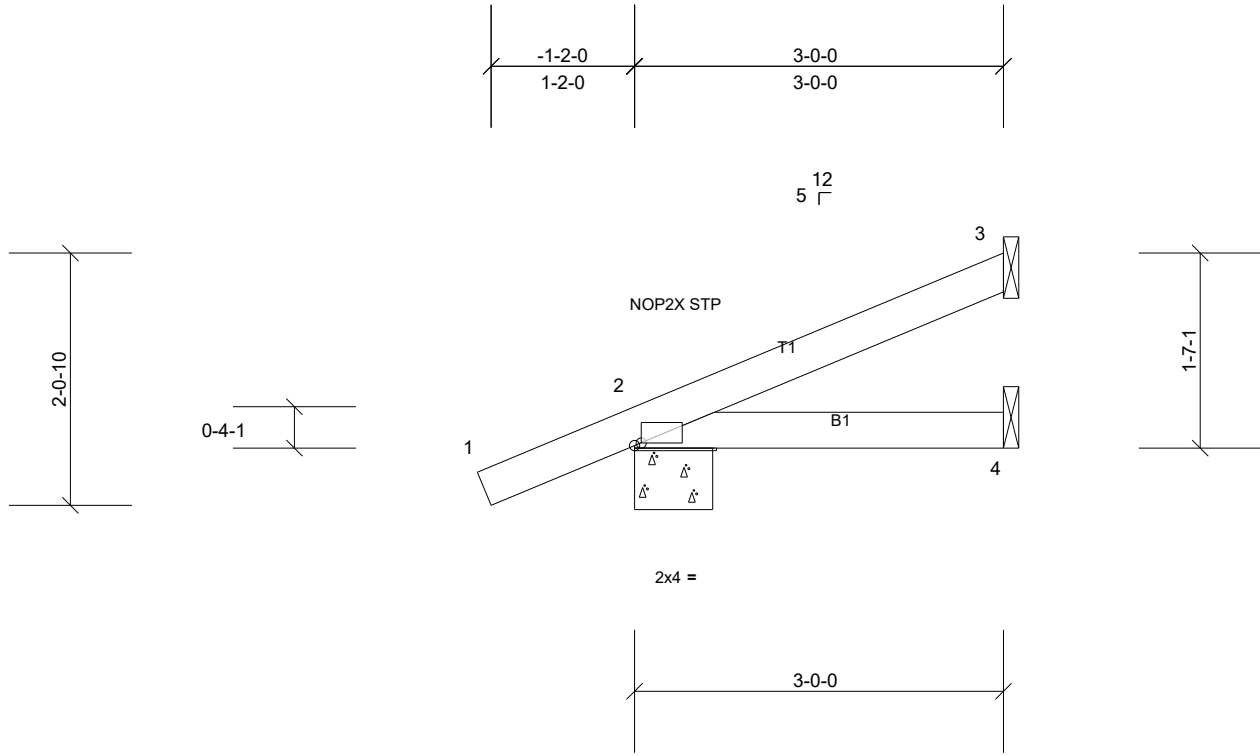


Plate Offsets (X, Y): [2:0-0-10,Edge]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	16.0	Plate Grip DOL	1.25	TC	0.25	Vert(LL)	0.01	4-7	>999	240	MT20	244/190
TCDL	7.0	Lumber DOL	1.25	BC	0.10	Vert(CT)	-0.01	4-7	>999	180		
BCLL	0.0*	Rep Stress Incr	NO	WB	0.00	Horz(CT)	0.00	3	n/a	n/a		
BCDL	10.0	Code	FRC2023/TPI2014	Matrix-MP							Weight: 11 lb	FT = 20%

LUMBER

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2

REACTIONS (lb/size) 2=165/0-7-10, (min. 0-1-8), 3=54/ Mechanical, (min. 0-1-8),
4=32/ Mechanical, (min. 0-1-8)

Max Horiz 2=118 (LC 10)

Max Uplift 2=-135 (LC 10), 3=-77 (LC 10), 4=-1 (LC 10)

Max Grav 2=165 (LC 1), 3=54 (LC 1), 4=50 (LC 3)

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES

- 1) Wind: ASCE 7-22; Vult=160mph (3-second gust) Vasd=124mph; TCDL=4.2psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) exterior (2) zone and C-C Zone3 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) All plates are MT20 plates unless otherwise indicated.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 77 lb uplift at joint 3, 135 lb uplift at joint 2 and 1 lb uplift at joint 4.

LOAD CASE(S) Standard

BRACING

TOP CHORD
BOT CHORD

Structural wood sheathing directly applied or 3-0-0 oc purlins.
Rigid ceiling directly applied or 10-0-0 oc bracing.

MiTek recommends that Stabilizers and required cross bracing be installed during truss erection, in accordance with Stabilizer Installation guide.

Job Willow F	Truss J55	Truss Type Jack-Open	Qty 8	Ply 1	Willow F Base Job Reference (optional)
-----------------	--------------	-------------------------	----------	----------	-------------------------------------------

Maronda Homes, Sanford, user

Run: 8.73 S Apr 25 2024 Print: 8.730 S Apr 25 2024 MiTek Industries, Inc. Tue Aug 13 13:48:31

Page: 1

ID:CUPNtsKCbEiOBkJ1r40vaXypywH-wSE1taPujePohtelHelEoembhoXn7zCoku9LXayoFsE

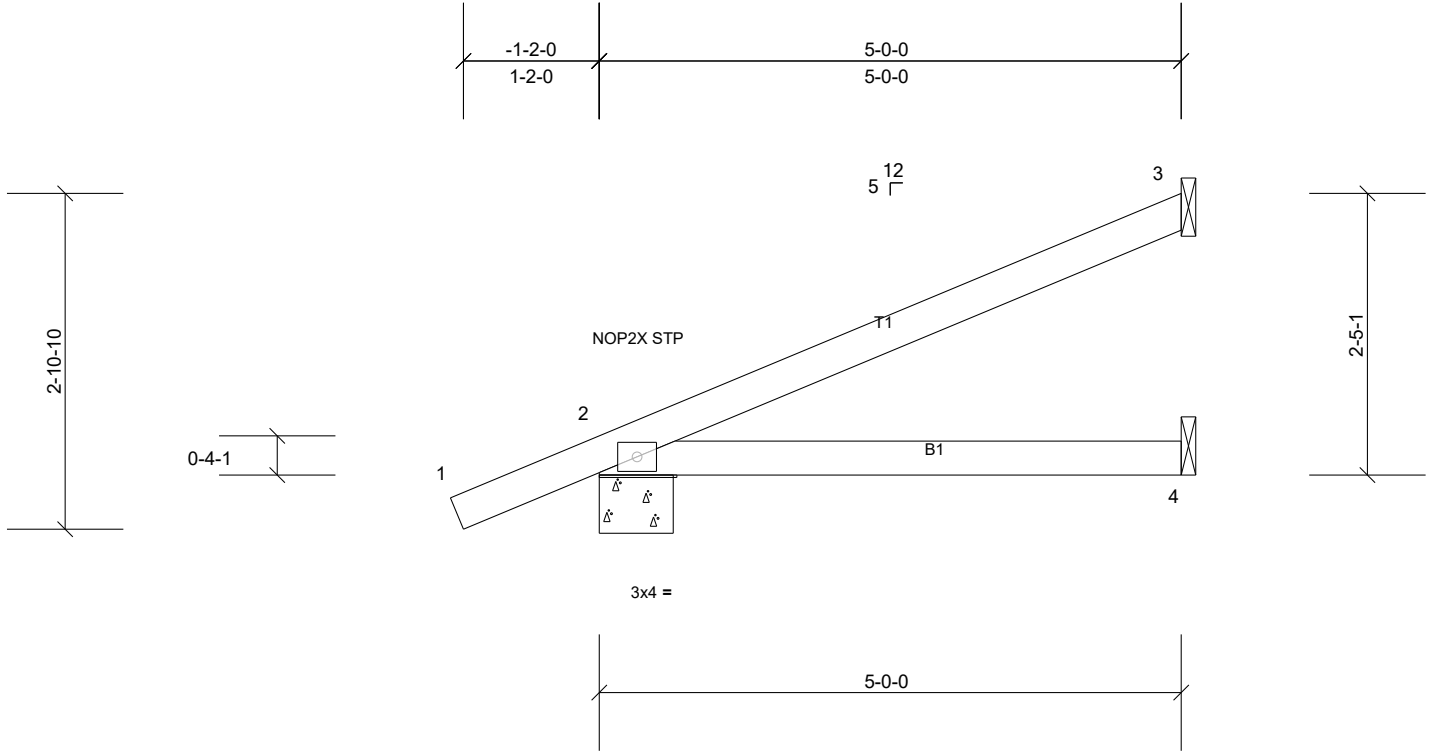


Plate Offsets (X, Y): [2:0-1-14,0-0-2]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	16.0	Plate Grip DOL	1.25	TC	0.55	Vert(LL)	0.06	4-7	>999	240	MT20	244/190
TCDL	7.0	Lumber DOL	1.25	BC	0.42	Vert(CT)	-0.06	4-7	>953	180		
BCLL	0.0*	Rep Stress Incr	NO	WB	0.00	Horz(CT)	0.00	3	n/a	n/a		
BCDL	10.0	Code	FRC2023/TPI2014	Matrix-MP							Weight: 18 lb	FT = 20%

LUMBER

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2

REACTIONS (lb/size) 2=226/0-7-10, (min. 0-1-8), 3=98/ Mechanical, (min. 0-1-8),
4=58/ Mechanical, (min. 0-1-8)
Max Horiz 2=177 (LC 10)
Max Uplift 2=-167 (LC 10), 3=-144 (LC 10), 4=-4 (LC 10)
Max Grav 2=226 (LC 1), 3=98 (LC 1), 4=88 (LC 3)

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES

- 1) Wind: ASCE 7-22; Vult=160mph (3-second gust) Vasd=124mph; TCDL=4.2psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) exterior (2) zone and C-C Zone3 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) All plates are MT20 plates unless otherwise indicated.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 144 lb uplift at joint 3, 167 lb uplift at joint 2 and 4 lb uplift at joint 4.

LOAD CASE(S) Standard

BRACING

TOP CHORD
BOT CHORD

Structural wood sheathing directly applied or 5-0-0 oc purlins.
Rigid ceiling directly applied or 10-0-0 oc bracing.

MiTek recommends that Stabilizers and required cross bracing be installed during truss erection, in accordance with Stabilizer Installation guide.

Job Willow F	Truss J75	Truss Type Jack-Open	Qty 8	Ply 1	Willow F Base Job Reference (optional)
-----------------	--------------	-------------------------	----------	----------	-------------------------------------------

Maronda Homes, Sanford, user

Run: 8.73 S Apr 25 2024 Print: 8.730 S Apr 25 2024 MiTek Industries, Inc. Tue Aug 13 13:48:31

Page: 1

ID:CUpNtsKCbEiOBk1r40vaXypywH-wSE1taPujePohteLhelEoemdWoW77yxOku9LXayoFsE

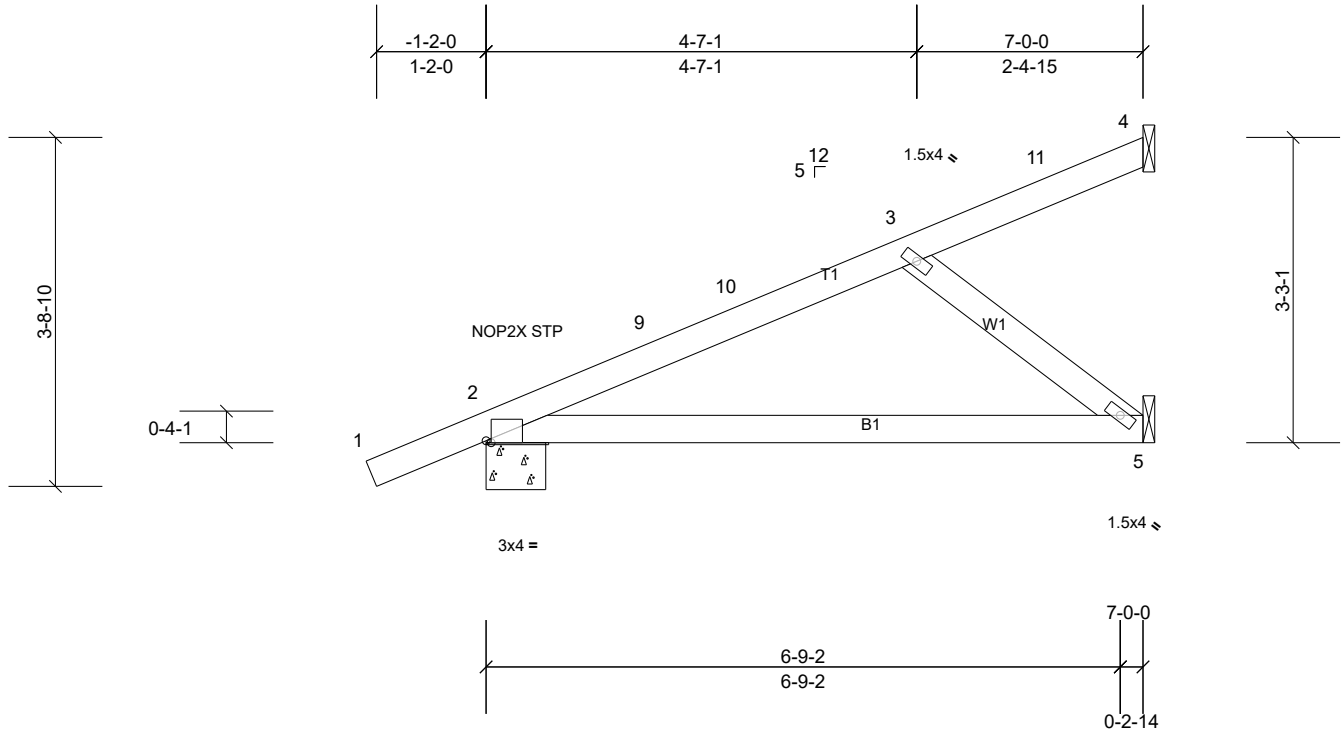


Plate Offsets (X, Y): [2:0-0-10,Edge]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	16.0	Plate Grip DOL	1.25	TC	0.43	Vert(LL)	-0.07	5-8	>999	240	MT20	244/190
TCDL	7.0	Lumber DOL	1.25	BC	0.46	Vert(CT)	-0.15	5-8	>570	180		
BCLL	0.0*	Rep Stress Incr	NO	WB	0.08	Horz(CT)	0.00	5	n/a	n/a		
BCDL	10.0	Code	FRC2023/TPI2014	Matrix-MP							Weight: 28 lb	FT = 20%

LUMBER

TOP CHORD 2x4 SP No.2
 BOT CHORD 2x4 SP No.2
 WEBS 2x4 SP No.2

BRACING

TOP CHORD
 BOT CHORD

Structural wood sheathing directly applied or 6-0-0 oc purlins.
 Rigid ceiling directly applied or 9-5-14 oc bracing.

MiTek recommends that Stabilizers and required cross bracing be installed during truss erection, in accordance with Stabilizer Installation guide.

REACTIONS (lb/size) 2=291/0-7-10, (min. 0-1-8), 4=20/ Mechanical, (min. 0-1-8),
 5=204/ Mechanical, (min. 0-1-8)
 Max Horiz 2=228 (LC 10)
 Max Uplift 2=-205 (LC 10), 4=-45 (LC 6), 5=-150 (LC 10)

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 BOT CHORD 2-5=-370/278
 WEBS 3-5=-349/464

NOTES

- 1) Wind: ASCE 7-22; Vult=160mph (3-second gust) Vasd=124mph; TCDL=4.2psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) exterior (2) zone and C-C Zone3 -1-2-11 to 1-9-5, Zone1 1-9-5 to 2-8-5, Zone2 2-8-5 to 6-11-4 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) All plates are MT20 plates unless otherwise indicated.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 45 lb uplift at joint 4, 205 lb uplift at joint 2 and 150 lb uplift at joint 5.

LOAD CASE(S) Standard

Job Willow F	Truss J95	Truss Type Jack-Open	Qty 30	Ply 1	Willow F Base Job Reference (optional)
-----------------	--------------	-------------------------	-----------	----------	-------------------------------------------

Maronda Homes, Sanford, user

Run: 8.73 S Apr 25 2024 Print: 8.730 S Apr 25 2024 MiTek Industries, Inc. Tue Aug 13 13:48:31

Page: 1

ID:3iXzyXs9JvSy0Bj3HYurFVzMEYk-wSE1taPujePohteLhelEoemZ_oSE7vqOku9LXayoFsE

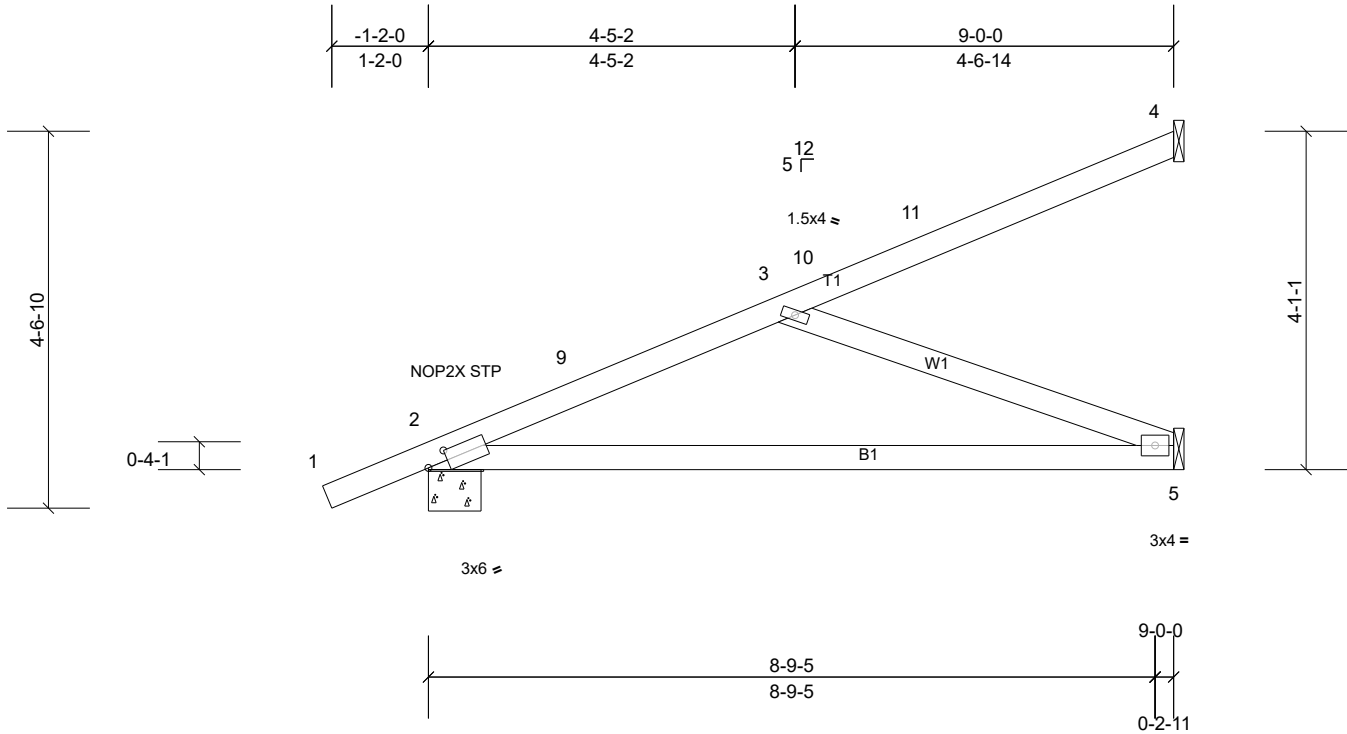


Plate Offsets (X, Y): [2:0-3-0,0-1-8]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	16.0	Plate Grip DOL	1.25	TC	0.66	Vert(LL)	-0.19	5-8	>574	240	MT20	244/190
TCDL	7.0	Lumber DOL	1.25	BC	0.71	Vert(CT)	-0.38	5-8	>284	180		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.28	Horz(CT)	-0.01	5	n/a	n/a		
BCDL	10.0	Code	FRC2023/TPI2014	Matrix-MS								
											Weight: 37 lb	FT = 20%

LUMBER

TOP CHORD 2x4 SP No.2
 BOT CHORD 2x4 SP No.2
 WEBS 2x4 SP No.2

BRACING

TOP CHORD
 BOT CHORD

Structural wood sheathing directly applied or 6-0-0 oc purlins.
 Rigid ceiling directly applied or 6-8-0 oc bracing.

MiTek recommends that Stabilizers and required cross bracing be installed during truss erection, in accordance with Stabilizer Installation guide.

REACTIONS (lb/size) 2=357/0-7-10, (min. 0-1-8), 4=80/ Mechanical, (min. 0-1-8), 5=211/ Mechanical, (min. 0-1-8)
 Max Horiz 2=337 (LC 12)
 Max Uplift 2=-325 (LC 12), 4=-133 (LC 8), 5=-161 (LC 12)
 Max Grav 2=357 (LC 1), 4=80 (LC 1), 5=231 (LC 3)

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-9=-440/446, 3-9=-436/457
 BOT CHORD 2-5=-740/574
 WEBS 3-5=-612/790

NOTES

- 1) Wind: ASCE 7-22; Vult=160mph (3-second gust) Vasd=124mph; TCCL=4.2psf; BCDL=6.0psf; h=45ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) exterior (2) zone and C-C Zone3 -1-2-11 to 1-9-5, Zone1 1-9-5 to 8-11-4 zone; cantilever left and right exposed ; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) All plates are MT20 plates unless otherwise indicated.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 133 lb uplift at joint 4, 325 lb uplift at joint 2 and 161 lb uplift at joint 5.

LOAD CASE(S) Standard

Job Willow F	Truss T18	Truss Type Hip	Qty 8	Ply 1	Willow F Base Job Reference (optional)
-----------------	--------------	-------------------	----------	----------	-------------------------------------------

Maronda Homes, Sanford, user

Run: 8.72 S Aug 20 2023 Print: 8.730 S Apr 25 2024 MiTek Industries, Inc. Tue Aug 13 13:48:32

Page: 1

ID: ?cXxEKAI2fDzoRAWWjJGDzMQeq-OeoP4wQWUjYXfJ1DYFMGTLrliiCIAsKbXzYvu30yoFsD

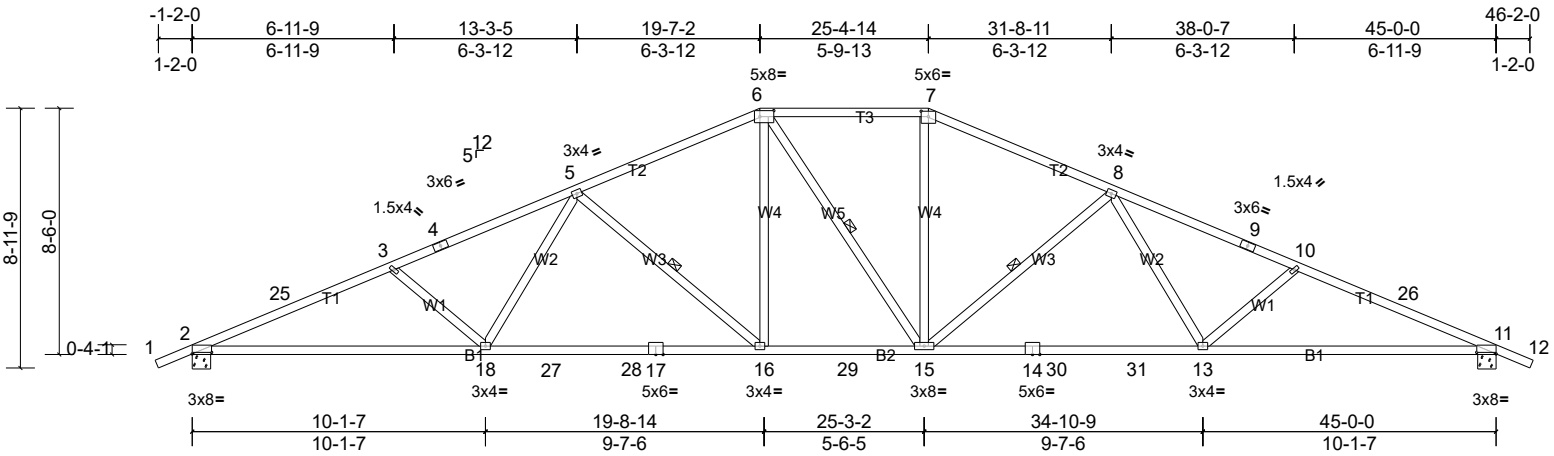


Plate Offsets (X, Y): [2:0-8-0,0-0-10], [6:0-5-12,0-2-8], [7:0-3-0,0-2-4], [11:0-8-0,0-0-10]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	16.0	Plate Grip DOL	1.25	TC	0.79	Vert(LL)	-0.42	16-18	>999	240	MT20	244/190
TCDL	7.0	Lumber DOL	1.25	BC	0.92	Vert(CT)	-0.75	16-18	>722	180		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.44	Horz(CT)	0.17	11	n/a	n/a		
BCDL	10.0	Code	FRC2023/TPI2014	Matrix-MS								Weight: 236 lb FT = 20%

LUMBER

TOP CHORD 2x4 SP No.2
 BOT CHORD 2x4 SP No.1D
 WEBS 2x4 SP No.2

BRACING

TOP CHORD Structural wood sheathing directly applied or 2-2-0 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 2-2-0 oc bracing.
 WEBS 1 Row at midpt 5-16, 6-15, 8-15

REACTIONS (lb/size) 2=1541/0-7-10, (min. 0-1-12), 11=1541/0-7-10, (min. 0-1-12)
 Max Horiz 2=267 (LC 12)
 Max Uplift 2=-963 (LC 12), 11=-963 (LC 13)
 Max Grav 2=1754 (LC 2), 11=1751 (LC 2)

MiTek recommends that Stabilizers and required cross bracing be installed during truss erection, in accordance with Stabilizer Installation guide.

FORCES

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-25=-3771/2260, 3-25=-3742/2271, 3-4=-3564/2098, 4-5=-3516/2117, 5-6=-2604/1771, 6-7=-2364/1743, 7-8=-2598/1789, 8-9=-3509/2142, 9-10=-3558/2124, 10-26=-3735/2279, 11-26=-3765/2267
 BOT CHORD 2-18=-1927/3460, 18-27=-1547/2909, 27-28=-1547/2909, 17-28=-1547/2909, 16-17=-1547/2909, 16-29=-1159/2370, 15-29=-1159/2370, 14-15=-1650/2903, 14-30=-1650/2903, 30-31=-1650/2903, 13-31=-1650/2903, 11-13=-1985/3454
 WEBS 3-18=-335/497, 5-18=-251/685, 5-16=-729/706, 6-16=-371/774, 7-15=-311/762, 8-15=-729/706, 8-13=-251/685, 10-13=-335/497

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-22; Vult=160mph (3-second gust) Vasd=124mph; TC DL=4.2psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) exterior (2) zone and C-C Zone3 -1-2-11 to 3-3-5, Zone1 3-3-5 to 19-7-2, Zone3 19-7-2 to 25-4-14, Zone2 25-4-14 to 31-8-11, Zone1 31-8-11 to 46-2-11 zone; cantilever left and right exposed ; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 963 lb uplift at joint 2 and 963 lb uplift at joint 11.

LOAD CASE(S) Standard

Job Willow F	Truss V01	Truss Type Valley	Qty 2	Ply 1	Willow F Base Job Reference (optional)
-----------------	--------------	----------------------	----------	----------	-------------------------------------------

Maronda Homes, Sanford, user

Run: 8.73 S Apr 25 2024 Print: 8.730 S Apr 25 2024 MiTek Industries, Inc. Tue Aug 13 13:48:32

Page: 1

ID:twKjsHdeZCnMPEUz5YkJoiiT_?e-OeoP4wQWUyXFJ1DYFMGTLrlu3CzZsQvXzYvu30yoFsD

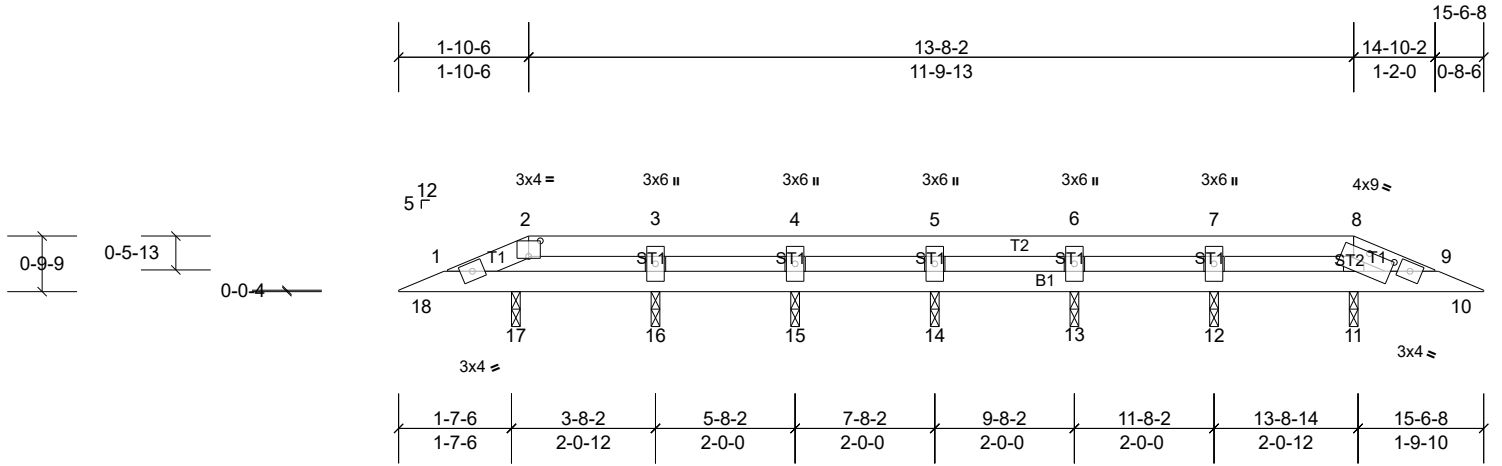


Plate Offsets (X, Y): [2:0-2-0,0-2-11], [8:0-4-8,0-0-4]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	16.0	Plate Grip DOL	1.25	TC	0.06	Vert(LL)	0.00	11-12	>999	240	MT20	244/190
TCDL	7.0	Lumber DOL	1.25	BC	0.06	Vert(CT)	0.00	11-12	>999	180		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.04	Horz(CT)	0.00	11	n/a	n/a		
BCDL	10.0	Code	FRC2023/TPI2014	Matrix-MS							Weight: 46 lb	FT = 20%

LUMBER

TOP CHORD 2x4 SP No.2
 BOT CHORD 2x4 SP No.2
 OTHERS 2x4 SP No.2

BRACING

TOP CHORD
 BOT CHORD

Structural wood sheathing directly applied or 10-0-0 oc purlins.
 Rigid ceiling directly applied or 6-0-0 oc bracing, Except:
 10-0-0 oc bracing: 1-18,9-10.

REACTIONS All bearings 0-1-8.

(lb) - Max Horiz 17=9 (LC 12)
 Max Uplift All uplift 100 (lb) or less at joint(s) 11, 12, 13, 14, 15, 16, 17
 Max Grav All reactions 250 (lb) or less at joint(s) 11, 12, 13, 14, 15, 16, 17

MiTek recommends that Stabilizers and required cross bracing be installed during truss erection, in accordance with Stabilizer Installation guide.

FORCES

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-22; Vult=160mph (3-second gust) Vasd=124mph; TCDL=4.2psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) and C-C Zone3 zone; cantilever left and right exposed ; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- Provide adequate drainage to prevent water ponding.
- Gable studs spaced at 2-0-0 oc.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate at joint(s) 14, 13, 12, 16, 15, 11, 17.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 14, 13, 12, 16, 15, 11, 17.

LOAD CASE(S) Standard

Job Willow F	Truss V11	Truss Type Valley	Qty 1	Ply 1	Willow F Base Job Reference (optional)
-----------------	--------------	----------------------	----------	----------	-------------------------------------------

Maronda Homes, Sanford, user

Run: 8.72 S Aug 20 2023 Print: 8.730 S Apr 25 2024 MiTek Industries, Inc. Tue Aug 13 13:48:32

Page: 1

ID:VDoHYdx95?IXXCzr4mZpJ?zMHz-OeoP4wQWUyXfJ1DYFMGTLrIsOCy_sQSXzYyu30yoFsD

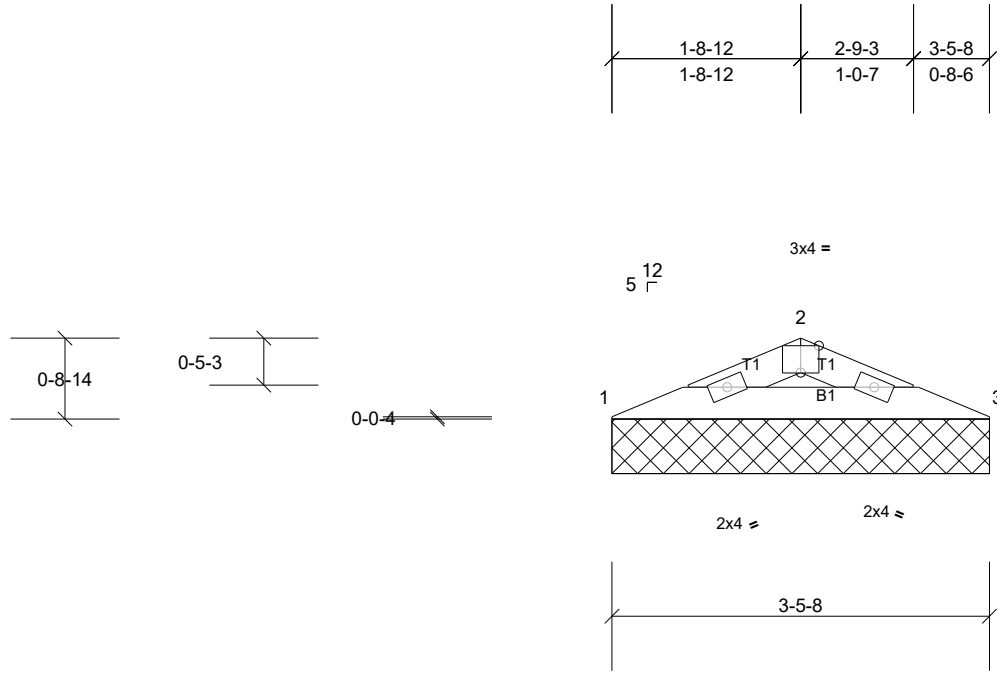


Plate Offsets (X, Y): [2:0-2-0,Edge]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	16.0	Plate Grip DOL	1.25	TC	0.17	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	7.0	Lumber DOL	1.25	BC	0.10	Vert(TL)	n/a	-	n/a	999		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.00	Horiz(TL)	0.00	3	n/a	n/a		
BCDL	10.0	Code	FRC2023/TPI2014	Matrix-MP							Weight: 8 lb	FT = 20%

LUMBER

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2

BRACING

TOP CHORD
BOT CHORD

Structural wood sheathing directly applied or 3-5-8 oc purlins.
Rigid ceiling directly applied or 9-3-11 oc bracing.

REACTIONS (lb/size) 1=114/3-5-8, (min. 0-1-8), 3=114/3-5-8, (min. 0-1-8)
Max Horiz 1=18 (LC 12)
Max Uplift 1=-73 (LC 12), 3=-73 (LC 13)

MiTek recommends that Stabilizers and required cross bracing be installed during truss erection, in accordance with Stabilizer Installation guide.

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=-258/491, 2-3=-238/460
BOT CHORD 1-3=-420/229

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-22; Vult=160mph (3-second gust) Vasd=124mph; TCDL=4.2psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) exterior (2) zone and C-C Zone3 zone; cantilever left and right exposed ; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 73 lb uplift at joint 1 and 73 lb uplift at joint 3.

LOAD CASE(S) Standard


Job Willow F	Truss V13	Truss Type Valley	Qty 1	Ply 1	Willow F Base Job Reference (optional)
-----------------	--------------	----------------------	----------	----------	-------------------------------------------

Maronda Homes, Sanford, user

Run: 8.72 S Aug 20 2023 Print: 8.730 S Apr 25 2024 MiTek Industries, Inc. Tue Aug 13 13:48:32

Page: 1

ID:cwVwZeUK2KVwzM3Yrnuum_zMZIT-OeoP4wQWUyXfJ1DYFMGTLrisECuEsP2XzYyu30yoFsD

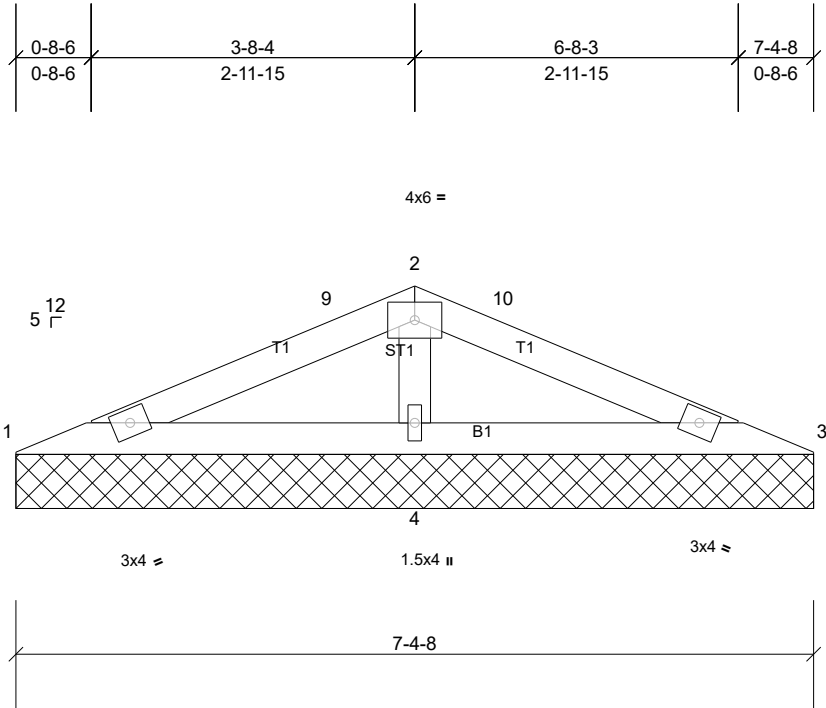

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	16.0	Plate Grip DOL	1.25	TC	0.18	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	7.0	Lumber DOL	1.25	BC	0.34	Vert(TL)	n/a	-	n/a	999		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.09	Horiz(TL)	0.00	4	n/a	n/a		
BCDL	10.0	Code	FRC2023/TPI2014	Matrix-MP							Weight: 22 lb	FT = 20%

LUMBER
 TOP CHORD 2x4 SP No.2
 BOT CHORD 2x4 SP No.2
 OTHERS 2x4 SP No.2

BRACING
 TOP CHORD
 BOT CHORD

Structural wood sheathing directly applied or 7-4-8 oc purlins.
 Rigid ceiling directly applied or 6-0-0 oc bracing.

MiTek recommends that Stabilizers and required cross bracing be installed during truss erection, in accordance with Stabilizer Installation guide.

REACTIONS (lb/size) 1=54/7-4-8, (min. 0-1-8), 3=54/7-4-8, (min. 0-1-8), 4=379/7-4-8, (min. 0-1-8)
 Max Horiz 1=43 (LC 12)
 Max Uplift 1=-48 (LC 12), 3=-56 (LC 13), 4=-213 (LC 12)
 Max Grav 1=70 (LC 25), 3=70 (LC 26), 4=379 (LC 1)

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 1-9=-317/193, 2-9=-312/198, 2-10=-331/198, 3-10=-335/193
 BOT CHORD 1-4=-218/454, 3-4=-218/454
 WEBS 2-4=-285/537

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-22; Vult=160mph (3-second gust) Vasd=124mph; TC DL=4.2psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) exterior (2) zone and C-C Zone3 0-1-12 to 3-1-12, Zone1 3-1-12 to 3-10-0, Zone3 3-10-0 to 7-6-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 48 lb uplift at joint 1, 56 lb uplift at joint 3 and 213 lb uplift at joint 4.

LOAD CASE(S) Standard

Job Willow F	Truss V14	Truss Type Valley	Qty 1	Ply 1	Willow F Base Job Reference (optional)
-----------------	--------------	----------------------	----------	----------	-------------------------------------------

Maronda Homes, Sanford, user

Run: 8.72 S Aug 20 2023 Print: 8.730 S Apr 25 2024 MiTek Industries, Inc. Tue Aug 13 13:48:32

Page: 1

ID:n1g4tOdDSiuMo2Pf_baTjJzMZII-OeoP4wQWUyXfJ1DYFMGTLrlsZCy_sQSXzYyu30yoFsD

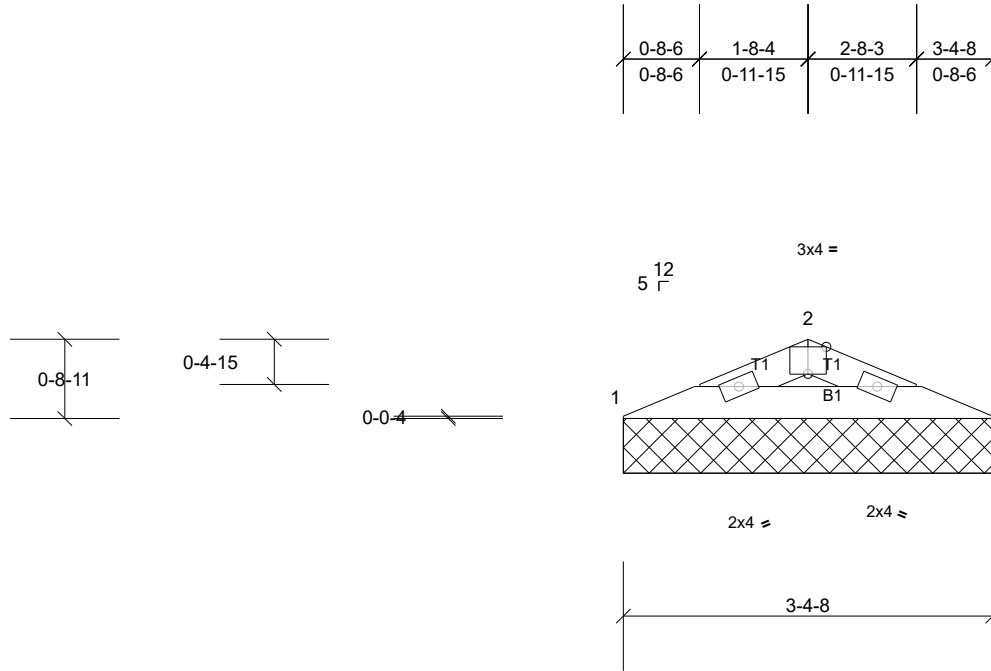


Plate Offsets (X, Y): [2:0-2-0,Edge]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	16.0	Plate Grip DOL	1.25	TC	0.16	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	7.0	Lumber DOL	1.25	BC	0.10	Vert(TL)	n/a	-	n/a	999		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.00	Horiz(TL)	0.00	3	n/a	n/a		
BCDL	10.0	Code	FRC2023/TPI2014	Matrix-MP							Weight: 8 lb	FT = 20%

LUMBER

TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2

REACTIONS (lb/size) 1=111/3-4-8, (min. 0-1-8), 3=111/3-4-8, (min. 0-1-8)
Max Horiz 1=17 (LC 12)
Max Uplift 1=-71 (LC 12), 3=-71 (LC 13)

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=-250/475, 2-3=-235/452
BOT CHORD 1-3=-404/224

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-22; Vult=160mph (3-second gust) Vasd=124mph; TCDL=4.2psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) exterior (2) zone and C-C Zone3 zone; cantilever left and right exposed ; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 71 lb uplift at joint 1 and 71 lb uplift at joint 3.

LOAD CASE(S) Standard

BRACING

TOP CHORD
BOT CHORD

Structural wood sheathing directly applied or 3-4-8 oc purlins.
Rigid ceiling directly applied or 9-4-10 oc bracing.

MiTek recommends that Stabilizers and required cross bracing be installed during truss erection, in accordance with Stabilizer Installation guide.


Job Willow F	Truss VG10	Truss Type Valley	Qty 1	Ply 1	Willow F Base Job Reference (optional)
-----------------	---------------	----------------------	----------	----------	-------------------------------------------

Maronda Homes, Sanford, user

Run: 8.72 S Aug 20 2023 Print: 8.730 S Apr 25 2024 MiTek Industries, Inc. Tue Aug 13 13:48:32

Page: 1

ID:4Z0ReM4dqBLcWH2CPLo9x1zMZJ_-OeoP4wQWUyXfJ1DYFMGTLrlsECu5sPuXzYyu30yoFsD

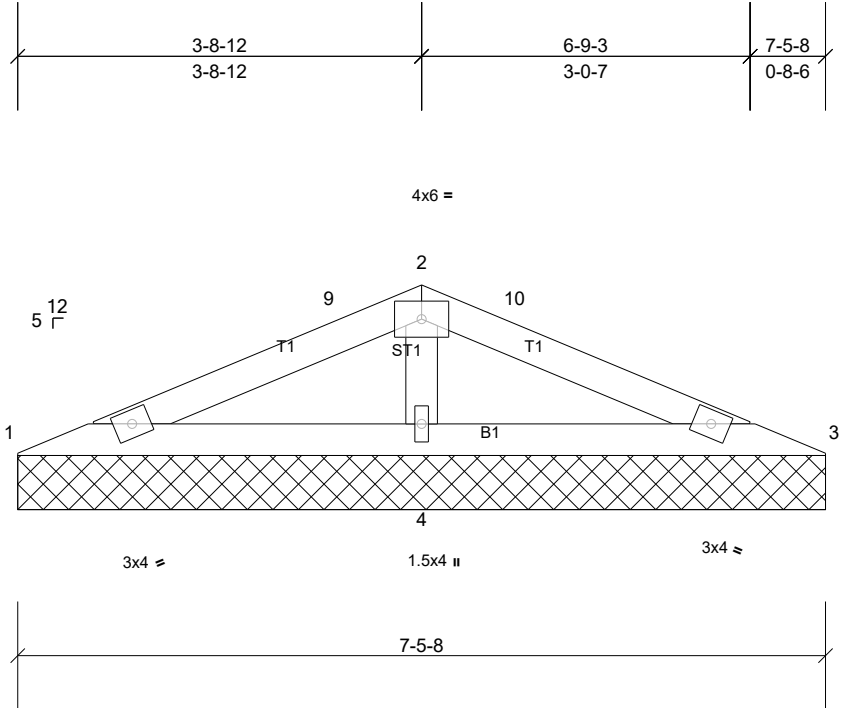

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL (roof)	16.0	Plate Grip DOL	1.25	TC	0.18	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	7.0	Lumber DOL	1.25	BC	0.35	Vert(TL)	n/a	-	n/a	999		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.10	Horiz(TL)	0.00	4	n/a	n/a		
BCDL	10.0	Code	FRC2023/TPI2014	Matrix-MP							Weight: 22 lb	FT = 20%

LUMBER
 TOP CHORD 2x4 SP No.2
 BOT CHORD 2x4 SP No.2
 OTHERS 2x4 SP No.2

BRACING
 TOP CHORD
 BOT CHORD

Structural wood sheathing directly applied or 7-5-8 oc purlins.
 Rigid ceiling directly applied or 6-0-0 oc bracing.

MiTek recommends that Stabilizers and required cross bracing be installed during truss erection, in accordance with Stabilizer Installation guide.

REACTIONS (lb/size) 1=54/7-5-8, (min. 0-1-8), 3=54/7-5-8, (min. 0-1-8), 4=385/7-5-8, (min. 0-1-8)
 Max Horiz 1=44 (LC 12)
 Max Uplift 1=-48 (LC 12), 3=-56 (LC 13), 4=-217 (LC 12)
 Max Grav 1=71 (LC 25), 3=71 (LC 26), 4=385 (LC 1)

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 1-9=-322/197, 2-9=-318/202, 2-10=-337/202, 3-10=-341/197
 BOT CHORD 1-4=-222/461, 3-4=-222/461
 WEBS 2-4=-290/543

- NOTES**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-22; Vult=160mph (3-second gust) Vasd=124mph; TCDL=4.2psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) exterior (2) zone and C-C Zone3 0-0-10 to 3-0-10, Zone1 3-0-10 to 3-9-6, Zone3 3-9-6 to 7-6-2 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Gable requires continuous bottom chord bearing.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 48 lb uplift at joint 1, 56 lb uplift at joint 3 and 217 lb uplift at joint 4.

LOAD CASE(S) Standard


Job Willow F	Truss VG12	Truss Type Valley	Qty 1	Ply 1	Willow F Base Job Reference (optional)
-----------------	---------------	----------------------	----------	----------	-------------------------------------------

Maronda Homes, Sanford, user

Run: 8.72 S Aug 20 2023 Print: 8.730 S Apr 25 2024 MiTek Industries, Inc. Tue Aug 13 13:48:32

Page: 1

ID:0DfddrJYL1kvlC_s1recC1zMZlh-OeoP4wQWUyXFJ1DYFMGTLrItBCxbsQXXzYvu30yoFsD

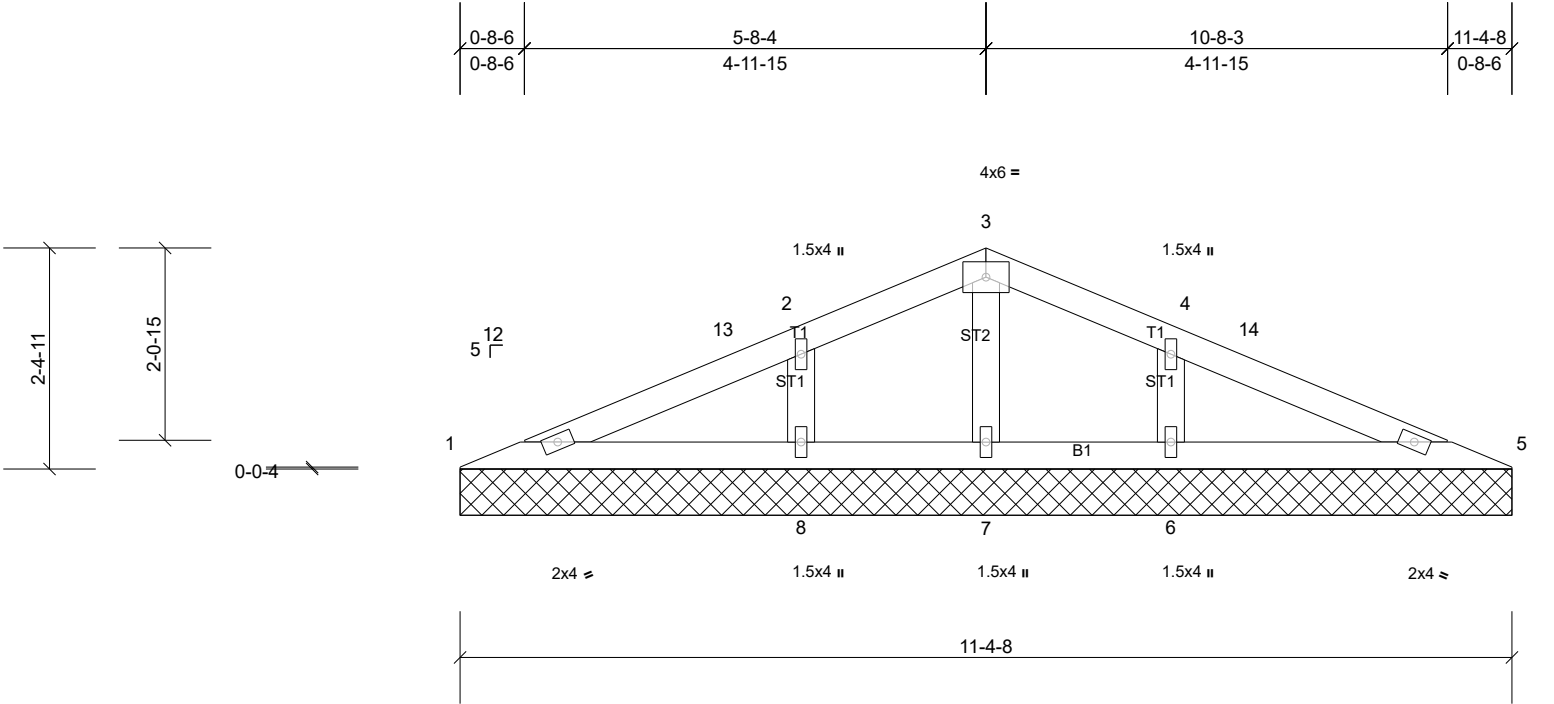

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL (roof)	16.0	Plate Grip DOL	1.25	TC	0.12	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL	7.0	Lumber DOL	1.25	BC	0.19	Vert(TL)	n/a	-	n/a	999		
BCLL	0.0*	Rep Stress Incr	YES	WB	0.06	Horiz(TL)	0.00	5	n/a	n/a		
BCDL	10.0	Code	FRC2023/TPI2014	Matrix-MS							Weight: 39 lb	FT = 20%

LUMBER
TOP CHORD 2x4 SP No.2
BOT CHORD 2x4 SP No.2
OTHERS 2x4 SP No.2

BRACING
TOP CHORD
BOT CHORD

Structural wood sheathing directly applied or 10-0-0 oc purlins.
Rigid ceiling directly applied or 6-0-0 oc bracing.

MiTek recommends that Stabilizers and required cross bracing be installed during truss erection, in accordance with Stabilizer Installation guide.

REACTIONS All bearings 11-4-8.
(lb) - Max Horiz 1=69 (LC 17)
Max Uplift All uplift 100 (lb) or less at joint(s) 1, 5, 7 except 6=225 (LC 13), 8=226 (LC 12)
Max Grav All reactions 250 (lb) or less at joint(s) 1, 5, 6, 7, 8

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
WEBS 2-8=-174/317, 4-6=-174/317

- NOTES**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-22; Vult=160mph (3-second gust) Vasd=124mph; TCCL=4.2psf; BCDL=6.0psf; h=15ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) exterior (2) zone and C-C Zone3 0-1-12 to 3-1-12, Zone1 3-1-12 to 5-10-0, Zone2 5-10-0 to 10-1-6, Zone1 10-1-6 to 11-6-4 zone; cantilever left and right exposed; end vertical left and right exposed; C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Gable requires continuous bottom chord bearing.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-06-00 tall by 2-00-00 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 5, 7 except (jt=lb) 8=225, 6=224.

LOAD CASE(S) Standard