



DDDO 49977
436 SW Callaway
DR
FL 32024



#000049977
436 DR-32024



000049977
436 SW Callaway
DR
FL 32024

000049977
SW Callaway
DR 32024
436

000049977
436 SW Callaway
DR
#1 32024



000049977
SW callaway
436 DR
4132024





0000 99977
436 SW Callaway
DR
A 32024



000099977
436 SW Calloway
DR
A 32024



000049977
436 SW Callaway
DR
A 32024



000049977
436 SW Callaway
DR
A 32024



000049977
436 SW Callaway
DR
32024

PS 2-92 PREPARED
EXPOSURE
SHEATHING
ALL APPLICATIONS TO
BE MADE PROPERLY
PRINCIPAL

D00049977
436 SW Callaway
DR
#132024



000049977
436 SW Callaway
DR
32024





8 102024 065 L

weather, footwear and roof pitch
conditions de la superficie, tipo de calzado o clima y la pendiente del techo
Le glissement peut varier dépendant de la température, chaussures utiliser et le toit pente

OVERLAP LINE

LÍNEA DE SUPERPOSICIÓN

Meets the Following: ASTM D226 Type II,
ASTM D4869 Type IV, ASTM D8257
CAN/CSA A123.3 and A220.1

ABC
Supply Co. Inc.

La resistencia al desliz puede variar de acuerdo a las condiciones de la superficie, tipo de calzado o clima y la pendiente del techo
La résistance au glissement peut varier en fonction de la température, chaussures utiliser et le toit pente

Meets the Following: ASTM D226 Type II,
ASTM D4869 Type IV, ASTM D8257
CAN/CSA A123.3 and A220.1

ABC
Supply Co. Inc.

OVERLAP LINE LÍNEA DE SUPERPOSICIÓN

h 2025 17
DR
436 SW Calloway
00004977

GL
ROOF

PRO GUARD 20

SYNTHETIC ROOFING UNDERLAYMENT

PRO GUARD 20

SYNTHETIC ROOFING UNDERLAYMENT

ABC
Supply Co. Inc.

Meets the Following: ASTM D226 Type II,
ASTM D4869 Type IV, ASTM D8257
CAN/CSA A123.3 and A220.1

Slip resistance may vary with surface conditions, weather, footwear and roof pitch
La resistencia al desliz puede variar de acuerdo a las condiciones de la superficie, tipo de calzado o clima y la pendiente del techo
La résistance au glissement peut varier en fonction de la température, chaussures utiliser et le toit pente



ABC
Supply Co. Inc.

Meets the Following: ASTM D226 Type II,
ASTM D4869 Type IV, ASTM D8257
CAN/CSA A123.3 and A220.1

weather and roof pitch
conditions de la superficie, tipo de calzado o clima y la pendiente del techo
Le glissement peut varier dépendant de la température, chaussures utiliser et le toit pente

ERPOSICIÓN



Slip resistance may vary with surface conditions, weather, footwear and roof pitch.
La resistencia al desliz puede variar de acuerdo a las condiciones de la superficie, tipo de calzado o clima y la pendiente del techo.
Le degré de résistance au glissement peut varier dépendant de la température, chaussures utiliser et la toit pente.

OVERLAP LINE

LÍNEA DE SUPERPOSICIÓN

Meets the Following: ASTM D226 Type II,
ASTM D4669 Type IV, ASTM D8257
CAN/CSA A122.3 and A220.1



GUARD 20

SYNTHETIC ROOFING UNDERLAYMENT

PRO GUARD 20

SYNTHETIC ROOFING UNDERLAYMENT



Meets the Following: ASTM D226 Type II,
ASTM D4669 Type IV, ASTM D8257
CAN/CSA A122.3 and A220.1

Slip resistance may vary with surface conditions, weather, footwear and roof pitch.
La resistencia al desliz puede variar de acuerdo a las condiciones de la superficie, tipo de calzado o clima y la pendiente del techo.
Le degré de résistance au glissement peut varier dépendant de la température, chaussures utiliser et la toit pente.

OVERLAP LINE

LÍNEA DE SUPERPOSICIÓN



Meets the Following: ASTM D226 Type II,
ASTM D4669 Type IV, ASTM D8257
CAN/CSA A122.3 and A220.1



Meets the Following: ASTM D226 Type II,
ASTM D4669 Type IV, ASTM D8257
CAN/CSA A122.3 and A220.1

Slip resistance may vary with surface conditions, weather, footwear and roof pitch.
La resistencia al desliz puede variar de acuerdo a las condiciones de la superficie, tipo de calzado o clima y la pendiente del techo.
Le degré de résistance au glissement peut varier dépendant de la température, chaussures utiliser et la toit pente.

OVERLAP LINE

LÍNEA DE SUPERPOSICIÓN



Meets the Following: ASTM D226 Type II,
ASTM D4669 Type IV, ASTM D8257
CAN/CSA A122.3 and A220.1



Meets the Following: ASTM D226 Type II,
ASTM D4669 Type IV, ASTM D8257
CAN/CSA A122.3 and A220.1

Slip resistance may vary with surface conditions, weather, footwear and roof pitch.
La resistencia al desliz puede variar de acuerdo a las condiciones de la superficie, tipo de calzado o clima y la pendiente del techo.
Le degré de résistance au glissement peut varier dépendant de la température, chaussures utiliser et la toit pente.

OVERLAP LINE

LÍNEA DE SUPERPOSICIÓN

000049977
436 SW Callaway
DR 32024


e
del techo

Meets
ASTM

D226 Type II,
257

20.1

La res
253

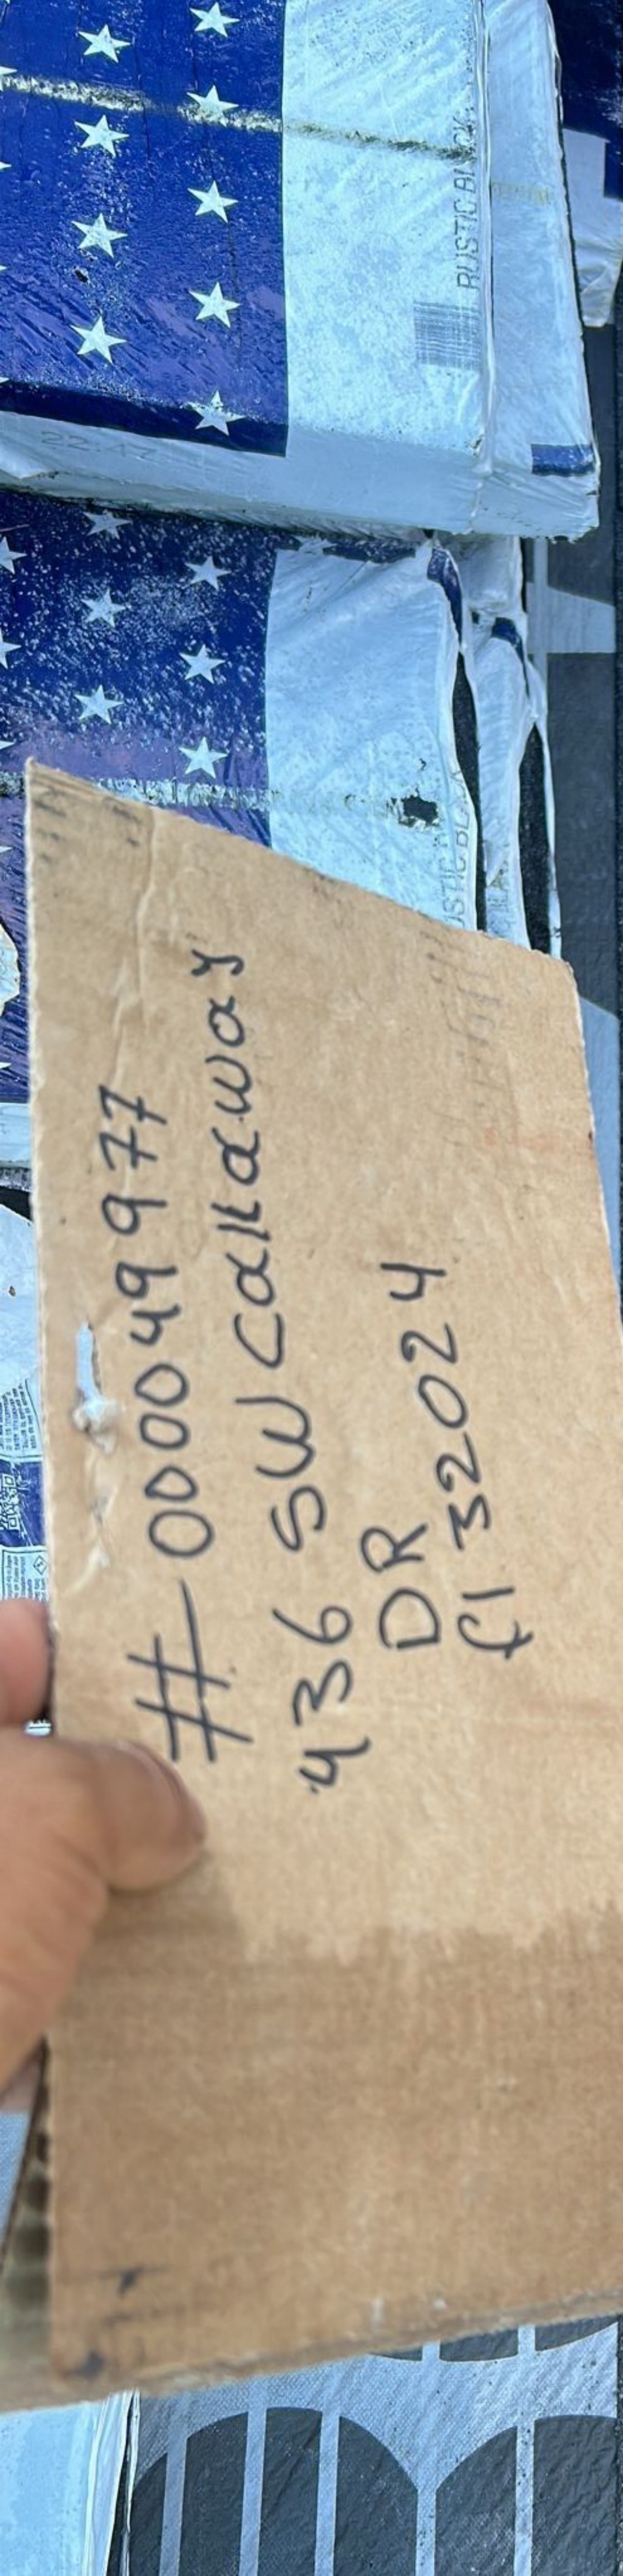

#-000049977
436 SW Callaway
DR
CI 32024

OVERLAP LINE

LÍNEA DE SUPERPOSICIÓN

CAN/CSA A122.3 and A122.3.1

Supply Co. inc.

©2021 5556 ©2024 865 B

OVERLAP LINE

LÍNEA DE SUPERPOSICIÓN

Le degré de résistance au glissement peut varier dépendant de la température, chaussures utiliser et

20

UNDERLAYMENT

ABC
Supply Co. Inc.

PRO GUARD 20

SYNTHETIC ROOFING UNDERLAYMENT

This membrane is designed for use as a synthetic underlayment, weather resistance and foot traffic. It is not intended to be used as a waterproofing membrane. The manufacturer is not responsible for any damage to the substrate or the membrane caused by improper installation or use. OVERLAP LINE LÍNEA DE SUPERPOSICIÓN

Meets the following: ASTM D2268, ASTM D669 Type IV, ASTM E CAN/CSA A122.3 and A122.3.1

#00048677
436 SM Corl d m o s
Dr
fl-52024

PRO
SYNTHETIC

OVERLAP LAYMENT

Meets the following ASTM D226 Type II,
ASTM D6681 Type IV, ASTM D8257
CLASSIC HD20.3, HD20.3



La resistencia al desliz puede variar de acuerdo a las condiciones de la superficie, tipo de calzado o clima y la pendiente del techo
Le degré de résistance au glissement peut varier dépendant de la température, chaussures utilisées et la toit pente

OVERLAP LINE

LÍNEA DE SUPERPOSICIÓN
Slip resistance may vary with surface conditions, weather, footwear and roof pitch

PRO GUVA
SYNTHETIC ROOFING

00049977
936 SW Caldwell Ave
Op
11-2024

000049977
436 SW Callaway
CI 32024

11
Elastic
Cement

MENT



For reference only. This is not a technical specification. Technical specifications and test results are available upon request. The information is provided for informational purposes only. It is not intended to be used as a basis for any warranty or liability. The information is provided as is, without any representation or warranty of any kind. The information is provided for informational purposes only. It is not intended to be used as a basis for any warranty or liability. The information is provided as is, without any representation or warranty of any kind.

Meets the following ASTM D2235 Type II, ASTM D2235 Type IV, ASTM D2235 CAN/CSA A123.3 and A123.1



Slip resistance may vary with surface conditions, weather, etc. La resistencia al desliz puede variar de acuerdo a las condiciones de la superficie, tipo de calzado o clima, etc. Slip resistance may vary with surface conditions, weather, etc. La resistencia al desliz puede variar de acuerdo a las condiciones de la superficie, tipo de calzado o clima, etc.

OVERLAP LINE

LÍNEA DE SUPERPOSICIÓN

MENT



PRO GUARD 20
SYNTHETIC ROOFING UNDERLAYMENT

For reference only. This is not a technical specification. Technical specifications and test results are available upon request. The information is provided for informational purposes only. It is not intended to be used as a basis for any warranty or liability. The information is provided as is, without any representation or warranty of any kind. The information is provided for informational purposes only. It is not intended to be used as a basis for any warranty or liability. The information is provided as is, without any representation or warranty of any kind.

Meets the following ASTM D2235 Type II, ASTM D2235 Type IV, ASTM D2235 CAN/CSA A123.3 and A123.1



Slip resistance may vary with surface conditions, weather, etc. La resistencia al desliz puede variar de acuerdo a las condiciones de la superficie, tipo de calzado o clima, etc. Slip resistance may vary with surface conditions, weather, etc. La resistencia al desliz puede variar de acuerdo a las condiciones de la superficie, tipo de calzado o clima, etc.

OVERLAP LINE



For reference only. This is not a technical specification. Technical specifications and test results are available upon request. The information is provided for informational purposes only. It is not intended to be used as a basis for any warranty or liability. The information is provided as is, without any representation or warranty of any kind. The information is provided for informational purposes only. It is not intended to be used as a basis for any warranty or liability. The information is provided as is, without any representation or warranty of any kind.

OVERLAP LINE

000049977
436 SW Callaway
DR
1132024

000049977
436 SW Caldwell
DR
F132024

Sam Callaway
776 649 9777
000 000 MS
DR 436
PL 32024

PRO GUARD
SYNTHETIC ROOFING UNDERLAY

Supply Co. Inc.

DESUPERPOSICIÓN
Footwear and roof
temperature, chausses
e, tipo de calzado o c

MENT

The image shows a construction site for a roof installation. The main surface is covered with white synthetic roofing underlayment branded "PRO GUARD 20" by ABC Supply Co. Inc. The underlayment features a large, stylized "PRO GUARD 20" logo and the text "SYNTHETIC ROOFING UNDERLAYMENT". A worker wearing an orange shirt and black gloves is visible on the right side of the image, using a power tool to install the underlayment. In the foreground, a hand holds a piece of cardboard with handwritten text: "# 000049977", "436 SW Callaway", and "11 32024". The background shows a residential area with greenery and a house.



Tamco way
936 SW Callaway
OP
11/3/2024

TAMKO
HERITAGE
PHALT SHINGLES



tamko.com/heritage



Meets the Following: ASTM D226 Type A,
ASTM D4869 Type IV, ASTM D6257
CAN/CSA A122.3 and A228.1

ABC
Supply Co. Inc.

GUARD 20
ROOFING UNDERLAYMENT

PRO GUARD 20

SYNTHETIC ROOFING UNDERLAYMENT

PRO GUARD 20

SYNTHETIC ROOFING UNDERLAYMENT

ABC
Supply Co. Inc.

Meets the Following: ASTM D226 Type A,
ASTM D4869 Type IV, ASTM D6257
CAN/CSA A122.3 and A228.1

Slip resistance may vary with surface conditions, weather, footwear and roof pitch.
La resistencia al deslize puede variar de acuerdo a las condiciones de la superficie, tipo de calzado y la inclinación del techo.
La résistance au glissement peut varier d'après de la température, chaussures utilisées et la pente.

LINEA DE SUPERPOSICIÓN
OVERLAP LINE

Supply Co. Inc.

h20251j DR 936
P132024 MS 936
#0000494000 #
ttbba9977

436
DR
f1 32024
00000000
sup cell & wdr
xom p1 b77







#-000049977
436 SW Callaway
DR
0132024

#-000099977

436 SW Callaway

DR 32024

FL 32024



10/20/14
1000
1000

#-000049977
436 SW Callaway
DR 32024

#-00049977
436 SW Callaway
DR 32024
Q1

#-000049977
436 SW Callaway
DR
0132024



65
#-00009977
436 SW Callaway
DR 32024



11668001
136 SW Canalway
108024
1132024