


*** SITE PLAN ***
SCALE: 1" = 40'-0"



RESIDENCE for DARRELL & NATALIE PERRY 249 SW SEDGEFIELD LN FORT WHITE, FL 32038	
Teena M. Ruffo 2925 SW 6th St. 41 Lake City, Florida 32025 Cell: (386) 867-1191 Email: teenaruffo@gmail.com	
PRINTED DATE: Tuesday, September 6, 2022	
DRAWN BY: Teena M. Ruffo	CHECKED BY:
BUILDING CONTRACTOR	
FINALS DATE:	
JOB NUMBER:	
DRAWING NUMBER A-1	
OF 6 SHEETS	




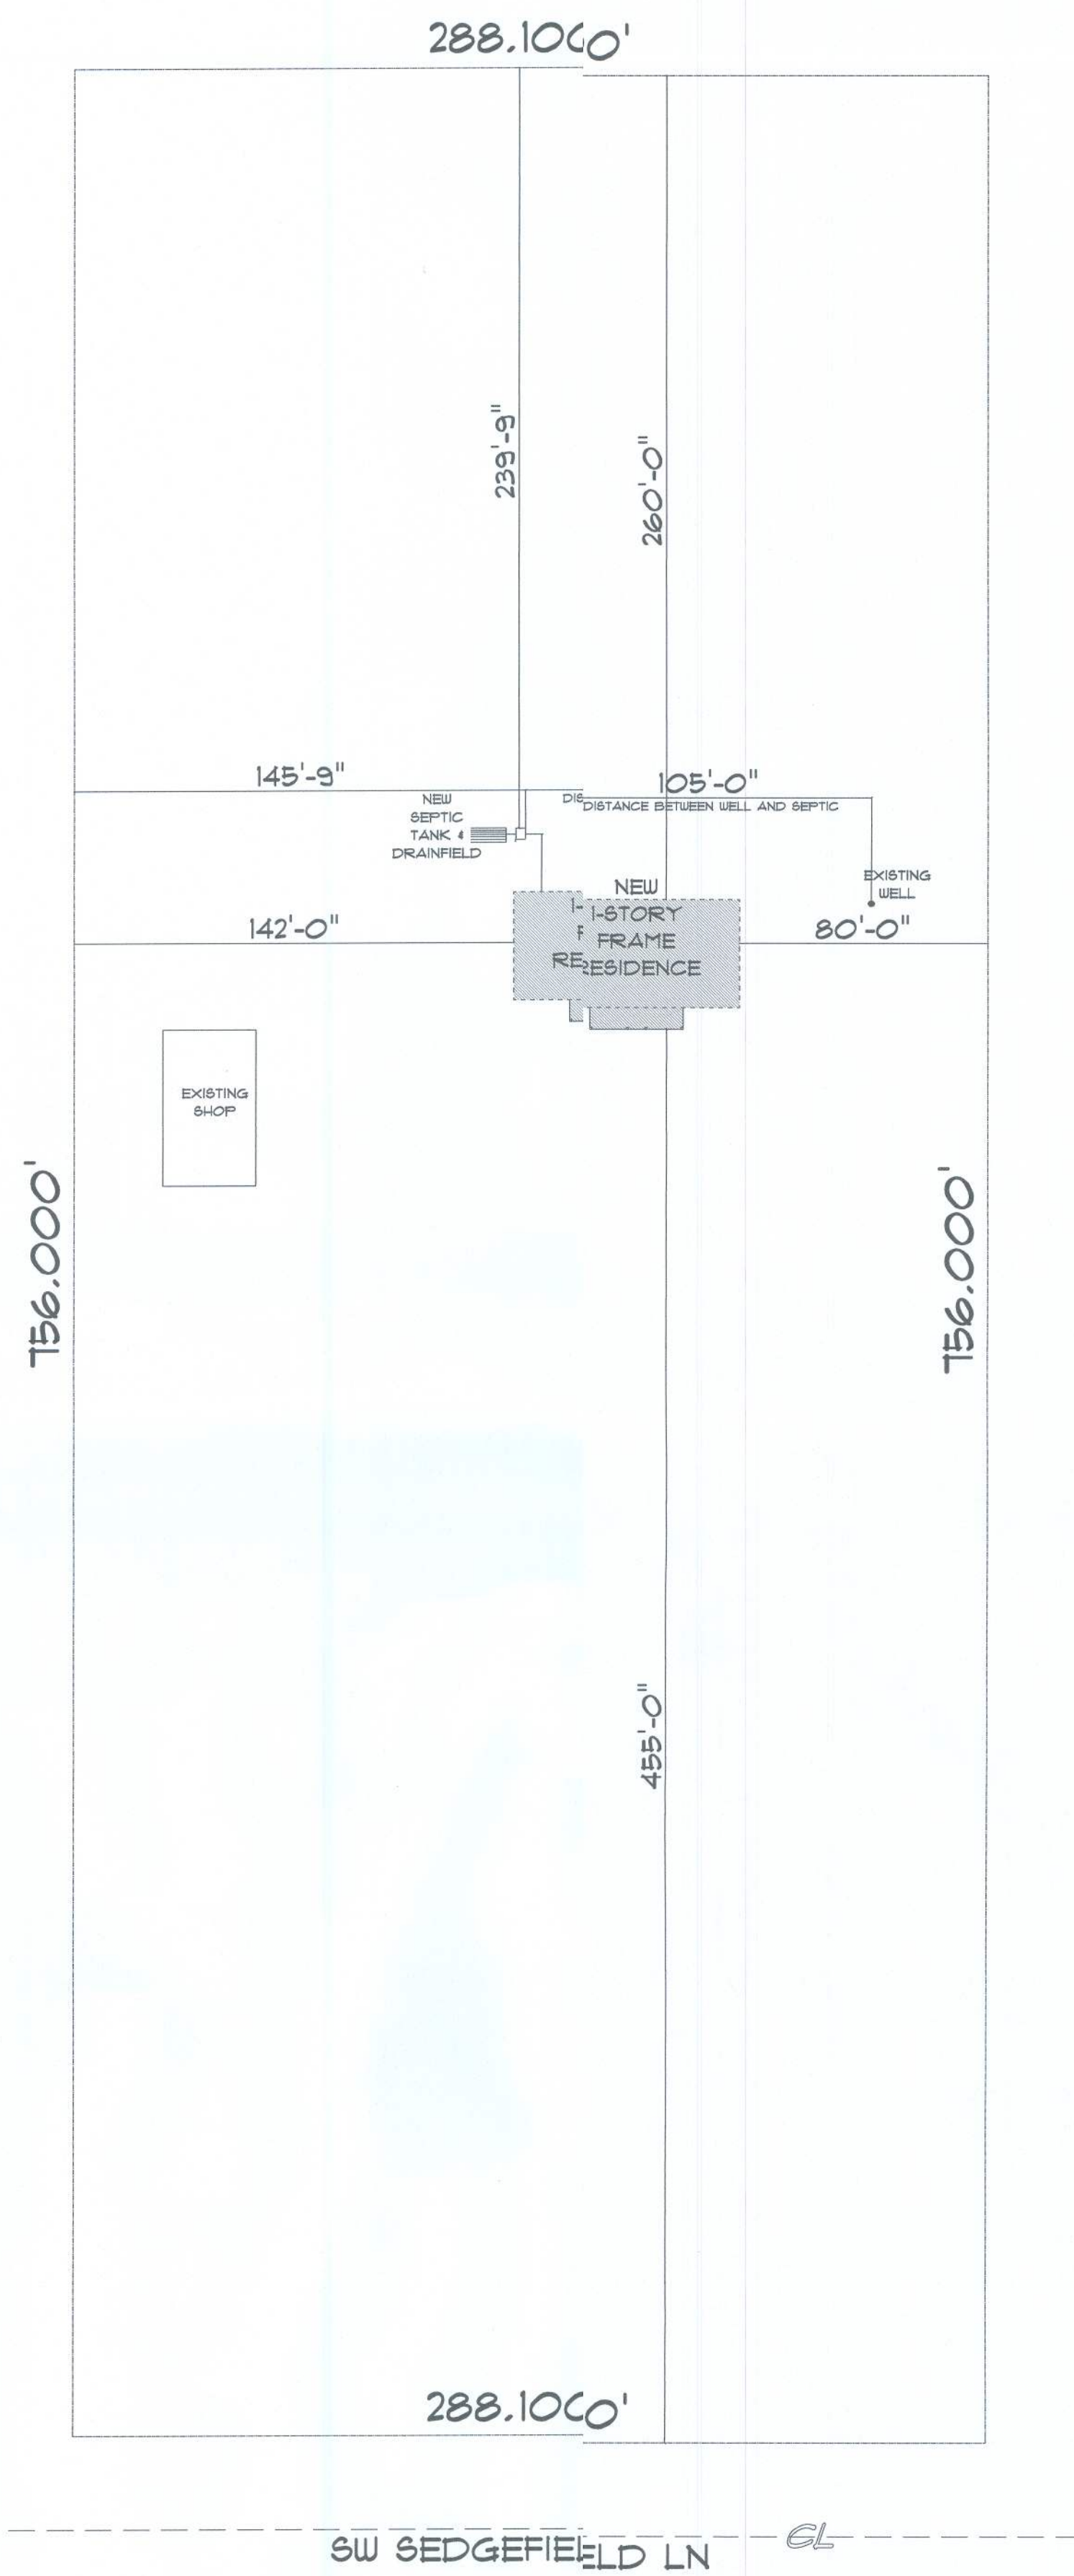

* FRONT ELEVATION *

SCALE : 1/4" = 1'-0"

NOTE: 18" OVERHANG ON EAVES
12" OVERHANG ON GABLE ENDS

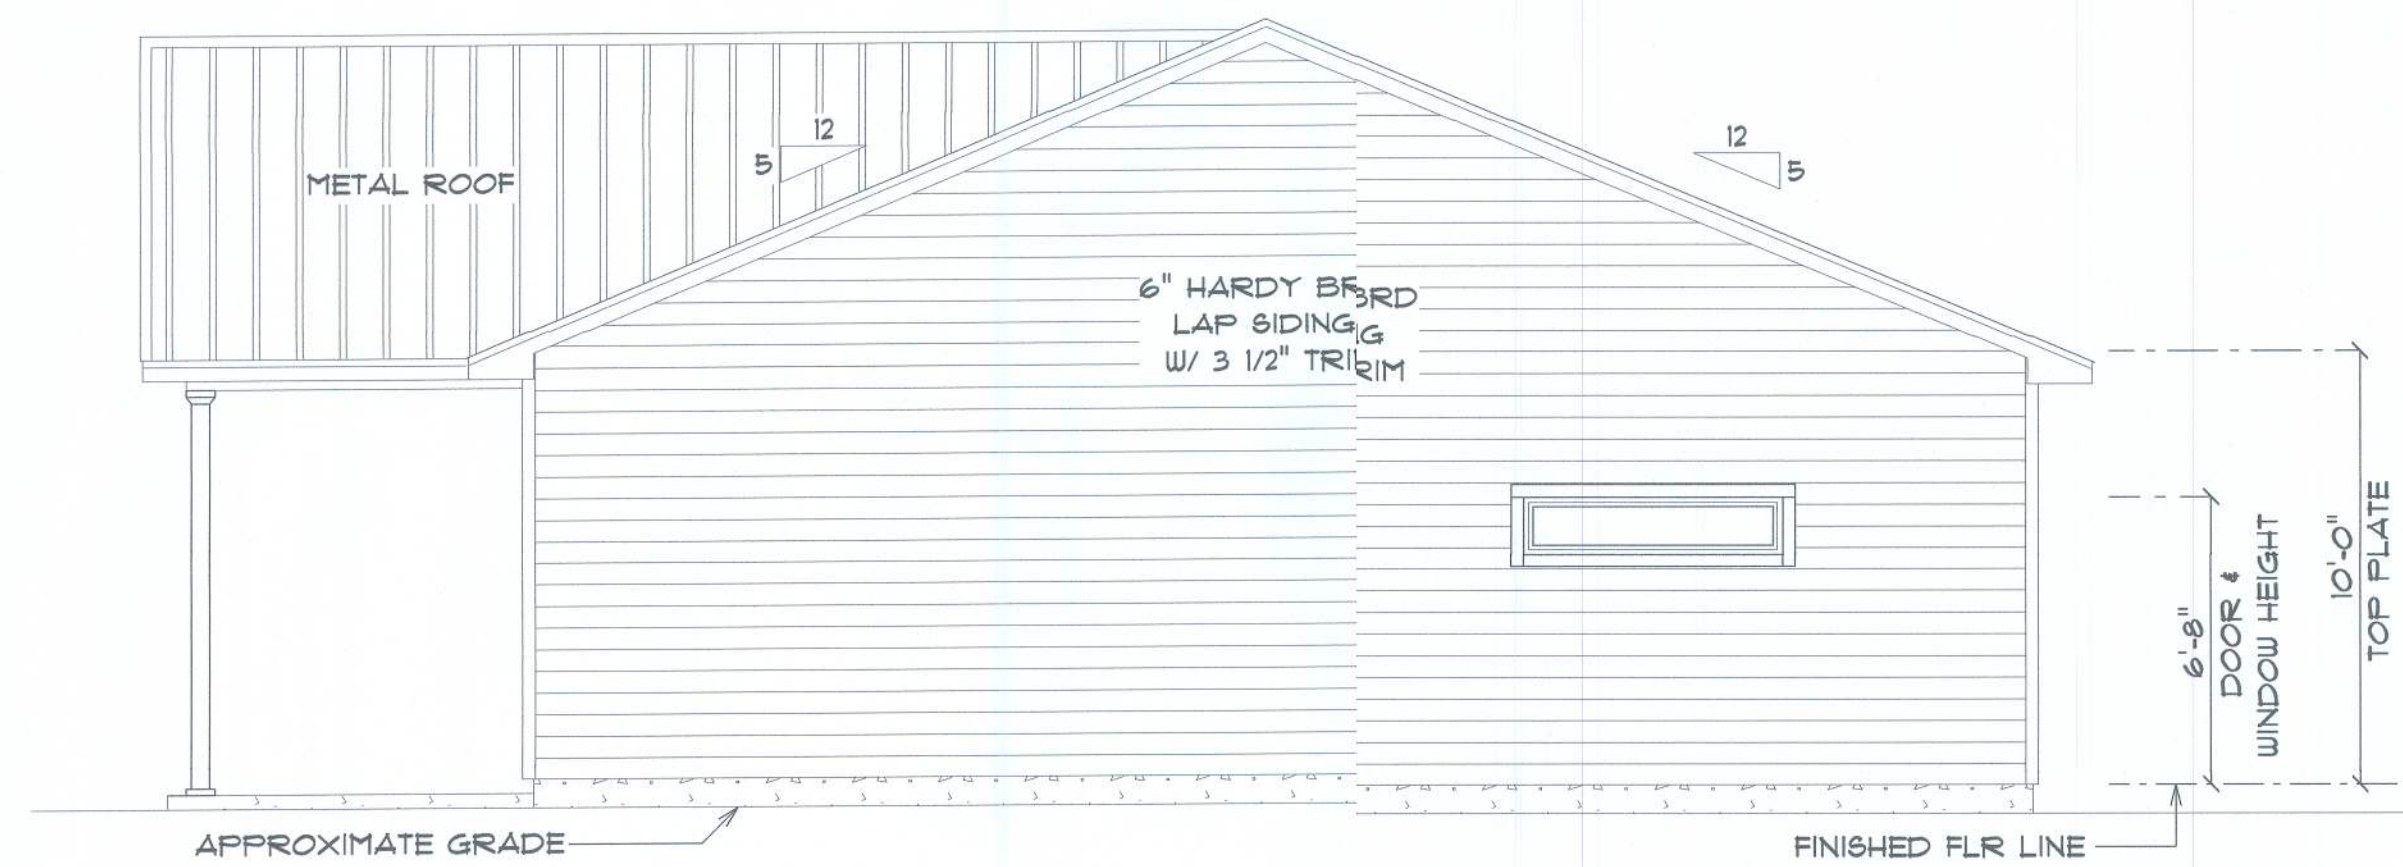

* RIGHT ELEVATION *

SCALE : 1/4" = 1'-0"

RESIDENCE
for
DARRELL & NATALIE
PERRY

249 SW BEDGEFIELD LN
FORT WHITE, FL
32038

Teresa M. Ruffo
2925 SW SR 41
Lake City, Florida 32025
Cell: (386) 867-1191
Email: teramaruffo@gmail.com

PRINTED DATE:
Tuesday, September 6, 2022

DRAWN BY: Teresa M. Ruffo
CHECKED BY:

BUILDING CONTRACTOR

FINALS DATE:

JOB NUMBER:

DRAWING NUMBER


A-4

OF 6 SHEETS



* REAR ELEVATION *

SCALE : 1/4" = 1'-0"

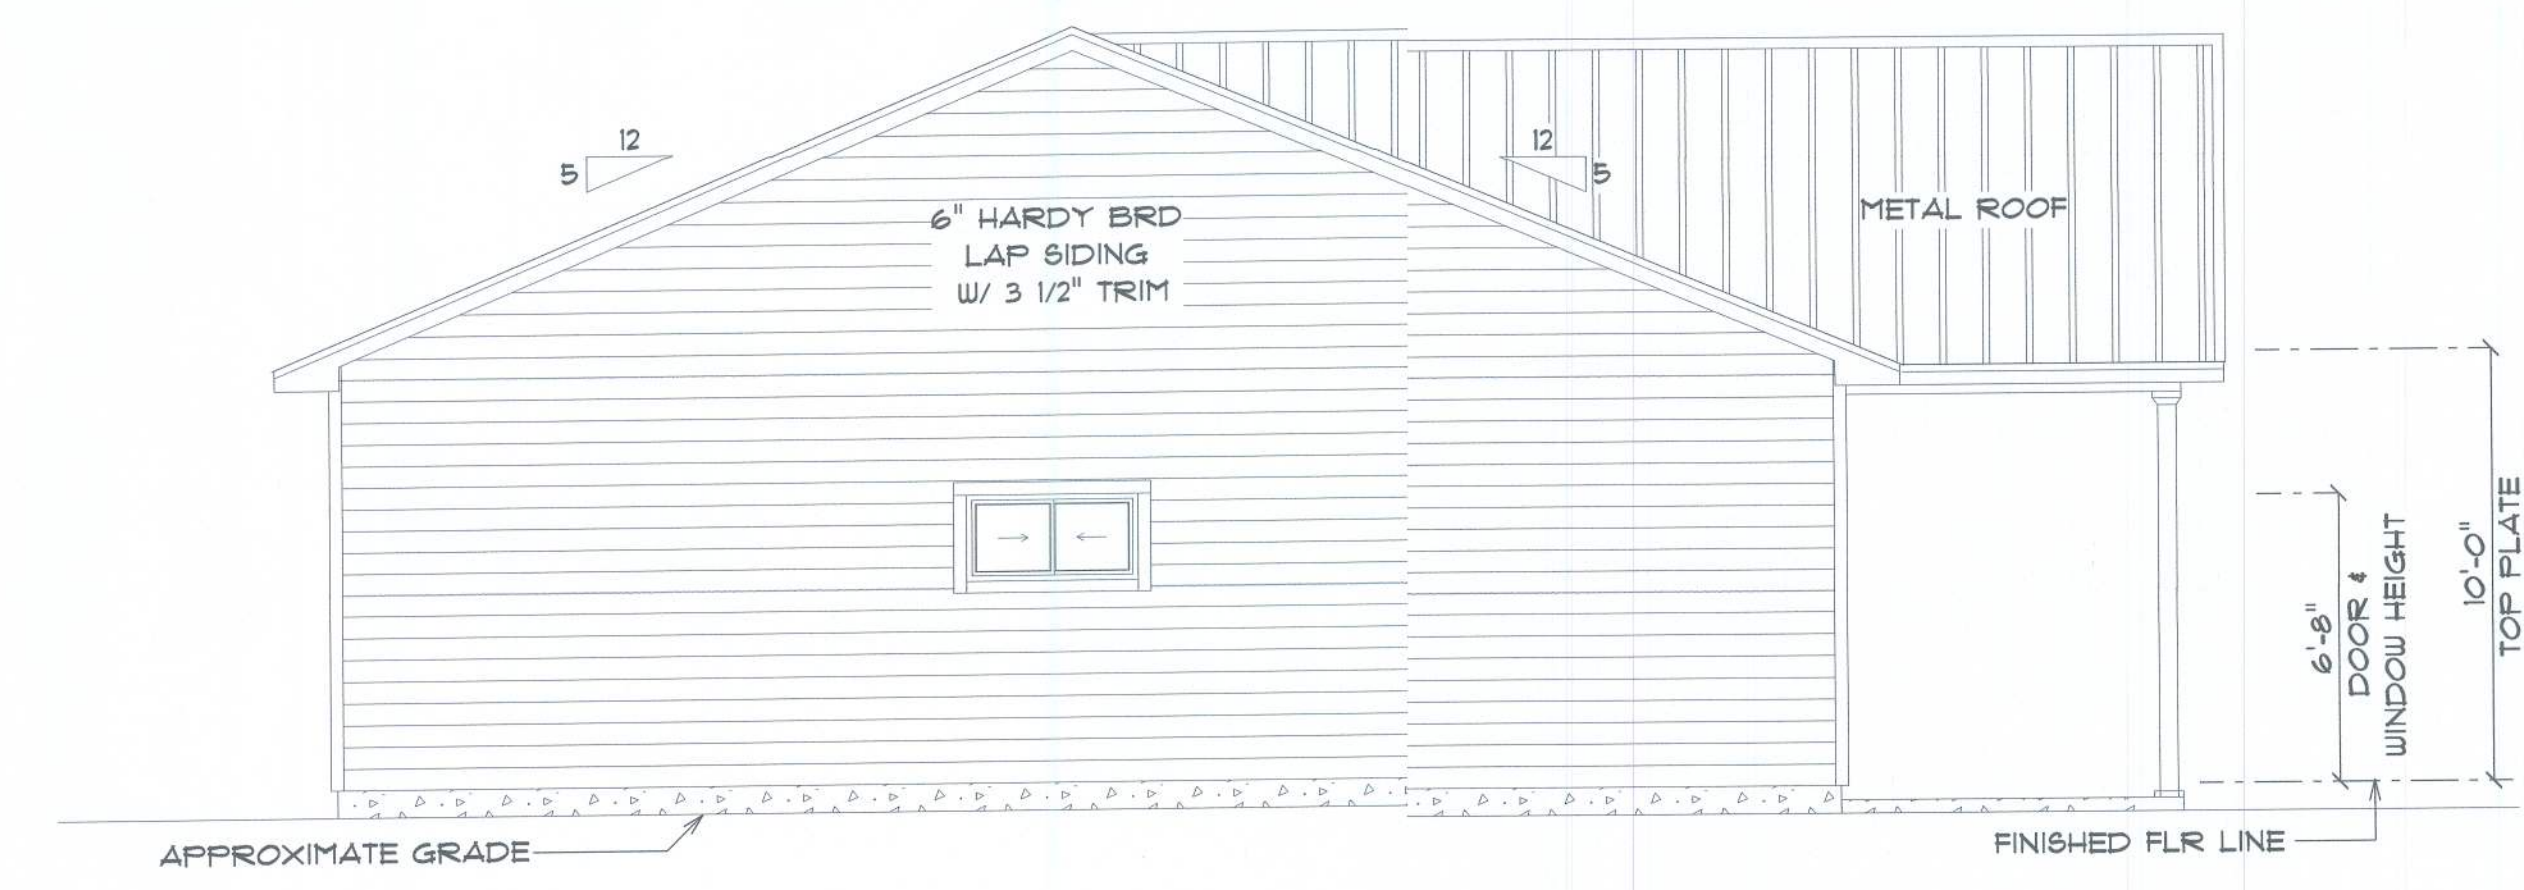

* LEFT ELEVATION *

SCALE : 1/4" = 1'-0"

RESIDENCE for DARRELL & NATALIE PERRY	
245 SW BEDGEFIELD LN FORT WHITE, FL 32038	
Teresa M. Ruffo 2025 SW 5th St Lake City, Florida 32025 Cell: (386) 861-1191 Email: tesaruffo@gmail.com	
PRINTED DATE: Tuesday, September 6, 2022	
DRAWN BY: Teresa M. Ruffo	CHECKED BY:
BUILDING CONTRACTOR	
FINALS DATE:	
JOB NUMBER:	
DRAWING NUMBER A-5	
OF 6 SHEETS	


ELECTRICAL LEGEND		
ELECTRICAL	COUNT	SYMBOL
ceiling fan globe 01	5	
ceiling classic	1	
pendant large	4	
pot light	27	
spotlight double	4	
wall mount savoy	5	
Smoke Detector	5	
electrical panel	1	
dimmer switch	4	
dimmer switch 3-way	4	
light	6	
outlet	40	
outlet 220v	5	
outlet gfi	12	
outlet wp	6	
switch	23	
switch 3 way	10	
vent light combo	2	
vanity bar light 01	1	
vanity bar light 02	2	

ELECTRICAL PLAN NOTES:

- E-1 WIRE ALL APPLIANCES, HVAC UNITS AND OTHER EQUIPMT PER MANUFACTURERS SPECIFICATIONS.
- E-2 ALL INSTALLATIONS SHALL BE PER NATIONAL ELECTRICCODE.
- E-3 ALL SMOKE /CARBON MONOXIDE DETECTORS SHALL BE20V W/BATTERY BACKUP OF THE PHOTOELECTRIC TYPE, AT SHALL BE INTERLOCKED TOGETHER. INSTALL INSIDE AND NEAALL BEDROOMS AS PER CODE.
- E-4 TELEPHONE, TELEVISION AND OTHER LOW VOLTAGE DEVICES OR OUTLETS SHALL BE AS PER THE OWNERS DIRECTIONAND IN ACCORDANCE WITH APPLICABLE SECTIONS OF NATION, ELCT. CODE LATEST EDITION.
- E-5 ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE FCTHE DESIGN AND SIZING OF ELECTRICAL SERVICE AND CIRTS.
- E-6 ENTRY OF SERVICE UNDERGROUND OR OVERHEAD) IS) BE DETERMINED BY THE POWER COMPANY.

ALL BEDROOM RECEPTALS ARE TO BE AFCI (ARC F.L.T CIRCUIT INTERRUPT.)

75% OF ALL PERMANENT LIGHTS TO BE ENERGY EFFECIT.

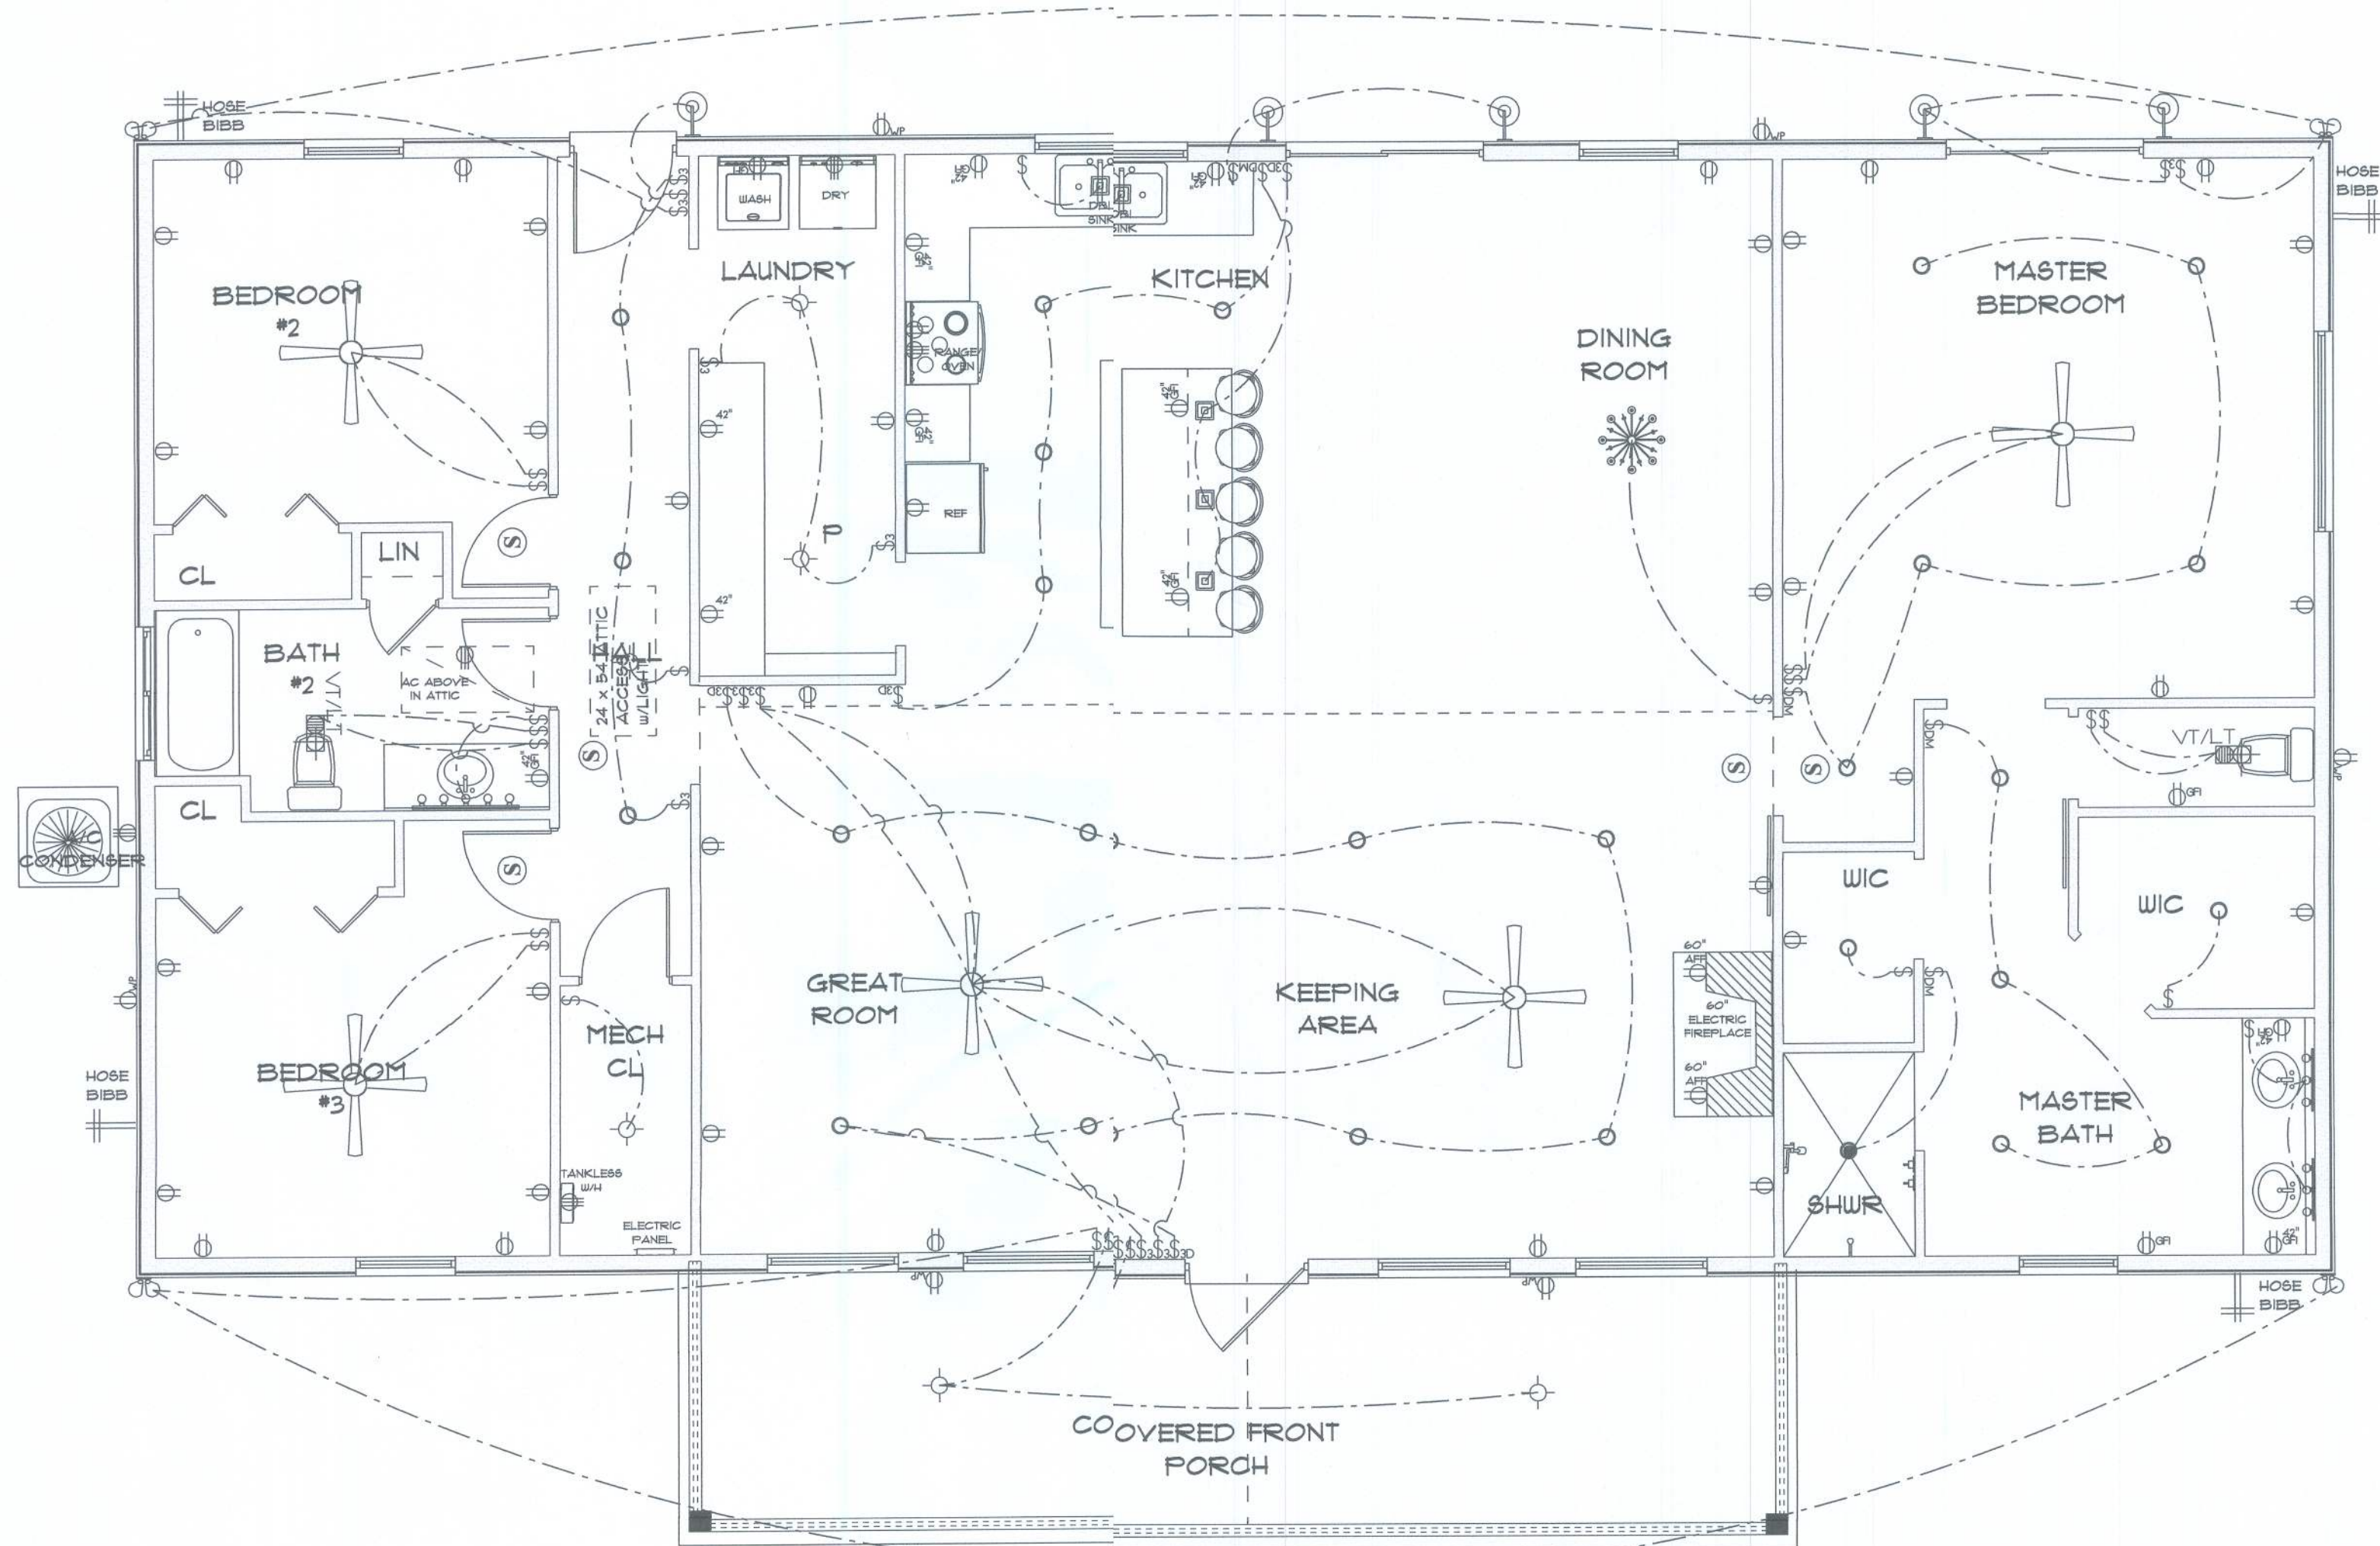

* ELECTRIC PLAN *

RESIDENCE
for
DARRELL & NATALIE
PERRY

249 SW SEDGEFIELD LN
FORT WHITE, FL
32038

Teresa M. Ruffo
2925 SW SR 471
Lake City, Florida 32025
Cell: (386) 861 - 1191
Email: teranruffo@gmail.com

PRINTED DATE:
Tuesday, September 6, 2022

DRAWN BY: CHECKED BY:

Teresa M. Ruffo

BUILDING CONTRACTOR

FINALS DATE:

JOB NUMBER:

DRAWING NUMBER

A-6

OF 6 SHEETS

WOO CONSTRUCTION

1. ALL CONCRETE SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH AT 28 DAYS OF 2500 PSI, A SLUMP OF 3" FOR FOOTINGS/FOUNDATIONS AND 4" FOR SLABS
2. ALL REINFORCING STEEL SHALL BE NEW DOMESTIC DEFORMED BILLET STEEL CONFORMING TO ASTM A-615 GRADE 40.
3. WELDED WIRE FABRIC SHALL CONFORM TO ASTM A-185. WWF SHALL BE LAPPED AT LEAST 6" AND CONTAIN AT LEAST ONE CROSS WIRE WITHIN THE 6".
4. HOOKS SHALL BE PROVIDED AT DISCONTINUOUS ENDS OF ALL TOP BARS OF BEAMS.
5. HORIZONTAL FOOTING BARS SHALL HAVE 1'-0" HOOK LENGTH OR CORNER BARS WITH A 2'-4" LAP PROVIDED
6. MINIMUM LAP SPACES ON ALL REINFORCING BAR SPICES SHALL BE 40 BAR DIAMETERS TYP.
7. CONCRETE COVER MIN. 3" WHEN EXPOSED TO EARTH OR 1 1/2" TO FORM.

ALL REINFORCING STEEL SHALL BE NEW DEFORMED BARS FREE FROM RUST. SCALE & OIL. SHALL MEET ASTM A-615 REINFORCING FOR FOOTING SHALL BE SUPPORTED ON PRE-CAST CONCRETE PADS, TOP REINFORCING SHALL BE POSITIVELY SUPPORTED BY TEMPORARY STRINGERS. DOWELS FOR COLUMNS & FILLED CELLS SHALL BE SECURED IN PLACE BY USING ADDITIONAL CROSS-REINFORCING TIED TO FOOTING REINFORCING. SPLICES IN REINFORCING WHERE PERMITTED SHALL BE THE FOLLOWING MINIMUM, UNLESS OTHERWISE INDICATED ON THE DRAWINGS:

FTGS, WALLS, COLUMNS, BEAMS, SLABS:	36 DIA. OR 2'-0" MIN.
FILLED CELL REINFORCING:	40 DIA. OR 2'-1" MIN.
TEMPERATURE REINFORCING:	20 DIA. OR 1'-0" MIN.
WELDED WIRE MESH:	8" LAP

1. HOLLOW LOAD BEARING UNITS SHALL BE NORMAL WEIGHT, GRADE N, TYPE 2, CONFORMING TO ASTM C90, WITH A MINIMUM NET COMPRESSIVE STRENGTH OF 1900 PSI ($f_m = 1500$ PSI)
2. MORTAR SHALL BE TYPE "S", CONFORMING TO ASTM C270.
3. COARSE GROUT SHALL CONFORM TO ASTM C476 WITH A MAXIMUM AGGREGATE SIZE OF 3/8" AND A MINIMUM COMPRESSIVE STRENGTH AT 28 DAYS OF 3000 PSI SLUMP 8" TO 11".
4. VERTICAL REINFORCEMENT SHALL BE AS NOTED ON THE DRAWINGS WITH THE CELLS FILLED WITH COARSE GROUT.
5. VERTICAL REINFORCEMENT SHALL BE HELD IN POSITION AT THE TOP AND BOTTOM AND AT A MAXIMUM SPACING OF 192 BAR DIAMETERS. REINFORCEMENT SHALL BE PLACED IN THE CENTER OF THE MASONRY CELL, TYPICAL UNLESS OTHERWISE NOTED.
6. REINFORCING STEEL SHALL BE LAPPED A MINIMUM OF 40 BAR DIAMETERS, UNLESS OTHERWISE NOTED ON THE DRAWINGS.
7. GROUT STOPS SHALL BE PROVIDED BELOW BOND BEAM, PLASTIC SCREEN, METAL LATH STRIP OR CAVITY CAPS MAY BE USED TO PREVENT THE FLOW GROUT INTO CELLS BELOW. THE USE OF FELT PAPER AS A STOP IS PROHIBITED.

WOO CONSTRUCTION

1. WOODCONSTRUCTION SHALL CONFORM TO THE NDS "NATIONAL DESIGN SPECIFICATION FOR WOOD CONSTRUCTION", 2018 EDITION.
2. ALL TERIOR WOOD STUD WALLS, BEARING WALLS, SHEAR WALLS AND MISSTRUCTURAL WOOD FRAMING MEMBERS, (I.E. BLOCKING OR GABLE ENDRAGING) SHALL BE EITHER SOUTHERN PINE, OR S.P.F. NUMBER 2 GDE OR BETTER SHALL BE USED REGARDLESS OF SPECIES.
3. ANYOOD FRAME INTERIOR BEARING WALL STUDS THAT HAVE HOLES IN THE NAILING SCHEDULE SHALL BE REPLACED WITH 2" DIA. SHALL HAVE STUD PROTECTION SHIELD FOR ALL HOLES OVER 1" IN DIA. FOR PLUMBING LINES, ETC.
4. SHAZE REPAIRED WITH SIMPSON HS2 STUD SHOES, TYP., U.N.O.
5. FASHERS FOR PRESSURE PRESERVATIVE AND FIRE-RETARDANT-TREATED WOODSHALL BE OF HOT-DIPPED GALVANIZED STEEL, STAINLESS STEEL, SILICN BRONZE OR COPPER.

1. ALL EBFABRICATED WOOD TRUSSES SHALL BE SECURELY FASTENED TO TIR SUPPORTING WALLS OR BEAMS WITH HURRICANE CLIPS OR ANCHORS.
2. PREBRIKED WOOD TRUSSES SHALL BE DESIGNED IN ACCORDANCE WITH THE LATEST EDITION OF THE "NATIONAL DESIGN SPECIFICATION FOR TIMBER-FRAME LUMBER AND ITS FASTENERS" AS RECOMMENDED BY T. NATIONAL FOREST PRODUCTS ASSOCIATION.
3. TRU/MEMBERS AND CONNECTIONS SHALL BE PROPORTIONED (WITH A MAJUM ALLOWABLE STRESS INCREASE FOR LOAD DURATION OF 25%) WITHSTAND THE LIVE LOADS GIVEN IN THE NOTES AND TOTAL DEADLOAD.

4. BRIDING FOR PRE-ENGINEERED TRUSSES SHALL BE AS REQUIRED BY THE USS MANUFACTURER UNLESS NOTED ON THE PLANS.
5. TRUCELEVATIONS AND SECTIONS ARE FOR GENERAL CONFIGURATION OF TISSES ONLY. WEB MEMBERS ARE NOT SHOWN, BUT SHALL BE DESIGNED BY THE TRUSS MANUFACTURER IN ACCORDANCE WITH THE FOLLOWING DESIGN LOADS:
6. DESIG SPECIFICATIONS FOR LIGHT WEIGHT METAL PLATE CONNECTED WOODTRUSSES PER THE TRUSS PLATE INSTITUTE TIPL LATEST EDITION.
7. PRE-ENGINEERED WOOD TRUSSES SHALL BE DESIGNED BY THE MANUFACTURER IN ACCORDANCE WITH SPECIFIED LOADS AND GOVING CODES . SUBMITTALS SHALL INCLUDE TRUSS FRAMING PLANNED DETAILS SHOWING MEMBER SIZES, BRACING, ANCHORAGE, TRUNCTIONS, TRUSS LOCATIONS, AND PERMANENT BRACING AND/OR BRASING REQUIRED FOR ERECTION AND FOR THE PERMANENT STRUCTURE. EACH SUBMITTAL SHALL BE SIGNED AND SEALED BY A FLORA REGISTERED STRUCTURAL ENGINEER, SUBMIT 2 COPIES FOR REVIEW AND APPROVAL PRIOR TO FABRICATION.
8. THE USS MANUFACTURER SHALL DETERMINE ALL SPANS WORKING POINT; BEARING POINTS, AND SIMILAR CONDITIONS. TRUSS SHOP DRAWINGS SHALL SHOW ALL TRUSSES; ALL BRACING MEMBERS, AND ALL TISS TO TRUSS HANGERS.

ASSUED ALLOWABLE SOIL BEARING PRESSURE AFTER COMPACTION:
2000SF SEE SOILS REPORT AND SPECIFICATIONS FOR COMPACTION
REQUIREMENTS IF SOIL CONDITIONS IN THE PROJECT DO NOT MEET
OR EXCEED THE CAPACITY THE GENERAL CONTRACTOR SHALL
CONTACT THE ENGINEER PRIOR TO FOUNDATION POUR FOR VERIFICATION
OF FOUNDATION DESIGN. SOIL TO BE COMPACTED TO AT LEAST 95% OF
MAX. ρ_d DENSITY AS DETERMINED BY ASTM - D1557

UPLIFT CONNECTORS

1. UPLIFT CONNECTORS SUCH AS HURRICANE CLIPS, TRUSS ANCHORS AND ANCHOR BOLTS ARE ONLY REQUIRED ON MEMBERS IN WALLS THAT ARE EXPOSED TO UPLIFT FORCES. INTERIOR LOAD BEARING WALLS ARE NOT ALWAYS EXPOSED TO UPLIFT FORCES. THE MEMBERS OF THESE WALLS WOULD NOT NEED TO HAVE CONNECTORS APPLIED. PLEASE CONSULT THE TRUSS ENGINEERING FOR THE LOCATION OF THESE WALLS.

1. MISSED "J" BOLTS FOR WOOD BEARING WALLS MAY BE SUBSTITUTED W/ 1/2" DIA. EPOXY ANCHORS WITH 6" EMBEDMENT. SIMPSON "SET" EPOXY ADHESIVE BEHIND FOLLOWING ALL MANUFACTURERS RECOMMENDATIONS. SEE PLAN FOR EMBEDMENT DEPTH AT FLOOR STEP.
2. FOR MISSED VERT. DOWELS DRILL A 3/4" DIAMETER HOLE 6" DEEP AT THE LOCATION OF THE OMITTED REBAR, AND INSTALL A 32" LONG #5 BARS INTO THE EPOXY FILLED HOLE. USE TWO 0 PART EMBEDMENT EPOXY (SIMPSON "SET", EPOXY), MIXED PER MANUFACTURER'S INSTRUCTIONS (SEE PLAN AT JOINT) AT EACH END OF THE HOLE. ALL REBAR ROLLING ARE REMOVED FROM THE HOLE BY BRUSHING AND USING COMPRESSED AIR PRIOR TO APPLYING THE EPOXY. ALLOW THE EPOXY TO CURE TO THE MANUFACTURER'S SPECIFICATIONS, THEN FILL THE CELL IN THE NORMAL WAY DURING BOND BEAM POUR.
3. FOR MORTER JOINTS LESS THAN 1/4", PROVIDE 1" #5 VERT. IN CONC. FILLED WITH EACH SIDE OF THE JOINT (BAR DOES NOT HAVE TO BE CONT. TO FOOTING.)
4. MISSED LINTEL STRAPS FOR MASONRY CONSTRUCTION MAY BE SUBSTITUTED WITH (1) SIMPSON MTSM16 TWISTED STRAP W/ (4) 3/4" X 24" TITENS TO MASONRY AND (7)-30d NAILS TO TRUSSUS FOR UPLIFTS LESS THAN 150 LB (SEE (2) DRAWING) OR (2) 3/4" X 24" TITENS LESS THAN 1200 LB. NO MORE THAN 10 STRAPS MAY BE SUBSTITUTED FOR LESS THAN 1200 LB. 3 IN A ROW. IF GIRDER TRUSS CONNECTIONS ARE MISSED CONTACT ENGINEER OF RECORD FOR SUBSTITUTION.

SECTION R318 PROTECTION AGAINST TERMITES:

TERMITE PROTECTION SHALL BE PROVIDED BY REGISTERED TERMITICIDES, INCLUDING SOIL APPLIED PESTICIDES, BAITING SYSTEMS, AND PESTICIDES APPLIED TO WOOD, OR TREATMENT TO NEW CONSTRUCTION (SEE SECTION 022, REGISTERED TERMITICIDE) UPON COMPLETION OF THE APPLICATION OF THE TERMITE TREATMENT. A CERTIFICATE OF COMPLIANCE SHALL BE ISSUED D TO THE BUILDING DEPARTMENT BY THE BUILDING DEPARTMENT. THE BUILDING DEPARTMENT SHALL CONTAIN THE FOLLOWING STATEMENT: "THE TERMITES. TREATMENT IS IN ACCORDANCE WITH R ESTABLISHED BY THE FLORIDA DEPARTMENT OF AGRICULTURE AND CONSUMER SERVICES."

WHERE PROJECT IS TO BE LOCATED IN KNOWN RADIATION GAS
PREVALENT AREAS, APPENDIX "F" OF THE 2017 FLORIDA
RESIDENTIAL BUILDING CODE IS TO BE IMPLEMENTED.
CONCRETE STRENGTH IN THESE AREAS ARE TO BE A MINIMUM
OF 3000 P.S.I.. THEREFORE, ANY AND ALL NOTES ON THESE
PLANS THAT INDICATE 2500 PSI SHALL BE REPLACED WITH
3000 P.S.I. FOR THE CONCRETE STRENGTH.

CODES:

2020 FLORIDA BUILDING CODE RESIDENTIAL
2020 FLORIDA FIRE PREVENTION CODE
2020 FLORIDA ACCESSIBILITY CODE
NEC NFPA 70 & FCEB
ACI 301-19 BUILDING CODE REQUIREMENTS FOR REINFORCED CONCRETE
ACI 308-19 SPECIFICATIONS FOR STRUCTURAL CONCRETE BUILDINGS
ACI 330-19 BUILDING CODE REQUIREMENTS FOR MASONRY STRUCTURES
2018 NATIONAL DESIGN SPECIFICATION FOR WOOD CONSTRUCTION
2018 WOOD FRAMED CONSTRUCTION MANUAL
APA PLYWOOD DESIGN SPECIFICATION
ASCE/SEI 7-16 AMERICAN SOCIETY OF CIVIL ENGINEERS

LIVE LOADS:

ROOF	20 PSF (REDUCIBLE)
RESIDENTIAL FLOOR, UNLESS OTHERWISE INDICATED	40 PSF
BALCONIES	60 PSF
STAIRS	40 PSF
LIGHT PARTITIONS (DEAD LOAD), U.N.O.	20 PSF
	10 PSF ATTIC L.L.

CONCRETE

ALL CONCRETE UNLESS OTHERWISE INDICATED
PEA GRAVEL CONCRETE FOR MASONRY CELLS ONLY
(DO NOT USE FOR CONCRETE COLUMNS OR TIE BEAMS)

REINFORCING:

WELDED WIRE FABRIC SHALL CONFORM TO	ASTM A1064/A1064M
ALL REINFORCING BARS	ASTM A615-40 40,000 PSI
ALL STIRRUPS AND TIES	ASTM A615-40 40,000 PSI
POLYPROPYLENE FIBERS FOR SLABS ON GRADE	MINIMUM 1.5 LBS. OF FIBERS PER CUBIC YARD

CONCRETE MASONRY

ASTM C90-01, STANDARD WEIGHT UNITS, $f_m=1500$ PSI
MORTAR TYPE "S" 1800 PSI
CONCRETE GROUT 3000 PSI
CONTINUOUS MASONRY INSPECTION IS REQUIRED DURING CONSTRUCTION

STRUCTURAL

ALL STRUCTURAL AND MISCELLANEOUS STEEL A36 36,000 PSI, U.N.O.
SHOP AND FIELD WELDS: E70XX ELECTRODES
ALL BOLTS CAST IN CONCRETE: ASTM A36 OR ASTM A-307

WOOD FRAMING:

BEAMS, RAFTERS, JOIST, PLATES, ETC. U.N.O.
NO. 2 SOUTHERN YELLOW PINE (19% M.C.)
FLOOR DECK: PLYWOOD C-C/C-D, EXTERIOR, or OSB
ROOF SHEATHING: T&G A-C GROUP 1 APA RATED (48/24)
WALL SHEATHING: PLYWOOD C-C/C-D, EXTERIOR OR OSB
VERSA LAM BEAM Fb = 2900 PSI (2.0E)
WOOD COLS. PARALLAM 2.0E U.N.O.

WOOD ROOF

DESIGN LOADS:	SHINGLE ROOF:
TOP CHORD LIVE LOAD:	20 PSF
TOP CHORD DEAD LOAD:	10 PSF
BOTTOM CHORD DEAD LOAD:	<u>10 PSF</u>
	40 PSF
BOTTOM CHORD ATTIC LIVE LOAD:	10 PSF

SEE DRAWINGS FOR SPECIAL CONCENTRATED LOADS. DESIGN FOR NEW WIND UPLIFT AS PER SPECIFIED CODES, DEDUCTING A MAXIMUM OF 5 P.S.F. DEAD LOAD, BUT NOT EXCEEDING ACTUAL DEAD LOAD.

SHT NO:

TITLE

1
2
3
S-1

COVER SHEET
STRUCTURAL FLOOR PLAN
TRUSS LAYOUT
FOUNDATION PLAN
DETAILS


WIND SPEED (ULTIMATE)	130 MPH
WIND SPEED (ALLOWABLE)	101 MPH
EXPOSURE CATEGORY	B
BUILDING CATEGORY	II
BUILDING TYPE	V
ENCLOSURE CLASSIFICATION	ENCLOSURE
INTERNAL PRESSURE COEFFICIENT	+/- 0.18

**THIS DRAWING AND DESIGN IS VALID
FOR 12 MONTHS AFTER THE DATE IT
IS SIGNED AND SEALED OR WHILE
CURRENT CODE IS VALID**

IT IS THE INTENT OF THIS DESIGNER THAT THESE PLANS ARE ACCURATE AND ARE CLEAR ENOUGH FOR THE LICENSED PROFESSIONAL TO CONSTRUCT THIS PROJECT. IN THE EVENT THAT SOMETHING IS UNCLEAR OR NEEDS CLARIFICATION...STOP...AND CALL THE DESIGNER LISTED IN THIS TITLE PAGE. IT IS THE RESPONSIBILITY OF THE LICENSED PROFESSIONAL THAT IS CONSTRUCTING THIS PROJECT TO FULLY REVIEW THESE DOCUMENTS BEFORE CONSTRUCTION BEGINS AND ANY AND ALL CORRECTIONS, IF NEEDED, TO BE MADE BEFORE ANY WORK IS DONE.

*DO NOT SCALE DRAWINGS FOR CRITICAL DIMENSIONS. INSTEAD CALL THE DESIGNER LISTED IN TITLE PAGE.

Residential Design



NDOLPH WIGGINS, P.E.


RANDOLPH WIGGINS, P.E.
 LICENSE NO. 15721
 No. 14137 State Street, Suite B Trenton, FL 32693
 STRUCTURAL DESIGN IS IN ACCORDANCE WITH THE
 2020 FLORIDA RESIDENTIAL BUILDING CODE.
 THIS PERMIT IS VALID ONLY
 STATE OF FLORIDA
 PROFESSIONAL ENGINEER
 RANDOLPH WIGGINS, P.E. FL # 15721

PROJECT:
Perry Engineering
249 SW Sedgefield Lane
Ft White, FL
Columbia County



SHEET NO.

1
OF
4


LAST PLOT DATE: November 15, 2022 06:30 AM

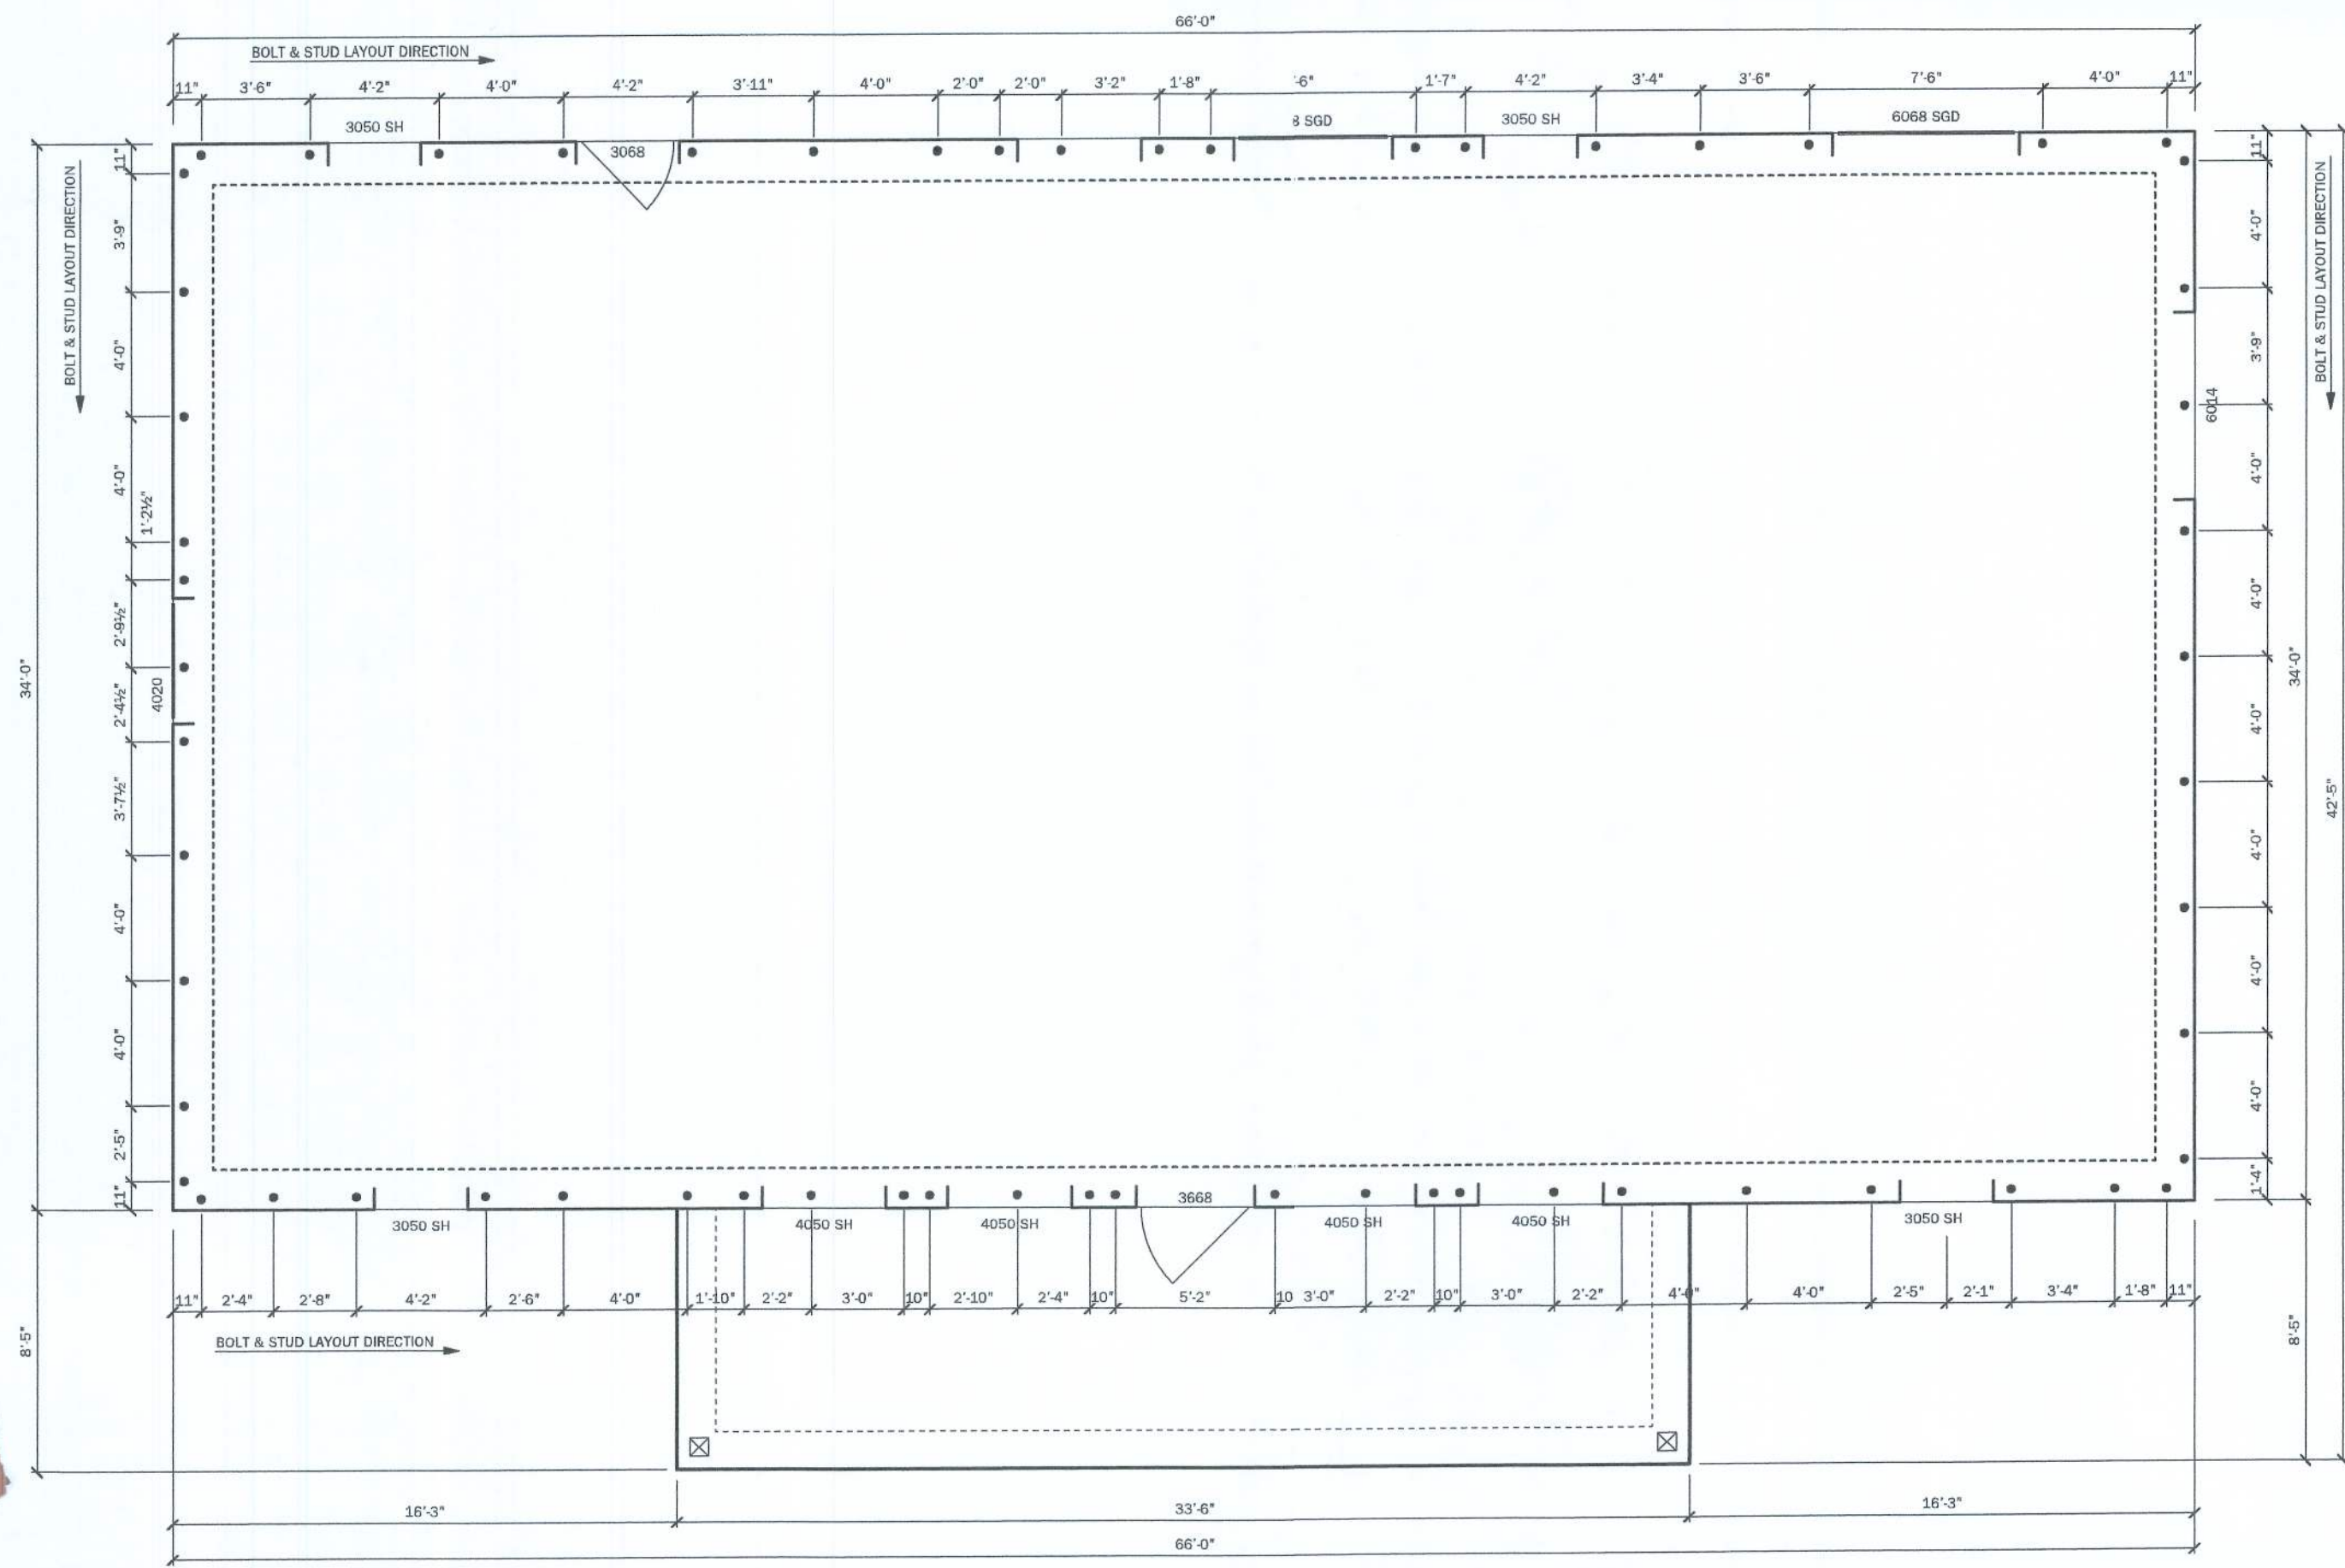

J-BOLT PLAN
SCALE: 3/16" = 1'-0"

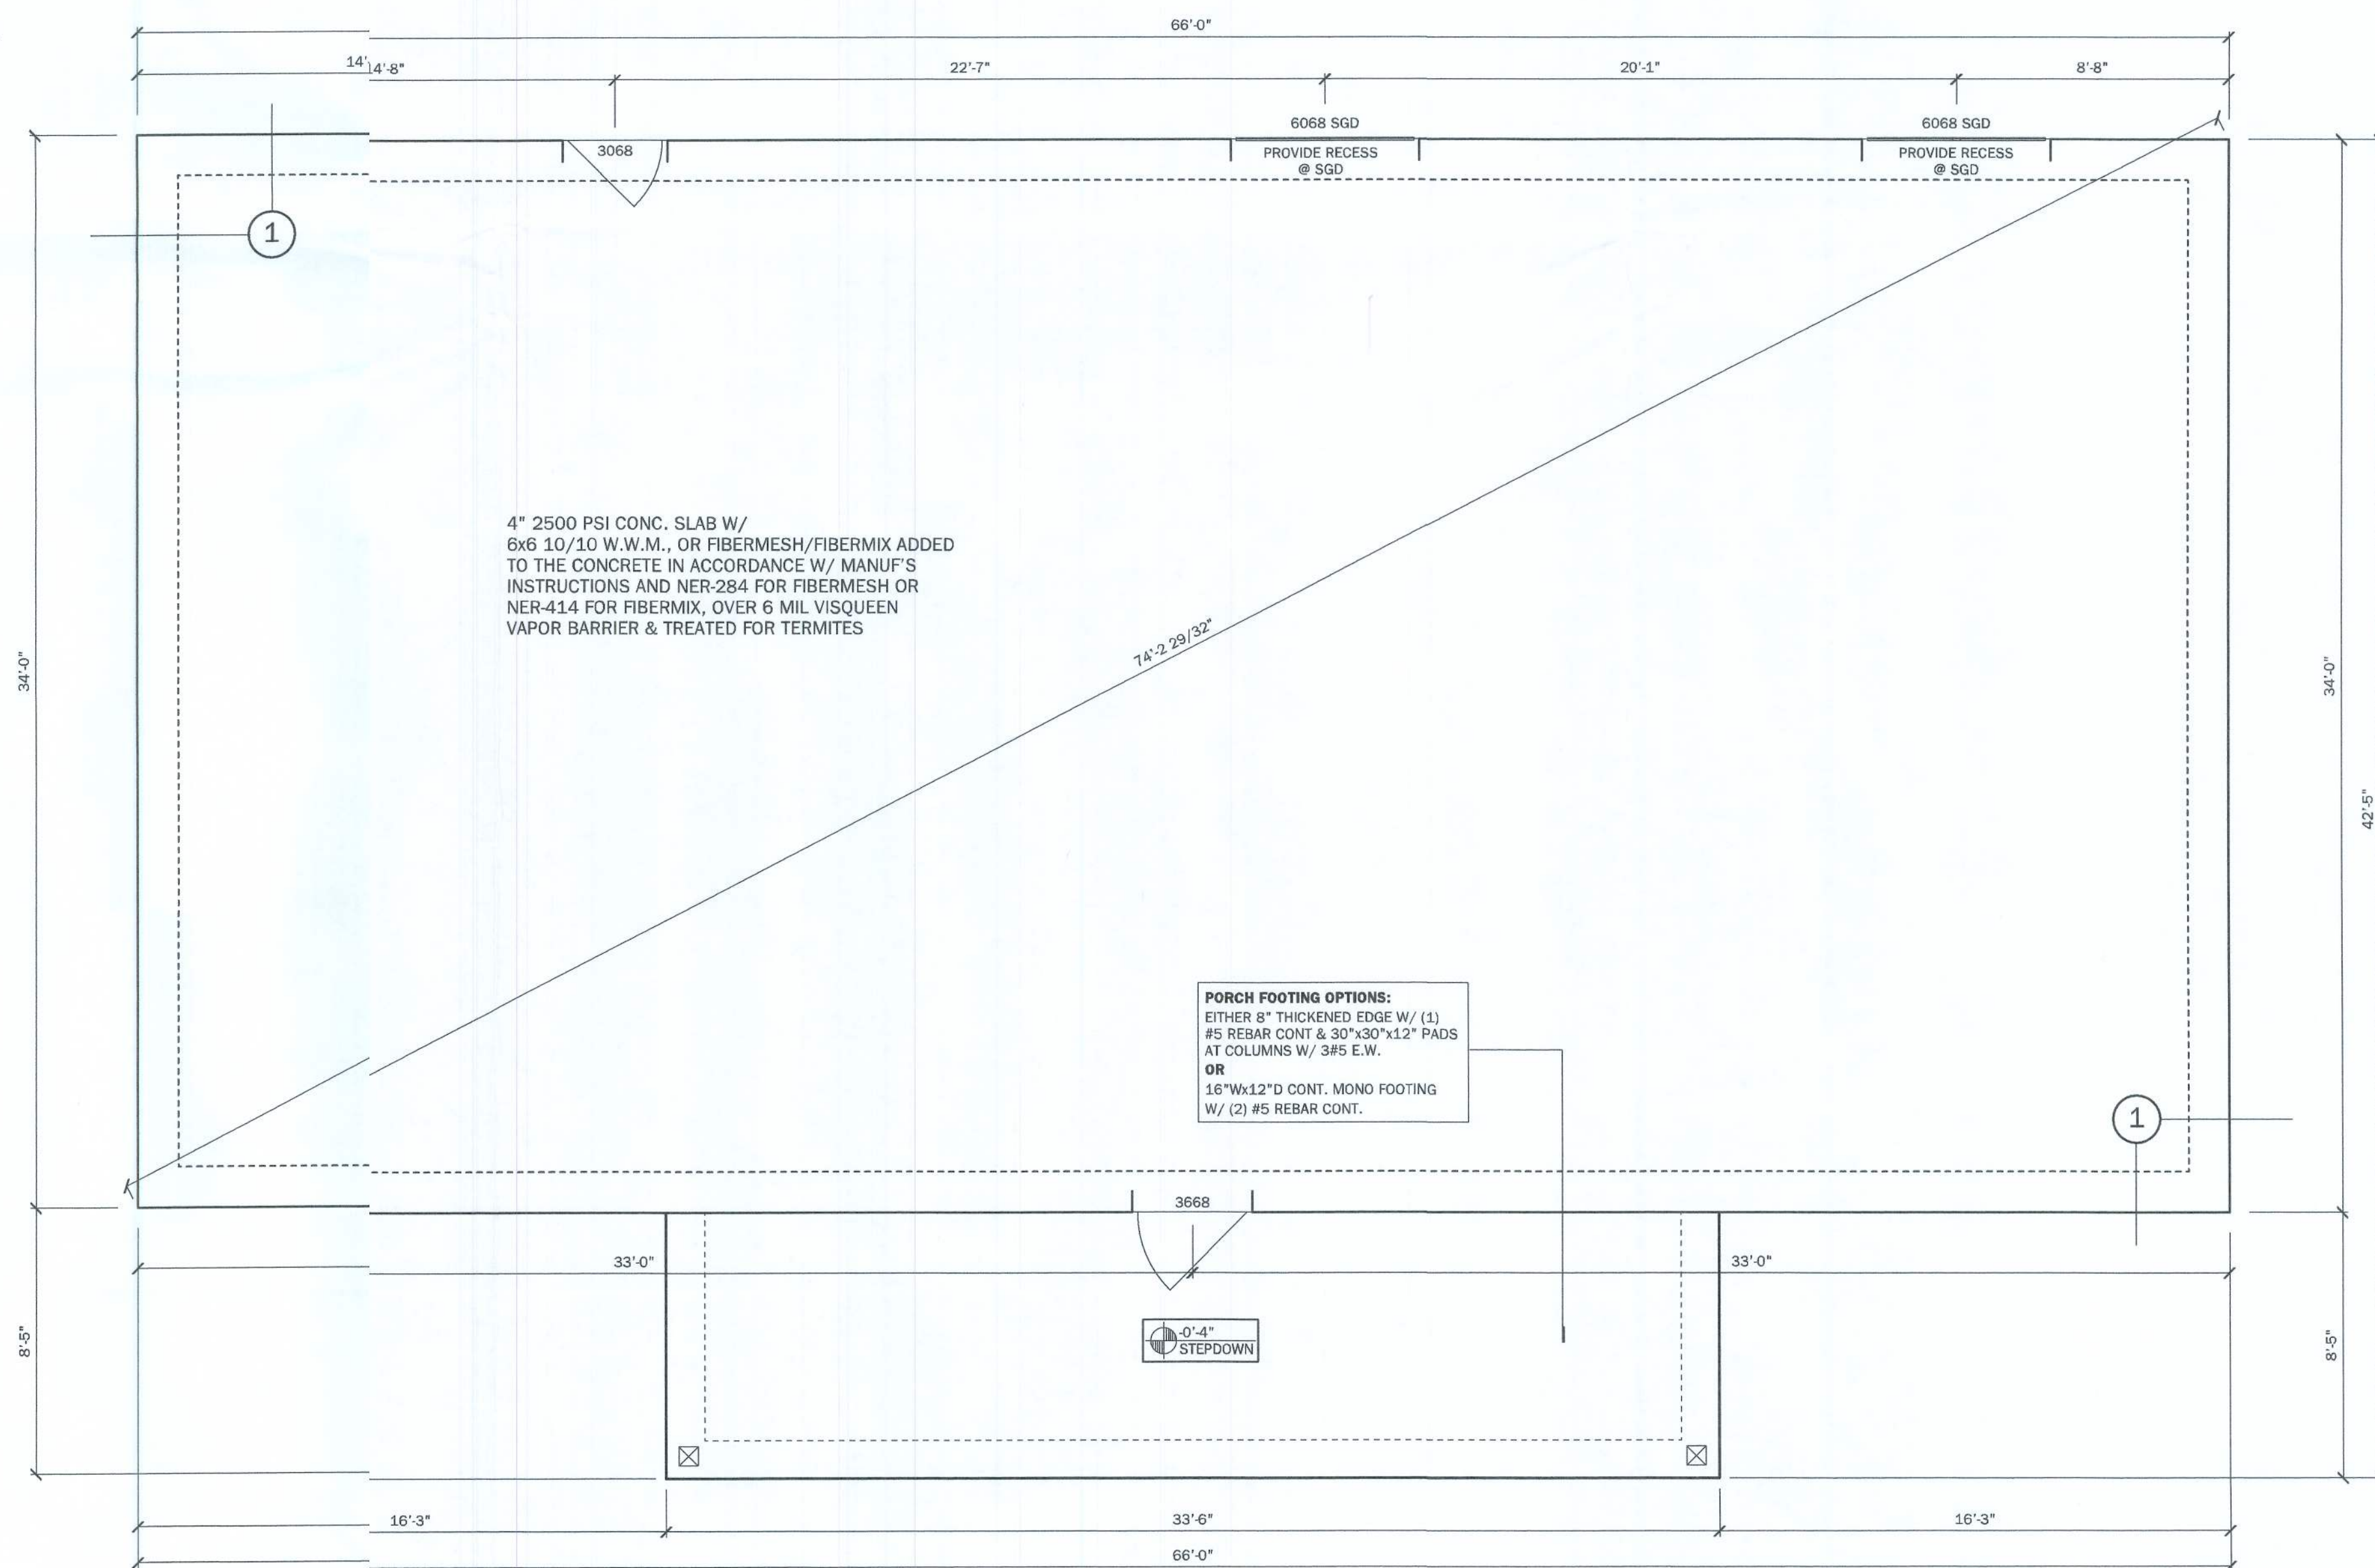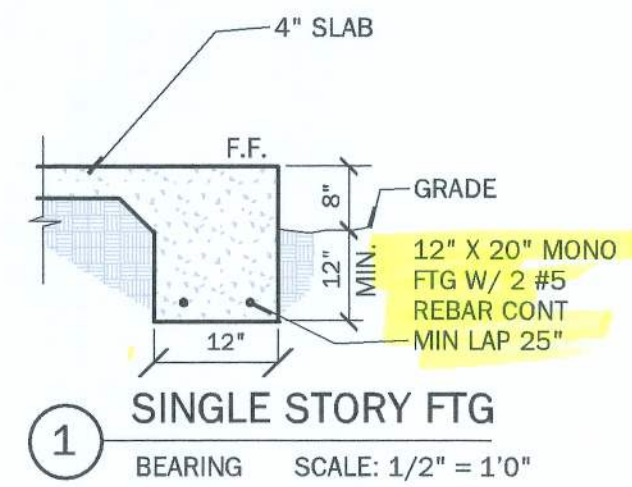

FOUNDATION PLAN
SCALE: 1/4" = 1'-0"

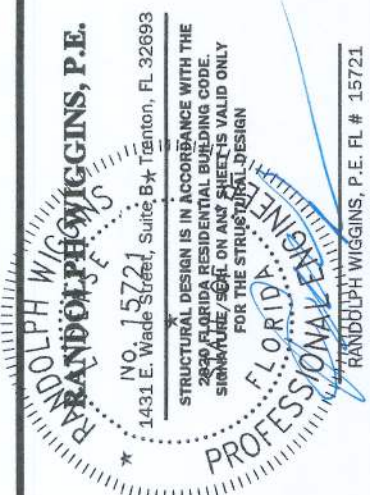

Residential Design
1431 E. Wade Street
Trenton, FL 32693
352-274-3006
tchdesigns@gmail.com | CAD PLAN REVISIONS
| PLAN REVISIONS
| CUSTOM DESIGNS

A | **B** | **D**

PROJECT: **Perry Engineering**
249 SW Sedgefield Lane
Ft White, FL
Columbia County

SHEETNO.

3
OF
4

LAST PLOT DATE: November 15, 2022 06:26 AM

