

DATE 07/31/2008

Columbia County Building Permit

This Permit Must Be Prominently Posted on Premises During Construction

PERMIT

000027225

APPLICANT PATRICK WILSON PHONE 352 206-5459
ADDRESS 6800 SOUTHPOINT PARKWAY JACKSONVILLE FL 32216
OWNER MARONDA HOMES PHONE 904 296-1490
ADDRESS 143 SW TIMBER RIDGE DRIVE LAKE CITY FL 32024
CONTRACTOR THEODORE BROCK PHONE 407 227-3504

LOCATION OF PROPERTY 90W, TL ON 247S, TR ON 252B, TL ON TIMBER RIDGE DR.,
2ND LOT ON RIGHT

TYPE DEVELOPMENT SFD,UTILITY ESTIMATED COST OF CONSTRUCTION 103350.00

HEATED FLOOR AREA 1637.00 TOTAL AREA 2067.00 HEIGHT STORIES 1

FOUNDATION CONC WALLS FRAMED ROOF PITCH 6/12 FLOOR SLAB

LAND USE & ZONING RSF-2 MAX. HEIGHT

Minimum Set Back Requirments: STREET-FRONT 25.00 REAR 15.00 SIDE 10.00

NO. EX.D.U. 0 FLOOD ZONE X DEVELOPMENT PERMIT NO.

PARCEL ID 10-4S-16-02856-102 SUBDIVISION TIMBERLANDS

LOT 2 BLOCK PHASE UNIT TOTAL ACRES 0.50

000001648 CBC1256382

Culvert Permit No. Culvert Waiver Contractor's License Number Applicant/Owner/Contractor

CULVERT 08-433 BK WR Y

Driveway Connection Septic Tank Number LU & Zoning checked by Approved for Issuance New Resident

COMMENTS: ELEVATION CONFIRMATION LETTER REQUIRED BEFORE SLAB, MFE: 98FT

NOC ON FILE

Check # or Cash 918692

FOR BUILDING & ZONING DEPARTMENT ONLY

(footer/Slab)

Temporary Power Foundation Monolithic
date/app. by date/app. by date/app. by

Under slab rough-in plumbing Slab Sheathing/Nailing
date/app. by date/app. by date/app. by

Framing Rough-in plumbing above slab and below wood floor
date/app. by date/app. by

Electrical rough-in Heat & Air Duct Peri. beam (Lintel)
date/app. by date/app. by date/app. by

Permanent power C.O. Final Culvert
date/app. by date/app. by date/app. by

M/H tie downs, blocking, electricity and plumbing Pool
date/app. by date/app. by

Reconnection Pump pole Utility Pole
date/app. by date/app. by date/app. by

M/H Pole Travel Trailer Re-roof
date/app. by date/app. by date/app. by

BUILDING PERMIT FEE \$ 520.00 CERTIFICATION FEE \$ 10.34 SURCHARGE FEE \$ 10.34

MISC. FEES \$ 0.00 ZONING CERT. FEE \$ 50.00 FIRE FEE \$ 0.00 WASTE FEE \$

FLOOD DEVELOPMENT FEE \$ FLOOD ZONE FEE \$ 25.00 CULVERT FEE \$ 25.00 TOTAL FEE 640.68

INSPECTORS OFFICE CLERKS OFFICE

NOTICE: IN ADDITION TO THE REQUIREMENTS OF THIS PERMIT, THERE MAY BE ADDITIONAL RESTRICTIONS APPLICABLE TO THIS PROPERTY THAT MAY BE FOUND IN THE PUBLIC RECORDS OF THIS COUNTY. AND THERE MAY BE ADDITIONAL PERMITS REQUIRED FROM OTHER GOVERNMENTAL ENTITIES SUCH AS WATER MANAGEMENT DISTRICTS, STATE AGENCIES, OR FEDERAL AGENCIES.

"WARNING TO OWNER: YOUR FAILURE TO RECORD A NOTICE OF COMMENCEMENT MAY RESULT IN YOUR PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR AN ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT."

EVERY PERMIT ISSUED SHALL BECOME INVALID UNLESS THE WORK AUTHORIZED BY SUCH PERMIT IS COMMENCED WITHIN 180 DAYS AFTER ITS ISSUANCE, OR IF THE WORK AUTHORIZED BY SUCH PERMIT IS SUSPENDED OR ABANDONED FOR A PERIOD OF 180 DAYS AFTER THE TIME THE WORK IS COMMENCED. A VALID PERMIT RECIEVES AN APPROVED INSPECTION EVERY 180 DAYS. WORK SHALL BE CONSIDERED TO BE IN ACTIVE PROGRESS WHEN THE PERMIT HAS RECIEVED AN APPROVED INSPECTION WITHIN 180 DAYS.

The Issuance of this Permit Does Not Waive Compliance by Permittee with Deed Restrictions.

Columbia County Building Permit Application

For Office Use Only Application # 0806-56 Date Received 6/27 By JW Permit # 1648/27225
 Zoning Official BLK Date 14.07.08 Flood Zone X FEMA Map # N/A Zoning RSF-2
 Land Use Residential Elevation N/A MFE 98 St River N/A Plans Examiner Am Date 7/7/08
 Comments Elevation Confirmation at slab

☒ NOC ☒ EH ☐ Deed or PA ☐ Site Plan ☐ State Road Info ☐ Parent Parcel #
☐ Dev Permit # ☐ In Floodway ☐ Letter of Authorization from Contractor
☐ Unincorporated area ☐ Incorporated area ☐ Town of Fort White ☐ Town of Fort White Compliance letter

Septic Permit No. _____ Fax (904)-332-6367

Name Authorized Person Signing Permit Theodore C. Brock/Melissa McKague Phone (904)-296-1490

Address 6800 Southpoint Pkwy. #300 Jacksonville, FL 32216

Owners Name Maronda Homes Inc. of Florida Phone (904)-296-1490

911 Address 143 SW Timber Ridge Drive Lake City, FL, 32024

Contractors Name Theodore C. Brock Phone (407)-227-3504

Address 6800 Southpoint Pkwy. #300 Jacksonville, FL 32216

Fee Simple Owner Name & Address N/A

Bonding Co. Name & Address N/A

Architect/Engineer Name & Address Tomas Ponce 4005 Maronda Way Sanford, FL 32771

Mortgage Lenders Name & Address Bank of America 250 Park Ave. S. #400 Winter Park, FL 32789

Circle the correct power company - FL Power & Light - Clay Elec. - Suwannee Valley Elec. - Progress Energy

Property ID Number 10-45-10-02850-102 Estimated Cost of Construction \$73,125.00

Subdivision Name Timberlands Lot 2 Block Unit Phase

Driving Directions Hwy 90, Left on 247 South; Right on 252B; Left on Timber Ridge, 2nd lot on Right.

Number of Existing Dwellings on Property 0

Construction of Residential Single Family Dwelling Total Acreage .50 Lot Size X

Do you need a Culvert Permit or Culvert Waiver or Have an Existing Drive Total Building Height NA

Actual Distance of Structure from Property Lines - Front 50.0' Side 35.0' Side 39.0' Rear 74.0'

Number of Stories 1 Heated Floor Area 1637 Total Floor Area 2067 Roof Pitch 12/6

Application is hereby made to obtain a permit to do work and installations as indicated. I certify that no work or installation has commenced prior to the issuance of a permit and that all work be performed to meet the standards of all laws regulating construction in this jurisdiction.

WARNING TO OWNER: YOUR FAILURE TO RECORD A NOTICE OF COMMENCEMENT MAY RESULT IN YOU PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. A NOTICE OF COMMENCEMENT MUST BE RECORDED AND POSTED ON THE JOB SITE BEFORE THE FIRST INSPECTION. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT.

FLORIDA'S CONSTRUCTION LIEN LAW: Protect Yourself and Your Investment

According to Florida Law, those who work on your property or provide materials, and are not paid-in-full, have a right to enforce their claim for payment against your property. This claim is known as a construction lien. If your contractor fails to pay subcontractors or material suppliers or neglects to make other legally required payments, the people who are owed money may look to your property for payment, even if you have paid your contractor in full. This means if a lien is filed against your property, it could be sold against your will to pay for labor, materials or other services which your contractor may have failed to pay.

NOTICE OF RESPONSIBILITY TO BUILDING PERMITEE:

YOU ARE HEREBY NOTIFIED as the recipient of a building permit from Columbia County, Florida, you will be held responsible to the County for any damage to sidewalks and/or road curbs and gutters, concrete features and structures, together with damage to drainage facilities, removal of sod, major changes to lot grades that result in ponding of water, or other damage to roadway and other public infrastructure facilities caused by you or your contractor, subcontractors, agents or representatives in the construction and/or improvement of the building and lot for which this permit is issued. No certificate of occupancy will be issued until all corrective work to these public infrastructures and facilities has been corrected.

OWNERS CERTIFICATION: I hereby certify that all the foregoing information is accurate and all work will be done in compliance with all applicable laws and regulating construction and zoning. I further understand the above written responsibilities in Columbia County for obtaining this Building Permit.



Owners Signature _____
Theodore C. Brock


CONTRACTORS AFFIDAVIT: By my signature I understand and agree that I have informed and provided this written statement to the owner of all the above written responsibilities in Columbia County for obtaining this Building Permit.



Contractor's Signature (Permitee) _____
Theodore C. Brock


Contractor's License Number BC 1250382
Columbia County
Competency Card Number _____

Affirmed under penalty of perjury to by the Contractor and subscribed before me this 4 day of June 2008.
Personally known XXX or Produced Identification _____



State of Florida Notary Signature (For the Contractor)
Melissa L. McKague

SEAL:

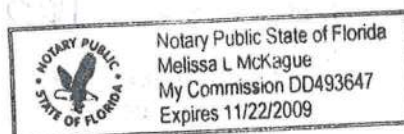

Columbia County Building Permit Application

WARNING TO OWNER: YOUR FAILURE TO RECORD A NOTICE OF COMMENCEMENT MAY RESULT IN YOU PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. A NOTICE OF COMMENCEMENT MUST BE RECORDED AND POSTED ON THE JOB SITE BEFORE THE FIRST INSPECTION. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT.

FLORIDA'S CONSTRUCTION LIEN LAW: Protect Yourself and Your Investment

According to Florida Law, those who work on your property or provide materials, and are not paid-in-full, have a right to enforce their claim for payment against your property. This claim is known as a construction lien. If your contractor fails to pay subcontractors or material suppliers or neglects to make other legally required payments, the people who are owed money may look to your property for payment, even if you have paid your contractor in full. This means if a lien is filed against your property, it could be sold against your will to pay for labor, materials or other services which your contractor may have failed to pay.

NOTICE OF RESPONSIBILITY TO BUILDING PERMITEE:

YOU ARE HEREBY NOTIFIED as the recipient of a building permit from Columbia County, Florida, you will be held responsible to the County for any damage to sidewalks and/or road curbs and gutters, concrete features and structures, together with damage to drainage facilities, removal of sod, major changes to lot grades that result in ponding of water, or other damage to roadway and other public infrastructure facilities caused by you or your contractor, subcontractors, agents or representatives in the construction and/or improvement of the building and lot for which this permit is issued. No certificate of occupancy will be issued until all corrective work to these public infrastructures and facilities has been corrected.

OWNERS CERTIFICATION: I hereby certify that all the foregoing information is accurate and all work will be done in compliance with all applicable laws and regulating construction and zoning. I further understand the above written responsibilities in Columbia County for obtaining this Building Permit.

Owners Signature

Steve Hogg

CONTRACTORS AFFIDAVIT: By my signature I understand and agree that I have informed and provided this written statement to the owner of all the above written responsibilities in Columbia County for obtaining this Building Permit.

Contractor's Signature (Permitee)

Theodore C. Brock

Contractor's License Number

CPC 1256382

Columbia County

Competency Card Number


Affirmed under penalty of perjury to by the Contractor and subscribed before me this 24 day of June 2008.

Personally known XXX or Produced Identification _____

State of Florida Notary Signature (For the Contractor)

Melissa L. McKague

SEAL:

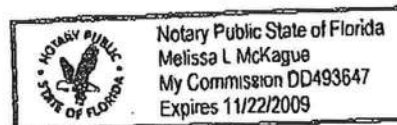

This Instrument Prepared by and Return to :

Amy Wesp
SOUTHERN TITLE HOLDING
COMPANY, LLC.
3943 BAY MEADOWS ROAD
JACKSONVILLE, Florida 32217

as a necessary incident to the fulfillment of conditions
contained in a title insurance commitment issued by it.

Property Appraisers Parcel I.D. (Folio) Number(s):
R02856-000

Grantee(s) I.D.#(s):

File No: JX0812085

Inst: 200812010775 Date: 6/6/2008 Time: 1:05 PM

Doc Stamp-Deed: 6293.00

DC, P. DeWitt Cason, Columbia County Page 1 of 1 8:1151 P-2385

WARRANTY DEED
(CORPORATION)

This Warranty Deed Made this 27th day of May, 2008, by RML HOLDINGS INC., A FLORIDA CORPORATION, and having its place of business at 703 NW BLACKBERRY CIRCLE, LAKE CITY, Florida 32055, hereinafter called the grantor,

to MARONDA HOMES, INC. OF FLORIDA, A FLORIDA CORPORATION, whose post office address is: 11200 ST. JOHNS INDUSTRIAL PARKWAY, JACKSONVILLE, FLORIDA 32246, hereinafter called the grantee,

\$899,000.00

WITNESSETH: That said grantor, for and in consideration of the sum of ~~899,000~~ Dollars and other valuable considerations, receipt whereof is hereby acknowledged, by these presents grants, bargains, sells, aliens, remises, releases, conveys and confirms unto the grantee, all that certain land situate in Columbia County, Florida, viz: LOTS 1, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 24, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, AND 41, OF TIMBERLANDS, PHASE 1, ACCORDING TO PLAT THEREOF AS RECORDED IN PLAT BOOK 9, PAGE 26 AND 27 OF THE PUBLIC RECORDS OF COLUMBIA COUNTY, FLORIDA.

TOGETHER with all the tenements, hereditaments and appurtenances thereto belonging or in anywise appertaining.

To Have and to Hold, the same in fee simple forever.

And the grantor hereby covenants with said grantee that the grantor is lawfully seized of said land in fee simple; that the grantor has good right and lawful authority to sell and convey said land; that the grantor hereby fully warrants the title to said land and will defend the same against the lawful claims of all persons whomsoever; and that said land is free of all encumbrances, except taxes accruing subsequent to December 31, 2007, reservations, restrictions and easements of record, if any.

(Wherever used herein the terms "grantor" and "grantee" included all the parties to this instrument, and the heirs, legal representatives and assigns of individuals, and the successors and assigns of corporation.)

In Witness Whereof, the Grantor has caused these presents to be executed in its name, and its corporate seal to be hereunto affixed, by its proper officers thereunto duly authorized, the day and year first above written.

Signed, sealed and delivered in our presence:

ATTEST:

Secretary

RML HOLDINGS INC.

Witness Signature: Worth D. Morris

Printed Name: WORTH D. MORRIS

Witness Signature: Jody M. Goble, AVP

Printed Name: Jody M. Goble


BY: Robert R. Lardizabal
ROBERT R. LARDIZABAL, PRESIDENT

STATE OF FLORIDA
COUNTY OF DUVAL

The foregoing instrument was acknowledged before me this 28th day of May, 2008, by ROBERT R. LARDIZABAL as PRESIDENT of RML HOLDINGS INC., A FLORIDA CORPORATION, on behalf of the corporation. He/she is personally known to me or who has produced driver license(s) as identification.


My Commission Expires:

Worth D. Morris
Printed Name: WORTH D. MORRIS
Notary Public
Serial Number

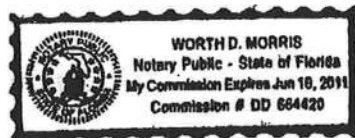

LEGAL DESCRIPTION:

LOT TWO (2) OF "TIMBERLANDS, PHASE 1" AS PER PLAT THEREOF, AS RECORDED IN PLAT BOOK '9', PAGE 27 OF THE PUBLIC RECORDS OF COLUMBIA COUNTY, FLORIDA.



PROPOSED BU

IN SECTION 10, TOWN
16 EAST, COLUMBIA

CERTIFIED TO:


- 1) MARONDA HOMES

BUILDING SETBACK NOTE:

BUILDING SETBACK INFORMATION FOR "TIMBERLANDS" IS AS FOLLOWS: FRONT 25', REAR 15', SIDE 10'

SURVEYOR NOTES:

- 1) TO THE BEST OF MY KNOWLEDGE, THERE ARE NO ENCROACHMENTS, BOUNDARY LINE DISPUTES, EASEMENTS, OR CLAIMS OF EASEMENTS, OTHER THAN ARE DEPICTED ON THIS DRAWING.
- 2) ALL UTILITIES AND OR IMPROVEMENTS, IF ANY, MAY NOT BE SHOWN ON THIS DRAWING.
- 3) IN THE OPINION OF THIS SURVEYOR THE BOUNDARY SHOWN HEREON BEST REPRESENTS THE LOCATION OF THE SUBJECT PROPERTY IN RELATION TO THE DESCRIPTION AND THOSE PROPERTY CORNERS FOUND TO BE ACCEPTABLE TO THIS SURVEYOR.
- 4) BUILDING SETBACK LINES DEPICTED HEREON ARE SHOWN AS PER THE RECORD PLAT, BUT ARE SUBJECT TO CHANGE. PRIOR TO ANY NEW CONSTRUCTION, THE APPROPRIATE GOVERNING AUTHORITY SHOULD BE CONTACTED FOR THE CURRENT SETBACK REQUIREMENTS.
- 5) THIS MAP OF SURVEY REFLECTS CONDITIONS LOCATED AS OF THE DATE OF FIELD WORK COMPLETION (SEE TITLE BLOCK).
- 6) AREAS OF ENVIRONMENTAL CONCERN HAVE NOT BEEN LOCATED BY THIS SURVEYOR, UNLESS OTHERWISE DEPICTED HEREON.

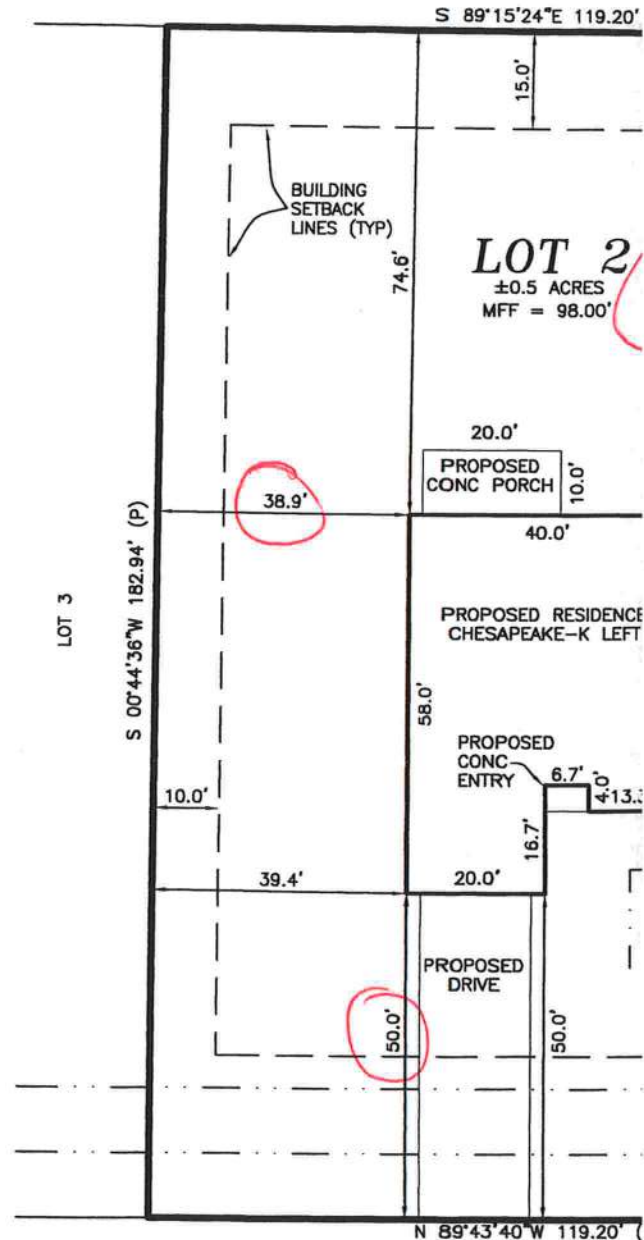

S.W. TIMBER RIDGE
60' RIGHT-OF-WAY

FLOOD NOTE:

IN THE OPINION OF THIS SURVEYOR, ACCORDING TO THE NATIONAL FLOOD INSURANCE PROGRAM, FLOOD INSURANCE RATE MAP COMMUNITY PANEL NO. 120070-0175-B, DATED 1-6-88, THIS PROPERTY IS IN FLOOD ZONE "X" WHICH IS AN AREA DETERMINED TO BE OUTSIDE 500-YEAR FLOOD PLAIN, AS SCALED FROM SAID MAP. INFORMATION FROM THE FEDERAL EMERGENCY MANAGEMENT AGENCY (FEMA) FLOOD INSURANCE RATE MAPS, SHOWN ON THIS MAP, WAS CURRENT AS OF THE REFERENCED DATE. MAP REVISIONS AND AMENDMENTS ARE PERIODICALLY MADE BY LETTER AND MAY NOT BE REFLECTED ON THE MOST CURRENT MAP.

**COLUMBIA COUNTY BUILDING DEPARTMENT
RESIDENTIAL MINIMUM PLAN REQUIREMENTS AND CHECKLIST
FOR THE FLORIDA RESIDENTIAL BUILDING CODE 2004 with 2005 & 2006
Supplements and One (1) and Two (2) Family Dwellings**

ALL REQUIREMENTS ARE SUBJECT TO CHANGE

ALL BUILDING PLANS MUST INDICATE COMPLIANCE with the Current FLORIDA BUILDING CODES and the Current FLORIDA RESIDENTIAL CODE. ALL PLANS OR DRAWING SHALL PROVIDED CALCULATIONS AND DETAILS THAT HAVE THE SEAL AND SIGNATURE OF A CERTIFIED ARCHITECT OR ENGINEER REGISTERED IN THE STATE OF FLORIDA, OR ALTERNATE METHODOLOGIES, APPROVED BY THE STATE OF FLORIDA BUILDING COMMISSION FOR ONE- AND-TWO FAMILY DWELLINGS.

FOR DESIGN PURPOSES THE FOLLOWING BASIC WIND SPEEDS ARE PER FIGURE R301.2(4) of the Residential Code (Florida Wind speed map) SHALL BE USED.

WIND SPEED LINE SHALL BE DEFINED AS FOLLOWS: THE CENTERLINE OF INTERSTATE 75.

1. ALL BUILDINGS CONSTRUCTED EAST OF SAID LINE SHALL BE ----- 100 MPH
2. ALL BUILDINGS CONSTRUCTED WEST OF SAID LINE SHALL BE ----- 110 MPH
3. NO AREA IN COLUMBIA COUNTY IS IN A WIND BORNE DEBRIS REGION

GENERAL REQUIREMENTS:

- Two (2) complete sets of plans containing the following:
- All drawings must be clear, concise and drawn to scale, details that are not used shall be marked void
- Condition space (Sq. Ft.) and total (Sq. Ft.) under roof shall be shown on the plans.
- Designers name and signature shall be on all documents and a licensed architect or engineer, signature and official embossed seal shall be affixed to the plans and documents per FBC 106.1.

Site Plan information including:

- Dimensions of lot or parcel of land
- Dimensions of all building set backs
- Location of all other structures (include square footage of structures) on parcel, existing or proposed well and septic tank and all utility easements.
- Provide a full legal description of property.

Wind-load Engineering Summary, calculations and any details required:

- Plans or specifications must meet state compliance with FRC Chapter 3
- The following information must be shown as per section FRC
- Basic wind speed (3-second gust), miles per hour
- Wind importance factor and nature of occupancy
- Wind exposure – if more than one wind exposure is used, the wind exposure and applicable wind direction shall be indicated
- The applicable internal pressure coefficient. Components and Cladding The design wind pressure in terms of psf (kN/m²), to be used for the design of exterior component and cladding materials not specifically designed by the registered design professional.

Elevations Drawing including:

- All side views of the structure
- Roof pitch
- Overhang dimensions and detail with attic ventilation
- Location, size and height above roof of chimneys
- Location and size of skylights with Florida Product Approval
- Number of stories
- e) Building height from the established grade to the roof's highest peak

Floor Plan including:

- Dimensioned area plan showing rooms, attached garage, breeze ways, covered porches, deck, balconies and raised floor surfaces located more than 30 inches above the floor or grade
- All exterior and interior shear walls indicated
- Shear wall opening shown (Windows, Doors and Garage doors)
- Emergency escape and rescue opening in each bedroom (net clear opening shown)
- Safety glazing of glass where needed
- Fireplaces types (gas appliance) (vented or non-vented) or wood burning with Hearth (see chapter 10 of FRC)
- Stairs with dimensions (width, tread and riser and total run) details of guardrails, Handrails (see FRC 311)
- Plans must show and identify accessibility of bathroom (see FRC 322)

All materials placed within opening or onto/into exterior shear walls, soffits or roofs shall have Florida product approval number and mfg. installation information submitted with the plans (see Florida product approval form)

Foundation Plans Per FRC 403:

- a) Location of all load-bearing walls footings indicated as standard, monolithic, dimensions, size and type of reinforcing.
- b) All posts and/or column footing including size and reinforcing
- c) Any special support required by soil analysis such as piling.
- d) Assumed load-bearing value of soil _____ (psf)
- e) Location of horizontal and vertical steel, for foundation or walls (include # size and type)

CONCRETE SLAB ON GRADE Per FRC R506

- Show Vapor retarder (6mil. Polyethylene with joints lapped 6 inches and sealed)
- Show control joints, synthetic fiber reinforcement or welded wire fabric reinforcement and Supports

PROTECTION AGAINST TERMITES Per FRC 320:

- Indicate on the foundation plan if soil treatment is used for subterranean termite prevention or submit other approved termite protection methods. Protection shall be provided by registered termiticides

Masonry Walls and Stem walls (load bearing & shear Walls) FRC Section R606

- Show all materials making up walls, wall height, and Block size, mortar type
- Show all Lintel sizes, type, spans and tie-beam sizes and spacing of reinforcement

Metal frame shear wall and roof systems shall be designed, signed and sealed by Florida Prof. Engineer or Architect

Floor Framing System: First and/or second story

- Floor truss package shall including layout and details, signed and sealed by Florida Registered Professional Engineer
- Show conventional floor joist type, size, span, spacing and attachment to load bearing walls, stem walls and/or piers
- Girder type, size and spacing to load bearing walls, stem wall and/or piers
- Attachment of joist to girder
- Wind load requirements where applicable
- Show required under-floor crawl space
- Show required amount of ventilation opening for under-floor spaces
- Show required covering of ventilation opening.
- Show the required access opening to access to under-floor spaces
- Show the sub-floor structural panel sheathing type, thickness and fastener schedule on the edges & intermediate of the areas structural panel sheathing
- Show Draft stopping, Fire caulking and Fire blocking
- Show fireproofing requirements for garages attached to living spaces, per FRC section R309
- Provide live and dead load rating of floor framing systems (psf).

WOOD WALL FRAMING CONSTRUCTION FRC CHAPTER 6

- Stud type, grade, size, wall height and oc spacing for all load bearing or shear walls.
- Fastener schedule for structural members per table R602.3 (1) are to be shown.
- Show wood structural panel's sheathing attachment to studs, joist, trusses, rafters and structural members, showing fastener schedule attachment on the edges & intermediate of the areas structural panel sheathing
- Show all required connectors with a max uplift rating and required number of connectors and oc spacing for continuous connection of structural walls to foundation and roof trusses or rafter systems.
- Show sizes, type, span lengths and required number of support jack studs. king studs for shear wall opening and girder or header per FRC Table R502.5 (1)
- Indicate where pressure treated wood will be placed.
- Show all wall structural panel sheathing, grade, thickness and show fastener schedule for structural panel sheathing edges & intermediate areas
- A detail showing gable truss bracing, wall balloon framing details or/ and wall hinge bracing detail

ROOF SYSTEMS:

- Truss design drawing shall meet section FRC R802.10 Wood trusses. Include a layout and truss details and be signed and sealed by Fl. Pro. Eng.
- Show types of connector's assemblies' and resistance uplift rating for all trusses and rafters
- Show gable ends with rake beams showing reinforcement or gable truss and wall bracing details
- Provide dead load rating of trusses

Conventional Roof Framing Layout Per FRC 802:

- Rafter and ridge beams sizes, span, species and spacing
- Connectors to wall assemblies' include assemblies' resistance to uplift rating.
- Valley framing and support details
- Provide dead load rating of rafter system.

ROOF SHEATHING FRC Table R602,3(2) FRC 803

- Include all materials which will make up the roof decking, identification of structural panel sheathing, grade, thickness and show fastener schedule for structural panel sheathing on the edges & intermediate areas

ROOF ASSEMBLIES FRC Chapter 9

- Include all materials which will make up the roof assemblies covering; with Florida Product Approval numbers for each component of the roof assemblies covering.

FCB Chapter 13 Florida Energy Efficiency Code for Building Construction

- Residential construction shall comply with this code by using the following compliance methods in the FBC Subchapter 13-6, Residential buildings compliance methods. Two of the required forms are to be submitted, showing dimensions condition area equal to the total condition living space area
- Show the insulation R value for the following areas of the structure: Attic space, Exterior wall cavity and Crawl space (if applicable)

HVAC information shown

- Manual J sizing equipment or equivalent computation
- Exhaust fans locations in bathrooms

Plumbing Fixture layout shown

- All fixtures waste water lines shall be shown on the foundation plan

Electrical layout shown including:

- Switches, outlets/receptacles, lighting and all required GFCI outlets identified
- Ceiling fans
- Smoke detectors
- Service panel, sub-panel, location(s) and total ampere ratings

- On the electrical plans identify the electrical service overcurrent protection device for the main electrical service. This device shall be installed on the exterior of structures to serve as a disconnecting means for the utility company electrical service. Conductors used from the exterior disconnecting means to a panel or sub panel shall have four-wire conductors, of which one conductor shall be used as an equipment ground. Indicate if the utility company service entrance cable will be of the overhead or underground type.
- Appliances and HVAC equipment and disconnects
- Arc Fault Circuits (AFCI) in bedrooms
- Notarized Disclosure Statement for Owner Builders
- Notice of Commencement Recorded (in the Columbia County Clerk Office) Notice Of Commencement is required to be filed with the building department Before Any Inspections Will Be Done.

Private Potable Water

- Size of pump motor
- Size of pressure tank
- Cycle stop valve if used

THE FOLLOWING ITEMS MUST BE SUBMITTED WITH BUILDING PLANS

- Building Permit Application: A current Building Permit Application form is to be completed and submitted for all residential projects.
- Parcel Number: The parcel number (Tax ID number) from the Property Appraiser (386) 758-1084 is required. A copy of property deed is also requested.
- Environmental Health Permit or Sewer Tap Approval: A copy of the Environmental Health permit, existing septic approval or sewer tap approval is required before a building permit can be issued. (386) 758-1058 (Toilet facilities shall be provided for construction workers)
- City Approval: If the project is to be located within the city limits of the Town of Fort White, prior approval is required. The Town of Fort White approval letter is required to be submitted by the owner or contractor to this office when applying for a Building Permit. (386) 497-2321
- Flood Information: All projects within the Floodway of the Suwannee or Santa Fe Rivers shall require permitting through the Suwannee River Water Management District, before submitting application to this office. Any project located within a flood zone where the base flood elevation (100 year flood) has been established shall meet the requirements of Section 8.8 of the Columbia County Land Development Regulations. Any project located within a flood zone where the base flood elevation has not been established (Zone A) shall meet the requirements of Section 8.7 of the Columbia County Land Development Regulations. CERTIFIED FINISHED FLOOR ELEVATIONS WILL BE REQUIRED ON ANY PROJECT WHERE THE BASE FLOOD ELEVATION (100 YEAR FLOOD) HAS BEEN ESTABLISHED. A development permit will also be required. The permit cost is \$50.00.
- Driveway Connection: If the property does not have an existing access to a public road, then an application for a culvert permit (\$25.00) must be made. If the applicant feels that a culvert is not needed, they may apply for a culvert waiver (\$50.00). All culvert waivers are sent to the Columbia County Public Works Department for approval or denial.
- 911 Address: If the project is located in an area where the 911 address has been issued, then the proper Paper work from the 911 Addressing Departments must be submitted. (386) 758-1125

ALL REQUIRED INFORMATION IS TO BE SUBMITTED FOR REVIEW. NOTIFICATION WILL BE GIVEN WHEN THE APPLICATION AND PLANS ARE APPROVED AND READY TO PERMIT.

PRODUCT APPROVAL SPECIFICATION SHEET

Location: _____ **Project Name:** _____

As required by Florida Statute 553.842 and Florida Administrative Code 9B-72, please provide the information and the product approval number(s) on the building components listed below if they will be utilized on the construction project for which you are **applying for a building permit on or after April 1, 2004**. We recommend you contact your local product supplier should you not know the product approval number for any of the applicable listed products. More information about statewide product approval can be obtained at www.floridapanel.com

Category/Subcategory	Manufacturer	Product Description	Approval Number(s)
A. EXTERIOR DOORS			
1. Swinging			
2. Sliding			
3. Sectional			
4. Roll up			
5. Automatic			
6. Other			
B. WINDOWS			
1. Single hung			
2. Horizontal Slider			
3. Casement			
4. Double Hung			
5. Fixed			
6. Awning			
7. Pass-through			
8. Projected			
9. Mullion			
10. Wind Breaker			
11. Dual Action			
12. Other			
C. PANEL WALL			
1. Siding			
2. Soffits			
3. EIFS			
4. Storefronts			
5. Curtain walls			
6. Wall louver			
7. Glass block			
8. Membrane			
9. Greenhouse			
10. Other			
D. ROOFING PRODUCTS			
1. Asphalt Shingles			
2. Underlayments			
3. Roofing Fasteners			
4. Non-structural Metal Rf			
5. Built-Up Roofing			
6. Modified Bitumen			
7. Single Ply Roofing Sys			
8. Roofing Tiles			
9. Roofing Insulation			
10. Waterproofing			
11. Wood shingles /shakes			
12. Roofing Slate			

Category/Subcategory (cont.)	Manufacturer	Product Description	Approval Number(s)
13. Liquid Applied Roof Sys			
14. Cements-Adhesives – Coatings			
15. Roof Tile Adhesive			
16. Spray Applied Polyurethane Roof			
17. Other			
E. SHUTTERS			
1. Accordion			
2. Bahama			
3. Storm Panels			
4. Colonial			
5. Roll-up			
6. Equipment			
7. Others			
F. SKYLIGHTS			
1. Skylight			
2. Other			
G. STRUCTURAL COMPONENTS			
1. Wood connector/anchor			
2. Truss plates			
3. Engineered lumber			
4. Railing			
5. Coolers-freezers			
6. Concrete Admixtures			
7. Material			
8. Insulation Forms			
9. Plastics			
10. Deck-Roof			
11. Wall			
12. Sheds			
13. Other			
H. NEW EXTERIOR ENVELOPE PRODUCTS			
1.			
2.			

The products listed below did not demonstrate product approval at plan review. I understand that at the time of inspection of these products, the following information must be available to the inspector on the jobsite; 1) copy of the product approval, 2) the performance characteristics which the product was tested and certified to comply with, 3) copy of the applicable manufacturers installation requirements.

I understand these products may have to be removed if approval cannot be demonstrated during inspection

Contractor or Contractor's Authorized Agent Signature

Location

Print Name

Date

Permit # (FOR STAFF USE ONLY)

FLORIDA ENERGY EFFICIENCY CODE FOR BUILDING CONSTRUCTION

Florida Department of Community Affairs
Residential Whole Building Performance Method A

2/1 TM

Project Name: CHESAPEAKE GAINESVILLE	Builder: MARONDA HOMES
Address: 143 SW Timber Ridge Dr.	Permitting Office: Columbia
City, State: Lake City, FL 32815	Permit Number: 27225
Owner: ELECTRIC	Jurisdiction Number: 221000
Climate Zone: North	

1. New construction or existing <input type="checkbox"/> New	12. Cooling systems
2. Single family or multi-family <input type="checkbox"/> Single family	a. Central Unit Cap: 33.8 kBtu/hr
3. Number of units, if multi-family <input type="checkbox"/> 1	SEER: 13.00
4. Number of Bedrooms <input type="checkbox"/> 3	b. N/A
5. Is this a worst case? <input type="checkbox"/> Yes	c. N/A
6. Conditioned floor area (ft ²) <input type="checkbox"/> 1637 ft ²	13. Heating systems
7. Glass type ¹ and area: (Label reqd. by 13-104.4.5 if not default)	a. Electric Heat Pump Cap: 33.8 kBtu/hr
a. U-factor: Description Area	HSPF: 7.80
(or Single or Double DEFAULT) 7a(Sngle Default) 133.0 ft ²	b. N/A
b. SHGC:	c. N/A
(or Clear or Tint DEFAULT) 7b. (Clear) 133.0 ft ²	14. Hot water systems
8. Floor types	a. Electric Resistance Cap: 50.0 gallons
a. Slab-On-Grade Edge Insulation R=0.0, 175.0(p) ft	EF: 0.90
b. N/A	b. N/A
c. N/A	c. Conservation credits
9. Wall types	(HR-Heat recovery, Solar
a. Concrete, Int Insul, Exterior R=4.1, 1033.0 ft ²	DHP-Dedicated heat pump)
b. Frame, Steel, Adjacent R=13.0, 207.0 ft ²	15. HVAC credits PT, <input type="checkbox"/>
c. N/A	(CF-Ceiling fan, CV-Cross ventilation,
d. N/A	HF-Whole house fan,
e. N/A	PT-Programmable Thermostat,
10. Ceiling types	MZ-C-Multizone cooling,
a. Under Attic R=19.0, 1701.0 ft ²	MZ-H-Multizone heating)
b. N/A	
c. N/A	
11. Ducts	
a. Sup: Unc. Ret: Con. AH(Sealed):Interior Sup. R=6.0, 165.0 ft	
b. N/A	

Glass/Floor Area: 0.08

Total as-built points: 21887

Total base points: 22865

PASS

I hereby certify that the plans and specifications covered by this calculation are in compliance with the Florida Energy Code.

PREPARED BY: Wayne CampbellDATE: 06/04/08

I hereby certify that this building, as designed, is in compliance with the Florida Energy Code.

OWNER/AGENT: Melissa McCarneDATE: 06/04/08

Review of the plans and specifications covered by this calculation indicates compliance with the Florida Energy Code. Before construction is completed this building will be inspected for compliance with Section 553.908 Florida Statutes.

BUILDING OFFICIAL: _____

DATE: _____



¹ Predominant glass type. For actual glass type and areas, see Summer & Winter Glass output on pages 2&4.

SUMMER CALCULATIONS

Residential Whole Building Performance Method A - Details

ADDRESS: , , ,

PERMIT #:

BASE				AS-BUILT							
GLASS TYPES											
.18 X Conditioned X BSPM = Points Floor Area				Type/SC	Overhang Ornt Len Hgt		Area X SPM X SOF = Points				
.18	1637.0	18.59	5478.0	1.Single, Clear	NW	1.0	6.0	16.0	29.42	0.97	458.0
				2.Single, Clear	SW	0.6	6.0	16.0	45.75	1.00	730.0
				3.Single, Clear	SE	1.0	7.5	40.0	48.65	0.99	1922.0
				4.Single, Clear	SE	1.0	6.0	16.0	48.65	0.96	749.0
				5.Single, Clear	NE	0.6	3.0	3.0	33.55	0.94	94.0
				6.Single, Clear	NE	1.0	11.0	36.0	33.55	1.00	1204.0
				7.Single, Clear	NE	1.0	3.0	6.0	33.55	0.86	173.0
				As-Built Total:		133.0			5330.0		
WALL TYPES Area X BSPM = Points				Type	R-Value		Area X SPM = Points				
Adjacent	207.0	0.70	144.9	1. Concrete, Int Insul, Exterior	4.1		1033.0	1.13	1172.5		
Exterior	1033.0	1.70	1756.1	2. Frame, Steel, Adjacent	13.0		207.0	0.90	186.3		
Base Total:				1240.0		1901.0		As-Built Total:		1240.0 1358.8	
DOOR TYPES Area X BSPM = Points				Type	Area X SPM = Points						
Adjacent	18.0	2.40	43.2	1.Exterior Insulated				20.0	4.10	82.0	
Exterior	20.0	6.10	122.0	2.Adjacent Wood				18.0	2.40	43.2	
Base Total:				38.0		165.2		As-Built Total:		38.0 125.2	
CEILING TYPES Area X BSPM = Points				Type	R-Value		Area X SPM X SCM = Points				
Under Attic	1637.0	1.73	2832.0	1. Under Attic	19.0		1701.0	2.34 X 1.00	3980.3		
Base Total:				1637.0		2832.0		As-Built Total:		1701.0 3980.3	
FLOOR TYPES Area X BSPM = Points				Type	R-Value		Area X SPM = Points				
Slab	175.0(p)	-37.0	-6475.0	1. Slab-On-Grade Edge Insulation	0.0		175.0(p)	-41.20	-7210.0		
Raised	0.0	0.00	0.0								
Base Total:				-6475.0		As-Built Total:		175.0		-7210.0	
INFILTRATION Area X BSPM = Points				Area X SPM = Points							
1637.0 10.21 16713.8				1637.0 10.21 16713.8							

SUMMER CALCULATIONS**Residential Whole Building Performance Method A - Details**

ADDRESS: , , ,

PERMIT #:

BASE				AS-BUILT					
Summer Base Points: 20615.0				Summer As-Built Points: 20298.1					
Total Summer Points	X System Multiplier	=	Cooling Points	Total Component (System - Points)	X Cap Ratio	X Duct Multiplier (DM x DSM x AHU)	X System Multiplier	X Credit Multiplier	= Cooling Points
20615.0	0.3250		6699.9	<small>(sys 1: Central Unit 33800btuh ,SEER/EFF(13.0) Ducts:Unc(S),Con(R),Int(AH),R6.0(INS)</small> 20298 1.00 (1.08 x 1.147 x 0.86) 0.260 0.950 5374.1 20298.1 1.00 1.072 0.260 0.950 5374.1					

WINTER CALCULATIONS

Residential Whole Building Performance Method A - Details

ADDRESS: , , ,

PERMIT #:

BASE				AS-BUILT							
GLASS TYPES											
.18 X Conditioned X BWPM = Points Floor Area				Type/SC	Overhang Ornt Len Hgt		Area X WPM X WOF = Points				
.18	1637.0	20.17	5943.0	1.Single, Clear	NW	1.0	6.0	16.0	32.93	1.00	526.0
				2.Single, Clear	SW	0.6	6.0	16.0	24.09	1.01	387.0
				3.Single, Clear	SE	1.0	7.5	40.0	21.82	1.02	890.0
				4.Single, Clear	SE	1.0	6.0	16.0	21.82	1.04	362.0
				5.Single, Clear	NE	0.6	3.0	3.0	32.04	1.00	96.0
				6.Single, Clear	NE	1.0	11.0	36.0	32.04	1.00	1152.0
				7.Single, Clear	NE	1.0	3.0	6.0	32.04	1.01	194.0
				As-Built Total:				133.0	3607.0		
WALL TYPES Area X BWPM = Points				Type	R-Value		Area X WPM = Points				
Adjacent	207.0	3.60	745.2	1. Concrete, Int Insul, Exterior	4.1		1033.0	6.42		6631.9	
Exterior	1033.0	3.70	3822.1	2. Frame, Steel, Adjacent	13.0		207.0	4.90		1014.3	
Base Total: 1240.0 4567.3				As-Built Total:		1240.0		7646.2			
DOOR TYPES Area X BWPM = Points				Type	R-Value		Area X WPM = Points				
Adjacent	18.0	11.50	207.0	1.Exterior Insulated			20.0	8.40		168.0	
Exterior	20.0	12.30	246.0	2.Adjacent Wood			18.0	11.50		207.0	
Base Total: 38.0 453.0				As-Built Total:		38.0		375.0			
CEILING TYPES Area X BWPM = Points				Type	R-Value		Area X WPM X WCM = Points				
Under Attic	1637.0	2.05	3355.8	1. Under Attic	19.0		1701.0	2.70 X 1.00		4592.7	
Base Total: 1637.0 3355.8				As-Built Total:		1701.0		4592.7			
FLOOR TYPES Area X BWPM = Points				Type	R-Value		Area X WPM = Points				
Slab	175.0(p)	8.9	1557.5	1. Slab-On-Grade Edge Insulation	0.0		175.0(p)	18.80		3290.0	
Raised	0.0	0.00	0.0								
Base Total: 1557.5				As-Built Total:		175.0		3290.0			
INFILTRATION Area X BWPM = Points						Area X WPM = Points					
1637.0 -0.59 -965.8						1637.0 -0.59 -965.8					

WINTER CALCULATIONS**Residential Whole Building Performance Method A - Details**

ADDRESS: , , ,

PERMIT #:

BASE			AS-BUILT						
Winter Base Points: 14910.8			Winter As-Built Points: 18545.0						
Total Winter Points	X System Multiplier	= Heating Points	Total Component (System - Points)	X Cap Ratio	X Duct Multiplier (DM x DSM x AHU)	X System Multiplier	X Credit Multiplier	= Heating Points	
14910.8	0.5540	8260.6	(sys 1: Electric Heat Pump 33800 btuh ,EFF(7.8) Ducts:Unc(S),Con(R),Int(AH),R6.0 18545.0 1.000 (1.060 x 1.169 x 0.88)0.437 0.950 8432.1 18545.0 1.00 1.095 0.437 0.950 8432.1						

WATER HEATING & CODE COMPLIANCE STATUS

Residential Whole Building Performance Method A - Details

ADDRESS: , , ,

PERMIT #:

BASE				AS-BUILT					
WATER HEATING									
Number of Bedrooms	X	Multiplier	= Total	Tank Volume	EF	Number of Bedrooms	X Tank Ratio	Multiplier X Credit	= Total Multiplier
3		2635.00	7905.0	50.0	0.90	3	1.00	2693.56	8080.7
				As-Built Total:					8080.7

CODE COMPLIANCE STATUS							
BASE				AS-BUILT			
Cooling Points	+	Heating Points	+ Hot Water Points = Total Points	Cooling Points	+	Heating Points	+ Hot Water Points = Total Points
6700		8261	7905 22865	5374		8432	8081 21887

PASS

Code Compliance Checklist

Residential Whole Building Performance Method A - Details

ADDRESS: , , ,

PERMIT #:

6A-21 INFILTRATION REDUCTION COMPLIANCE CHECKLIST

COMPONENTS	SECTION	REQUIREMENTS FOR EACH PRACTICE	CHECK
Exterior Windows & Doors	606.1.ABC.1.1	Maximum: .3 cfm/sq.ft. window area; .5 cfm/sq.ft. door area.	✓
Exterior & Adjacent Walls	606.1.ABC.1.2.1	Caulk, gasket, weatherstrip or seal between: windows/doors & frames, surrounding wall; foundation & wall sole or sill plate; joints between exterior wall panels at corners; utility penetrations; between wall panels & top/bottom plates; between walls and floor. EXCEPTION: Frame walls where a continuous infiltration barrier is installed that extends from, and is sealed to, the foundation to the top plate.	✓
Floors	606.1.ABC.1.2.2	Penetrations/openings >1/8" sealed unless backed by truss or joint members. EXCEPTION: Frame floors where a continuous infiltration barrier is installed that is sealed to the perimeter, penetrations and seams.	✓
Ceilings	606.1.ABC.1.2.3	Between walls & ceilings; penetrations of ceiling plane of top floor; around shafts, chases, soffits, chimneys, cabinets sealed to continuous air barrier; gaps in gyp board & top plate; attic access. EXCEPTION: Frame ceilings where a continuous infiltration barrier is installed that is sealed at the perimeter, at penetrations and seams.	✓
Recessed Lighting Fixtures	606.1.ABC.1.2.4	Type IC rated with no penetrations, sealed; or Type IC or non-IC rated, installed inside a sealed box with 1/2" clearance & 3" from insulation; or Type IC rated with < 2.0 cfm from conditioned space, tested.	✓
Multi-story Houses	606.1.ABC.1.2.5	Air barrier on perimeter of floor cavity between floors.	✓
Additional Infiltration reqts	606.1.ABC.1.3	Exhaust fans vented to outdoors, dampers; combustion space heaters comply with NFPA, have combustion air.	✓

6A-22 OTHER PRESCRIPTIVE MEASURES (must be met or exceeded by all residences.)

COMPONENTS	SECTION	REQUIREMENTS	CHECK
Water Heaters	612.1	Comply with efficiency requirements in Table 612.1.ABC.3.2. Switch or clearly marked circuit breaker (electric) or cutoff (gas) must be provided. External or built-in heat trap required.	✓
Swimming Pools & Spas	612.1	Spas & heated pools must have covers (except solar heated). Non-commercial pools must have a pump timer. Gas spa & pool heaters must have a minimum thermal efficiency of 78%.	✓
Shower heads	612.1	Water flow must be restricted to no more than 2.5 gallons per minute at 80 PSIG.	✓
Air Distribution Systems	610.1	All ducts, fittings, mechanical equipment and plenum chambers shall be mechanically attached, sealed, insulated, and installed in accordance with the criteria of Section 610. Ducts in unconditioned attics: R-6 min. insulation.	✓
HVAC Controls	607.1	Separate readily accessible manual or automatic thermostat for each system.	✓
Insulation	604.1, 602.1	Ceilings-Min. R-19. Common walls-Frame R-11 or CBS R-3 both sides. Common ceiling & floors R-11.	✓

ENERGY PERFORMANCE LEVEL (EPL) DISPLAY CARD

ESTIMATED ENERGY PERFORMANCE SCORE* = 85.7

The higher the score, the more efficient the home.

ELECTRIC, , , ,

1. New construction or existing	New	12. Cooling systems	
2. Single family or multi-family	Single family	a. Central Unit	Cap: 33.8 kBtu/hr
3. Number of units, if multi-family	1		SEER: 13.00
4. Number of Bedrooms	3	b. N/A	
5. Is this a worst case?	Yes	c. N/A	
6. Conditioned floor area (ft ²)	1637 ft ²		
7. Glass type ¹ and area: (Label reqd. by 13-104.4.5 if not default)		13. Heating systems	
a. U-factor:	Description Area	a. Electric Heat Pump	Cap: 33.8 kBtu/hr
(or Single or Double DEFAULT)	7a(Sngle Default) 133.0 ft ²		HSPF: 7.80
b. SHGC:		b. N/A	
(or Clear or Tint DEFAULT)	7b. (Clear) 133.0 ft ²	c. N/A	
8. Floor types			
a. Slab-On-Grade Edge Insulation	R=0.0, 175.0(p) ft	14. Hot water systems	
b. N/A		a. Electric Resistance	Cap: 50.0 gallons
c. N/A			EF: 0.90
9. Wall types		b. N/A	
a. Concrete, Int Insul, Exterior	R=4.1, 1033.0 ft ²	c. Conservation credits	
b. Frame, Steel, Adjacent	R=13.0, 207.0 ft ²	(HR-Heat recovery, Solar	
c. N/A		DHP-Dedicated heat pump)	
d. N/A		15. HVAC credits	PT,
e. N/A		(CF-Ceiling fan, CV-Cross ventilation,	
10. Ceiling types		HF-Whole house fan,	
a. Under Attic	R=19.0, 1701.0 ft ²	PT-Programmable Thermostat,	
b. N/A		MZ-C-Multizone cooling,	
c. N/A		MZ-H-Multizone heating)	
11. Ducts			
a. Sup: Unc. Ret: Con. AH(Sealed):Interior	Sup. R=6.0, 165.0 ft		
b. N/A			

I certify that this home has complied with the Florida Energy Efficiency Code For Building Construction through the above energy saving features which will be installed (or exceeded) in this home before final inspection. Otherwise, a new EPL Display Card will be completed based on installed Code compliant features.

Builder Signature: Melina McKeague

Date: 06/04/08

Address of New Home: 143 SW Timber Ridge Dr City/FL Zip: Lake City, FL 32615



**NOTE: The home's estimated energy performance score is only available through the FLA/RES computer program. This is not a Building Energy Rating. If your score is 80 or greater (or 86 for a US EPA/DOE EnergyStarTM designation), your home may qualify for energy efficiency mortgage (EEM) incentives if you obtain a Florida Energy Gauge Rating. Contact the Energy Gauge Hotline at 321/638-1492 or see the Energy Gauge web site at www.fsec.ucf.edu for information and a list of certified Raters. For information about Florida's Energy Efficiency Code For Building Construction, contact the Department of Community Affairs at 850/487-1824.*

¹ Predominant glass type. For actual glass type and areas, see Summer & Winter Glass output on pages 2&4.
EnergyGauge® (Version: FLRCSB v4.5)



STATE OF FLORIDA
DEPARTMENT OF HEALTH

APPLICATION FOR ONSITE SEWAGE DISPOSAL SYSTEM CONSTRUCTION PERMIT

Permit Application Number 08-0133

PART II - SITE PLAN

Scale: Each block represents 5 feet and 1 inch = 50 feet.

~~SEE ATTACHED~~
Site PLAN

Notes: _____

Site Plan submitted by: *Patricia Wilson*

Signature

Agent
Title

Plan Approved ☒

Not Approved ☐

Date 6-18-08

By *Mr. S. L.*

Columbia


County Health Department

ALL CHANGES MUST BE APPROVED BY THE COUNTY HEALTH DEPARTMENT



PROPOSED BUILDING LAYOUT

IN SECTION 10, TOWNSHIP 4 SOUTH, RANGE
16 EAST, COLUMBIA COUNTY, FLORIDA

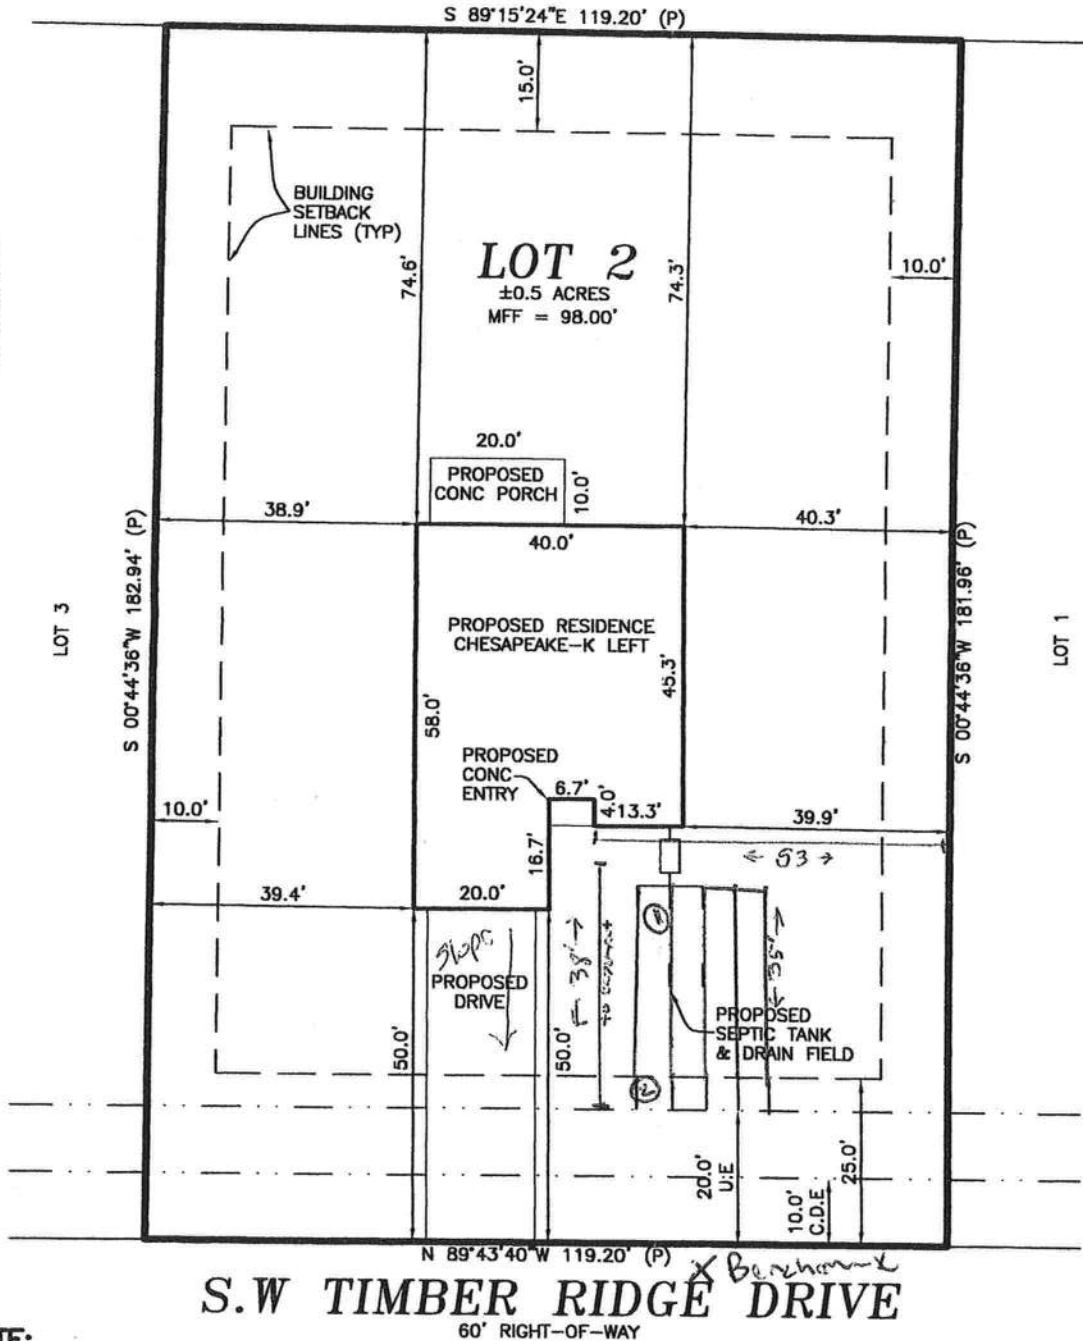

FLOOD NOTE:

IN THE OPINION OF THIS SURVEYOR, ACCORDING TO THE NATIONAL FLOOD INSURANCE PROGRAM, FLOOD INSURANCE RATE MAP COMMUNITY PANEL NO. 120070-0175-B, DATED 1-6-88, THIS PROPERTY IS IN FLOOD ZONE "X" WHICH IS AN AREA DETERMINED TO BE OUTSIDE 500-YEAR FLOOD PLAIN, AS SCALED FROM SAID MAP. INFORMATION FROM THE FEDERAL EMERGENCY MANAGEMENT AGENCY (FEMA) FLOOD INSURANCE RATE MAPS, SHOWN ON THIS MAP, WAS CURRENT AS OF THE REFERENCED DATE. MAP REVISIONS AND AMENDMENTS ARE PERIODICALLY MADE BY LETTER AND MAY NOT BE REFLECTED ON THE MOST CURRENT MAP.

TITLE NOTE:

THIS SURVEY IS SUBJECT TO ANY FACTS THAT MAY BE DISCLOSED BY A FULL AND ACCURATE TITLE SEARCH. THIS SURVEYOR HAS NOT PERFORMED A SEARCH OF THE PUBLIC RECORDS ON THIS PARCEL FOR ANY CLAIMS OF TITLE, EASEMENTS, OR RESTRICTIONS THAT MAY EFFECT THIS PARCEL. THE PRESENCE OR ABSENCE OF ANY SUCH CLAIMS ARE NOT CERTIFIED HEREON.

NOTICE OF COMMENCEMENT

Tax Parcel Identification Number 10-45-10-02850-102

County Clerk's Office Stamp or Seal

THE UNDERSIGNED hereby gives notice that improvements will be made to certain real property, and in accordance with Section 713.13 of the Florida Statutes, the following information is provided in this NOTICE OF COMMENCEMENT.

- Description of property (legal description): 2/1 Timberlands
a) Street (job) Address: 143 SW Timber Ridge Dr.
- General description of improvements: Construction of a single family dwelling
- Owner Information
a) Name and address: Maronda Homes Inc of FL 10800 Southpoint Pkwy #300 Jax FL 32216
b) Name and address of fee simple titleholder (if other than owner):
c) Interest in property:
- Contractor Information
a) Name and address: Maronda Homes Inc of FL 10800 Southpoint Pkwy #300 Jax FL 32216
b) Telephone No.: (904) 290-1490 Fax No. (Opt.): (904) 332-10315
- Surety Information
a) Name and address:
b) Amount of Bond:
c) Telephone No.: Fax No. (Opt.):
- Lender
a) Name and address:
b) Phone No.:
- Identity of person within the State of Florida designated by owner upon whom notices or other documents may be served:
a) Name and address: Southern Title Holding Co LLC 3945 Baymeadows Rd Jax FL 32217
b) Telephone No.: (904) 734-2205 Fax No. (Opt.):
- In addition to himself, owner designates the following person to receive a copy of the Lienor's Notice as provided in Section 713.13(l)(b), Florida Statutes:
a) Name and address:
b) Telephone No.: Fax No. (Opt.):
- Expiration date of Notice of Commencement (the expiration date is one year from the date of recording unless a different date is specified):

WARNING TO OWNER: ANY PAYMENTS MADE BY THE OWNER AFTER THE EXPIRATION OF THE NOTICE OF COMMENCEMENT ARE CONSIDERED IMPROPER PAYMENTS UNDER CHAPTER 713, PART I, SECTION 713.13, FLORIDA STATUTES, AND CAN RESULT IN YOUR PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY; A NOTICE OF COMMENCEMENT MUST BE RECORDED AND POSTED ON THE JOB SITE BEFORE THE FIRST INSPECTION. IF YOU INTEND TO OBTAIN FINANCING, CONSULT YOUR LENDER OR AN ATTORNEY BEFORE COMMENCING WORK OR RECORDING YOUR NOTICE OF COMMENCEMENT.


STATE OF FLORIDA
COUNTY OF COLUMBIA

10. [Signature]
Signature of Owner or Owner's Authorized Officer/Partner/Manager
Theodore C. Brock
Print Name

The foregoing instrument was acknowledged before me, a Florida Notary, this 4 day of June, 2008, by:
Theodore C. Brock as V.P. of Construction (type of authority, e.g. officer, trustee, attorney
fact) for Maronda Homes Inc of Florida (name of party on behalf of whom instrument was executed).

Personally Known ☒ OR Produced Identification Type

Notary Signature Melissa L McKague Notary Stamp or Seal:

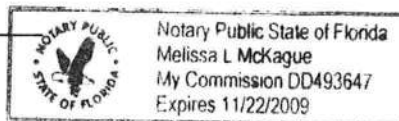

11. Verification pursuant to Section 92.525, Florida Statutes. Under penalties of perjury, I declare that I have read the foregoing and that the facts stated in it are true to the best of my knowledge and belief.

[Signature]
Signature of Natural Person Signing (in line #10 above.)


Columbia County Building Department Culvert Permit

Culvert Permit No.
000001648

DATE 07/31/2008 PARCEL ID # 10-4S-16-02856-102
APPLICANT PATRICK WILSON PHONE 352 206-5459
ADDRESS 6800 SOUTHPPOINT PARKWAY JACKSONVILLE FL 32216
OWNER MARONDA HOMES PHONE 904 296-1490
ADDRESS 143 SW TIMBER RIDGE DRIVE LAKE CITY FL 32024
CONTRACTOR THEODORE BROCK PHONE 407 227-3504
LOCATION OF PROPERTY 90W, TL ON 247S, TR ON 252B, TL ON TIMBER RIDGE, 2ND
LOT ON RIGHT _____

SUBDIVISION/LOT/BLOCK/PHASE/UNIT TIMBERLANDS 2

SIGNATURE

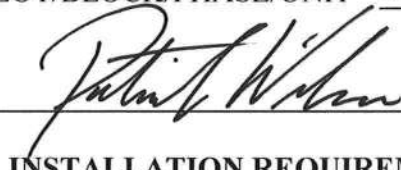

INSTALLATION REQUIREMENTS



Culvert size will be 18 inches in diameter with a total length of 32 feet, leaving 24 feet of driving surface. Both ends will be mitered 4 foot with a 4 : 1 slope and poured with a 4 inch thick reinforced concrete slab.

INSTALLATION NOTE: Turnouts will be required as follows:

- a) a majority of the current and existing driveway turnouts are paved, or;
- b) the driveway to be served will be paved or formed with concrete.

Turnouts shall be concrete or paved a minimum of 12 feet wide or the width of the concrete or paved driveway, whichever is greater. The width shall conform to the current and existing paved or concreted turnouts.



Culvert installation shall conform to the approved site plan standards.



Department of Transportation Permit installation approved standards.



Other _____

**ALL PROPER SAFETY REQUIREMENTS SHOULD BE FOLLOWED
DURING THE INSTALLATION OF THE CULVERT.**

135 NE Hernando Ave., Suite B-21
Lake City, FL 32055
Phone: 386-758-1008 Fax: 386-758-2160

Amount Paid 25.00



Columbia County

Building Department

Residential Plan Review Checklist

Application # 0806-56

Date Received: 6/27/08

911 Address: 143 SW Timber Ridge Drive

Applicant Name: Patrick Wilson Phone # 904-296-1490

Owner Name: Maronda Homes Phone # 904-296-1490

Contractor Name: Theodore C. Brock Phone # 904-296-1490

Engineer/Architect Name: Elmer Bergman P.E. # 50158

Phone # 407-321-0064

Fax Numbers: 904-332-6367



Application and Processing Forms

1.	Application & Checklist complete	Yes
2.	Notice of Commencement recorded at Columbia County Clerk office.	No
3.	Section 10 Township 4s Range 16 Parcel Number 02856-102 Subdivision Name Timberlands Lot 2 Block 1	
4.	A copy of a approved Columbia County Environmental Health waste disposal system	No
5.	Owner Builder disclosure statement	N/A

6.	Front Setback 50 Side Setback 39 Side Setback 38 Rear Setback 74 ½ Acre	
7.	Height of proposed structure measured from existing grade. 24'	
8.	Under roof square footage 2067	
9.	Condition heated/cooled area 1637 Florida energy code Matches 1637	Yes
10.	Do worksheet calculations agree with calculations on plans? Sheet 3C	Yes
11.	Is the structure within the floodway?	No

Structure Code Compliance

12.	Are plans sealed by Architect or <u>Engineer</u> ? Elmer Bergman P.E. # 50158	Yes
13.	Is correct wind speed shown? (FBC R301.2(4)) 110 MPH (3 second gust) Sheet OK 125 MPH	Yes
14.	Is exposure category 'B' shown? (FBC R301.2.1.4) Sheet OK	Yes
15.	Is Importance Factor 1 shown? (FBC 1604.5) Sheet OK	Yes
16.	Is internal pressure coefficient shown? (fully enclosed .18/Partial .55) ASCE 7 Sheet OK	Yes
17.	Are pressures for wind loading on components and cladding shown? (FBC R301.2) Sheet OK	Yes

18.	Is there a proposed detach accessory structure on the same lot?	No
19.	Are the exterior walls, less than 6' apart, protected by 1 hr fire-resistance rating? (FBC R302.1)	N/A
20.	Are the projections extending into the 6' separation distance protected by 1 hr fire-resistance rating? (FBC R302.1)	N/A
21.	Are penetrations located in the exterior wall of a dwelling separated by less than 6' protected in accordance with FBC R317.3?	N/A

Energy Code Information

22.	Is current energy code form completed properly and signed by designer and owner/agent, address, climate zone(3), Jurisdiction (Columbia County) and jurisdiction number (221000)? (FBC 13-600)	Yes
23.	Does conditioned square feet area on plans match square feet shown on energy forms?	Yes
24.	Manuel J submitted?	No

Construction Plans

25.	Is Designer's name, address and phone number shown on plans?	Yes
26.	Are current codes used for design listed? Sheet Oc	Yes

Foundation Plan

27.	Are all footings shown, including interior bearing walls, column pads and concentrated loads? Sheet 2	Yes
28.	Are all locations of vertical reinforcement and anchor bolts shown with spacing and size? Sheet 2	Yes
29.	Are all elevation changes in slab shown? Sheet 2 & FTG	Yes
30.	Is horizontal reinforcement shown or specified? Sheet 2M	Yes
31.	Is minimum concrete PSI shown? (FBC R402.2) 2500 Sheet 2 General Foundation notes	Yes
32.	Wire meshes size and gauges shown?	No
33.	Fiber meshes reinforcement? Sheet 2 General Foundation notes	Yes
34.	Is vapor barrier, minimum 6 mil. shown? (FBC R320.1.4 & R506.2.3)	No
35.	Is minimum slab on grade thickness shown? (FBC R506.1) 3 1/2 " Sheet 2 General Foundation notes	Yes
36.	Is type of soil treatment for termites shown? (FBC R320) Sheet 2 General Foundation notes	Yes
37.	Is perimeter slab reinforcement shown? Sheet FTG	Yes
38.	Do plans show bottom of foundation minimum of 12" below finish grade? (FBC R403.1.4) Sheet FTG	Yes
39.	Do plans show concrete footings have a specified compressive strength of not less than 2500 PSI at 28 days? (FBC TABLE R402.2) Sheet 2 General Foundation notes	Yes

Typical Wall Section

40.	Is finished grade shown? Sheet FTG	Yes
41.	Is minimum floor elevation shown?	No
A.	Minimum 6" above adjacent grade? (FBC R319.1(5)) Sheet FTG	Yes
B.	Minimum 12" above crown of road or drainage plan submitted? See subdivision plan (Timberland)	Yes
C.	Flood protection elevation?	N/A

Typical Wall Section

D.	Base flood elevation? X Zone	N/A
----	------------------------------	-----

E.	Are engineered floor elevations shown?	N/A
42.	Is minimum footing depth beneath finished grade shown? (FBC R403.1.4) Sheet FTG	Yes
43.	Are all footing sizes shown? (FBC TABLE R403.1 for minimum) Sheet FTG	Yes
44.	Are all horizontal reinforcements shown? (FBC R606.8) Sheet FTG	Yes
A.	Number and size of reinforcement? Sheet FTG	Yes
B.	Minimum lap?	No
43.	Is vertical reinforcement shown with spacing? (FBC R606.8) Sheet 2	Yes
44.	Masonry construction: 8" CMU	Yes
A.	Is exterior wall finish shown? Sheet 1K Stucco	Yes
B.	Is interior wall finish shown? Sheet WS-B 1	Yes
C.	Is interior furring shown? Sheet WS-B 1	Yes
D.	Is insulation shown for exterior walls, floors, and roofs? Sheet WS-B 1 Walls R-4 Attic R-19	Yes
45.	Wood frame construction: (FBC R602.3)	N/A
A.	Is stud size, spacing, grade and lumber species shown? (FBC R602.3.1)	N/A
B.	Are exterior sheathing (type and thickness) and attachment details shown? (FBC R602.3)	N/A
C.	Are nailing requirements (size and spacing) shown? (FBC R602.3(1) through R602.3(4))	N/A
D.	Is exterior wall finish shown?	N/A
E.	Is interior wall finish shown?	N/A
F.	Is wall insulation shown?	N/A
G.	Is minimum clearance between wood siding and finished grade shown? (FBC R319.1(5)) 6"	N/A
H.	Are shear wall segments shown with detailed drawings?	N/A
I.	Type of hold-downs with locations, number and type of fasteners shown?	N/A
46.	Are all hurricane anchorage and hold-downs specified and labeled?	Yes
47.	Is connector schedule showing connector type, max uplift, number and size of fasteners provided? Sheet TR1	Yes
48.	Is ceiling type shown, drywall thickness? Sheet WS-B 1	Yes
49.	Are ceiling heights shown? (FBC R305) Sheet CSU	Yes

Roof Framing:

50.	Are engineered trusses shown? (FBC R802.10.2)	Yes
51.	Are conventional frame rafters used? (FBC R802.2)	N/A
52.	Rafter size shown?	N/A
53.	Are all hurricane anchors and hold downs shown and specified?	N/A
54.	Species of lumber shown?	N/A
55.	Grade of lumber shown?	N/A
56.	Type of roof sheathing shown? (FBC R803) Sheet WS-B1	Yes
57.	Thickness of roof sheathing shown? Sheet WS-B1	Yes
58.	Grade of roof sheathing shown? Sheet WS-B1	Yes
59.	Nailing pattern of roof sheathing shown? (FBC Table R602.3(1)) Sheet WS-B1	
60.	Type of roof cover shown? Sheet WS-B1	Yes
61.	Attachment asphalt/fiberglass shingles shown? (FBC R905.2) Sheet WS-B1	Yes
62.	Other roof covering and attachments shown?	N/A
63.	Length of roof overhang shown? Sheet WS-B1	Yes
64.	Type of soffit and fascia shown? Sheet WS-B1	Yes
65.	Attic ventilation shown? (FBC R806) Sheet RS1	Yes

Floor Plan

66.	Does square footage on plan match square footage shown on energy form and site plan? Sheet 3	Yes
67.	Are square footage calculations shown for total square footage under roof? Sheet 3	Yes
68.	Are all room dimensions shown? (FBC R304.3) Sheet 3	Yes
69.	Are all door and window sizes shown? Sheet 1	Yes
70.	Are all exterior and adjacent doors shown to be insulated or solid core (other than glass doors)? Sheets 1 & 2	Yes
71.	Is garage separated from the residence and its attic area by not less than 1/2 inch gypsum board? (FBC R309.2)	Yes
72.	Are habitable rooms above the garage separated by not less than 5/8 inch Type X gypsum board? (FBC R309.2)	N/A
73.	Is door between garage and living space equipped with solid wood door not less than 1 3/8 inches, solid or honeycomb core steel door not less than 1 3/8 inches thick, or 20 minute fire-rated door? (FBC R309.1) Sheets 1 & 2	Yes
74.	Are all emergency egress openings shown (egress windows and doors)? (FBC R310.1) Sheet 3c	Yes
75.	Is required tempered glass shown at all hazardous locations? (FBC R308.4) Sheet 3	Yes
76.	Are all vertical reinforcements shown for shear walls shown? Sheet 3	Yes
77.	Are all shear wall segments shown? Sheet 3	Yes
78.	Are all hold-downs and hurricane anchorage shown and identified? Sheet TR1K	Yes
79.	Is required attic access shown? 22" x 30" (FBC R807.7) Sheet 3	Yes
80.	Does one (1) bathroom on the first habitable floor level have a 29" net clear door opening and handicap accessible route? (FBC 11-11) (minimum door size 32") Sheet C3	Yes
81.	Does bedroom not opening directly into garage? (FBC R309.1)	NO
82.	Is at least one 3' 0" wide, side hinged egress door shown? (FBC R311.4) Sheet C3 Front door	Yes
83.	Do doors and landings comply with FBC R311.4.3? Sheet C3	Yes
84.	Are habitable rooms shown with the minimum light and ventilation requirements of FBC R303.1? (8% natural light)	Yes
85.	Are garage doors, all windows, doors, sky lights and other openings shown as meeting wind load requirements for components and cladding per FBC R301.2.1? Are design pressures specified? Sheet 1 & 2	Yes
86.	Does floor plan show fireplace?	No
87.	Does masonry fireplace have a detailed for a load-bearing foundation?	N/A
88.	Are copies of pre-fabricated fireplace manufacturer's specifications included?	N/A
89.	Is hearth size and detail shown? (FBC R1003.9)	N/A

Stairs Details

90.	Is minimum stair width shown? (FBC R311.5.1)	N/A
91.	Are tread and riser sizes shown? (FBC R311.5.3)	N/A
92.	Do spiral stairways comply with FBC R311.5.8.1?	N/A
93.	Are required landings and size shown? (Max vertical rise is 12' between floors.) (FBC R311.5.4)	N/A
94.	Are handrail height, spacing and grasp ability details shown? (FBC R311.5.6)	N/A
95.	Is required headroom clearance shown? (FBC R311.5.2) 6' 8"	Yes
96.	Are guardrail height, spacing and details shown (max openings less than 4")? (FBC R312)	N/A
97.	Are exterior door landing shown? Sheet 3c	Yes

Porches

98.	Are all columns and beams shown for porches and lanais?	N/A
99.	Are column type, size and anchorage shown?	N/A
100.	Are beam type, size, span and anchorage shown including garage opening and porch beams? Sheet 3	Yes
101.	Are all lintel and beam details shown? (FBC R611.7.3) sheet SD-1 &SD-D	Yes

Floor Framing (FBC-2307)

102.	Is joist plan provided, showing size, spacing, span, species, grade of lumber and connections?	N/A
103.	Is floor sheathing indicated, showing type, thickness and nailing pattern? (FBC R503)	N/A
104.	Is crawl space opening shown (18" x 24" minimum)? (FBC R408.3)	N/A
105.	Is the crawl space showed to be insulated, showing R rating?	N/A
106.	Is joist plan provided, showing size, spacing, span, species, grade of lumber and connections?	N/A
107.	Is floor sheathing indicated, showing type, thickness and nailing pattern? (FBC R503)	N/A
108.	Is crawl space opening shown (18" x 24" minimum)? (FBC R408.3)	N/A
109.	Is the correct amount of area of ventilation openings shown? (FBC R408.2)	N/A

Elevations

110.	Does plan show four (4) elevations? Sheet 1k	Yes
111.	Are attic ventilation requirements shown? (FBC R806.1) Sheet RSI	Yes
112.	Are roof pitch and overhang shown for sloped and flat roofs? Sheet RSI	Yes
113.	Is chimney height and location shown? (FBC R1001.6)	N/A
114.	Are all lanai/porch details shown?	N/A
115.	Are roof drainage provisions shown? (FBC R801.3)	N/A
116.	Does the front elevation show the existing grade elevation?	No
117.	Is total height shown from the existing grade, not from finished floor?	Yes

Structural Details (also see Structural Code Compliance section)

118.	Are gable end bracing details shown? Hip Roof	No
119.	Are roof sheathing nailing zones shown? (FBC FIGURE R301.2(8))	Yes
120.	Are wind design pressures for components and cladding shown? (FBC R301.2)	Yes
121.	Are exterior windows and glass doors shown as approved by independent testing laboratory and do they bear a label by AAMA or WDMA or other approved label? (FBC R613.3.1) Sheet 1 & 2	Yes
122.	Are exterior window and door manufacturer's specifications and installation details which meet the specified design pressures provided? Sheet 1 & 2	Yes
123.	Are window and door installation and buck details shown? Sheet 1 & 2	Yes
124.	Are mullion installation details and design criteria provided Sheet 1 & 2	Yes
125.	Are garage door positive and negative design wind pressures shown as meeting requirements of 1.5 x pressure? (FBC R613.4) Sheet OK	Yes
126.	Are number and size of fasteners for all connections shown?	Yes

Electrical (NEC)

127.	Is underground service specified? (WPA 106.3.4) sheet ELI	Yes
128.	Is an exterior service disconnect shown? Sheet ELIA	Yes
129.	Is service size (amps) and location shown? (NEC 230) 150 Amp	Yes
123.	Are panel locations shown with proper clearances (NEC 384)?	Yes
124.	Are disconnects shown (WH and A/C equipment) (NEC 440-14)? Include exterior 110 Volt receptacle GFI Near Ac Compressor	Yes
125.	Are GFI receptacles (kitchen, bath, exteriors, basements and garage) shown? (NEC 210-8)	Yes

Electrical (NEC)

126.	Are all smoke detectors shown (bedroom halls, top & bottom of stairs)? (FBC R313.1)	Yes
127.	Are the required carbon monoxide alarm shown within 10 feet of each room used for sleeping room, with the dwelling having a fossil-fuel-burning heater or appliance, a fireplace, or an attached garage carbon monoxide alarm installed purposes.	No
128.	Are receptacle locations shown? (NEC 210-52) The 2008 National Electric Code expands the Combination Type AFCI requirement beyond bedroom circuits to include <i>additional circuits in the home</i> , (i.e. family rooms, dining rooms, living rooms, hallways, libraries, dens, sun rooms, recreation rooms, and similar rooms.	No
129.	NEC Article 406.11 states that all 125-volt, 15- and 20-ampere receptacles shall be listed tamper-resistant receptacles the effective date will be upon the adoption of the 2008 NEC	No

130.	Walls receptacles (12 ft. o.c. & 6 ft from openings)?	Yes
140.	Kitchen counter tops (12 in. widths, 48 in. o.c. and 2in. from edge of counter) and islands?	Yes
141.	Plan shows GFI – receptacles, with water proof or unattended type covers front and rear of dwelling.	Yes
142.	Is switched lighting shown? (NEC 210-70)	Yes
143.	A. Top and Bottom of stairs?	N/A
144.	B. Attic access?	Yes
145.	C. Exterior doors?	Yes
146.	D. Occupiable rooms (light or switched receptacle)?	Yes
147.	Are all electrical fixtures shown?	Yes

Plumbing (FPC)

148.	Are all plumbing fixtures shown on the foundation plan and floor plan?	Yes
149.	Is water heater size and location shown?	Yes
150.	Is the potable well shown on the site plan to include the size of pump motor, size of pressure tank and cycle stop valve?	City

Mechanical (FMC)

151.	Are all mechanical fixtures shown?	Yes
152.	Are the clothes dryer vent route shown not to exceed 25 feet from the dryer location to the outlet terminal.(Fuel & Gas code 504.4)	Yes

COLUMBIA COUNTY FLORIDA DEPARTMENT OF BUILDING AND ZONING INSPECTION

OCCUPANCY

COLUMBIA COUNTY, FLORIDA

Department of Building and Zoning Inspection

This Certificate of Occupancy is issued to the below named permit holder for the building and premises at the below named location, and certifies that the work has been completed in accordance with the Columbia County Building Code.

Parcel Number 10-4S-16-02856-102

Building permit No. 000027225

Use Classification SFD, UTILITY

Fire: 70.62

Permit Holder THEODORE BROCK

Waste: 184.25

Owner of Building MARONDA HOMES

Total: 254.87

Location: 143 SW TIMBERIDGE DRIVE, LAKE CITY, FL

Date: 11/14/2008

Building Inspector

POST IN A CONSPICUOUS PLACE
(Business Places Only)



27225

FIELD DENSITY WORKSHEET

CLIENT MARONDA HUMPHS DATE 5 AUG 08
 PROJECT NAME TIMBER LANDS LAKE CITY PROJECT NO. _____
 EARTH CONTRACTOR Lot #2 143 SW Timber Ridge Dr PERMIT NO. #27225
 COMPACTION REQUIREMENT (%) 95% ☐ Standard Proctor Patric FIELD CONTACT
☒ Modified Proctor
 TOTAL ON-SITE TIME _____ MILES FROM OFFICE _____
☐ Limerock ☐ Subgrade ☐ Pipe Backfill ☒ Building Pad ☐ Building Footing ☐ Other _____

TEST LOCATION	LAB PROCTOR		TEST DEPTH	PROBE DEPTH	% MOIST.	WET DENSITY (PCF)	DRY DENSITY (PCF)	% COMP.
	DENS.	OMC						
CTR. of PAD	104.9	10.1	FR	120	3.4	107.2	103.6	98.8
CTR. of S. FTG.	L	L)	L	4.8	105.1	100.3	95.6
CTR. of N. FTG.	L	L)	L	4.6	105.0	100.4	95.7

REMARKS _____

- * Density failed to meet minimum project requirement
- ** Retest indicates minimum density requirement was obtained.
- () Client is aware of unsatisfactory test results.

Maronda Systems 4005 Maronda Way Sanford FL 32771 (407) 321-0064 Fax (407) 321-3913
 Engineer/Architect of Record: Tomas Ponce, P.E. 367 Medallion PL. Chuluota, FL 32766 FL PE # 50068,
 Design Criteria: TPI Design: Matrix Analysis MiTek software

CHESAPEAKE K & M

The Truss Engineering package for the above referenced site was generated by the Truss Designer at Maronda Systems.

I, Tomas Ponce, P.E. the Architect/Engineer of Record for the above referenced lot Have reviewed the package and confirmed that it matches the physical and structural Parameters found on the set of permit drawings.

MAY 21 2008

HARDWARE LEGEND

- 1 HUS26
- 2 HUS28
- 3 JUS26
- 4 MP6F
- 5 MPA1 & MPA1F
- 6 SKH26 L/R
- 7 SKHH26 L/R
- 8 SUS26
- 9 SUS28
- 10 THD26
- 11 THD28
- 12 THD28-2
- 13 THDH28-3
- 14 THD48
- 15 THJ26**
- 16 LTW12

[Handwritten Signature]

MAY 21 2008

HARDWARE MANUFACTURED
BY USP

* HARDWARE MANUFACTURED
BY SIMPSON

** HARDWARE MANUFACTURED
BY CLEVELAND



DESIGNER: B.DISHONG
CHECKER: MIKE

DRAWN BY: MKH

SCALE: 1/8" = 1'-0"
DATE: 10/23/2007

LOADING-FBC2004/TPI2002

TC LIVE	16.00	SNOW LOAD	0.00
TC DEAD	7.00	LUMBER DOL	1.25
BC LIVE	10.00	PLATE DOL	1.25
BC DEAD	10.00	WIND	125
TOTAL	43.00	SPACING	2'-0"

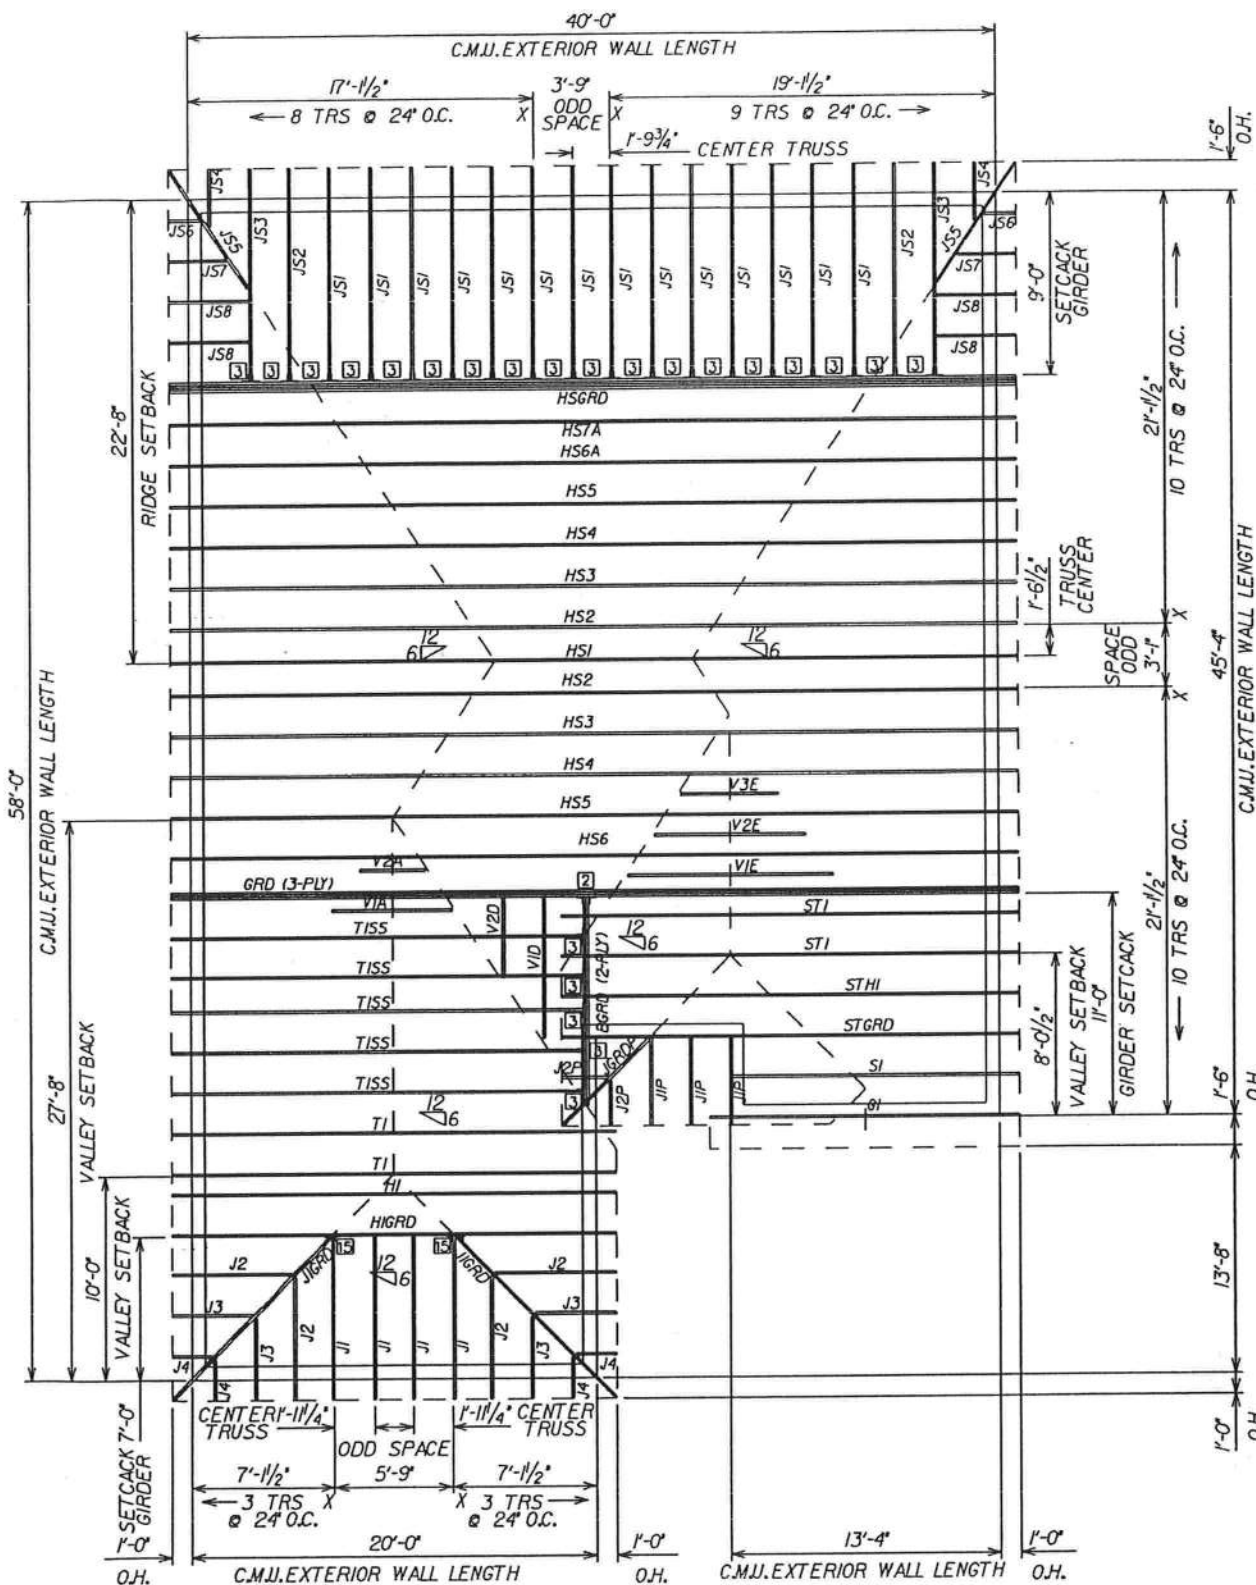

CHESAPEAKE "K & M" - FL

GARAGE: LEFT



(407) 321-0064 4005 MARONDA WAY SANFORD, FLORIDA

GENERAL NOTES

Trusses are not marked in any way to identify the frequency or location of temporary lateral restraint and diagonal bracing. Follow the recommendations for handling, installing and temporary restraining and bracing of trusses. Refer to BCSI Guide to Good Practice for Handling, Installing, Restraining & Bracing of Metal Plate Connected Wood Trusses for more detailed information.

Truss Design Drawings may specify locations of permanent lateral restraint or reinforcement for individual truss members. Refer to the BCSI-B3 Summary Sheet - Permanent Restraint/Bracing of Chords & Web Members for more information. All other permanent bracing design is the responsibility of the Building Designer.

NOTAS GENERALES

Los trusses no están marcados de ningún modo que identifique la frecuencia o localización de restricción lateral y arrioste diagonal temporales. Use las recomendaciones de manejo, instalación, restricción y arrioste temporal de los trusses. Vea el folleto BCSI Guía de Buena Práctica para el Manejo, Instalación, Restricción y Arrioste de los Trusses de Madera Conectados con Placas de Metal para información más detallada.

Los dibujos de diseño de los trusses pueden especificar las localizaciones de restricción lateral permanente o refuerzo en los miembros individuales del truss. Vea la hoja resumen BCSI-B3 - Restricción/Arrioste Permanente de Cuerdas y Miembros Secundarios para más información. El resto de los diseños de arriostres permanentes son la responsabilidad del Diseñador del Edificio.

- ⚠ The consequences of improper handling, erecting, installing, restraining and bracing can result in a collapse of the structure, or worse, serious personal injury or death.

El resultado de un manejo, levantamiento, instalación, restricción y arrioste incorrecto puede ser la caída de la estructura o aún peor, heridos o muertos.

- ⚠ Banding and truss plates have sharp edges. Wear gloves when handling and safety glasses when cutting banding.

Empaques y placas de metal tienen bordes afilados. Use guantes y lentes protectores cuando corte los empaques.


HANDLING — MANEJO

- ⚠ Avoid lateral bending. — Evite la flexión lateral.



- ⚠ Use special care in windy weather or near power lines and airports.

Utilice cuidado especial en días ventosos o cerca de cables eléctricos o de aeropuertos.

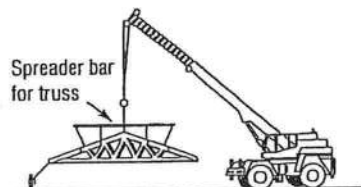


- ✓ Use proper rigging and hoisting equipment.

Use equipo apropiado para levantar e improvisar.

- ⚠ The contractor is responsible for properly receiving, unloading and storing the trusses at the jobsite.

El contratista tiene la responsabilidad de recibir, descargar y almacenar adecuadamente los trusses en la obra.

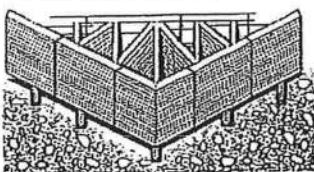

- ✓ If trusses are to be stored horizontally, place blocking of sufficient height beneath the stack of trusses at 8' to 10' on center.

For trusses stored for more than one week, cover bundles to prevent moisture gain but allow for ventilation.

Refer to BCSI Guide to Good Practice for Handling, Installing, Restraining & Bracing of Metal Plate Connected Wood Trusses for more detailed information pertaining to handling and jobsite storage of trusses.


Si los trusses estarán guardados horizontalmente, ponga bloqueando de altura suficiente detrás de la pila de los trusses.

Para trusses guardados por más de una semana, cubra los paquetes para prevenir aumento de humedad pero permita ventilación.

Vea el folleto BCSI Guía de Buena Práctica para el Manejo, Instalación, Restricción y Arrioste de los Trusses de Madera Conectados con Placas de Metal para información más detallada sobre el manejo y almacenamiento de los trusses en área de trabajo.

HOISTING RECOMMENDATIONS FOR TRUSS BUNDLES RECOMENDACIONES PARA LEVANTAR PAQUETES DE TRUSSES.

- ⚠ Warning! Don't overload the crane.
¡Advertencia! No sobrecargue la grúa!
- ⚠ Never use banding alone to lift a bundle. Do not lift a group of individually banded bundles. Nunca use sólo los empaques para levantar un paquete. No levante un grupo de empaques individuales.

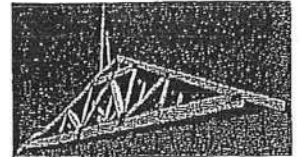

- ✓ A single lift point may be used for bundles with trusses up to 45'. Two lift points may be used for bundles with trusses up to 60'. Use at least 3 lift points for bundles with trusses greater than 60'.


Puede usar un solo lugar de levantar para paquetes de trusses hasta 45 pies. Puede usar dos puntos de levantar para paquetes más de 60 pies. Use por lo menos tres puntos de levantar para paquetes más de 60 pies.

- ⚠ Warning! Do not over load supporting structure with truss bundle.
¡Advertencia! No sobrecargue la estructura apoyada con el paquete de trusses.

- ✓ Place truss bundles in stable position. Puse paquetes de trusses en una posición estable.


INSTALLATION OF SINGLE TRUSSES BY HAND INSTALACIÓN POR LA MANO DE TRUSSES INDIVIDUALES

- ✓ Trusses 20' or less, support at peak.



Levante del pico los trusses de 20 pies o menos.

- ✓ Trusses 30' or less, support at quarter points.




Levante de los cuartos de tramo los trusses de 30 pies o menos.

HOISTING OF SINGLE TRUSSES — LEVANTAMIENTO DE TRUSSES INDIVIDUALES

- ✓ Hold each truss in position with the erection equipment until top chord temporary lateral restraint is installed and the truss is fastened to the bearing points.
Sostenga cada truss en posición con equipo de grúa hasta que la restricción lateral temporal de la cuerda superior esté instalada y el truss está asegurado en los soportes.


- ⚠ Warning! Using a single pick-point at the peak can damage the truss.

¡Advertencia! El uso de un solo lugar para levantar en el pico puede hacer daño al truss.

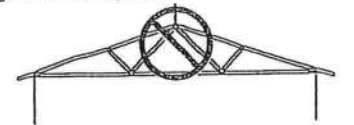


HOISTING RECOMMENDATIONS FOR SINGLE TRUSSES

RECOMENDACIONES PARA LEVANTAR TRUSSES INDIVIDUALES

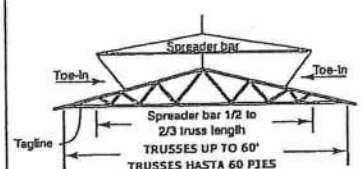

Trusses up to 30' TRUSSES HASTA 30 PIES
Trusses up to 60' TRUSSES HASTA 60 PIES

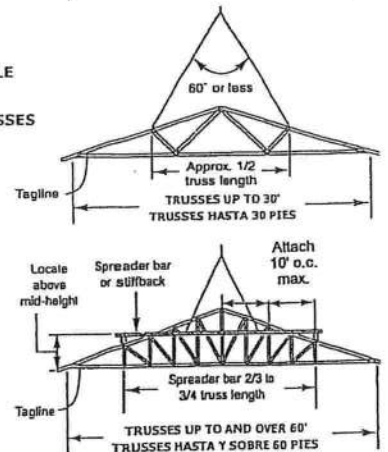

Trusses up to 30' TRUSSES HASTA 30 PIES
Trusses up to 60' TRUSSES HASTA 60 PIES
Trusses up to and over 60' TRUSSES HASTA Y SOBRE 60 PIES

TEMPORARY RESTRAINT & BRACING RESTRICCIÓN Y ARRIOSTRE TEMPORAL

- ⚠ Refer to BCSI-B2 Summary Sheet - Truss Installation & Temporary Restraint/Bracing for more information.



Vea el resumen BCSI B2 - Restricción/Arrioste Temporal y Instalación de los Trusses para más información.

- ✓ Locate ground braces for first truss directly in line with all rows of top chord temporary lateral restraint (see table in the next column).

Coloque los arriostres de tierra para el primer truss directamente en línea con cada una de las filas de restricción lateral temporal de la cuerda superior (vea la table en la próxima columna).



- ⚠ Do not walk on unbraced trusses. No camine en trusses sueltos.

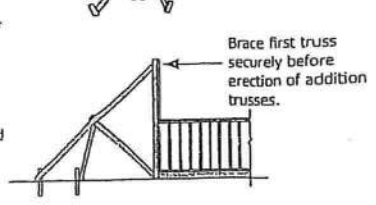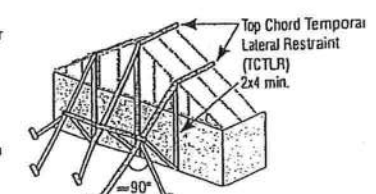

Brace first truss securely before erection of addition trusses.

Maronda Systems

MARONDA SYSTEMS

4005 Maronda Way

Sanford, FL 32771

(407) 321-0064

Fax (407) 321-3913

Date: November 1, 2006

To: Building Department

From: Maronda Systems

Tomas Ponce

Professional Engineer


State of Florida #0050068

Subject: Valley Trusses

All valley trusses labeled V-1 through 100 are covered under the general valley sheet provided in the truss package signed and sealed by the engineer of record. The connections are noted on the structural info sheet of the plans. All criteria of the valley trusses are noted on the general sheet.

If you have any questions please feel free to call at 407-321-0064.

Sincerely,

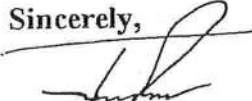

Tomas Ponce, P.E.

Date: 11/1/06

DESIGN INFORMATION

This design is for an individual building component and has been based on information provided by the client. The Designer disclaims any responsibility for damages as a result of faulty or incorrect information, specifications and/or designs furnished to the trade designer by the client and the correctness or accuracy of this information as it may apply to a specific project or specific scope of work. The Designer disclaims any responsibility for damages resulting from the use of the design for any other purpose. Education, training, shipping, handling and installation of fixtures.

This trade has been designed in accordance with ANSI/UPA 1-1993 and NDS-97 to be incorporated as part of the building design by a Building Designer (registered architect or professional engineer). When reviewed for approval by the building designer, the design loadings shown must be applied to the trade that the design is for. In general, the design loadings shown are for the building component, not the building, and are not to be used for the building or for other building components or special wind or snow loads, special specifications or special applied loads. Unless shown, trade has been designed for storage or occupancy loads. The design assumes compression chords (top or bottom) are continuously braced by sheathing unless otherwise specified. Where bottom chords in trusses are not fully braced laterally by a properly applied roof ceiling, they should be braced at a maximum spacing of 10'-0" c/c. Connector plates shall be used in accordance with the provisions of the American Institute of Steel Construction, Inc. (AISC) 360.

FABRICATION NOTES

Prior to fabrication, the fabricator shall review this drawing to verify that this drawing is in conformance with the fabricator's plans and to verify a continuing responsibility for such realization. Any discrepancies are to be put in writing before cutting or fabrication. Plates shall not be installed over bolts/nuts, bolts or distanced from them. Members shall be cut for tight fitting wood to wood joining. Connector plates shall be located on both faces of the joint with nails fully embedded and shall be 3/16" above the joint with nails otherwise shown. A 3/4" plate is 3" wide x 1/2" long. (old plate is 6" wide x 1/2" long). (Notes) The fabricator shall ensure that the plates are cut and installed with members still intact in this condition of the job, whereas otherwise shown. Connector plates size are minimum 3/16" based on the forces shown and may need to be increased for certain handling and/or reaction stresses. This must not be fabricated with fire retardant treated lumber unless otherwise shown. For additional information on Quality Control refer to ANS1/701.

PRECAUTIONARY NOTES

All bracing and erection recommendations are to be followed in accordance with "Handling, Insulating and Bracing," HB-91. Trusses are to be handled with particular care during bundling and bundling, delivery and installation to avoid damage. Temporary and permanent bracing for holding trusses in a straight and plumb position and for resisting lateral forces shall be designed and installed by others. Careful handling is essential and erection bracing is always required. Normal precumulatory action for trusses requires such temporary bracing during installation between trusses to avoid toppling and buckling. The supervision of erection of trusses shall be under the control of persons experienced in the installation of trusses. Professional advice shall be sought if needed. Concentration of construction loads greater than the design loads shall not be applied to trusses at any time. No loads other than the weight of the erectors shall be applied to trusses until after all tightening and bracing is completed.

TOP CHORDS: 2X4 SP #2
BOT CHORDS: 2X4 SP #2
WEBS: 2X4 SP #3

T/C MUST BE CONTINUOUSLY BRACED
BY ROOF SHEATHING UNLESS NOTED
OTHERWISE.

VALLEY MEMBERS TO BE SET
PERPENDICULAR TO TRUSSES BELOW.

IT IS NOT REQUIRED TO SHEATH TRUSSES
BELOW VALLEY SET. VALLEY MEMBERS
PROVIDE ALL NECESSARY TOP CHORD
BRACING.

WHEN VALLEY MEMBERS ARE NAILED DIRECTLY TO TRUSS TOP CHORDS USE (2) 16d NAILS PER INTERSECTION, OR TWO FEET ON CENTER. WHEN BELOW TRUSSES ARE SHEATHED FIRST USE (2) 10d NAILS OR (1) 16d NAIL PER INTERSECTION, OR TWO FEET ON CENTER.

IF LESS THEN 3-0-0 THEN MOVE
DIAGONAL WEB TO NEXT PANEL.

(*) WHEN DIGAONAL WEB PRESENT USE 4X8 PLATE

(B) WHEN NO DIAGONAL WEB PRESENT USE 2X4 PLAT

VALLEY MEMBERS AT

24 * O.C. [TYP]


2x4
3x6

2x4

12

VÄRME

5 2x4 2x4 3x5

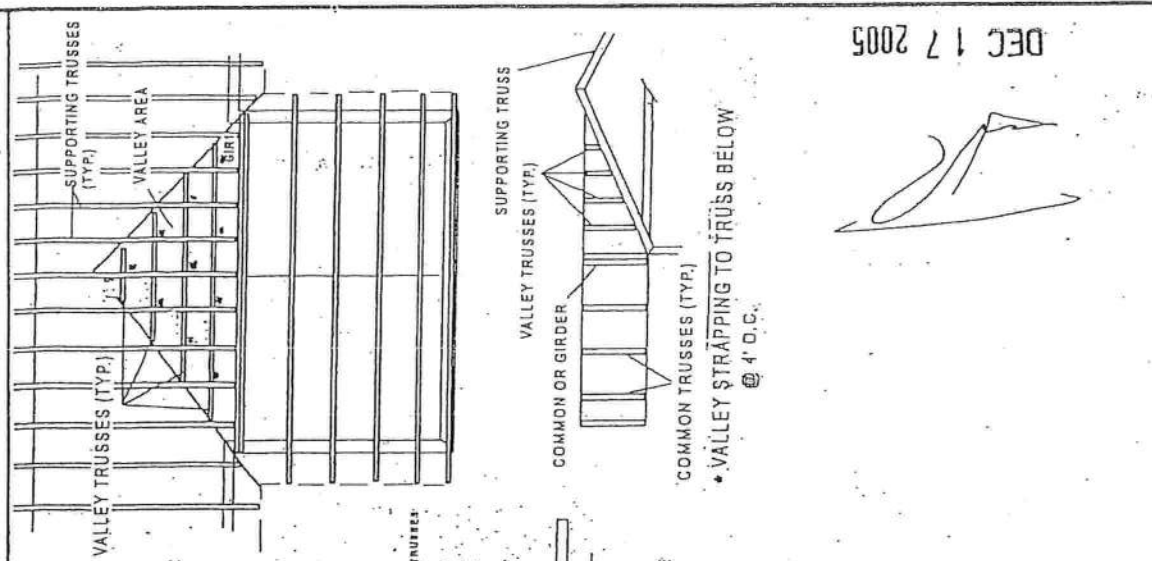

EXCEPT AS SHOWN PLATES ARE TL20 GA TESTED PER ANSI/TPI 1-1995
 Cont. Support Studs @ 6-0-0 O.C.

Maronda Systems
4005 MARONDA WAY
Sanford, FL 32771
(407) 321-0064 Fax (407) 321-3913
TOMAS PONCE P.E. LICENSE #0050068
1005 VANNESSA DR. OVIEDO FL 32706

Eng Job:	WO: VALLEY SET
Dwg:	TI: V
Dsgnrt: TLY	Chk: 7/27/2005
TC Live	16.0 psf
TC Dead	7.0 psf
BC Live	10.0 psf
BC Dead	2.0 psf
TOTAL	35.0 psf
	Lbr DF: 1.25
	Plt DF: 1.25
	O.C.: 2-0-0
	TPI-02/FBC-04
	Code: FLA
	v4.7.21.0355

DESIGN INFORMATION

This design is for an individual building component and is not to be used for any other purpose. The design is based on information provided by the client. The engineer disclaims any responsibility for damages to a building or its contents resulting from the use of this design for any purpose other than that intended by the client. The client is responsible for obtaining all necessary permits and for ensuring that the design complies with all applicable codes and regulations.

FABRICATION NOTES

Prior to fabrication, the fabricator shall review this drawing to verify that this drawing is in conformance with the fabricator's plans and to realize a continuing responsibility for each verification. Any discrepancies are to be put in writing before cutting or fabrication. Plates shall not be installed over knotholes, knots or distorted grain. Members shall be cut for tight fitting wood to wood bearing. Connectors shall be installed in accordance with the joint unless otherwise shown. A 5/8" plate is 5" wide x 4" long. A 6/8" plate is 6" wide x 4" long. Slots (holes) run parallel to the plate length specified. Double ends on web members shall meet at the center of the web unless otherwise shown. Connector plate sizes are minimum sizes based on the forces shown and may need to be increased for certain handling and/or erection stresses. This truss is not to be fabricated with fire retardant treated lumber unless otherwise shown. For additional information on Quality Control refer to ANSI/TPI 1-1995

PRECAUTIONARY NOTES



All bracing and erection recommendations are to be followed in accordance with accepted industry publications. Trusses are to be handled with particular care during handling and bundling, delivery and installation to avoid damage. Temporary and permanent bracing for holding trusses in a straight and plumb position and for resisting lateral forces shall be designed and installed by others. Careful handling is essential and erection bracing is always required. Normal precautionary action for trusses requires such temporary bracing during installation between trusses to avoid toppling and dominating. The supervision of erection of trusses shall be under the control of persons experienced in the installation of trusses. Professional services shall be sought if needed. Concentration of construction loads greater than the design loads shall not be applied to trusses at any time. No loads other than the weight of the erections shall be applied to trusses until after all latching and bracing is completed.

HIP TRUSS BLOCKING REQUIREMENTS

APA-FORM NO. TT-083
SPAN RATING AND BLOCKING RECOMMENDATIONS FOR USE OVER HIP-ROOFS SUPPORT AT 24" O.C

Roof Slope	24/18	32/18	40/20	48/24
≤ 1:12	OK	OK	OK	OK
≤ 2:12	OK	OK	OK	OK
≤ 3:12	OK	OK	OK	OK
≤ 4:12	OK	OK	OK	OK
≤ 5:12	OK	OK	OK	OK
≤ 6:12	OK	OK	OK	OK
≤ 7:12	OK	OK	OK	OK
≤ 8:12	OK	OK	OK	OK
≤ 10:12	OK	OK	OK	OK
≤ 11:12	OK	OK	OK	OK
≤ 12:12	OK	OK	OK	OK
≤ 13:12	OK	OK	OK	OK
≤ 14:12	OK	OK	OK	OK

NOTE: SHADED AREA REQUIRES 2X LUMBER BLOCKING BETWEEN TRUSS AT UN SUPPORTED PANEL EDGES IN HIP ROOF AREAS

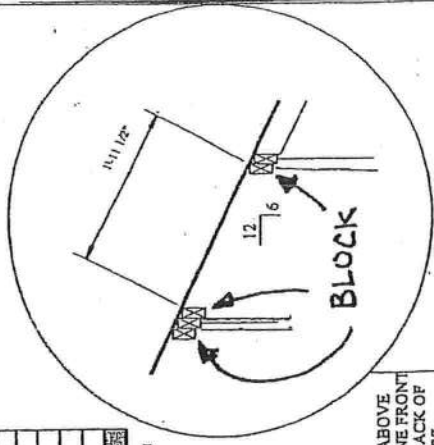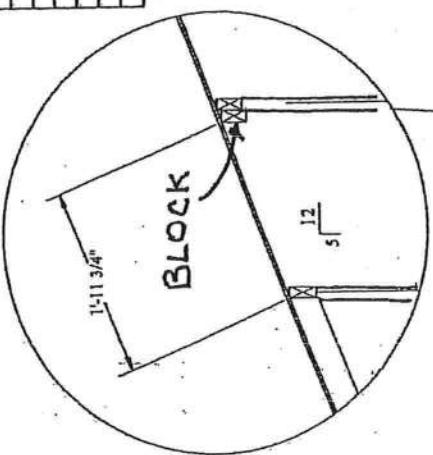

2X BLOCKING TYP
NAILED W/ 10D 12" O.C.

1'-11 3/4"

5/12 (1) 2X
TO THE FRONT OF
HIP TRUSS

7/16" OSB ROOF
SHEATHING

6/12 OR ABOVE
(2) 2X ONE FRONT
& ONE BACK OF
HIP TRUSS

PRE-ENG'D TRUSSES

NOTE: NO BLOCKING IS REQUIRED ON 4/12 AND BELOW PITCHED ROOFS

WARNING:

READ ALL NOTES ON THIS SHEET. A COPY OF THIS DRAWING TO BE GIVEN TO
ERECTING CONTRACTOR. ERECTION WARNING:
Bracing shown on this drawing is not erection bracing, wind bracing, portal bracing or similar bracing which is a part of
the building design and which must be considered by the building designer. Bracing shown is for lateral support of truss
members only to reduce buckling length. Provisions must be made to anchor lateral bracing at ends and specified
locations determined by the building designer. Additional bracing of the overall structure may be required. (See HB-91
of TPI) For specific truss bracing requirements, contact building designer (Truss Plate Institute, TPI is located at 383
D'Oench Drive, Madison, Wisconsin 53719).

Maronda Systems

4005 MARONDA WAY
Sanford, FL 32771
(407) 321-0064 Fax (407) 321-3913
TOMAS PONCE P.E. LICENSE #0050068
367 Mettallon Pl. Chuluota, FL 32766

Eng Job:

Dwg:

Dsgnr: TLY Chk:

TC Live 16.0 psf

TC Dead 7.0 psf

BC Live 10.0 psf

BC Dead 10.0 psf

TOTAL 43.0 psf

WO: HIPDETAIL

TI: HIP

11/2/2006

Lbr DF: 1.25


Plt DF: 1.25

O.C.: 2'-0"-0

TPI-02/FBC-04

Code: FLA

v4.7.32-0

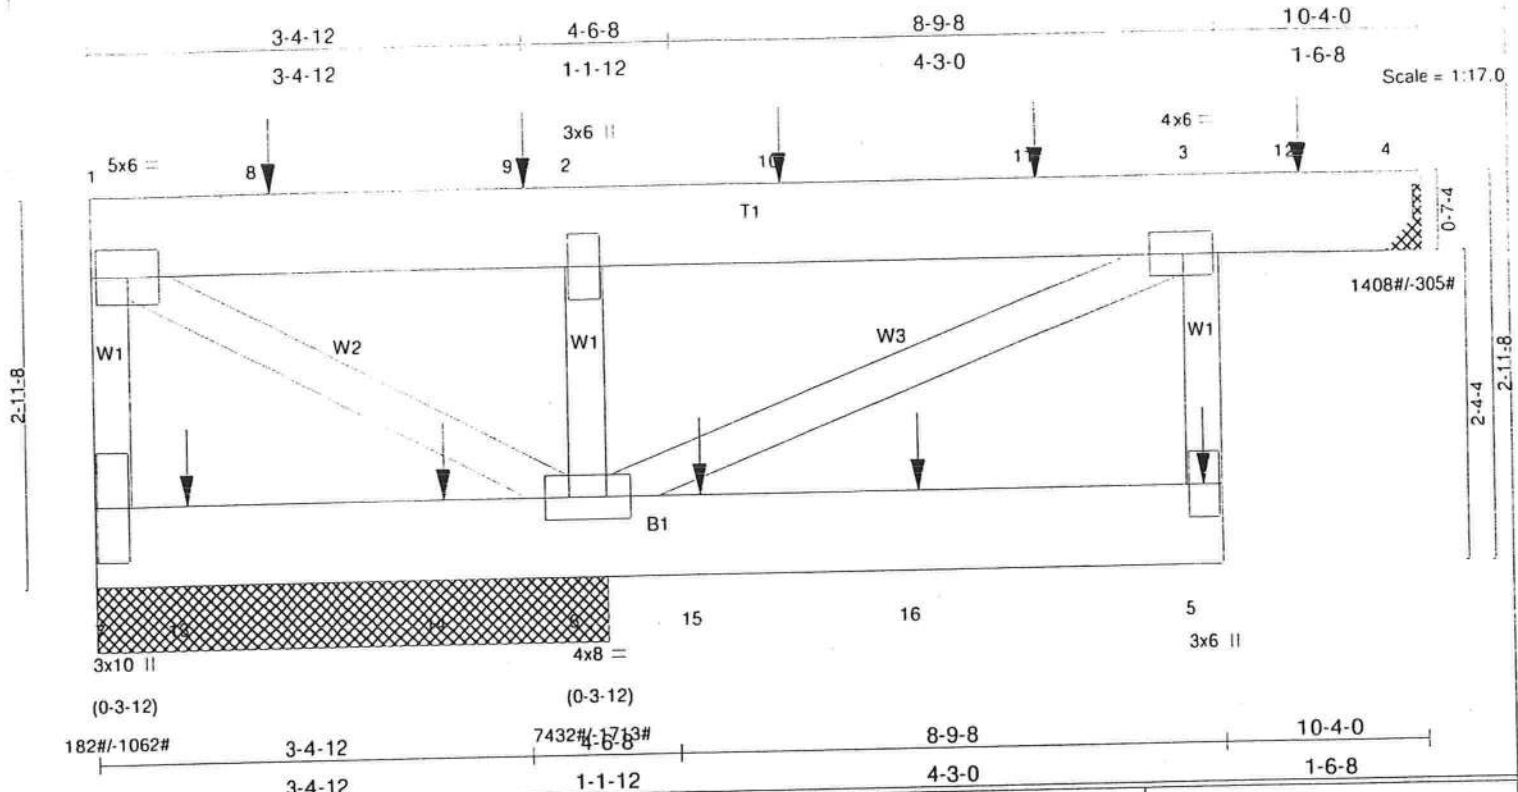

LOADING (psf)	SPACING	CSI	DEFL	PLATES	GRIP
TCCL 16.0	2-0-0	TC 0.71	in (loc) l/defl L/d	MT20	244/190
TCDL 7.0	Plates Increase 1.25	BC 0.45	Ver(LL) -0.04 5 >999 240		
BCLL 10.0	Lumber Increase 1.25	WB 0.23	Ver(TL) -0.07 5 >999 180		
BCDL 10.0	Rep Stress Incr NO	(Matrix)	Horz(TL) 0.02 4 n/a n/a		
	Code FBC2004/TPI2002			Weight: 159 lb	


LUMBER
 TOP CHORD 2 X 8 SYP No.2
 BOT CHORD 2 X 8 SYP No.2
 WEBS 2 X 4 SYP No.2

BRACING
 TOP CHORD Structural wood sheathing directly applied or 10-0-0 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (lb/size) 7=-1062/4-0-0, 4=1408/Mechanical, 6=7432/4-0-0
 Max Uplift 7=-1062(LC 1), 4=-305(LC 3), 6=-1713(LC 3)
 Max Grav 7=182(LC 3), 4=1408(LC 1), 6=7432(LC 1)

FORCES (lb) - Maximum Compression/Maximum Tension
 TOP CHORD 1-7=-278/1632, 1-8=-468/2178, 8-9=-468/2178, 2-9=-468/2178, 2-10=-468/2178, 10-11=-468/2178, 3-11=-468/2178, 3-12=0/0, 4-12=0/0
 BOT CHORD 7-13=0/0, 13-14=0/0, 6-14=0/0, 6-15=0/0, 15-16=0/0, 5-16=0/0
 WEBS 1-6=-2579/554, 2-6=-2449/762, 3-5=-199/1130, 3-6=-2426/521

- NOTES**
- 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
 Top chords connected as follows: 2 X 4 - 1 row at 0-9-0 oc, 2 X 8 - 2 rows at 0-9-0 oc.
 Bottom chords connected as follows: 2 X 8 - 2 rows at 0-7-0 oc.
 Webs connected as follows: 2 X 4 - 1 row at 0-9-0 oc.
 - All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
 - Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS; Lumber DOL=1.60 plate grip DOL=1.60.
 - Provide adequate drainage to prevent water ponding.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
 - Refer to girder(s) for truss to truss connections.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 1062 lb uplift at joint 7, 305 lb uplift at joint 4 and 1713 lb uplift at joint 6.
 - Uplift for first LC exceeds limits
 - Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 79 lb down and 60 lb up at 1-4-12, 376 lb down and 221 lb up at 3-4-12, 877 lb down and 157 lb up at 5-4-12, and 877 lb down and 174 lb up at 7-4-12, and 877 lb down and 174 lb up at 9-4-12 on top chord, and 778 lb down and 164 lb up at 0-8-12, 778 lb down and 164 lb up at 2-8-12, 778 lb down and 164 lb up at 4-8-12, and 778 lb down and 164 lb up at 6-5-4, and 778 lb down and 164 lb up at 8-7-12 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.

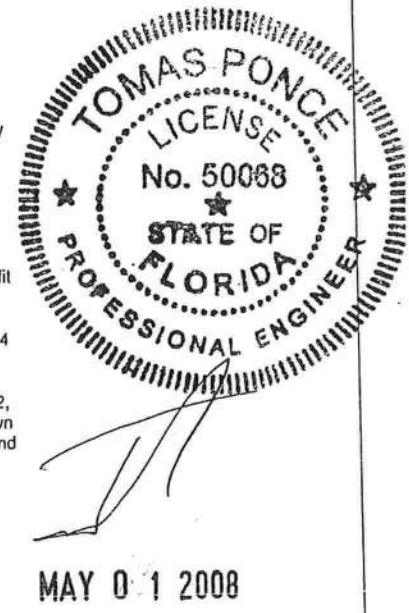


Job	Truss	Truss Type	Qty	Ply	CHESAPEAKE_FL_125
CHESAPEAKE	BGRD	SPECIAL	1	2	Job Reference (optional)

Maronda Homes Inc., Sanford, Florida

LOAD CASE(S) Standard

Concentrated Loads (lb)

Vert: 5=-778(B) 8=-79(F) 9=-376(F) 10=-877(F) 11=-877(F) 12=-877(F) 13=-778(B) 14=-778(B) 15=-778(B) 16=-778(B)

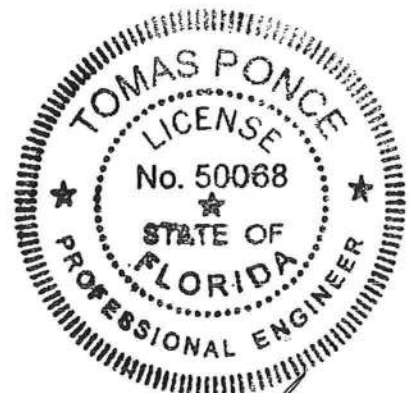

A handwritten signature in black ink, appearing to be "T. Ponce", written over the bottom right portion of the professional seal.

MAY 01 2008

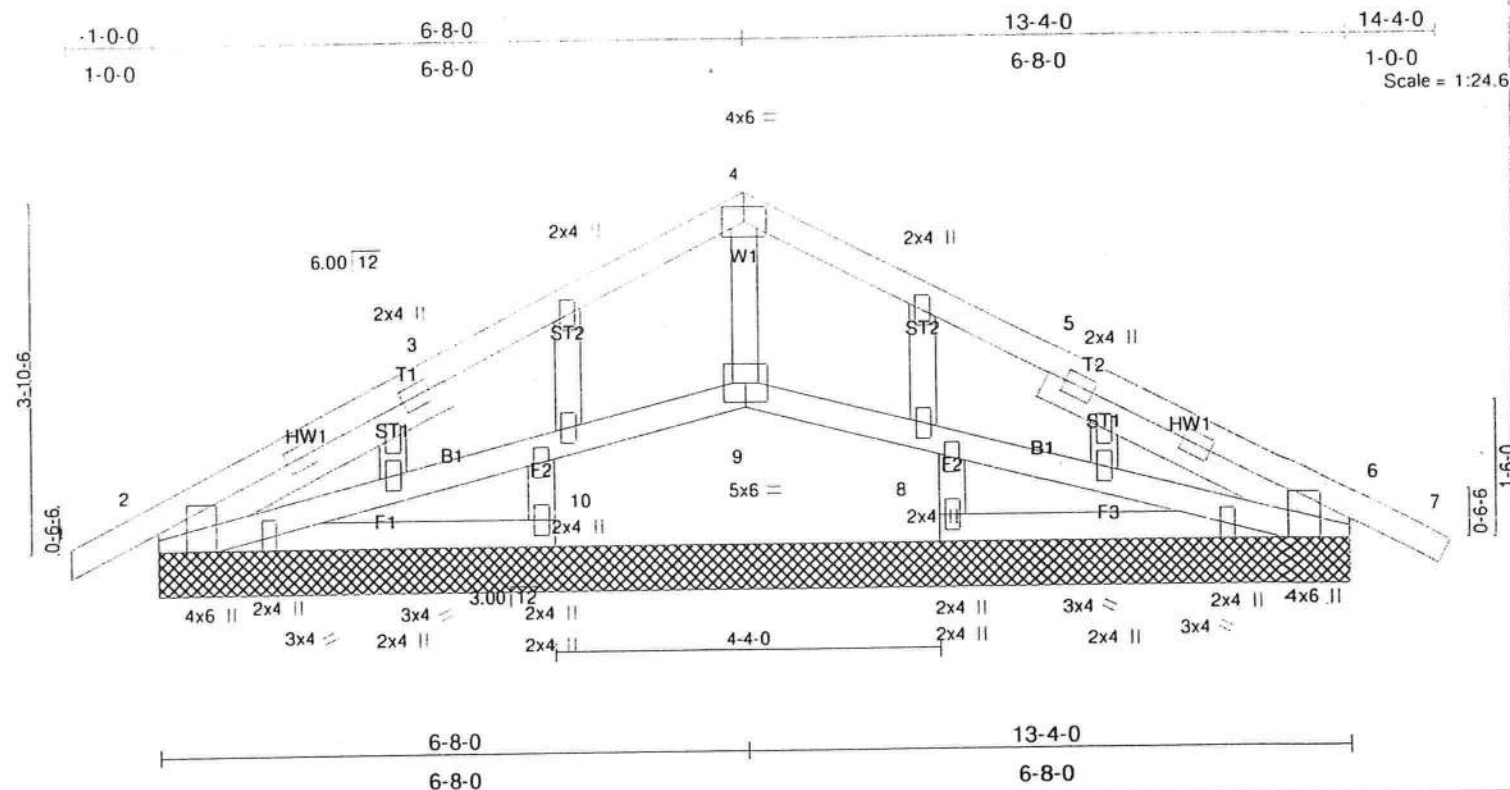


Plate Offsets (X,Y): [2:0-2-5,0-3-14], [6:0-2-5,0-3-14]

LOADING (psf)	SPACING	CSI	DEFL	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 16.0	2-0-0	TC 0.40	Vert(LL)	0.02	7	n/r	MT20	244/190
TCDL 7.0	Plates Increase 1.25	BC 0.24	Vert(TL)	0.03	7	n/r		
BCCL 10.0	Lumber Increase 1.25	WB 0.01	Horz(TL)	-0.01	6	n/a		
BCDL 10.0	Rep Stress Incr NO	(Matrix)						
	Code FBC2004/TPI2002							
							Weight: 79 lb	

LUMBER
 TOP CHORD 2 X 4 SYP No.2
 BOT CHORD 2 X 4 SYP No.2
 WEBS 2 X 4 SYP No.3 *Except*
 W1 2 X 4 SYP No.2
 OTHERS 2 X 4 SYP No.3
 SLIDER Left 2 X 4 SYP No.2 3-8-2, Right 2 X 4 SYP No.2 3-8-2


BRACING
 TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (lb/size) 2=346/13-4-0, 9=137/13-4-0, 6=350/13-4-0, 10=202/13-4-0, 8=201/13-4-0
 Max Horz 2=-76(LC 7)
 Max Uplift 2=-294(LC 6), 9=-29(LC 6), 6=-328(LC 7), 10=-4(LC 6), 8=-2(LC 7)
 Max Grav 2=346(LC 1), 9=137(LC 1), 6=350(LC 1), 10=212(LC 10), 8=212(LC 11)

FORCES (lb) - Maximum Compression/Maximum Tension
 TOP CHORD 1-2=0/6, 2-3=-391/556, 3-4=-330/572, 4-5=-330/573, 5-6=-391/557, 6-7=0/8
 BOT CHORD 2-10=-358/330, 9-10=-344/301, 8-9=-344/301, 6-8=-358/330
 WEBS 4-9=-98/13

- NOTES** (11)
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCCL=6.0psf; Category II; Exp B; enclosed; MWFRS gable end zone and C-C Exterior(2) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
 - Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see MiTek "Standard Gable End Detail".
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
 - Gable requires continuous bottom chord bearing.
 - Gable studs spaced at 2-0-0 oc.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 294 lb uplift at joint 2, 29 lb uplift at joint 9, 328 lb uplift at joint 6, 4 lb uplift at joint 10 and 2 lb uplift at joint 8.
 - Beveled plate or shim required to provide full bearing surface with truss chord at joint(s) 9, 10, 8.
 - See explanation of repetitive member factor Cr on TEK form 4.20.2005

LOAD CASE(S) Standard

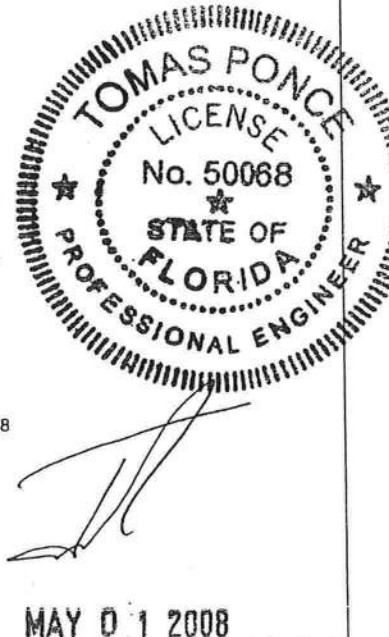

MAY 01 2008

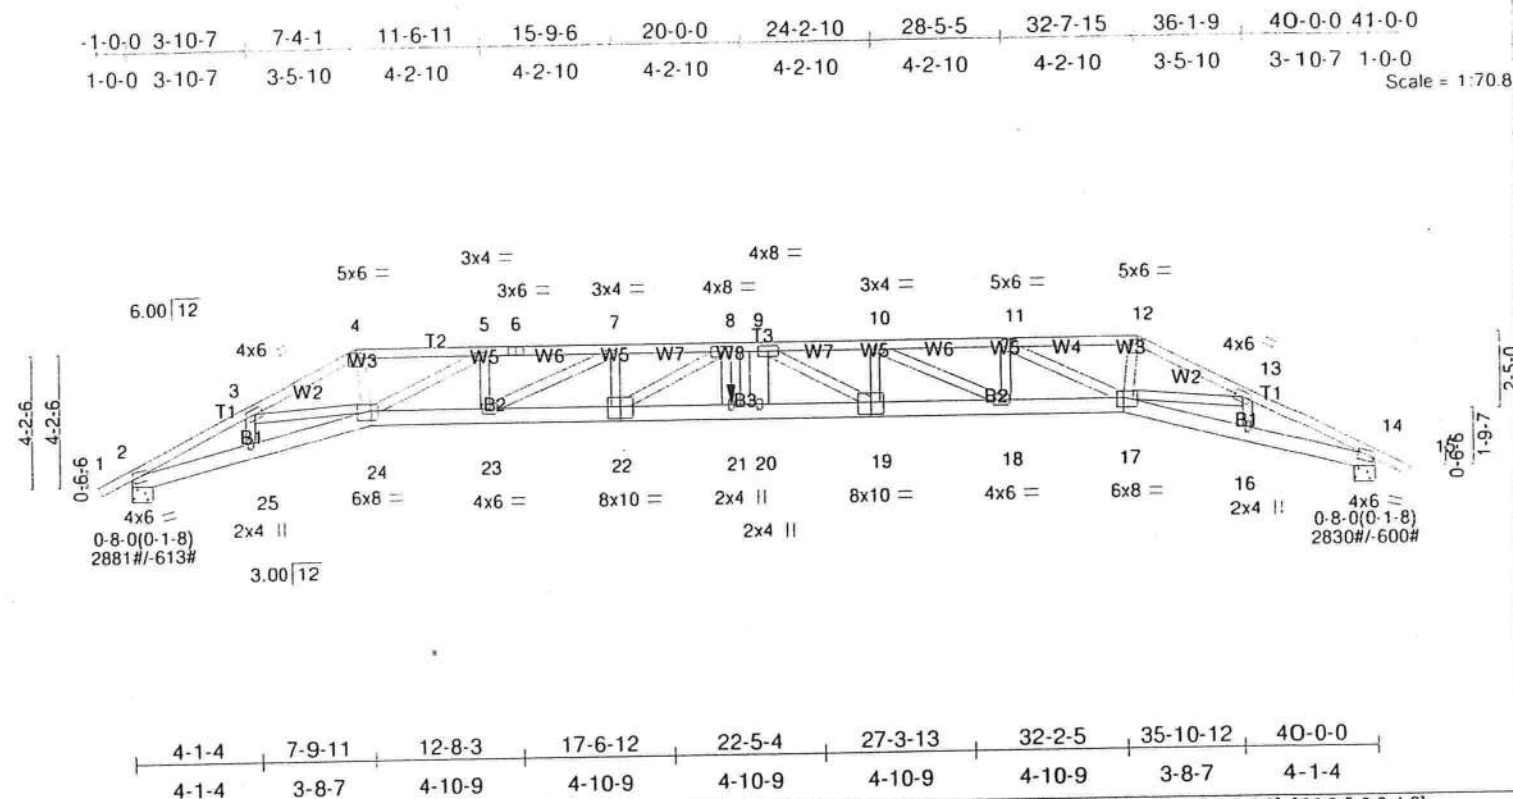


Plate Offsets (X,Y): [2:0-2-0,0-2-0], [4:0-3-0,0-2-0], [11:0-3-0,0-3-0], [12:0-3-0,0-2-0], [13:0-0-0,0-0-0], [14:0-2-0,0-2-0], [17:0-2-12,0-3-8], [19:0-5-0,0-4-8], [22:0-5-0,0-4-8], [24:0-2-12,0-3-8]									
LOADING (psf)		SPACING 2-0-0		CSI		DEFL in (loc) l/defl L/d		PLATES GRIP	
TCLL	16.0	Plates Increase 1.25		TC	0.56	Vert(LL)	-0.66 21 >719 240	MT20	244/190
TCDL	7.0	Lumber Increase 1.25		BC	0.83	Vert(TL)	-1.30 21-22 >363 180		
BCLL	10.0	Rep Stress Incr NO		WB	0.25	Horz(TL)	0.54 14 n/a n/a		
BCDL	10.0	Code FBC2004/TPI2002		(Matrix)				Weight: 705 lb	


LUMBER	BRACING	Structural wood sheathing directly applied or 5-3-0 oc purlins. Rigid ceiling directly applied or 10-0-0 oc bracing.
TOP CHORD 2 X 4 SYP No.2	TOP CHORD	
BOT CHORD 2 X 6 SYP No.1D "Except"	BOT CHORD	
B1 2 X 6 SYP No.2, B1 2 X 6 SYP No.2		
WEBS 2 X 4 SYP No.2 "Except"		
W8 2 X 8 SYP No.2, W8 2 X 8 SYP No.2		

REACTIONS (lb/size) 2=2881/0-8-0, 14=2830/0-8-0
Max Horz 2=-74(LC 6)
Max Uplift 2=-613(LC 4), 14=-600(LC 3)

FORCES (lb) - Maximum Compression/Maximum Tension
TOP CHORD 1-2=0/14, 2-3=-8171/1777, 3-4=-9216/2094, 4-5=-9121/2084, 5-6=-12673/2943, 6-7=-12673/2943, 7-8=-16141/3761,
8-9=-18256/4250, 9-10=-15656/3590, 10-11=-12417/2824, 11-12=-8924/1982, 12-13=-9016/1991, 13-14=-8019/1698,
14-15=0/14
BOT CHORD 2-25=-1573/7125, 24-25=-1588/7184, 23-24=-2879/12673, 22-23=-3697/16141, 21-22=-4186/18256, 20-21=-4186/18256,
19-20=-4186/18256, 18-19=-3520/15656, 17-18=-2677/12294, 16-17=-1456/7049, 14-16=-1443/6993
WEBS 3-25=-103/100, 3-24=-391/1394, 4-24=-838/3985, 5-24=-4098/1044, 7-23=-3890/967, 7-22=-278/1471, 8-22=-2451/623,
9-19=-3003/757, 10-19=-266/1423, 10-18=-3636/910, 11-18=-352/1756, 11-17=-3926/1005, 12-17=-796/3902,
13-17=-390/1344, 13-16=-91/98, 8-21=-276/1290, 9-20=-232/1106, 5-23=-359/1790

NOTES

- 1) 3-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2 X 4 - 1 row at 0-9-0 oc.
Bottom chords connected as follows: 2 X 6 - 2 rows at 0-4-0 oc.
Webs connected as follows: 2 X 4 - 1 row at 0-9-0 oc, 2 X 8 - 2 rows at 0-9-0 oc.
- 2) All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
- 3) Unbalanced roof live loads have been considered for this design.
- 4) Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS; Lumber DOL=1.60 plate grip DOL=1.60.
- 5) Provide adequate drainage to prevent water ponding.
- 6) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 7) This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
- 8) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
- 9) Bearing at joint(s) 2, 14 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 10) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 613 lb uplift at joint 2 and 600 lb uplift at joint 14.

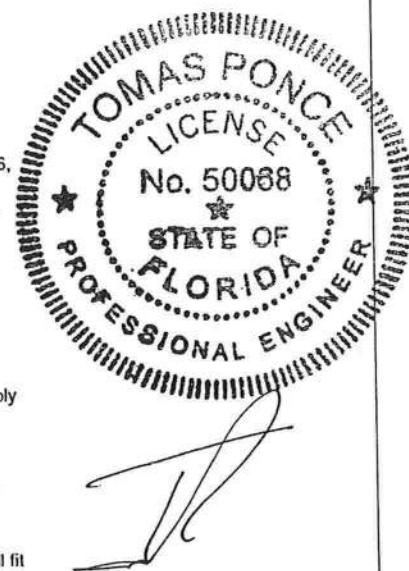

MAY 01 2008

Job	Truss	Truss Type	Qty	Ply	CHESAPEAKE_FL_125
CHESAPEAKE	GRD	SPECIAL	1	3	Job Reference (optional)

Maronda Homes Inc., Sanford, Florida


7.000 s May 29 2007 MiTek Industries, Inc. Wed Apr 30 15:39:04 2008 Page 2

NOTES

11) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 2200 lb down and 538 lb up at 19'-6"-8" on bottom chord. The design/selection of such connection device(s) is the responsibility of others.


LOAD CASE(S) Standard

- 1) Regular: Lumber Increase=1.25, Plate Increase=1.25
- Uniform Loads (plf)
Vert: 1-4=-46, 4-12=-46, 12-15=-46, 2-24=-40, 17-24=-40, 14-17=-40
- Concentrated Loads (lb)
Vert: 21=-2200(F)

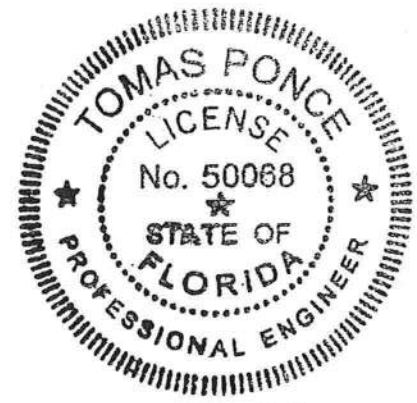


A handwritten signature in black ink, appearing to be "T. Ponce", written over the seal.

MAY 01 2008

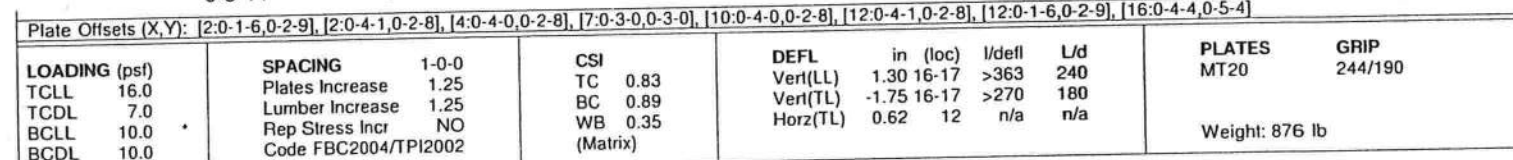

FORCES (lb) - Maximum Compression/Maximum Tension
 TOP CHORD 1-20=0/5, 2-20=0/9, 2-3=-13087/8592, 3-4=-13041/8604, 4-5=-13171/8708, 5-6=-21305/14173, 6-7=-25106/16718, 7-8=-25106/16703, 8-9=-21305/14151, 9-10=-13171/8688, 10-11=-13041/8584, 11-12=-13086/8573, 12-21=0/9, 13-21=0/5
 BOT CHORD 2-22=-7646/11598, 22-23=-7720/11732, 19-23=-7786/11825, 19-24=-13011/19611, 24-25=-13011/19611, 25-26=-13011/19611, 18-26=-13011/19611, 18-27=-15801/23773, 27-28=-15801/23773, 17-28=-15801/23773, 17-29=-16755/25207, 29-30=-16755/25207, 16-30=-16755/25207, 16-31=-15776/23773, 31-32=-15776/23773, 15-32=-15776/23773, 15-33=-12965/19611, 33-34=-12965/19611, 34-35=-12965/19611, 14-35=-12965/19611, 14-36=-7741/11824, 36-37=-7678/11732, 12-37=-7602/11598
 WEBS 4-19=-4334/6547, 5-19=-6982/4711, 5-18=-1965/2922, 6-18=-2763/1865, 6-17=-1192/1777, 7-17=-131/94, 7-16=-132/94, 8-16=-1192/1777, 8-15=-2764/1865, 9-15=-1965/2922, 9-14=-6982/4712, 10-14=-4324/6547

A circular professional engineer seal for the State of Florida. The outer ring contains the text "TOMAS PONCE" at the top and "PROFESSIONAL ENGINEER" at the bottom, separated by two stars. The inner circle contains the text "LICENSE" at the top, "No. 50068" in the center, and "STATE OF FLORIDA" at the bottom, also separated by two stars. The seal is stamped in black ink on a white background.




MAY 01 2008

Job	Truss	Truss Type	Qty	Ply	CHESAPEAKE_FL_125
CHESAPEAKE	HSGRD	SPECIAL	1	4	Job Reference (optional)

NOTES
 11) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 433 lb down and 325 lb up at 3-0-12, 366 lb down and 271 lb up at 5-0-12, 366 lb down and 283 lb up at 7-0-12, 366 lb down and 283 lb up at 9-0-12, 366 lb down and 283 lb up at 11-0-12, 366 lb down and 283 lb up at 13-0-12, 366 lb down and 283 lb up at 15-0-12, 366 lb down and 283 lb up at 17-0-12, 366 lb down and 283 lb up at 19-0-12, 366 lb down and 283 lb up at 20-11-4, 366 lb down and 283 lb up at 22-11-4, 366 lb down and 283 lb up at 24-11-4, 366 lb down and 283 lb up at 26-11-4, 366 lb down and 283 lb up at 28-11-4, 366 lb down and 283 lb up at 30-11-4, 366 lb down and 283 lb up at 32-11-4, and 366 lb down and 271 lb up at 34-11-4, and 433 lb down and 325 lb up at 36-11-4 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.

LOAD CASE(S) Standard
 1) Regular: Lumber Increase=1.25, Plate Increase=1.25
 Uniform Loads (plf)
 Vert: 1-20=-23, 3-20=-48(F=-25), 3-4=-23, 4-10=-23, 10-11=-23, 11-21=-48(F=-25), 13-21=-23, 2-22=-40(F=-20), 19-22=-20, 14-19=-20, 14-37=-20, 12-37=-40(F=-20)
 Concentrated Loads (lb)
 Vert: 17=-366(B) 16=-366(B) 22=-433(B) 23=-366(B) 24=-366(B) 25=-366(B) 26=-366(B) 27=-366(B) 28=-366(B) 29=-366(B) 30=-366(B) 31=-366(B) 32=-366(B)
 33=-366(B) 34=-366(B) 35=-366(B) 36=-366(B) 37=-433(B)

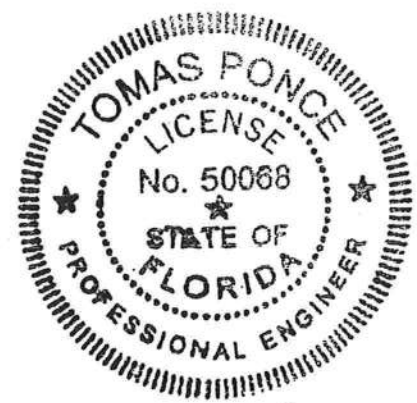

A handwritten signature in black ink, appearing to be "T. Ponce", written over the seal area.

MAY 01 2008

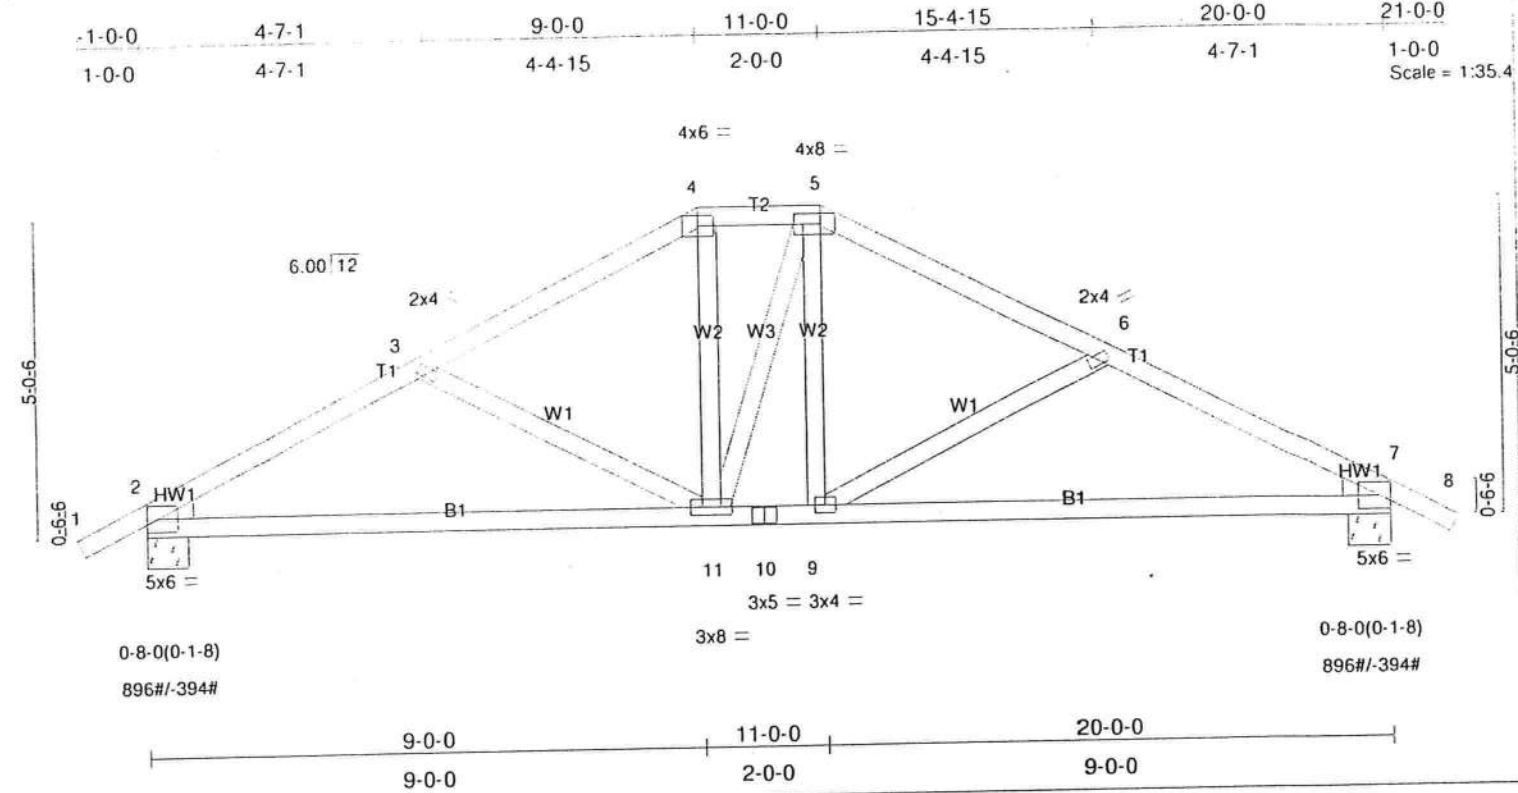


Plate Offsets (X,Y): [5:0-5-4,0-2-0]									
LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in	(loc)	I/defl	L/d	PLATES
TCLL 16.0	Plates Increase	1.25	TC 0.30	Vert(LL)	-0.14	7-9	>999	240	MT20
TCDL 7.0	Lumber Increase	1.25	BC 0.58	Vert(TL)	-0.34	7-9	>688	180	GRIP
BCLL 10.0	Rep Stress Incr	YES	WB 0.10	Horz(TL)	0.03	7	n/a	n/a	244/190
BCDL 10.0	Code FBC2004/TPI2002		(Matrix)						Weight: 103 lb

LUMBER

TOP CHORD

2 X 4 SYP No.2

BOT CHORD

2 X 4 SYP No.2

WEBS

2 X 4 SYP No.3

WEDGE

Left: 2 X 4 SYP No.2, Right: 2 X 4 SYP No.2

BRACING

TOP CHORD

Structural wood sheathing directly applied or 5-2-8 oc purlins.

BOT CHORD


Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (lb/size) 2=896/0-8-0, 7=896/0-8-0
 Max Horz 2=-87(LC 7)
 Max Uplift 2=-232(LC 6), 7=-232(LC 7)

FORCES (lb) - Maximum Compression/Maximum Tension
 TOP CHORD 1-2=0/14, 2-3=-1233/430, 3-4=-1039/343, 4-5=-890/353, 5-6=-1037/343, 6-7=-1233/430, 7-8=0/14
 BOT CHORD 2-11=-264/1052, 10-11=-100/888, 9-10=-100/888, 7-9=-264/1053
 WEBS 3-11=-203/186, 4-11=-30/324, 5-11=-83/95, 5-9=-19/307, 6-9=-205/186

- NOTES**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS and C-C Interior(1) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
 - Provide adequate drainage to prevent water ponding.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 232 lb uplift at joint 2 and 232 lb uplift at joint 7.

LOAD CASE(S) Standard

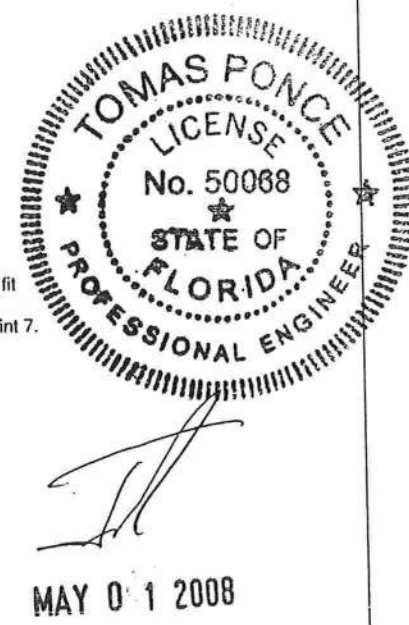

1-0-0 3-9-1 7-0-0 10-0-0 13-0-0 16-2-15 20-0-0 21-0-0
 1-0-0 3-9-1 3-2-15 3-0-0 3-0-0 3-2-15 3-9-1 1-0-0
 Scale = 1:35.4

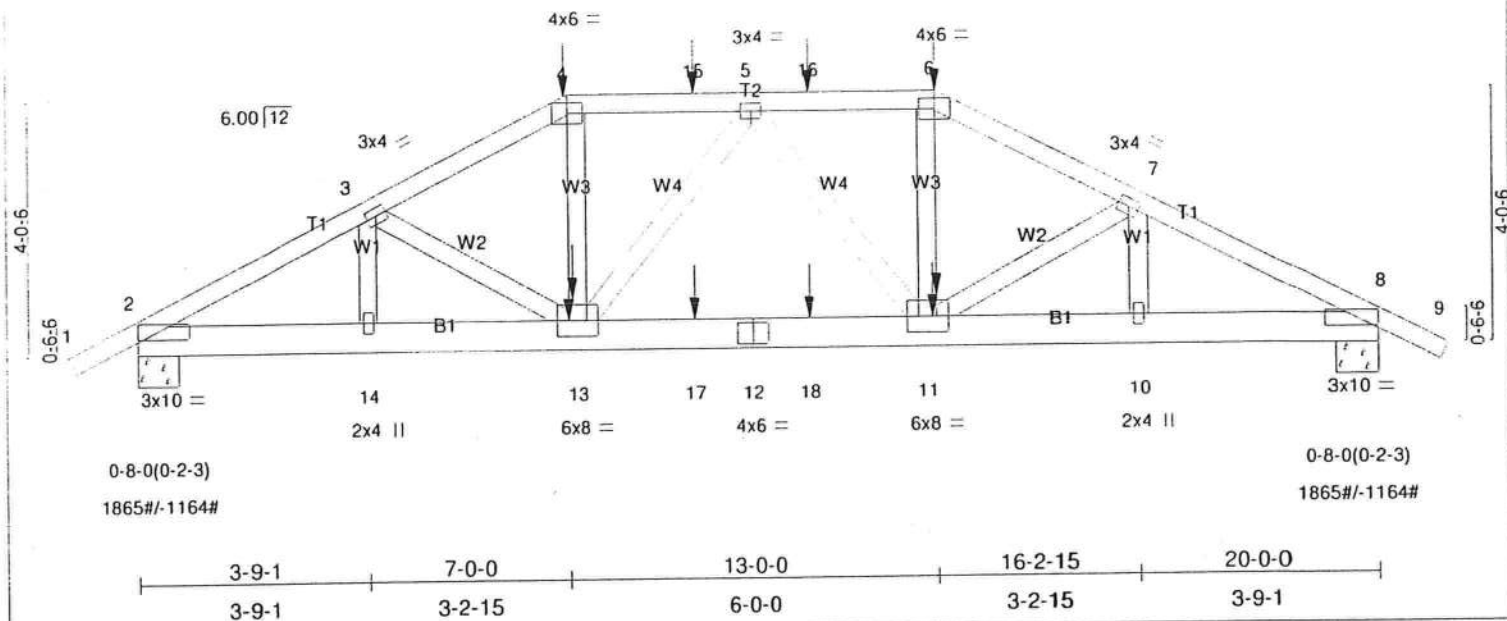


Plate Offsets (X,Y): [2:0-10-1,0-0-8], [8:0-10-1,0-0-8]

LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 16.0	Plates Increase	1.25	TC 0.36	Vert(LL)	0.14 11-13	>999	240	MT20	244/190
TCDL 7.0	Lumber Increase	1.25	BC 0.55	Vert(TL)	-0.21 11-13	>999	180		
BCLL 10.0	Rep Stress Incr	NO	WB 0.21	Horz(TL)	0.06 8	n/a	n/a		
BCDL 10.0	Code FBC2004/TPI2002		(Matrix)						
								Weight: 121 lb	

LUMBER

TOP CHORD 2 X 4 SYP No.2
 BOT CHORD 2 X 6 SYP No.2
 WEBS 2 X 4 SYP No.2

REACTIONS (lb/size) 2=1865/0-8-0, 8=1865/0-8-0
 Max Horz 2=-74(LC 8)
 Max Uplift 2=-1164(LC 7), 8=-1164(LC 8)

FORCES (lb) - Maximum Compression/Maximum Tension


TOP CHORD 1-2=0/17, 2-3=-3196/1981, 3-4=-3164/2130, 4-15=-2854/1962, 5-15=-2854/1962, 5-16=-2854/1962, 6-16=-2854/1962,
 6-7=-3164/2130, 7-8=-3196/1982, 8-9=0/17
 BOT CHORD 2-14=-1703/2716, 13-14=-1703/2716, 13-17=-1940/2955, 12-17=-1940/2955, 12-18=-1940/2955, 11-18=-1940/2955,
 10-11=-1630/2716, 8-10=-1630/2716
 WEBS 3-14=0/125, 3-13=-255/199, 4-13=-696/1115, 5-13=-217/188, 5-11=-218/188, 6-11=-696/1115, 7-11=-256/199, 7-10=0/124

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS; Lumber DOL=1.60 plate grip DOL=1.60.
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 1164 lb uplift at joint 2 and 1164 lb uplift at joint 8.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 99 lb down and 141 lb up at 7-0-0, 99 lb down and 141 lb up at 9-0-12, and 99 lb down and 141 lb up at 10-11-4, and 99 lb down and 141 lb up at 13-0-0 on top chord, and 661 lb down and 577 lb up at 7-0-0, 109 lb down and 88 lb up at 9-0-12, and 109 lb down and 88 lb up at 10-11-4, and 661 lb down and 577 lb up at 12-11-4 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- Regular: Lumber Increase=1.25, Plate Increase=1.25
 Uniform Loads (plf)
 Vert: 1-4=-46, 4-6=-46, 6-9=-46, 2-8=-40
 Concentrated Loads (lb)
 Vert: 4=-99(F) 6=-99(F) 13=-661(F) 11=-661(F) 15=-99(F) 16=-99(F) 17=-109(F) 18=-109(F)

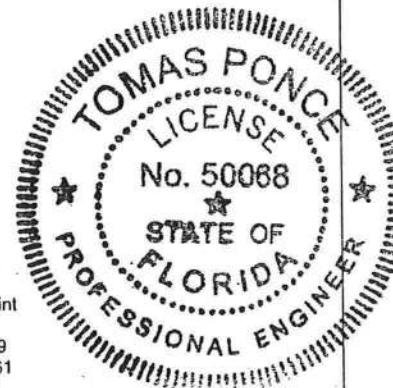

[Signature]

MAY 01 2008

-1-0-0 5-0-14 10-2-14 15-0-13 20-0-0 24-11-3 29-9-2 34-11-2 40-0-0 41-0-0
 1-0-0 5-0-14 5-2-0 4-9-15 4-11-3 4-11-3 4-9-15 5-2-0 5-0-14 1-0-0
 Scale = 1:70.5

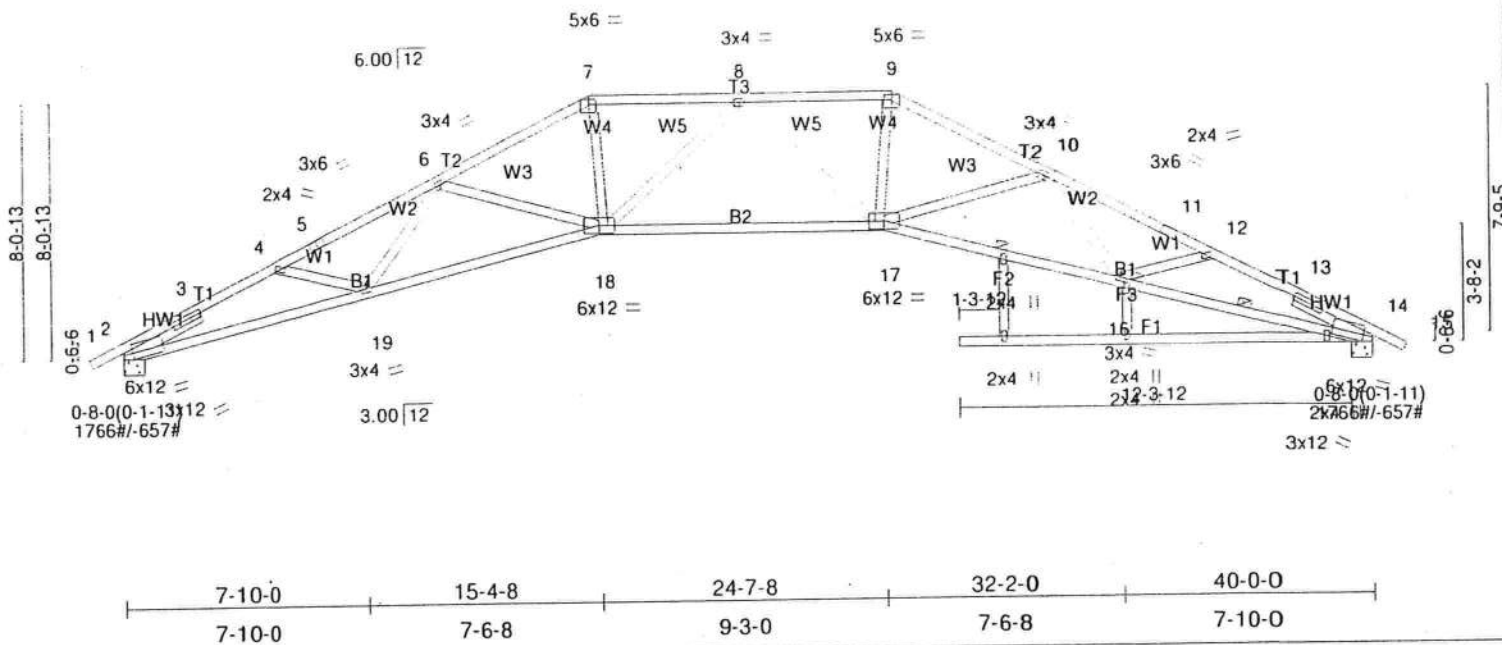


Plate Offsets (X,Y): [2:0-3-6,0-3-5], [7:0-3-0,0-2-0], [9:0-3-0,0-2-0], [14:0-3-6,0-3-5], [14:0-0-0,0-7-6]					
LOADING (psf)	SPACING	CSI	DEFL	PLATES	GRIP
TCLL 16.0	2-0-0	TC 0.94	in (loc) l/defl L/d	MT20	244/190
TCDL 7.0	Plates Increase 1.25	BC 0.95	Vert(LL) -0.68 17-18 >707 240	Weight: 227 lb	
BCLL 10.0	Lumber Increase 1.25	WB 0.32	Vert(TL) -1.39 17-18 >344 180		
BCDL 10.0	Rep Stress Incr YES	(Matrix)	Horz(TL) 0.85 14 n/a n/a		
Code FBC2004/TPI2002					


LUMBER	BRACING
TOP CHORD 2 X 4 SYP No.2 *Except*	TOP CHORD Structural wood sheathing directly applied.
T1 2 X 4 SYP No.1D, T1 2 X 4 SYP No.1D	BOT CHORD Rigid ceiling directly applied or 5-9-12 oc bracing. Except:
BOT CHORD 2 X 4 SYP No.1D *Except*	5-10-0 oc bracing: 14-16
F1 2 X 4 SYP No.2	6-0-0 oc bracing: 16-17
WEBS 2 X 4 SYP No.2	JOINTS 1 Brace at Jt(s): 16
SLIDER Left 2 X 4 SYP No.2 2-9-1, Right 2 X 4 SYP No.2 2-9-1	

REACTIONS (lb/size) 2=1766/0-8-0, 14=1766/0-8-0
Max Horz 2=-128(LC 7)
Max Uplift 2=-355(LC 6), 14=-355(LC 7)

FORCES (lb) - Maximum Compression/Maximum Tension
TOP CHORD 1-2=0/8, 2-3=-5020/1595, 3-4=-4962/1601, 4-5=-5071/1508, 5-6=-5053/1523, 6-7=-4403/1338, 7-8=-4014/1270,
8-9=-4014/1270, 9-10=-4403/1338, 10-11=-5053/1523, 11-12=-5071/1508, 12-13=-4962/1601, 13-14=-5019/1595, 14-15=0/8
BOT CHORD 2-19=-1331/4461, 18-19=-1225/4586, 17-18=-1001/4137, 16-17=-1225/4586, 14-16=-1331/4461
WEBS 4-19=0/324, 6-19=0/233, 6-18=-567/341, 8-18=-312/224, 8-17=-312/223, 10-17=-567/341, 10-16=-7/233, 12-16=0/324,
7-18=-405/1741, 9-17=-405/1741

- NOTES**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS and C-C Interior(1) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
 - Provide adequate drainage to prevent water ponding.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
 - Bearing at joint(s) 2, 14 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 355 lb uplift at joint 2 and 355 lb uplift at joint 14.

LOAD CASE(S) Standard

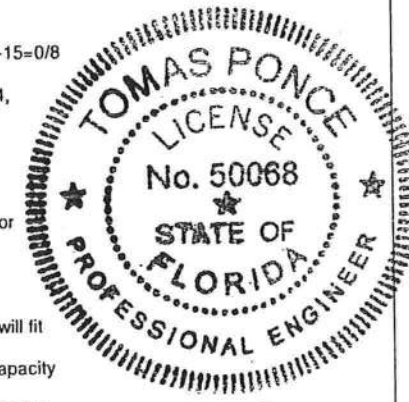

MAY 01 2008

1-0-0	4-6-7	9-1-4	14-0-0	20-0-0	26-0-0	30-10-12	35-5-9	40-0-0	41-0-0
1-0-0	4-6-7	4-6-13	4-10-12	6-0-0	6-0-0	4-10-12	4-6-13	4-6-7	1-0-0

Scale = 1:69.0

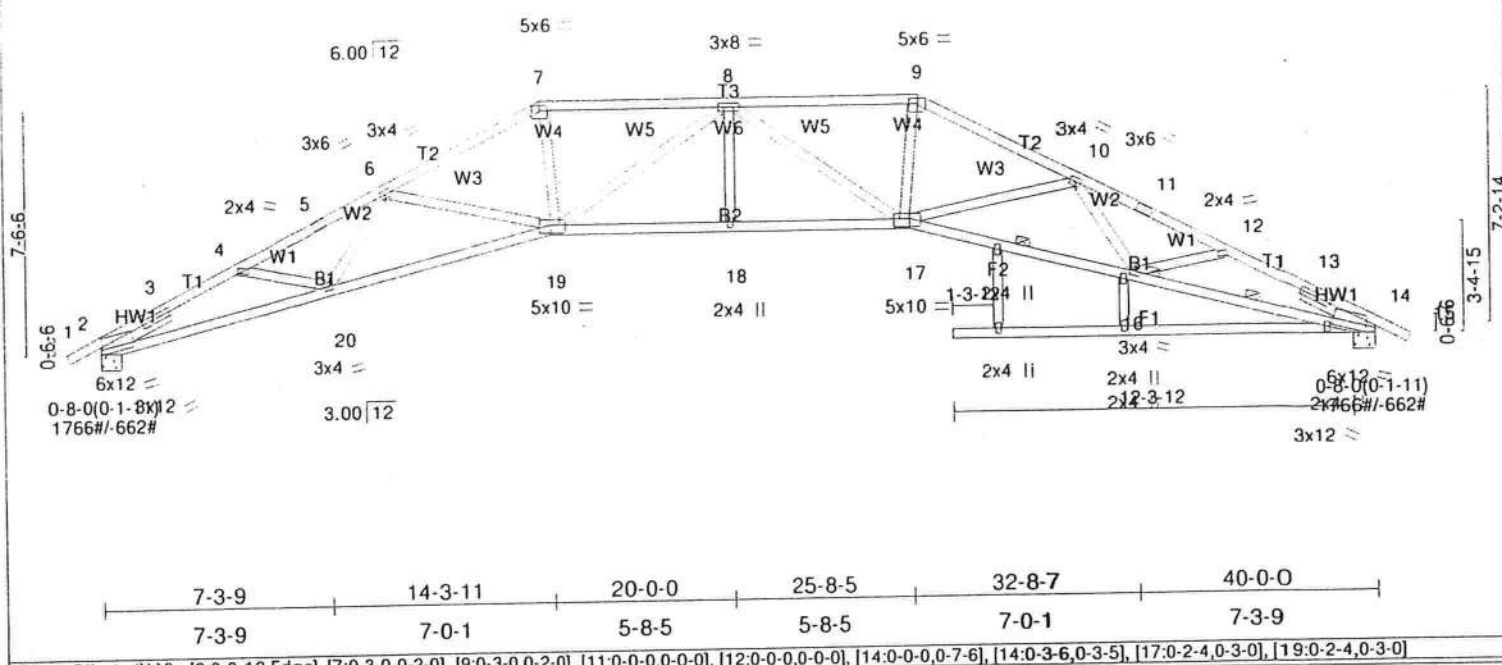


Plate Offsets (X,Y): [2:0-0-13,Edge], [7:0-3-0,0-2-0], [9:0-3-0,0-2-0], [11:0-0-0,0-0-0], [12:0-0-0,0-0-0], [14:0-0-0,0-7-6], [14:0-3-6,0-3-5], [17:0-2-4,0-3-0], [19:0-2-4,0-3-0]					
LOADING (psf)	SPACING	CSI	DEFL	PLATES	GRIP
TCLL 16.0	2-0-0	TC 0.74	in (loc)	MT20	244/190
TCDL 7.0	Plates Increase 1.25	BC 0.95	Veri(LL) -0.62 17-18 >777	Weight: 230 lb	
BCLL 10.0	Lumber Increase 1.25	WB 0.39	Veri(TL) -1.22 17-18 >392		
BCDL 10.0	Rep Stress Incr YES	(Matrix)	Horz(TL) 0.86 14 n/a		
	Code FBC2004/TPI2002				


LUMBER	BRACING
TOP CHORD 2 X 4 SYP No.2 'Except'	TOP CHORD Structural wood sheathing directly applied or 2-2-0 oc purlins.
T1 2 X 4 SYP No.1D, T1 2 X 4 SYP No.1D	BOT CHORD Rigid ceiling directly applied or 2-2-0 oc bracing. Except:
BOT CHORD 2 X 4 SYP No.2 'Except'	5-10-0 oc bracing: 16-17, 14-16
B1 2 X 4 SYP No.1D, B1 2 X 4 SYP No.1D	JOINTS 1 Brace at Jt(s): 16
WEBS 2 X 4 SYP No.2	
SLIDER Left 2 X 4 SYP No.2 2-5-6, Right 2 X 4 SYP No.2 2-5-6	
REACTIONS (lb/size) 2=1766/0-8-0, 14=1766/0-8-0	
Max Horz 2=-120(LC 7)	
Max Uplift 2=-346(LC 6), 14=-346(LC 7)	

FORCES (lb) - Maximum Compression/Maximum Tension
TOP CHORD 1-2=0/8, 2-3=-4919/1572, 3-4=-4865/1578, 4-5=-5093/1531, 5-6=-5047/1542, 6-7=-4536/1417, 7-8=-4149/1349, 8-9=-4149/1349, 9-10=-4536/1417, 10-11=-5048/1542, 11-12=-5093/1531, 12-13=-4865/1578, 13-14=-4919/1572, 14-15=0/8
BOT CHORD 2-20=-1304/4348, 19-20=-1289/4671, 18-19=-1132/4501, 17-18=-1132/4501, 16-17=-1289/4671, 14-16=-1305/4348
WEBS 4-20=0/425, 6-20=0/170, 6-19=-523/295, 8-19=-576/228, 8-18=0/205, 8-17=-576/227, 10-17=-523/295, 10-16=0/170, 12-16=-8/425, 7-19=-413/1770, 9-17=-413/1770

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS and C-C Interior(1) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
- Bearing at joint(s) 2, 14 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 346 lb uplift at joint 2 and 346 lb uplift at joint 14.

LOAD CASE(S) Standard

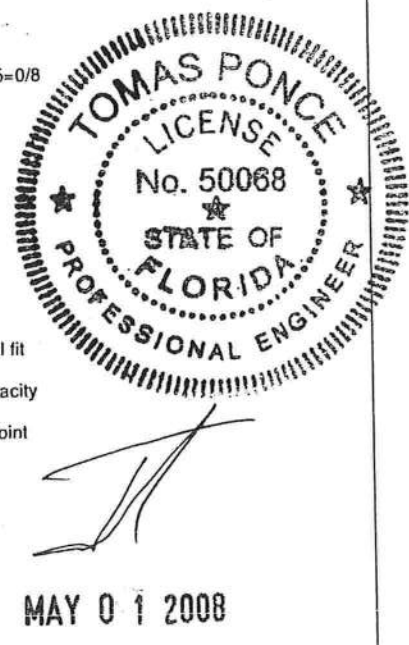

-1-0-0 4-11-7 8-10-4 12-8-0 20-0-0 27-4-0 31-1-12 35-0-9 40-0-0 41-0-0
 1-0-0 4-11-7 3-10-13 3-9-12 7-4-0 7-4-0 3-9-12 3-10-13 4-11-7 1-0-0
 Scale = 1:70.6

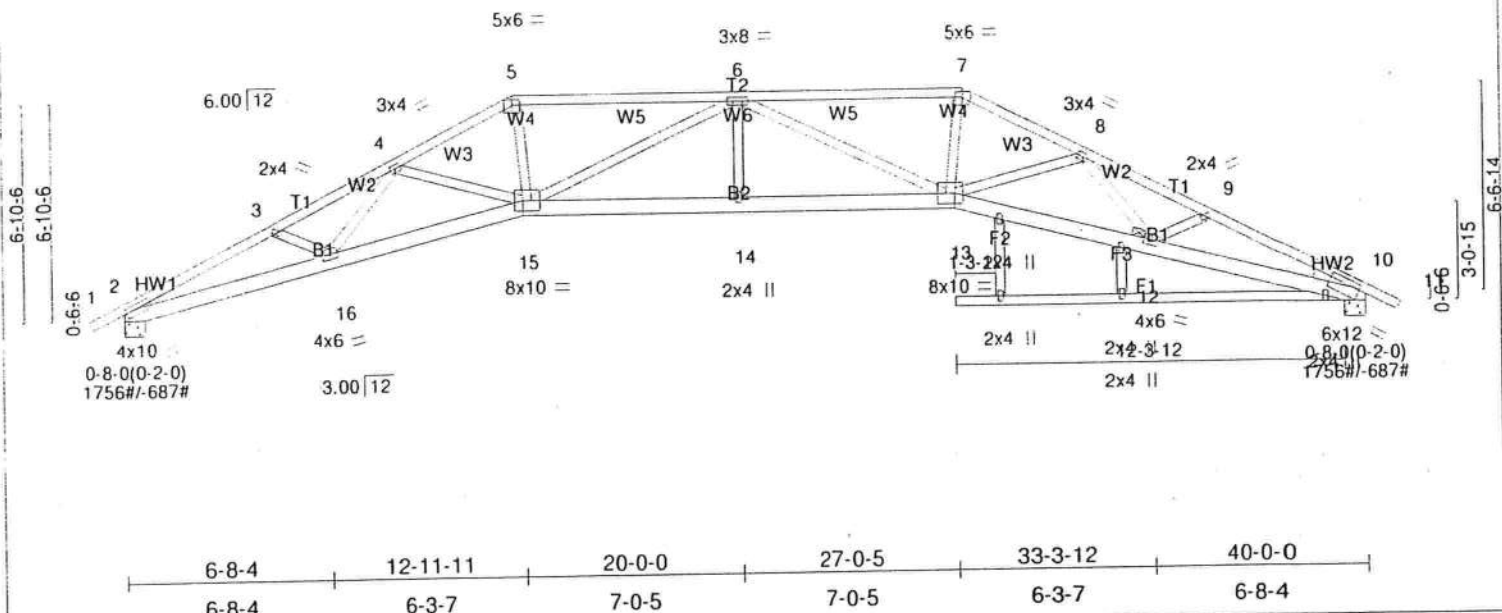


Plate Offsets (X,Y): [2:0-0-15,0-1-12], [5:0-3-0,0-2-0], [7:0-3-0,0-2-0], [10:0-2-11,0-2-0]					
LOADING (psf)	SPACING	CSI	DEFL	PLATES	GRIP
TCLL 16.0	2-0-0	TC 0.75	in (loc) l/defl L/d	MT20	244/190
TCDL 7.0	Plates Increase 1.25	BC 0.90	Vert(LL) -0.55 14 >854 240	Weight: 255 lb	
BCLL 10.0	Lumber Increase 1.25	WB 0.75	Vert(TL) -1.10 14-15 >430 180		
BCDL 10.0	Rep Stress Incr YES	(Matrix)	Horz(TL) 0.70 10 n/a n/a		
Code FBC2004/TPI2002					

LUMBER
 TOP CHORD 2 X 4 SYP No.2
 BOT CHORD 2 X 6 SYP No.2 *Except*
 F1 2 X 4 SYP No.2
 WEBS 2 X 4 SYP No.2
 WEDGE
 Left: 2 X 4 SYP No.3, Right: 2 X 4 SYP No.3


BRACING
 TOP CHORD Structural wood sheathing directly applied or 2-6-6 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 6-10-9 oc bracing.
 JOINTS 1 Brace at Jt(s): 12

REACTIONS (lb/size) 2=1756/0-8-0, 10=1756/0-8-0
 Max Horz 2=-115(LC 7)
 Max Uplift 2=-345(LC 6), 10=-345(LC 7)

FORCES (lb) - Maximum Compression/Maximum Tension
 TOP CHORD 1-2=0/14, 2-3=-5017/1573, 3-4=-5021/1531, 4-5=-4665/1467, 5-6=-4308/1396, 6-7=-4308/1396, 7-8=-4665/1466,
 8-9=-5021/1531, 9-10=-5017/1573, 10-11=0/14
 BOT CHORD 2-16=-1293/4432, 15-16=-1236/4574, 14-15=-1305/4949, 13-14=-1305/4949, 12-13=-1236/4574, 10-12=-1293/4432
 WEBS 3-16=0/278, 4-16=-9/145, 4-15=-286/212, 6-15=-859/292, 6-14=0/281, 6-13=-859/291, 8-13=-286/219, 8-12=-21/145,
 9-12=0/278, 5-15=-415/1808, 7-13=-415/1808

- NOTES**
- 1) Unbalanced roof live loads have been considered for this design.
 - 2) Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS and C-C Interior(1) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
 - 3) Provide adequate drainage to prevent water ponding.
 - 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 5) This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
 - 6) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
 - 7) Bearing at joint(s) 2, 10 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
 - 8) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 345 lb uplift at joint 2 and 345 lb uplift at joint 10.


LOAD CASE(S) Standard

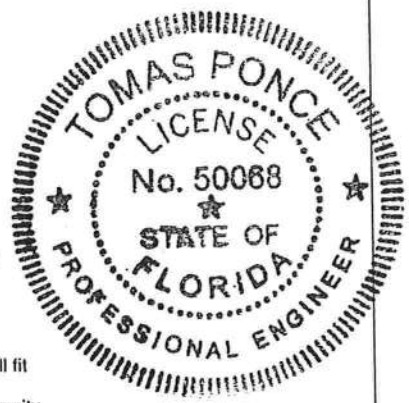

[Signature]
 MAY 01 2008

$-1.0-0$ $5.9-12$ $11.4-0$ $17.1-5$ $22.10-11$ $28.8-0$ $34.2-4$ $40.0-0$ $41.0-0$
 $1.0-0$ $5.9-12$ $5.6-4$ $5.9-5$ $5.9-5$ $5.9-5$ $5.6-4$ $5.9-12$ $1.0-0$

Scale = 1:71.0

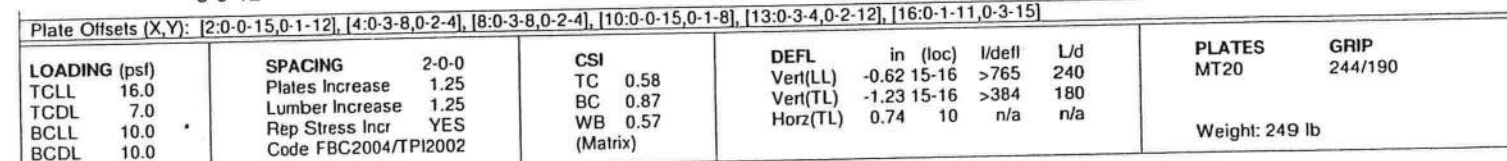


BRACING	
TOP CHORD	Structural wood sheathing directly applied or 2-5-4 oc purlins.
BOT CHORD	Rigid ceiling directly applied or 6-5-7 oc bracing.
JOINTS	1 Brace at Jt(s): 12

FORCES (lb) - Maximum Compression/Maximum Tension
TOP CHORD 1-2=0/14, 2-3=-5201/1600, 3-4=-4869/1525, 4-5=-4493/1464, 5-6=-5408/1747, 6-7=-5408/1747, 7-8=-4493/1464,
8-9=-4869/1525, 9-10=-5201/1600, 10-11=0/14
BOT CHORD 2-17=-1316/4616, 16-17=-1322/4641, 15-16=-1490/5249, 14-15=-1490/5249, 13-14=-1490/5249, 12-13=-1322/4640,
10-12=-1316/4616
WEBS 3-17=0/177, 3-16=-182/244, 5-16=-988/384, 5-15=0/296, 7-15=0/296, 7-13=-988/385, 9-13=-182/258, 9-12=0/177,
4-16=-445/1887, 8-13=-445/1887

NOTES

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-02; 125mph (3-second gust); $h=25ft$; $TCDL=4.2psf$; $BCDL=6.0psf$; Category II; Exp B; enclosed; MWFRS and C-C Interior(1) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
- 6) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
- 7) Bearing at joint(s) 2, 10 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 8) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 332 lb uplift at joint 2 and 332 lb uplift at joint 10.

LOAD CASE(S) Standard

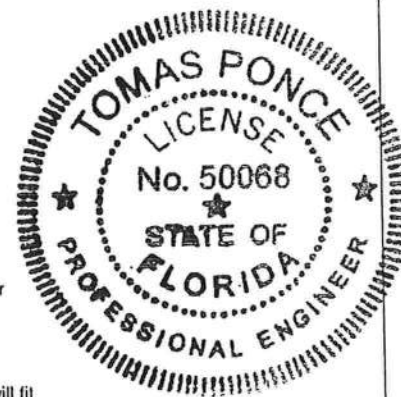

MAY 01 2008

1-0-0 5-3-9 10-0-0 16-8-0 23-4-0 30-0-0 34-8-7 40-0-0 41-0-0
 1-0-0 5-3-9 4-8-7 6-8-0 6-8-0 6-8-0 4-8-7 5-3-9 1-0-0
 Scale = 1:69.5

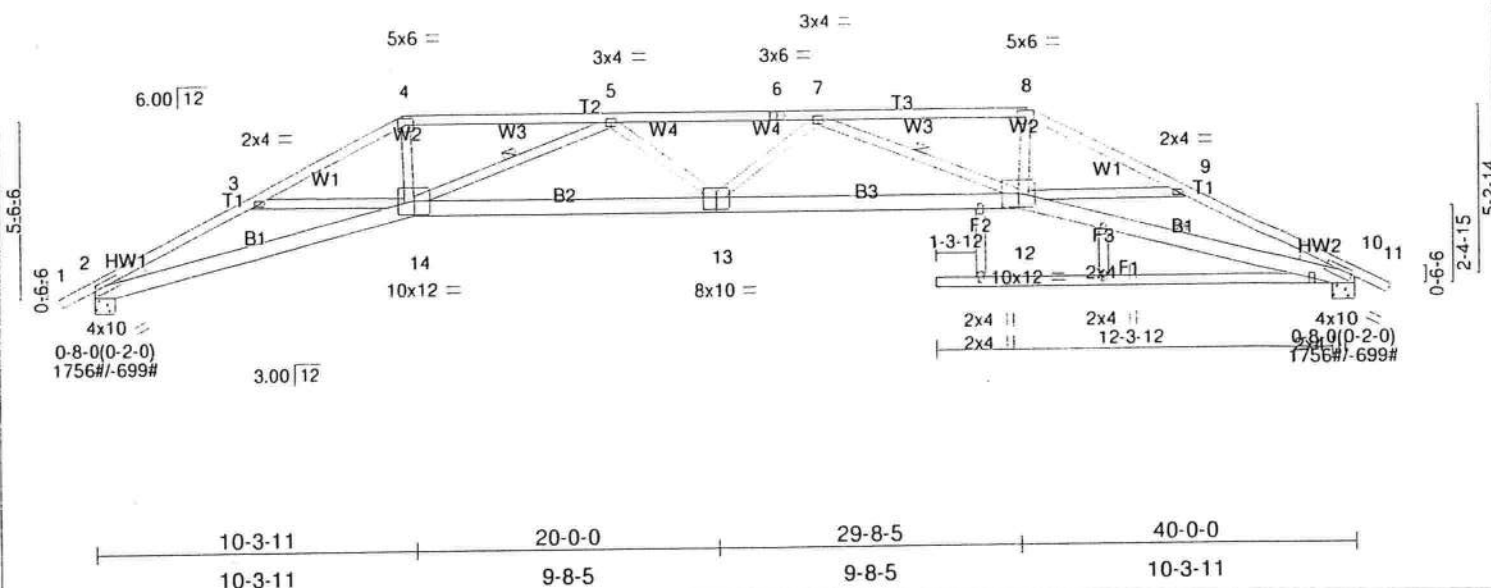


Plate Offsets (X,Y): [2:0-0-15,0-1-12], [4:0-3-0,0-2-7], [8:0-3-0,0-2-7], [10:0-0-15,0-1-8], [13:0-5-0,0-4-8]

LOADING (psf)	SPACING	CSI	DEFL	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 16.0	Plates Increase 1.25	TC 0.78	Vert(LL)	-0.69 12-13	>684	240	MT20	244/190
TCDL 7.0	Lumber Increase 1.25	BC 0.88	Vert(TL)	-1.37 12-13	>344	180		
BCLL 10.0	Rep Stress Incr YES	WB 0.36	Horz(TL)	0.75 10	n/a	n/a		
BCDL 10.0	Code FBC2004/TPI2002	(Matrix)						
							Weight: 244 lb	

LUMBER
 TOP CHORD 2 X 4 SYP No.2
 BOT CHORD 2 X 6 SYP No.2 *Except*
 F1 2 X 4 SYP No.2
 WEBS 2 X 4 SYP No.2
 WEDGE
 Left: 2 X 4 SYP No.3, Right: 2 X 4 SYP No.3


BRACING
 TOP CHORD Structural wood sheathing directly applied or 2-2-0 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 5-10-7 oc bracing. Except:
 6-7-0 oc bracing: 10-12
 WEBS 1 Row at midpt 5-14, 7-12

REACTIONS (lb/size) 2=1756/0-8-0, 10=1756/0-8-0
 Max Horz 2=-95(LC 7)
 Max Uplift 2=-319(LC 6), 10=-319(LC 7)

FORCES (lb) - Maximum Compression/Maximum Tension
 TOP CHORD 1-2=0/14, 2-3=-4941/1687, 3-4=-5071/1561, 4-5=-4691/1498, 5-6=-6068/1978, 6-7=-6068/1978, 7-8=-4691/1498,
 8-9=-5071/1561, 9-10=-4941/1687, 10-11=0/14
 BOT CHORD 2-14=-1397/4418, 13-14=-1764/5840, 12-13=-1764/5840, 10-12=-1397/4418
 WEBS 3-14=-64/472, 5-14=-1359/593, 5-13=0/350, 7-13=0/350, 7-12=-1359/593, 9-12=-75/472, 8-12=-445/1971, 4-14=-445/1971


- NOTES**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS and C-C Interior(1) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
 - Provide adequate drainage to prevent water ponding.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
 - Bearing at joint(s) 2, 10 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 319 lb uplift at joint 2 and 319 lb uplift at joint 10.

LOAD CASE(S) Standard

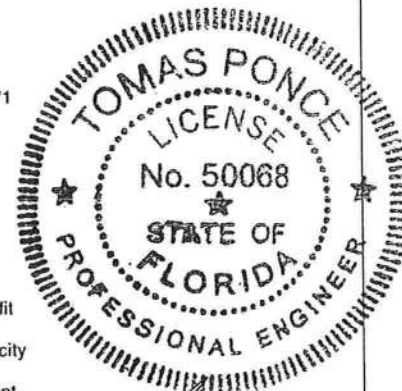

MAY 01 2008

1-0-0 4-11-5 8-8-0 14-4-0 20-0-0 25-8-0 31-4-0 35-0-11 40-0-0 41-0-0
 1-0-0 4-11-5 3-8-11 5-8-0 5-8-0 5-8-0 5-8-0 3-8-11 4-11-5 1-0-0
 Scale = 1:69.5

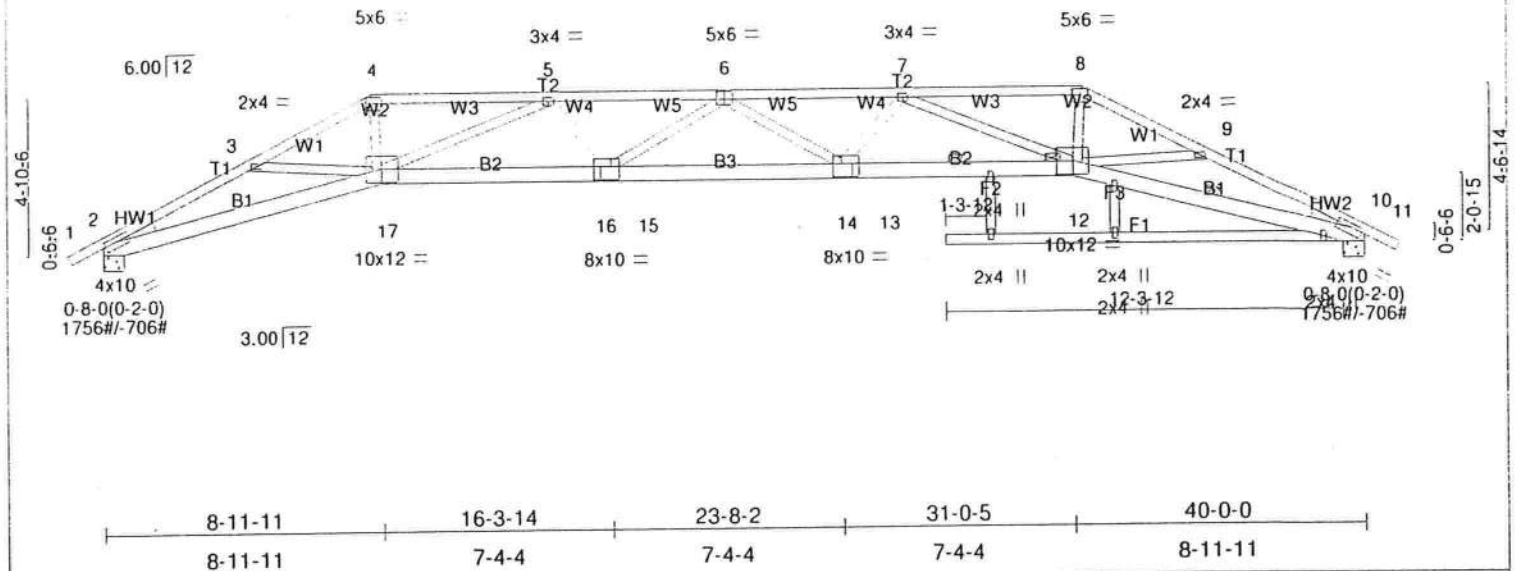

LOADING (psf)		SPACING		CSI		DEFL		PLATES		GRIP	
TCLL	16.0	Plates Increase	1.25	TC	0.67	in (loc)	l/defl	MT20		244/190	
TCDL	7.0	Lumber Increase	1.25	BC	0.81	Vert(LL)	>601				
BCLL	10.0	Rep Stress Incr	YES	WB	0.95	Vert(TL)	>302				
BCDL	10.0	Code FBC2004/TPI2002		(Matrix)		Horz(TL)	n/a				
										Weight: 244 lb	

LUMBER
 TOP CHORD 2 X 4 SYP No.2
 BOT CHORD 2 X 6 SYP No.1D 'Except'
 B1 2 X 6 SYP No.2, B1 2 X 6 SYP No.2, F1 2 X 4 SYP No.2
 WEBS 2 X 4 SYP No.2
 WEDGE
 Left: 2 X 4 SYP No.3, Right: 2 X 4 SYP No.2


BRACING
 TOP CHORD Structural wood sheathing directly applied or 2-1-13 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 5-8-13 oc bracing. Except:
 6-0-0 oc bracing: 12-14
 6-8-0 oc bracing: 10-12
JOINTS 1 Brace at Jt(s): 12


REACTIONS (lb/size) 2=1756/0-8-0, 10=1756/0-8-0
 Max Horz 2=-85(LC 7)
 Max Uplift 2=-316(LC 5), 10=-316(LC 4)

FORCES (lb) - Maximum Compression/Maximum Tension
 TOP CHORD 1-2=0/14, 2-3=-4912/1665, 3-4=-5104/1614, 4-5=-4772/1548, 5-6=-6613/2213, 6-7=-6613/2213, 7-8=-4772/1548,
 8-9=-5104/1614, 9-10=-4912/1665, 10-11=0/14
 BOT CHORD 2-17=-1374/4358, 16-17=-1934/6270, 15-16=-1934/6270, 14-15=-2152/6813, 13-14=-1934/6270, 12-13=-1934/6270,
 10-12=-1374/4358
 WEBS 3-17=-83/520, 5-17=-1716/693, 5-15=-52/571, 6-15=-288/222, 6-14=-288/222, 7-14=-52/571, 7-12=-1716/693, 9-12=-92/519,
 4-17=-511/2038, 8-12=-511/2038

- NOTES**
- 1) Unbalanced roof live loads have been considered for this design.
 - 2) Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS and C-C Interior(1) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
 - 3) Provide adequate drainage to prevent water ponding.
 - 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 5) This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
 - 6) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
 - 7) Bearing at joint(s) 2, 10 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
 - 8) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 316 lb uplift at joint 2 and 316 lb uplift at joint 10.

LOAD CASE(S) Standard

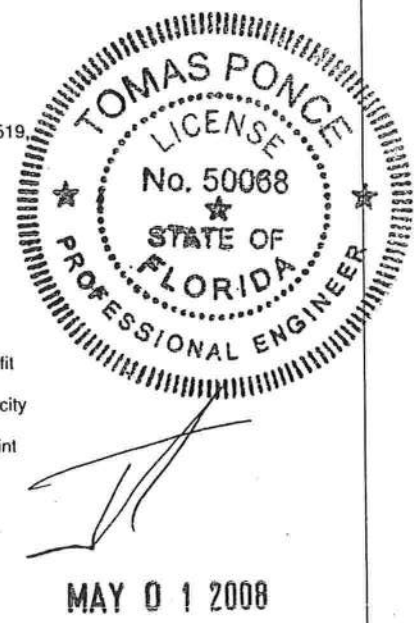

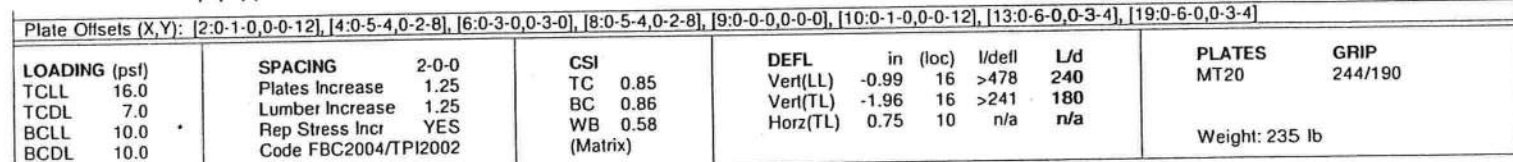

REACTIONS (lb/size) 2=1756/0-8-0, 10=1756/0-8-0
Max Horz 2=-75(LC 7)
Max Uplift 2=-337(LC 5), 10=-337(LC 4)

FORCES (lb) - Maximum Compression/Maximum Tension
TOP CHORD 1-2=0/14, 2-3=-4810/1520, 3-4=-5196/1719, 4-5=-7165/2476, 5-6=-7956/2759, 6-7=-7956/2759, 7-8=-7165/2476,
 8-9=-5196/1719, 9-10=-4810/1520, 10-11=0/14
BOT CHORD 2-20=-1235/4212, 19-20=-1246/4251, 18-19=-1404/4811, 17-18=-1404/4811, 16-17=-2261/7165, 15-16=-2261/7165,
 14-15=-1404/4811, 13-14=-1404/4811, 12-13=-1246/4251, 10-12=-1235/4212
WEBS 3-19=-219/667, 4-17=-902/2548, 5-17=-571/371, 5-16=-298/893, 6-16=-285/267, 7-16=-298/893, 7-15=-571/371,
 8-15=-902/2548, 9-13=-230/666, 4-19=-260/1263, 8-13=-260/1263, 3-20=-24/95, 9-12=-24/95

NOTES

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-02; 125mph (3-second gust); $h=25ft$; $TCDL=4.2psf$; $BCDL=6.0psf$; Category II; Exp B; enclosed; MWFRS and C-C Interior(1) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
- 6) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
- 7) Bearing at joint(s) 2, 10 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 8) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 337 lb uplift at joint 2 and 337 lb uplift at joint 10.

LOAD CASE(S) Standard

A circular professional engineer seal for the State of Florida. The outer ring contains the text "TOMAS PONCE" at the top and "PROFESSIONAL ENGINEER" at the bottom, separated by two stars. The inner circle contains the word "LICENSE" at the top, "No. 50068" in the center, and "STATE OF FLORIDA" at the bottom, also separated by two stars. The seal is surrounded by a decorative border of small dots.

MAY 01 2008

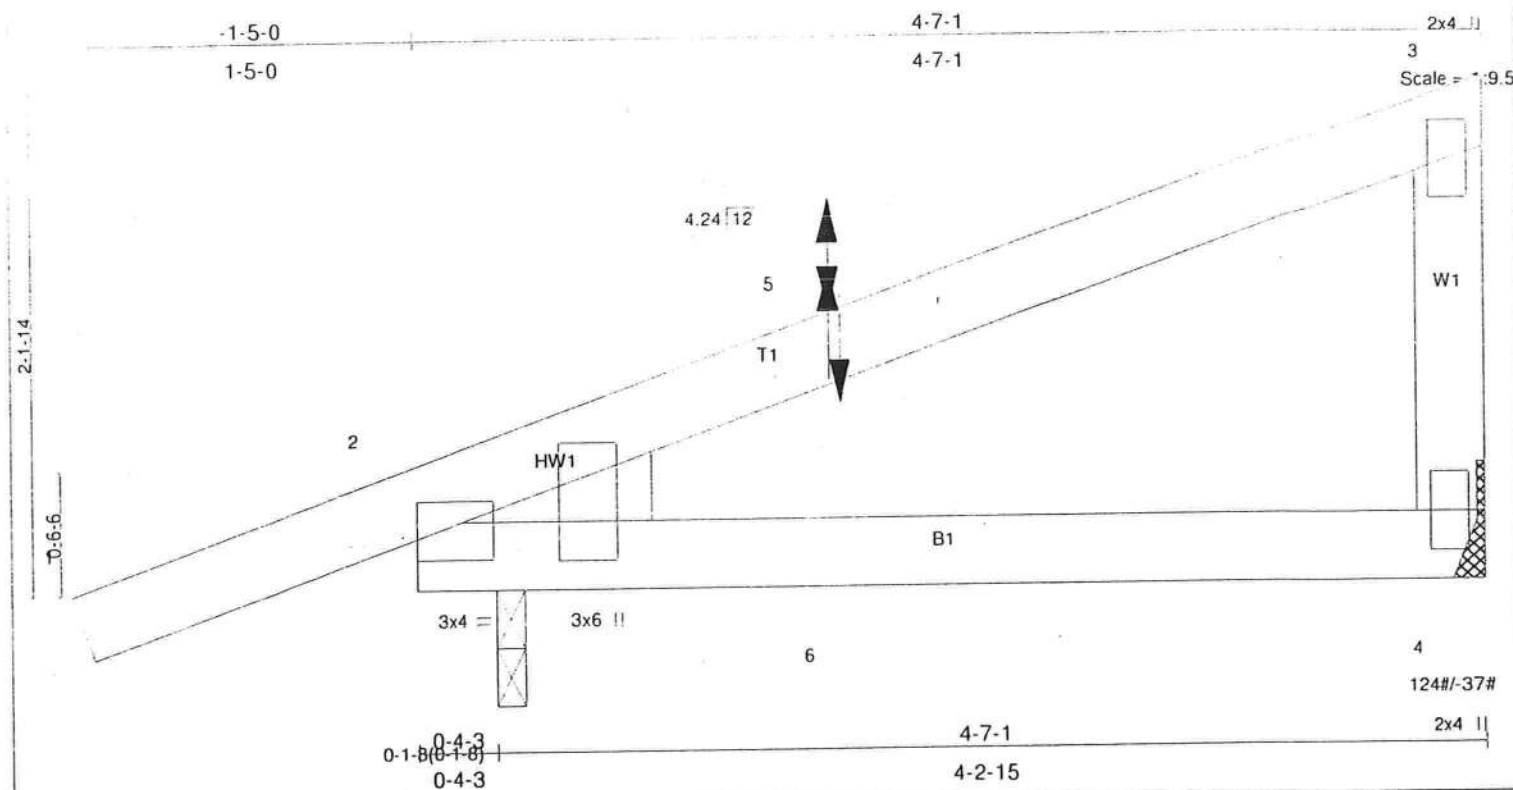


Plate Offsets (X,Y): [2:0-0-0,0-1-1], [2:0-1-3,0-7-8]

LOADING (psf)	SPACING	CSI	DEFL	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 16.0	2-0-0	TC 0.22	Vert(LL)	-0.01	2-4	>999	MT20	244/190
TCDL 7.0	Plates Increase 1.25	BC 0.27	Vert(TL)	-0.04	2-4	>999		
BCLL 10.0	Lumber Increase 1.25	WB 0.01	Horz(TL)	0.00	n/a	n/a		
BCDL 10.0	Rep Stress Incr NO	(Matrix)						
	Code FBC2004/TPI2002							
							Weight: 20 lb	

LUMBER
 TOP CHORD 2 X 4 SYP No.2
 BOT CHORD 2 X 4 SYP No.2
 WEBS 2 X 4 SYP No.2
 WEDGE
 Left: 2 X 4 SYP No.2


BRACING
 TOP CHORD Structural wood sheathing directly applied or 4-7-1 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (lb/size) 4=124/Mechanical, 2=195/0-1-8
 Max Horz 2=93(LC 3)
 Max Uplift 4=-37(LC 7), 2=-121(LC 7)

FORCES (lb) - Maximum Compression/Maximum Tension
 TOP CHORD 1-2=0/13, 2-5=-61/0, 3-5=-29/11
 BOT CHORD 2-6=0/0, 4-6=0/0
 WEBS 3-4=-49/64

- NOTES**
- 1) Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS; Lumber DOL=1.60 plate grip DOL=1.60.
 - 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 3) This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
 - 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
 - 5) Refer to girder(s) for truss to truss connections.
 - 6) Provide mechanical connection (by others) of truss to bearing plate at joint(s) 2.
 - 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 37 lb uplift at joint 4 and 121 lb uplift at joint 2.
 - 8) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 43 lb down and 48 lb up at 1-10-3, and 43 lb down and 48 lb up at 1-10-3 on top chord, and 16 lb up at 1-10-3, and 16 lb up at 1-10-3 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
 - 9) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard
 1) Regular: Lumber Increase=1.25, Plate Increase=1.25
 Uniform Loads (plf)
 Vert: 1-3=-46, 2-4=-40
 Concentrated Loads (lb)
 Vert: 5=96(F=48, B=48) 6=32(F=16, B=16)

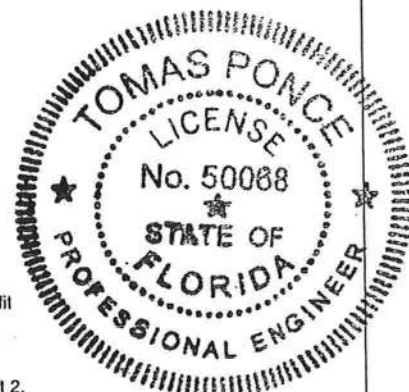

MAY 01 2008

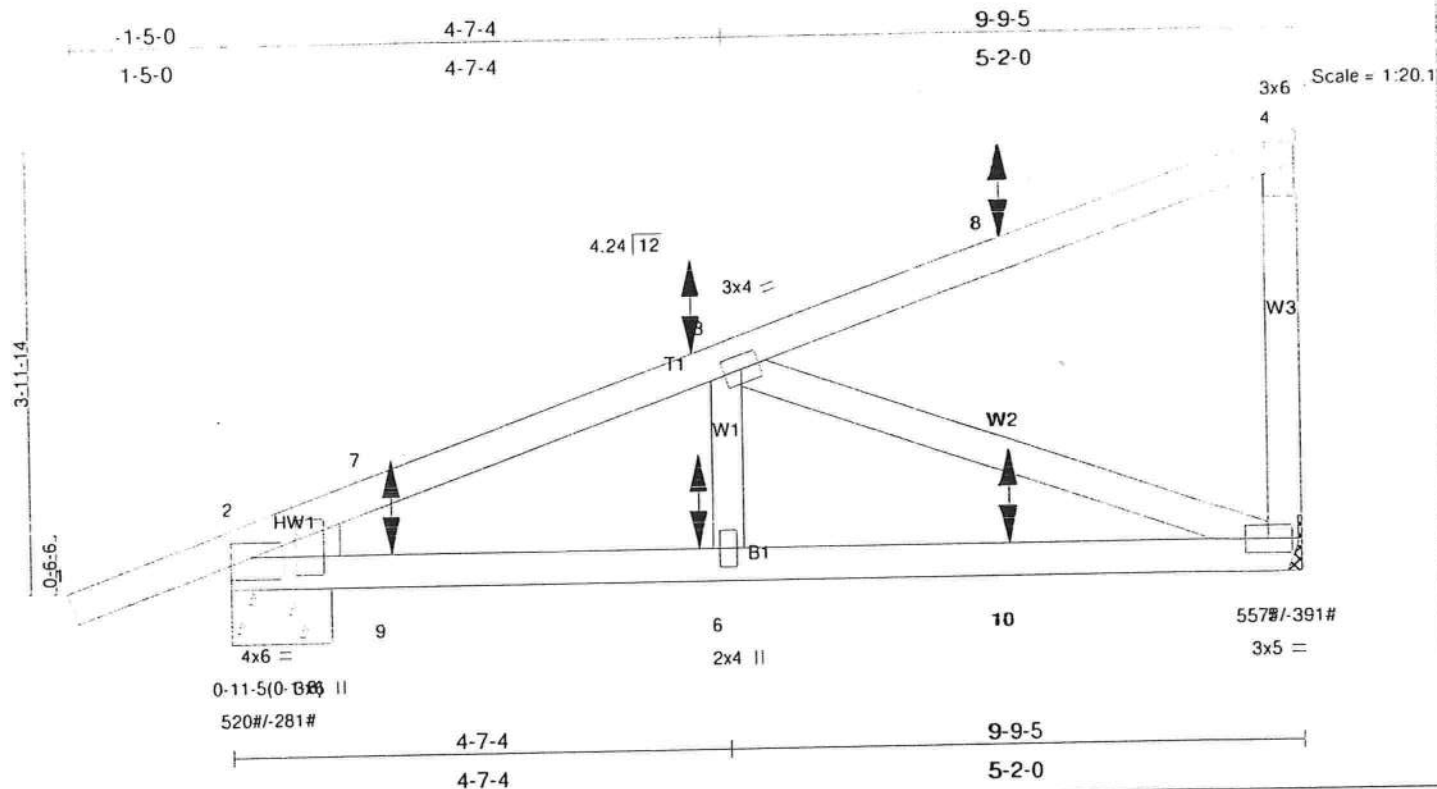


Plate Offsets (X,Y): [2:0-0-0,0-1-9], [2:0-1-3,0-7-7]

LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 16.0	Plates Increase	1.25	TC 0.38	Vert(LL)	-0.03	5-6	>999	240	MT20	244/190
TCDL 7.0	Lumber Increase	1.25	BC 0.35	Vert(TL)	-0.08	5-6	>999	180		
BCCL 10.0	Rep Stress Incr	NO	WB 0.30	Horz(TL)	0.01	5	n/a	n/a		
BCDL 10.0	Code FBC2004/TPI2002		(Matrix)							
									Weight: 48 lb	

LUMBER
 TOP CHORD 2 X 4 SYP No.2
 BOT CHORD 2 X 4 SYP No.2
 WEBS 2 X 4 SYP No.2
 WEDGE
 Left: 2 X 4 SYP No.2

BRACING
 TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 8-7-10 oc bracing.


REACTIONS (lb/size) 5=557/Mechanical, 2=520/0-11-5
 Max Horz 2=169(LC 3)
 Max Uplift 5=-391(LC 7), 2=-281(LC 7)

FORCES (lb) - Maximum Compression/Maximum Tension
 TOP CHORD 1-2=0/13, 2-7=-827/400, 3-7=-756/429, 3-8=-139/93, 4-8=-61/0, 4-5=-154/235
 BOT CHORD 2-9=-508/728, 6-9=-508/728, 6-10=-508/728, 5-10=-508/728
 WEBS 3-6=0/273, 3-5=-693/469

- NOTES**
- 1) Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS; Lumber DOL=1.60 plate grip DOL=1.60.
 - 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 3) This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
 - 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
 - 5) Refer to girder(s) for truss to truss connections.
 - 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 391 lb uplift at joint 5 and 281 lb uplift at joint 2.
 - 7) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 65 lb up at 4-4-0, 65 lb up at 4-4-0, 59 lb down and 165 lb up at 7-1-15, 59 lb down and 165 lb up at 7-1-15, and 57 lb down at 1-6-1, and 57 lb down at 1-6-1 on top chord, and 22 lb up at 1-6-1, 22 lb up at 1-6-1, 12 lb down at 4-4-0, 12 lb down at 4-4-0, and 52 lb down at 7-1-15, and 52 lb down at 7-1-15 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
 - 8) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- 1) Regular: Lumber Increase=1.25, Plate Increase=1.25
 Uniform Loads (plf)
 Vert: 1-4=-46, 2-5=-40
 Concentrated Loads (lb)
 Vert: 3=8(F=4, B=4) 6=-24(F=-12, B=-12) 8=-118(F=-59, B=-59) 9=43(F=22, B=22) 10=-104(F=-52, B=-52)

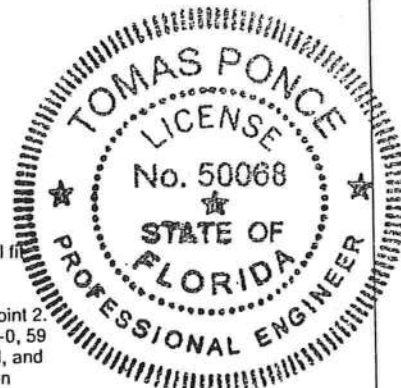

[Signature]

MAY 01 2008

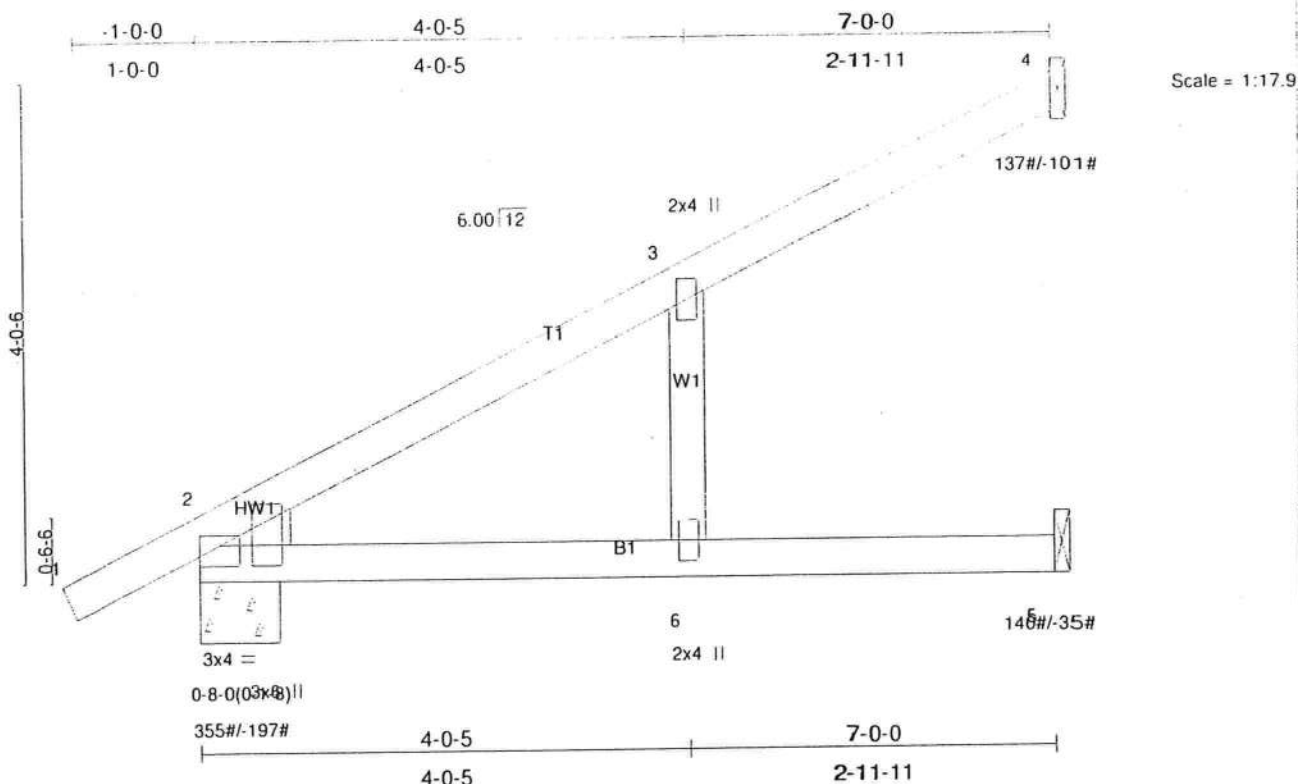


Plate Offsets (X,Y): [2:0-0-0,0-1-0], [2:0-0-15,0-5-4]

LOADING (psf)	SPACING	CSI	DEFL	in (loc)	I/defl	L/d	PLATES	GRIP
TCLL 16.0	Plates Increase 1.25	TC 0.38	Ver(LL) 0.15	2-6	>527	240	MT20	244/190
TCDL 7.0	Lumber Increase 1.25	BC 0.45	Ver(TL) -0.26	2-6	>305	180		
BCLL 10.0	Rep Stress Incr YES	WB 0.02	Horz(TL) 0.03	4	n/a	n/a		
BCDL 10.0	Code FBC2004/TPI2002	(Matrix)						
							Weight: 28 lb	

LUMBER

TOP CHORD 2 X 4 SYP No.2
 BOT CHORD 2 X 4 SYP No.2
 WEBS 2 X 4 SYP No.2
 WEDGE
 Left: 2 X 4 SYP No.2

BRACING

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (lb/size) 4=137/Mechanical, 2=355/0-8-0, 5=140/Mechanical
 Max Horz 2=173(LC 6)
 Max Uplift 4=-78(LC 6), 2=-115(LC 6), 5=-25(LC 6)


FORCES (lb) - Maximum Compression/Maximum Tension

TOP CHORD 1-2=0/14, 2-3=-137/0, 3-4=-55/55
 BOT CHORD 2-6=0/0, 5-6=0/0
 WEBS 3-6=-14/133

NOTES

- Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS and C-C Interior(1) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 78 lb uplift at joint 4, 115 lb uplift at joint 2 and 25 lb uplift at joint 5.
- Attach with (2) 16d Common Toe-Nails (0.162"x3.5") at joints 4 and 5.

LOAD CASE(S) Standard

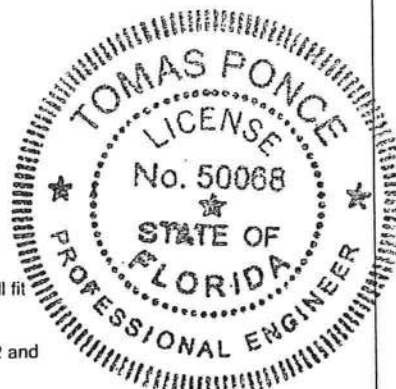

MAY 01 2008

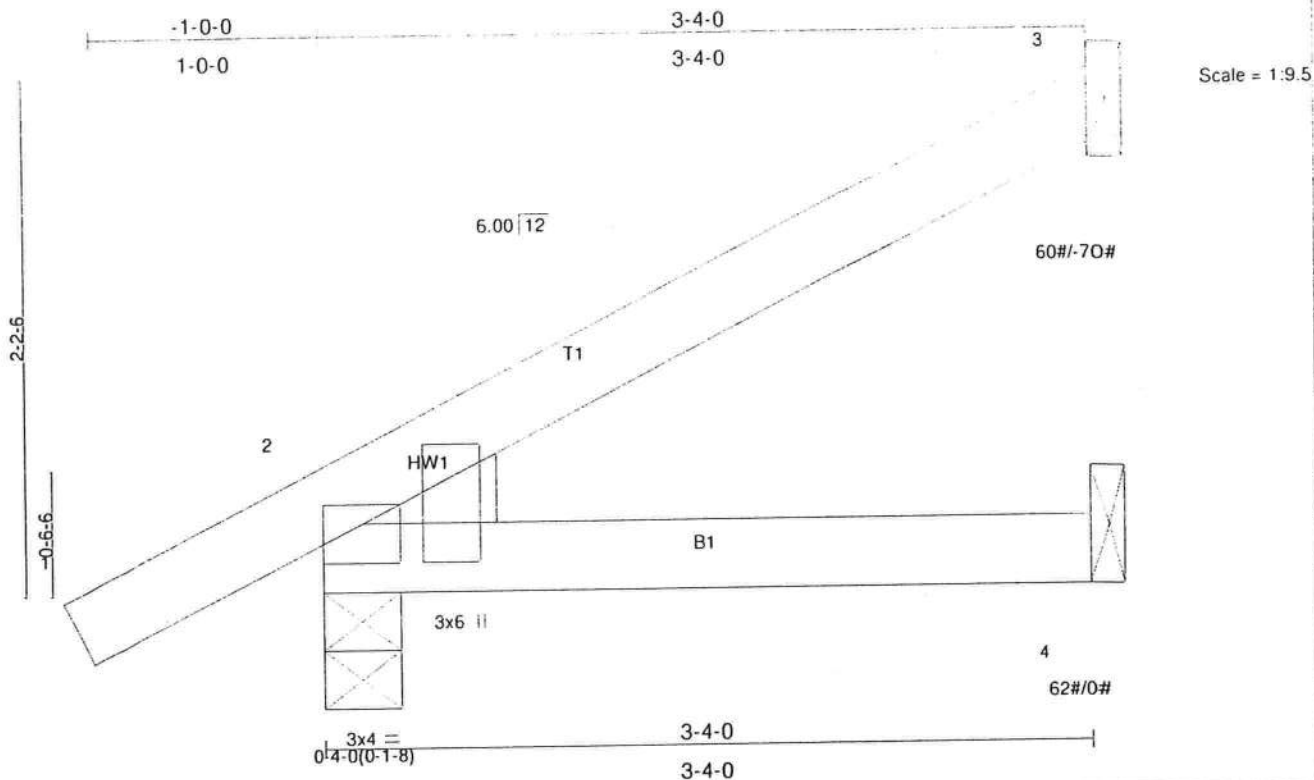


Plate Offsets (X,Y): [2:0-0-0,0-1-0], [2:0-0-15,0-5-4]			201#/-164#						PLATES	GRIP	
LOADING (psf)		SPACING	2-0-0	CSI		DEFL	in (loc)	I/defl	L/d	MT20	244/190
TCLL	16.0	Plates Increase	1.25	TC	0.11	Vert(LL)	-0.00 2-4	>999	240		
TCDL	7.0	Lumber Increase	1.25	BC	0.09	Vert(TL)	-0.01 2-4	>999	180		
BCLL	10.0	Rep Stress Incr	YES	WB	0.00	Horz(TL)	-0.00 3	n/a	n/a		
BCDL	10.0	Code FBC2004/TPI2002		(Matrix)						Weight: 13 lb	

LUMBER
 TOP CHORD 2 X 4 SYP No.2
 BOT CHORD 2 X 4 SYP No.2
 WEDGE
 Left: 2 X 4 SYP No.2

BRACING
 TOP CHORD Structural wood sheathing directly applied or 3-4-0 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (lb/size) 3=60/Mechanical, 2=201/0-4-0, 4=62/Mechanical
 Max Horz 2=97(LC 6)
 Max Uplift 3=-59(LC 6), 2=-95(LC 6)

FORCES (lb) - Maximum Compression/Maximum Tension
 TOP CHORD 1-2=0/14, 2-3=-49/24
 BOT CHORD 2-4=0/0

- NOTES** (7)
 1) Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS and C-C Interior(1) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 3) This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
 5) Refer to girder(s) for truss to truss connections.
 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 59 lb uplift at joint 3 and 95 lb uplift at joint 2.
 7) Attach with (2) 16d Common Toe-Nails (0.162"x3.5") at joints 3 and 4.

LOAD CASE(S) Standard



MAY 01 2008

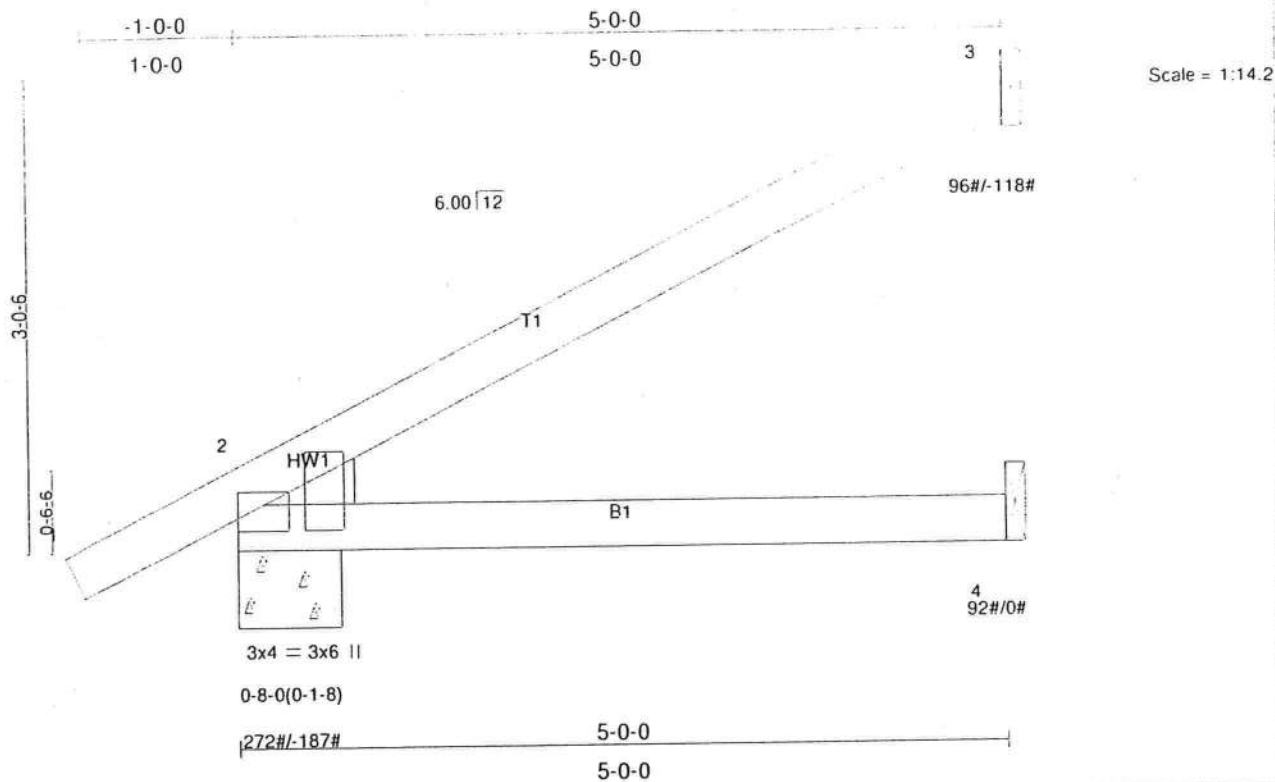


Plate Offsets (X,Y): [2:0-0,0-1-0], [2:0-0,15,0-5-4]

LOADING (psf)	SPACING	CSI	DEFL	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 16.0	Plates Increase 1.25	TC 0.18	Vert(LL) -0.02	2-4	>999	240	MT20	244/190
TCDL 7.0	Lumber Increase 1.25	BC 0.20	Vert(TL) -0.06	2-4	>937	180		
BCCL 10.0	Rep Stress Incr YES	WB 0.00	Horz(TL) -0.00	3	n/a	n/a		
BCDL 10.0	Code FBC2004/TPI2002	(Matrix)						
							Weight: 18 lb	

LUMBER
 TOP CHORD 2 X 4 SYP No.2
 BOT CHORD 2 X 4 SYP No.2
 WEDGE
 Left: 2 X 4 SYP No.2

BRACING
 TOP CHORD Structural wood sheathing directly applied or 5-0-0 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (lb/size) 3=96/Mechanical, 2=272/0-8-0, 4=92/Mechanical
 Max Horz 2=132(LC 6)
 Max Uplift 3=-96(LC 6), 2=-108(LC 6)


FORCES (lb) - Maximum Compression/Maximum Tension
 TOP CHORD 1-2=0/14, 2-3=-79/38
 BOT CHORD 2-4=0/0

- NOTES** (7)
- 1) Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS and C-C Interior(1) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
 - 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 3) This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
 - 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
 - 5) Refer to girder(s) for truss to truss connections.
 - 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 96 lb uplift at joint 3 and 108 lb uplift at joint 2.
 - 7) Attach with (2) 16d Common Toe-Nails (0.162"x3.5") at joints 3 and 4.

LOAD CASE(S) Standard



MAY 01 2008

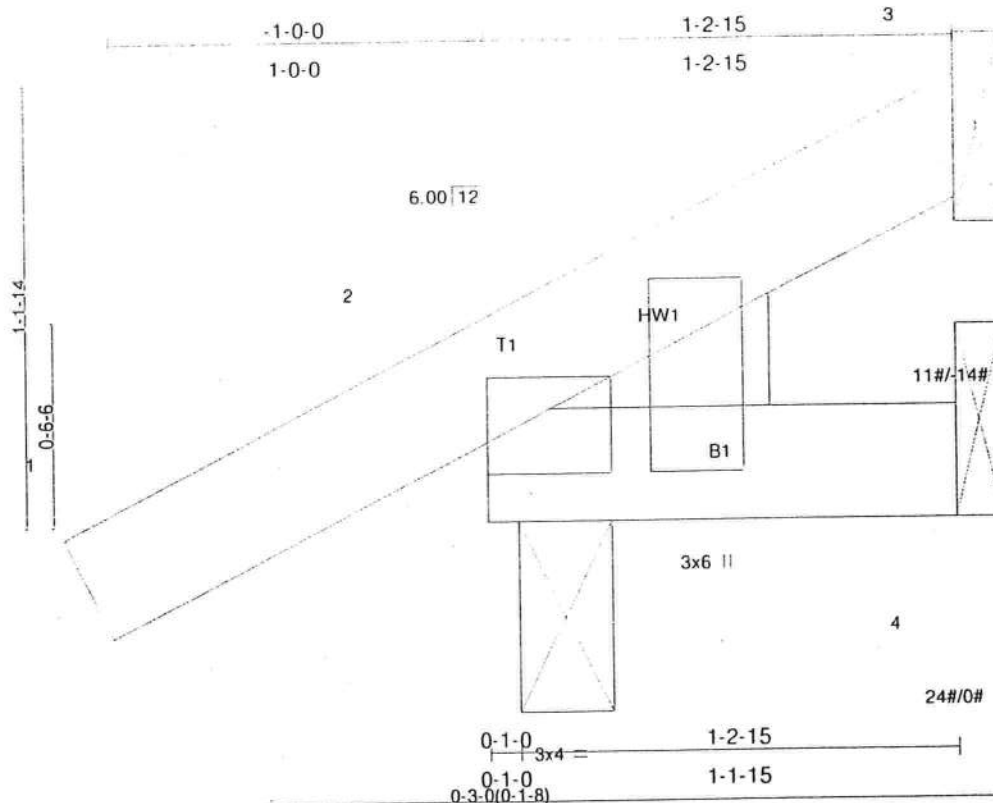

Scale = 1:5.8

Plate Offsets (X,Y): [2:0-0-0,0-1-0], [2:0-0-15,0-5-4]

LOADING (psf)	SPACING	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 16.0	Plates Increase 1.25	TC 0.09	Ver(LLL) -0.00	2	>999	240		MT20	244/190
TCDL 7.0	Lumber Increase 1.25	BC 0.01	Ver(TL) -0.00	2	>999	180			
BCCL 10.0	Rep Stress Incr YES	WB 0.00	Horz(TL) -0.00	3	n/a	n/a			
BCDL 10.0	Code FBC2004/TPI2002	(Matrix)							Weight: 7 lb

LUMBER
 TOP CHORD 2 X 4 SYP No.2
 BOT CHORD 2 X 4 SYP No.2
 WEDGE
 Left: 2 X 4 SYP No.2


BRACING
 TOP CHORD Structural wood sheathing directly applied or 1-2-15 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (lb/size) 2=125/0-3-0, 4=24/Mechanical, 3=5/Mechanical
 Max Horz 2=55(LC 6)
 Max Uplift 2=93(LC 6), 3=14(LC 5)
 Max Grav 2=125(LC 1), 4=24(LC 1), 3=9(LC 4)

FORCES (lb) - Maximum Compression/Maximum Tension
 TOP CHORD 1-2=0/14, 2-3=29/5
 BOT CHORD 2-4=0/0

- NOTES** (7)
 1) Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS and C-C Interior(1) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 3) This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
 5) Refer to girder(s) for truss to truss connections.
 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 93 lb uplift at joint 2 and 14 lb uplift at joint 3.
 7) Attach with (2) 16d Common Toe-Nails (0.162"x3.5") at joints 3 and 4.

LOAD CASE(S) Standard

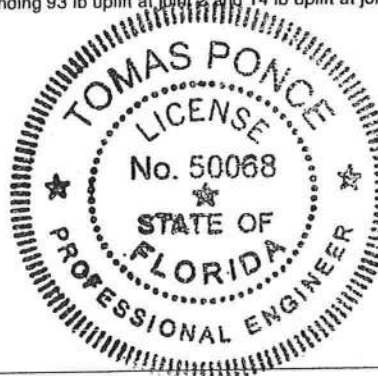

MAY 01 2008

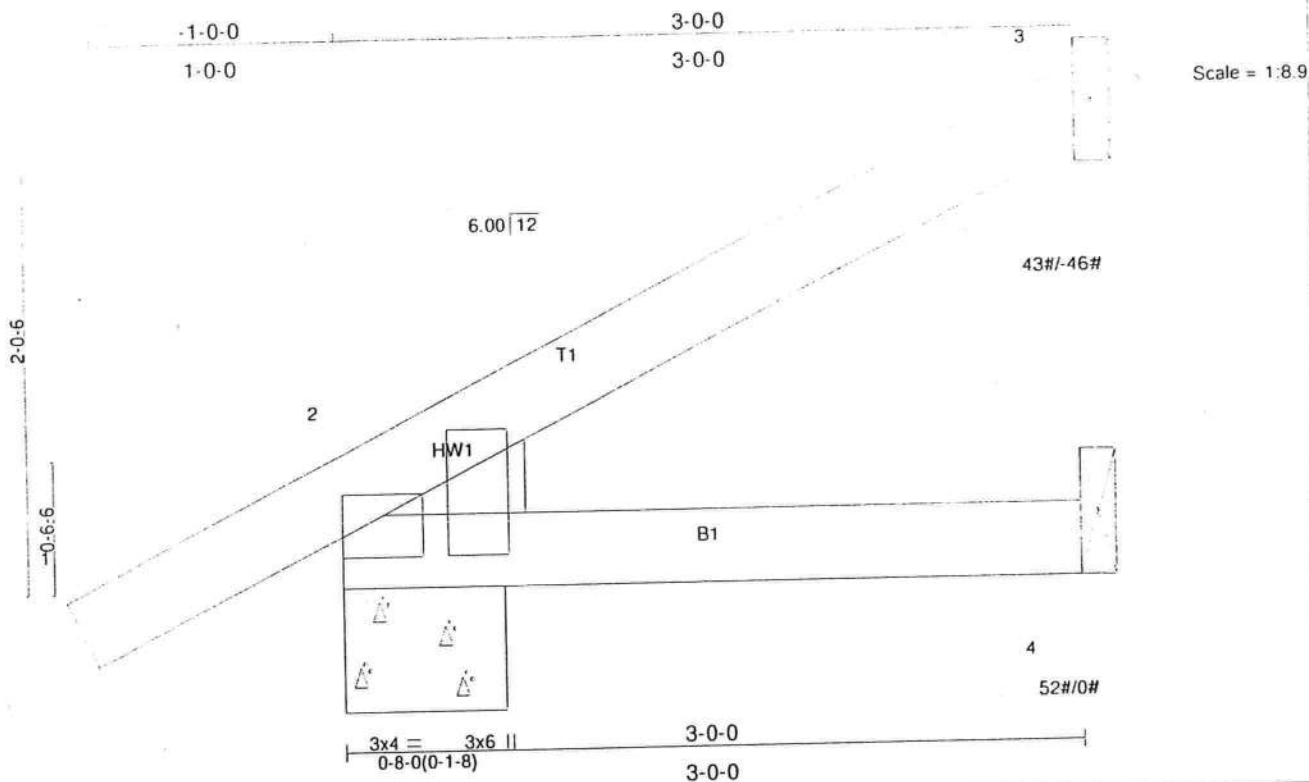


Plate Offsets (X,Y): [2:0-0-0,0-1-0], [2:0-0-15,0-5-4]		194#/-185#						PLATES	GRIP
LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in (loc)	l/dell	L/d	MT20	244/190
TCLL 16.0	Plates Increase	1.25	TC 0.14	Vert(LL)	-0.00 2-4	>999	240		
TCDL 7.0	Lumber Increase	1.25	BC 0.06	Vert(TL)	-0.01 2-4	>999	180		
BCLL 10.0	Rep Stress Incr	YES	WB 0.00	Horz(TL)	-0.00 3	n/a	n/a		
BCDL 10.0	Code FBC2004/TPI2002		(Matrix)					Weight: 12 lb	

LUMBER
 TOP CHORD 2 X 4 SYP No.2
 BOT CHORD 2 X 4 SYP No.2
 WEDGE
 Left: 2 X 4 SYP No.2


BRACING
 TOP CHORD Structural wood sheathing directly applied or 3-0-0 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (lb/size) 3=43/Mechanical, 2=194/0-8-0, 4=52/Mechanical
 Max Horz 2=90(LC 6)
 Max Uplift 3=-43(LC 6), 2=-107(LC 6)


FORCES (lb) - Maximum Compression/Maximum Tension
 TOP CHORD 1-2=0/14, 2-3=-42/17
 BOT CHORD 2-4=0/0

- NOTES** (7)
- 1) Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS and C-C Interior(1) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
 - 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 3) This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
 - 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
 - 5) Refer to girder(s) for truss to truss connections.
 - 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 43 lb uplift at joint 3 and 107 lb uplift at joint 2.
 - 7) Attach with (2) 16d Common Toe-Nails (0.162"x3.5") at joints 3 and 4.

LOAD CASE(S) Standard

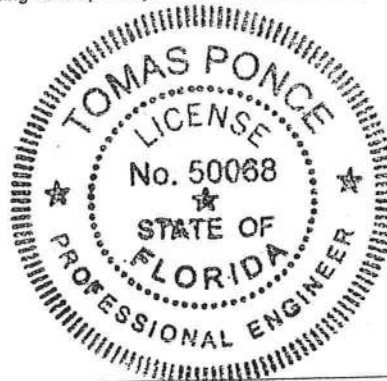

MAY 01 2008

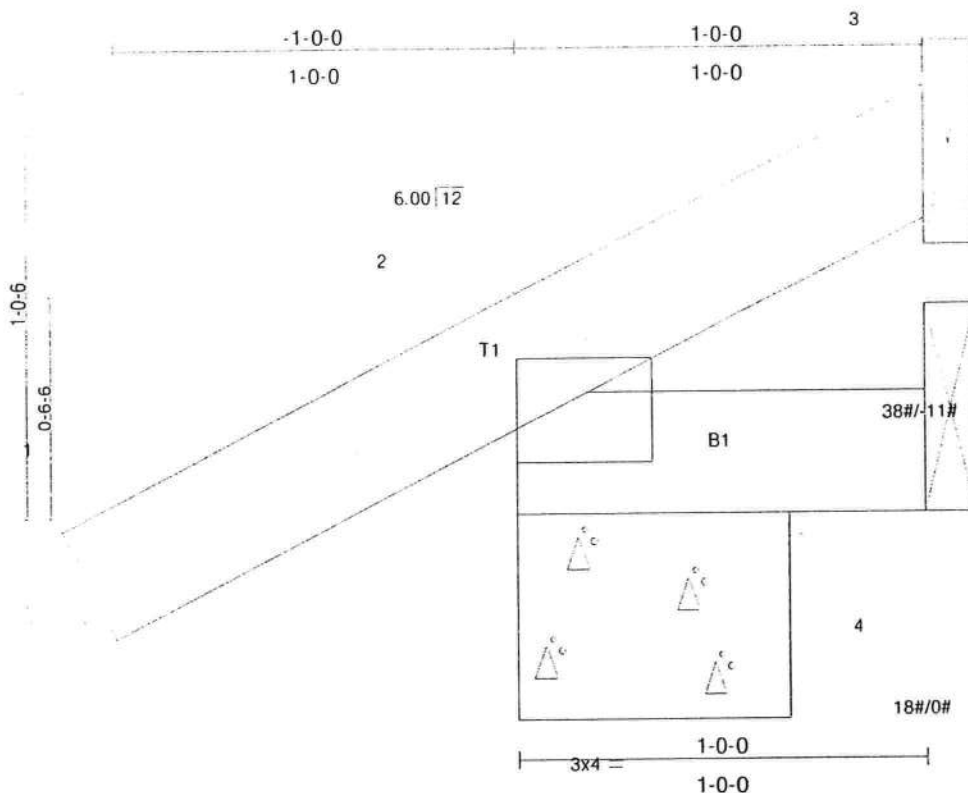

LOADING (psf)	SPACING 2-0-0	CSI	0-8-0(0-1-8)				PLATES	GRIP
	TCLL 16.0	Plates Increase 1.25	TC 0.10	DEFL in (loc) l/dell L/d			MT20	244/190
	TCDL 7.0	Lumber Increase 1.25	BC 0.01	Vert(LL) -0.00 2 >999 240				
	BCLL 10.0	Rep Stress Incr YES	WB 0.00	Vert(TL) -0.00 2 >999 180				
	BCDL 10.0	Code FBC2004/TPI2002	(Matrix)	Horz(TL) 0.00 3 n/a n/a			Weight: 5 lb	

LUMBER
TOP CHORD 2 X 4 SYP No.2
BOT CHORD 2 X 4 SYP No.2

BRACING	
TOP CHORD	Structural wood sheathing directly applied or 1-0-0 oc purlins.
BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS (lb/size) 2=124/0-8-0, 4=18/Mechanical, 3=-11/Mechanical
 Max Horz 2=50(LC 6)
 Max Uplift 2=-105(LC 6), 3=-11(LC 1)
 Max Grav 2=124(LC 1), 4=18(LC 1), 3=16(LC 6)

FORCES (lb) - Maximum Compression/Maximum Tension
 TOP CHORD 1-2=0/14, 2-3=-33/23
 BOT CHORD 2-4=0/0

NOTES (7)

- NOTES (7)
- 1) Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDF=4.2psf; BCDF=6.0psf; Category II; Exp B; enclosed; MWFRS and C-C Interior(1) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
 - 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 3) This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
 - 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
 - 5) Refer to girder(s) for truss to truss connections.
 - 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 105 lb uplift at joint 2 and 11 lb uplift at joint 3.
 - 7) Attach with (2) 16d Common Toe-Nails (0.162"x3.5") at joints 3 and 4.

LOAD CASE(S) Standard

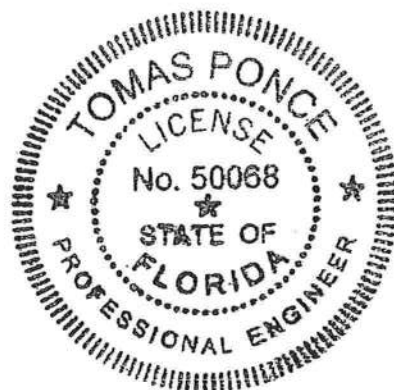

MAY 01 2008

MAY 01 2008

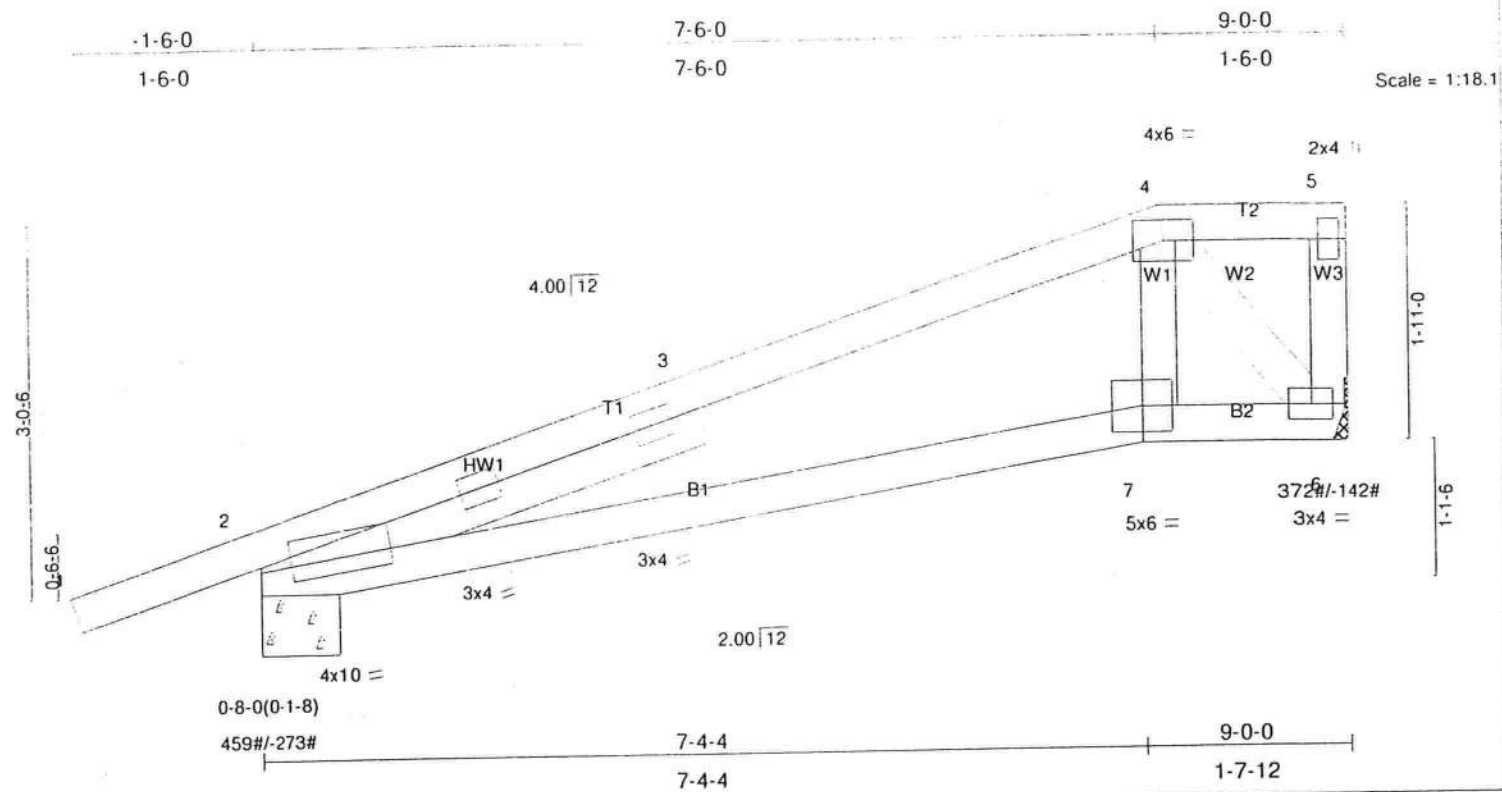


Plate Offsets (X,Y): [2:0-3-3,0-1-15]									
LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES
TCLL 16.0	Plates Increase	1.25	TC 0.47	Vert(LL)	-0.15	2-7	>690	240	MT20
TCDL 7.0	Lumber Increase	1.25	BC 0.55	Vert(TL)	-0.38	2-7	>279	180	GRIP
BCLL 10.0	Rep Stress Incr	YES	WB 0.04	Horz(TL)	0.00	6	n/a	n/a	244/190
BCDL 10.0	Code FBC2004/TPI2002		(Matrix)						Weight: 42 lb

LUMBER
 TOP CHORD 2 X 4 SYP No.2
 BOT CHORD 2 X 4 SYP No.2
 WEBS 2 X 4 SYP No.2
 SLIDER Left 2 X 4 SYP No.2 3-10-11

BRACING
 TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (lb/size) 6=372/Mechanical, 2=459/0-8-0
 Max Horz 2=130(LC 4)
 Max Uplift 6=-103(LC 4), 2=-173(LC 4)


FORCES (lb) - Maximum Compression/Maximum Tension
 TOP CHORD 1-2=0/8, 2-3=-369/41, 3-4=-293/48, 4-5=0/0, 5-6=-31/30
 BOT CHORD 2-7=-102/301, 6-7=-99/255
 WEBS 4-7=0/224, 4-6=-403/156

- NOTES**
- 1) Unbalanced roof live loads have been considered for this design.
 - 2) Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS and C-C Interior(1) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
 - 3) Provide adequate drainage to prevent water ponding.
 - 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 5) This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
 - 6) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
 - 7) Refer to girder(s) for truss to truss connections.
 - 8) Bearing at joint(s) 2 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
 - 9) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 103 lb uplift at joint 1 and 173 lb uplift at joint 2.

LOAD CASE(S) Standard



MAY 01 2008

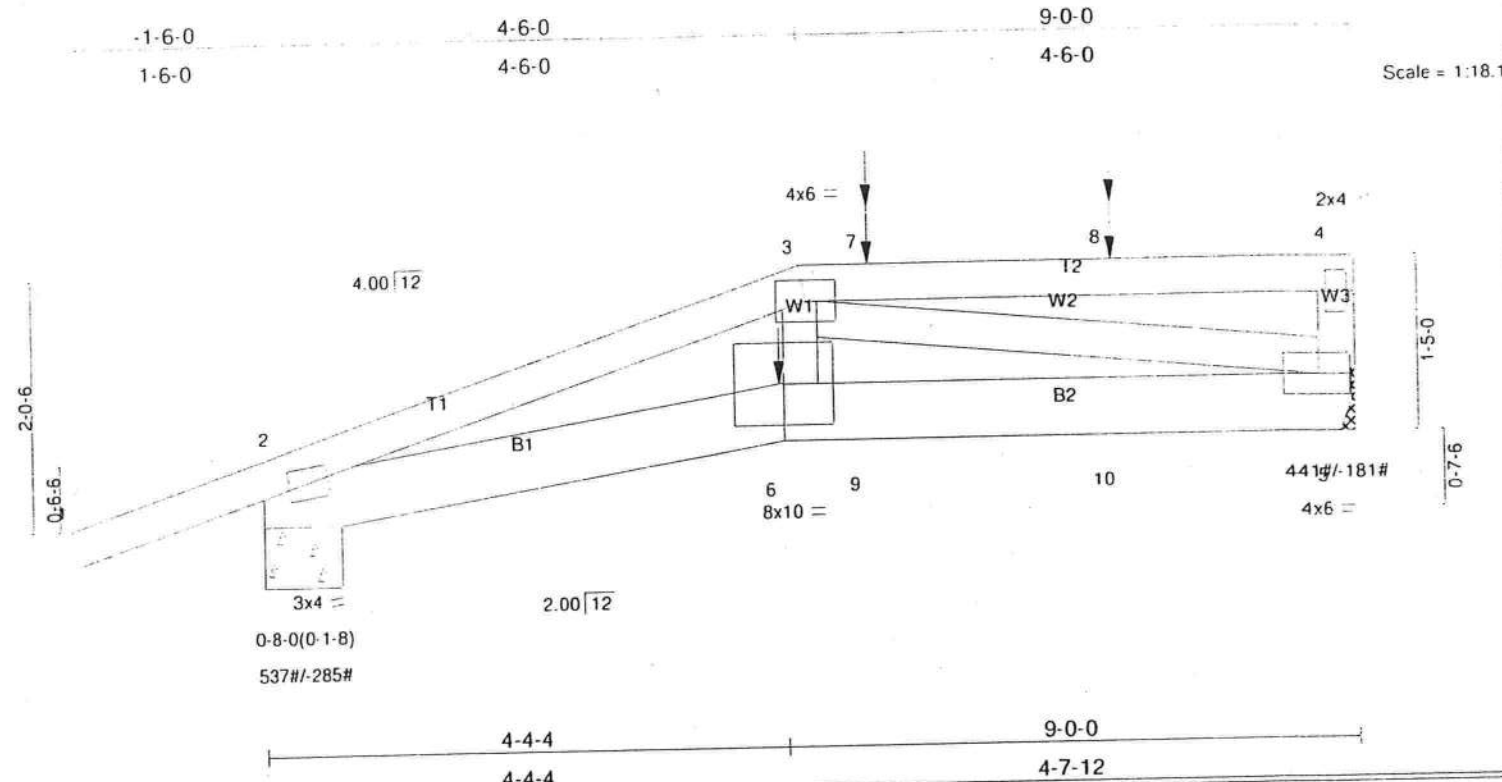

LOADING (psf)	SPACING	CSI	DEFL	PLATES	GRIP
TCLL 16.0	2-0-0	TC 0.26	in (loc) l/defl L/d	MT20	244/190
TCDL 7.0	Plates Increase 1.25	BC 0.42	Ver(LL) -0.03 6 >999 240		
BCLL 10.0	Lumber Increase 1.25	WB 0.30	Ver(TL) -0.06 6 >999 180		
BCDL 10.0	Rep Stress Incr NO	(Matrix)	Horz(TL) 0.02 5 n/a n/a		
	Code FBC2004/TPI2002			Weight: 46 lb	

LUMBER
 TOP CHORD 2 X 4 SYP No.2
 BOT CHORD 2 X 6 SYP No.2
 WEBS 2 X 4 SYP No.2


BRACING
 TOP CHORD Structural wood sheathing directly applied or 5-7-12 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (lb/size) 5=441/Mechanical, 2=537/0-8-0
 Max Horz 2=91(LC 7)
 Max Uplift 5=-181(LC 7), 2=-285(LC 7)


FORCES (lb) - Maximum Compression/Maximum Tension
 TOP CHORD 1-2=0/14, 2-3=-1179/524, 3-7=0/0, 7-8=0/0, 4-5=-107/94
 BOT CHORD 2-6=-517/1076, 6-9=-486/974, 9-10=-486/974, 5-10=-486/974
 WEBS 3-6=-133/479, 3-5=-1002/500

- NOTES**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS; Lumber DOL=1.60 plate grip DOL=1.60.
 - Provide adequate drainage to prevent water ponding.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
 - Refer to girder(s) for truss to truss connections.
 - Bearing at joint(s) 2 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 181 lb uplift at joint 5 and 285 lb uplift at joint 2.
 - Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 11 lb down and 74 lb up at 5-0-12, and 11 lb down and 74 lb up at 7-0-12 on top chord, and 112 lb down and 98 lb up at 4-4-4, and 12 lb down at 5-0-12 and 12 lb down at 7-0-12 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
 - In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard
 1) Regular: Lumber Increase=1.25, Plate Increase=1.25
 Uniform Loads (plf)
 Vert: 1-3=-46, 3-4=-46, 2-6=-40, 5-6=-40
 Concentrated Loads (lb)
 Vert: 6=-112(F) 7=-11(F) 8=-11(F) 9=-12(F) 10=-12(F)

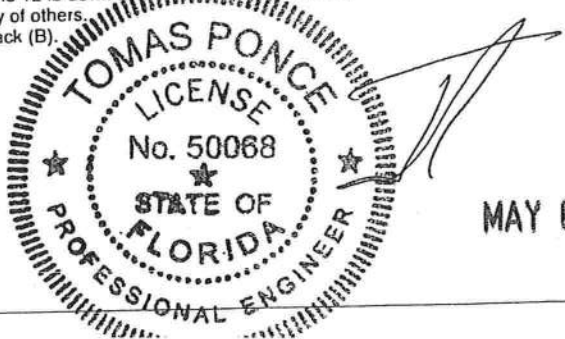

MAY 01 2008

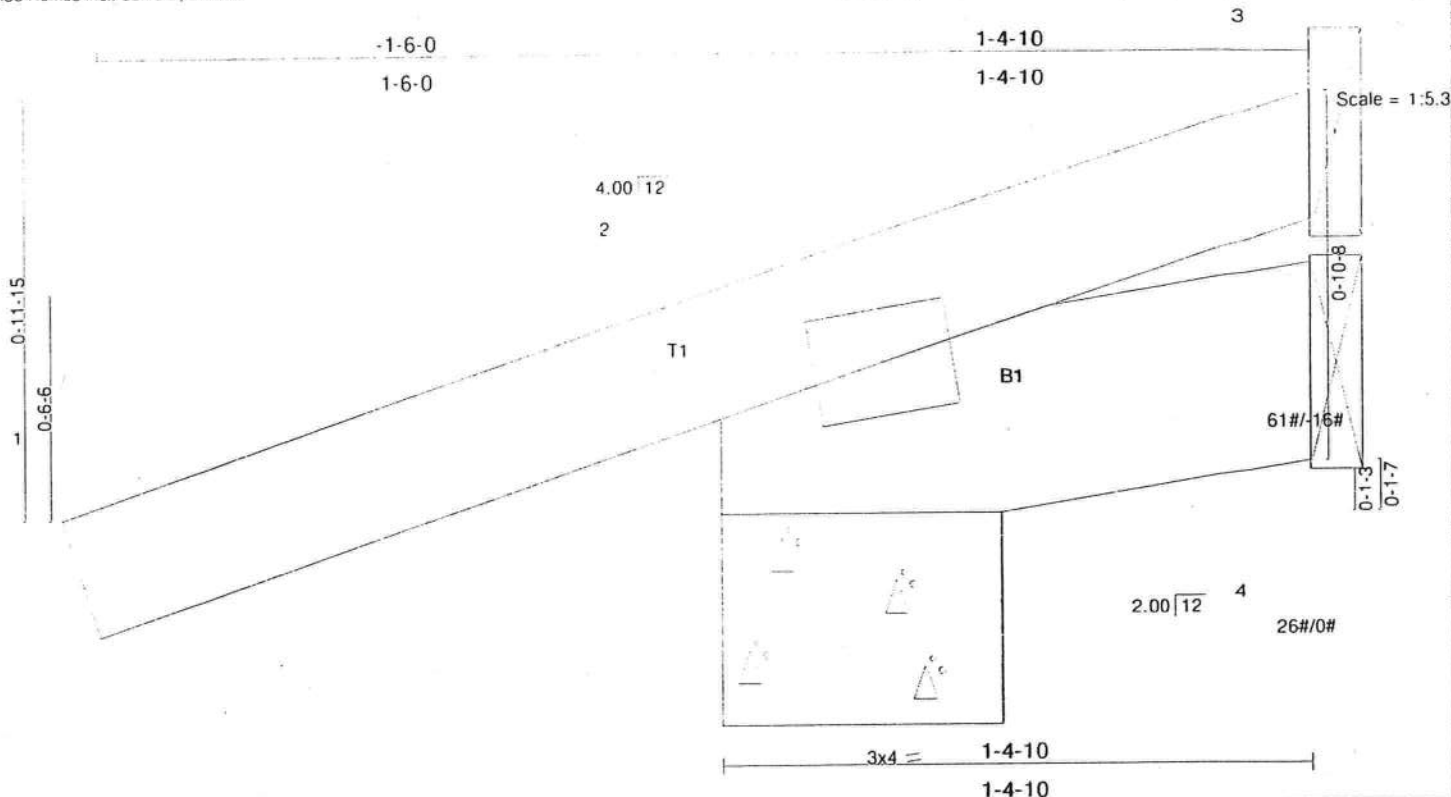

LOADING (psf)	SPACING	2-0-0	CSI	0-8-0(0-1-8)	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 16.0	Plates Increase	1.25	TC 0.19	Vert(LL)	-0.00	2	>999	240		MT20	244/190
TCDL 7.0	Lumber Increase	1.25	BC 0.01	Vert(TL)	-0.00	2	>999	180			
BCLL 10.0	Rep Stress Incr	YES	WB 0.00	Horz(TL)	0.00	3	n/a	n/a			
BCDL 10.0	Code FBC2004/TPI2002		(Matrix)	176#/-265#						Weight: 8 lb	

LUMBER

TOP CHORD 2 X 4 SYP No.2
 BOT CHORD 2 X 6 SYP No.2

BRACING

TOP CHORD Structural wood sheathing directly applied or 1-4-10 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (lb/size)

2=176/0-8-0, 4=26/Mechanical, 3=-16/Mechanical
 Max Horz 2=47(LC 4)
 Max Uplift 2=-156(LC 4), 3=-16(LC 1)
 Max Grav 2=176(LC 1), 4=26(LC 1), 3=29(LC 4)


FORCES (lb) - Maximum Compression/Maximum Tension

TOP CHORD 1-2=0/12, 2-3=-36/28
 BOT CHORD 2-4=-3/3


NOTES (8)

- 1) Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS and C-C Interior(1) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Bearing at joint(s) 2 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 156 lb uplift at joint 2 and 16 lb uplift at joint 3.
- 8) Attach with (2) 16d Common Toe-Nails (0.162"x3.5") at joints 3 and 4.

LOAD CASE(S) Standard

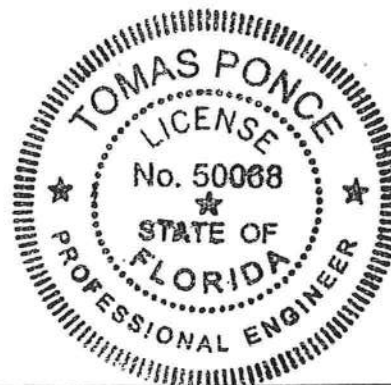

MAY 01 2008

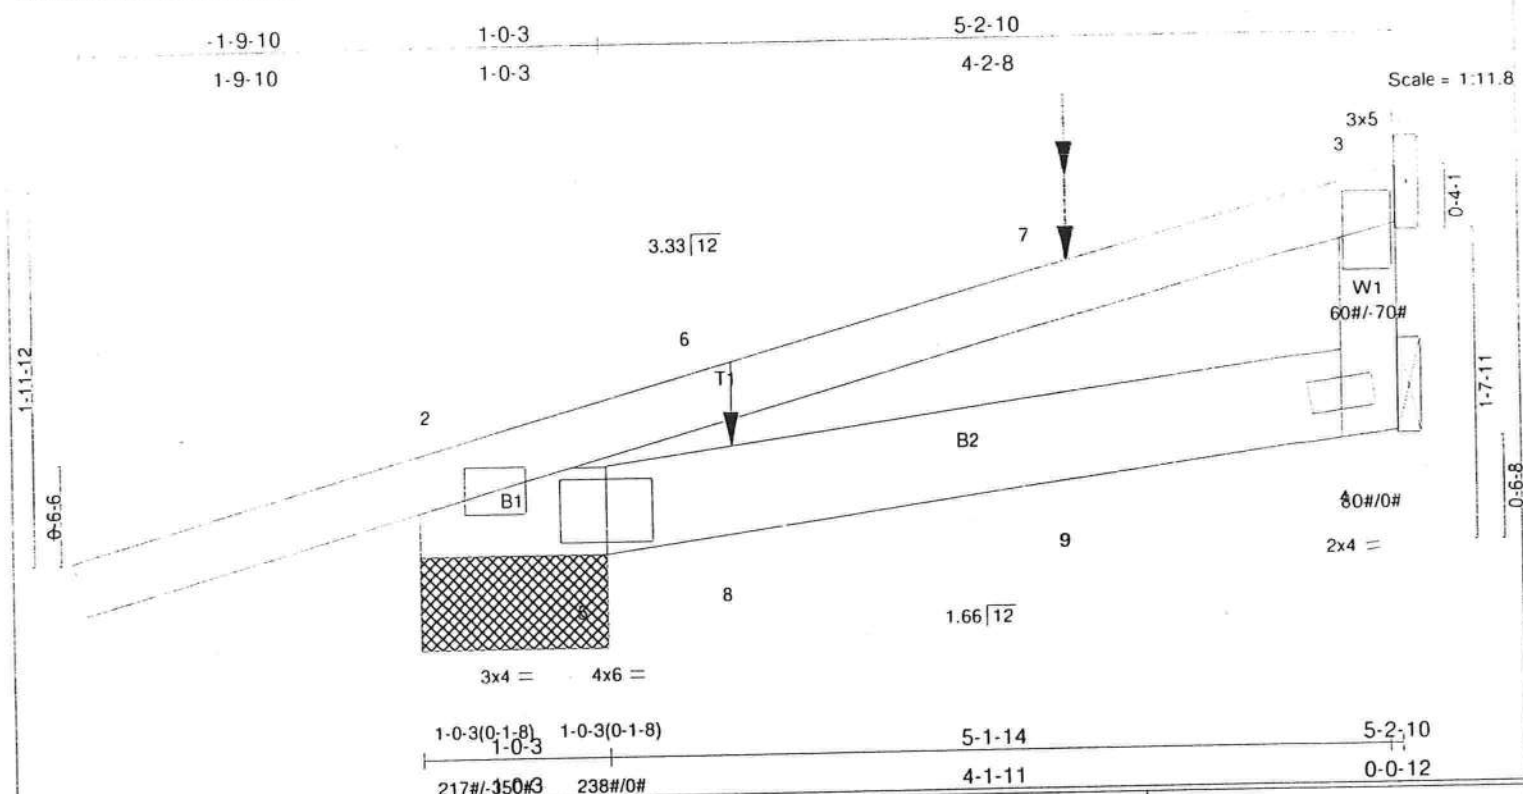

LOADING (psf)	SPACING	CSI	DEFL	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 16.0	Plates Increase 1.25	TC 0.23	Vert(LL) -0.00	4-5	>999	240	MT20	244/190
TCCL 7.0	Lumber Increase 1.25	BC 0.07	Vert(TL) -0.00	4-5	>999	180		
BCCL 10.0	Rep Stress Incr NO	WB 0.00	Horz(TL) -0.00	3	n/a	n/a		
BCDL 10.0	Code FBC2004/TPI2002	(Matrix)						
							Weight: 24 lb	

LUMBER
 TOP CHORD 2 X 4 SYP No.2
 BOT CHORD 2 X 6 SYP No.2
 WEBS 2 X 4 SYP No.2

BRACING
 TOP CHORD Structural wood sheathing directly applied or 5-2-10 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (lb/size) 3=60/Mechanical, 2=217/1-0-3, 5=105/1-0-3, 4=80/Mechanical
 Max Horz 2=88(LC 3)
 Max Uplift 3=-70(LC 7), 2=-350(LC 3)
 Max Grav 3=60(LC 1), 2=217(LC 1), 5=238(LC 3), 4=80(LC 1)


FORCES (lb) - Maximum Compression/Maximum Tension
 TOP CHORD 1-2=0/16, 2-6=-124/23, 6-7=-90/37, 3-7=-85/37, 3-4=0/0
 BOT CHORD 2-5=-62/85, 5-8=-67/79, 8-9=-63/86, 4-9=-62/96

NOTES
 1) Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCCL=4.2psf; BCCL=6.0psf; Category II; Exp B; enclosed; MWFRS; Lumber


- DOL=1.60 plate grip DOL=1.60.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 70 lb uplift at joint 3 and 350 lb uplift at joint 2.
- Gap between inside of top chord bearing and first diagonal or vertical web shall not exceed 0.500in.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 15 lb down and 26 lb up at 3-6-9, and 58 lb down at 1-8-12 on top chord, and 14 lb up at 1-8-12, and 12 lb up at 3-6-9 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- Regular: Lumber Increase=1.25, Plate Increase=1.25
 Uniform Loads (plf)
 Vert: 1-3=-46, 2-5=-40, 4-5=-40
 Concentrated Loads (lb)
 Vert: 7=21(F) 8=14(B) 9=12(F)

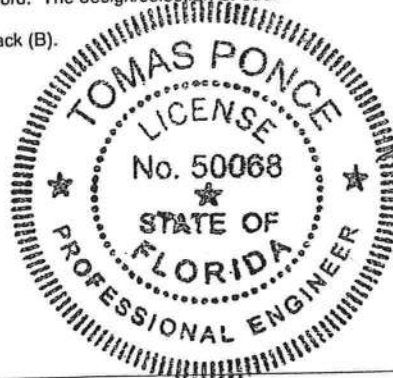

MAY 01 2008

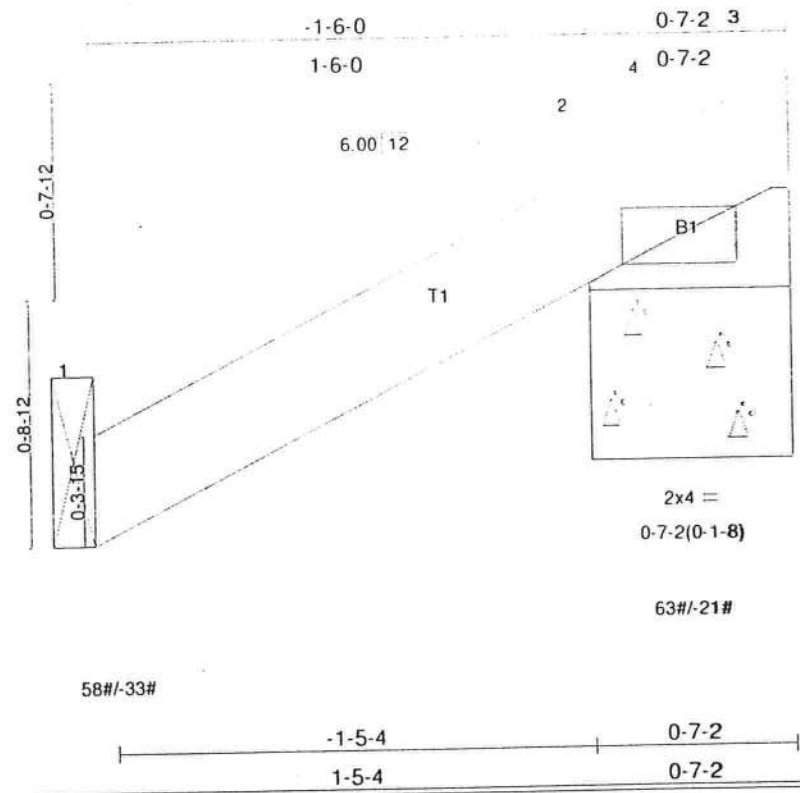

Scale = 1:6.6

LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 16.0	Plates Increase	1.25	TC 0.05	Vert(LL)	0.00	2	240	MT20	244/190
TCDL 7.0	Lumber Increase	1.25	BC 0.00	Vert(TL)	0.00	2	180		
BCLL 10.0	Rep Stress Incr	YES	WB 0.00	Horz(TL)	-0.00	1	n/a	n/a		
BCDL 10.0	Code FBC2004/TPI2002		(Matrix)						Weight: 5 lb	

LUMBER

TOP CHORD 2 X 4 SYP No.2

BOT CHORD 2 X 4 SYP No.2

BRACING

TOP CHORD Structural wood sheathing directly applied or 0-7-2 oc purlins.

BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (lb/size) 2=63/0-7-2, 4=0/0-7-2, 1=58/Mechanical

Max Horz 2=39(LC 6)

Max Uplift 2=-21(LC 6), 1=-21(LC 6)

FORCES (lb) - Maximum Compression/Maximum Tension

TOP CHORD 1-2=-17/24, 2-3=-3/0

BOT CHORD 2-4=0/0

NOTES (6)

1) Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS and C-C Interior(1) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.

2) This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.


3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.

4) Refer to girder(s) for truss to truss connections.

5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 21 lb uplift at joint 2 and 21 lb uplift at joint 1.

6) Attach with (2) 16d Common Toe-Nails (0.162"x3.5") at joint 3.

LOAD CASE(S) Standard

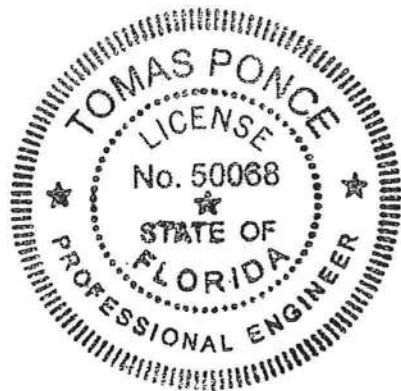

[Signature]

MAY 01 2008

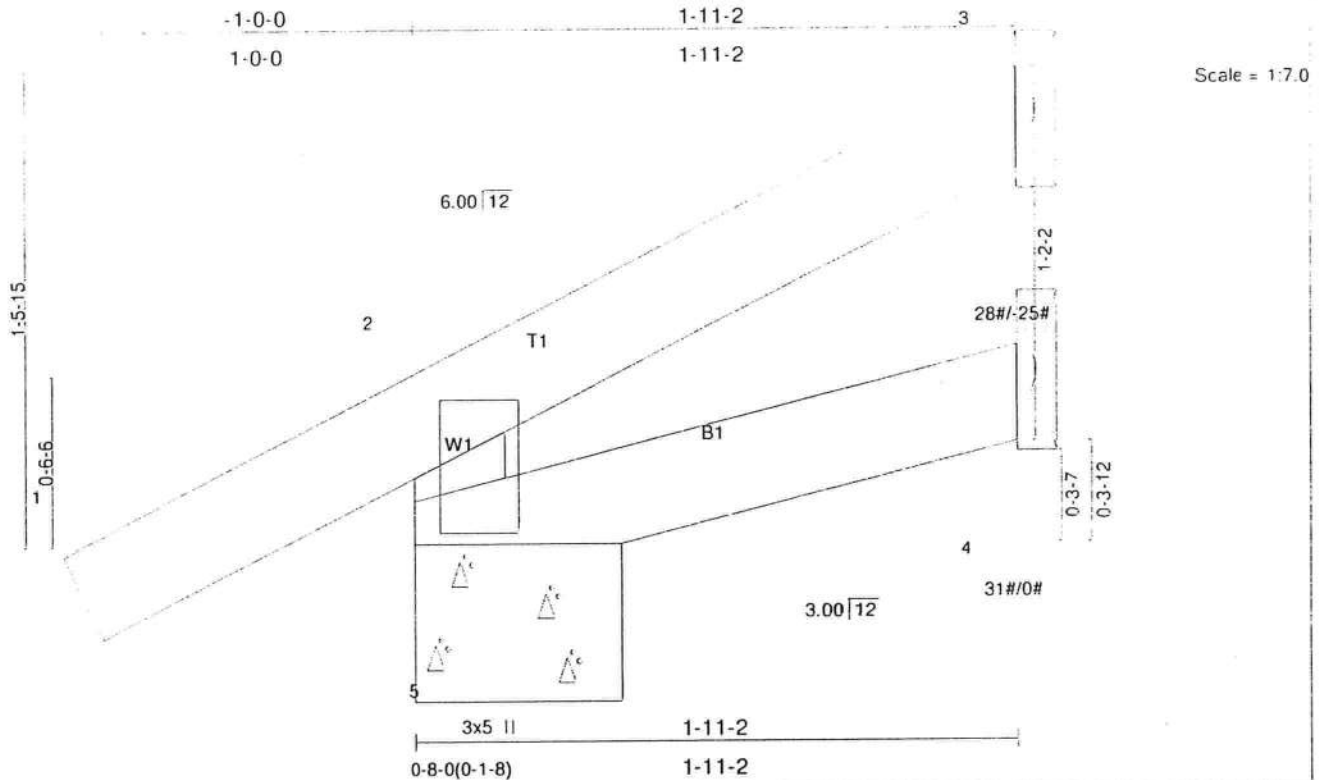


Plate Offsets (X,Y): [5:0-2-8,0-0-12]

LOADING (psf)	SPACING	CSI	151#/-158#	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 16.0	Plates Increase 1.25	TC 0.13		Vert(LL)	-0.00	5	>999	240	MT20	244/190
TCDL 7.0	Lumber Increase 1.25	BC 0.02		Vert(TL)	-0.00	5	>999	180		
BCLL 10.0	Rep Stress Incr YES	WB 0.00		Horz(TL)	0.00	3	n/a	n/a		
BCDL 10.0	Code FBC2004/TPI2002	(Matrix)								Weight: 8 lb

LUMBER

TOP CHORD 2 X 4 SYP No.2
 BOT CHORD 2 X 4 SYP No.2
 WEBS 2 X 4 SYP No.2

BRACING

TOP CHORD Structural wood sheathing directly applied or 1-11-2 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS (lb/size)

5=151/0-8-0, 4=29/Mechanical, 3=28/Mechanical
 Max Horz 5=76(LC 6)
 Max Uplift 5=91(LC 6), 3=-24(LC 6)
 Max Grav 5=151(LC 1), 4=31(LC 2), 3=28(LC 1)

FORCES (lb) - Maximum Compression/Maximum Tension

TOP CHORD 2-5=-109/168, 1-2=0/25, 2-3=-24/9
 BOT CHORD 4-5=-10/6

NOTES (8)

- 1) Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS and C-C Interior(1) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Bearing at joint(s) 5 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 91 lb uplift at joint 5 and 24 lb uplift at joint 3.
- 8) Attach with (2) 16d Common Toe-Nails (0.162"x3.5") at joints 3 and 4.

LOAD CASE(S) Standard



MAY 01 2008

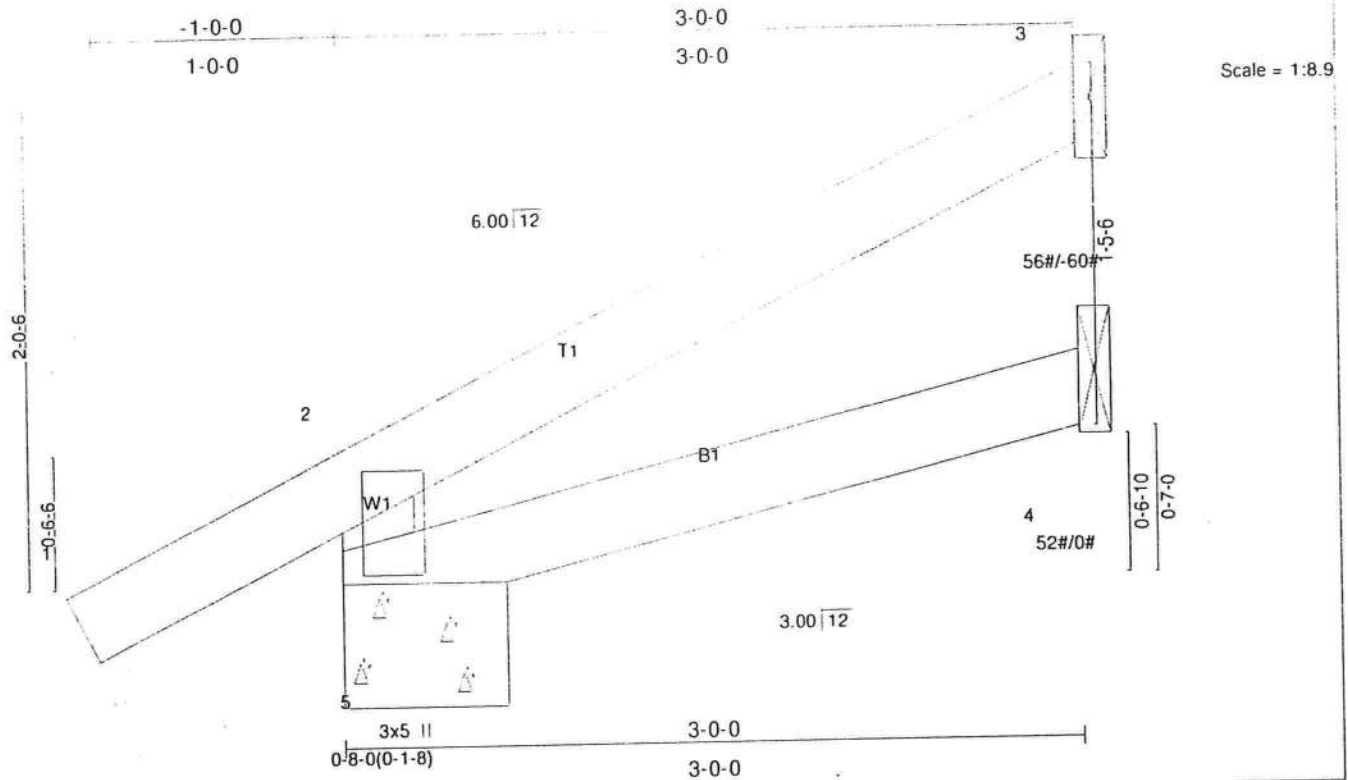


Plate Offsets (X,Y): [5:0-2-8,0-0-12]

188#/-154#

LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in	(loc)	I/dell	L/d	PLATES	GRIP
TCLL 16.0	Plates Increase	1.25	TC 0.13	Vert(LL)	-0.00	4-5	>999	240	MT20	244/190
TCDL 7.0	Lumber Increase	1.25	BC 0.06	Vert(TL)	-0.01	4-5	>999	180		
BCLL 10.0	Rep Stress Incr	YES	WB 0.00	Horz(TL)	0.00	3	n/a	n/a		
BCDL 10.0	Code FBC2004/TPI2002		(Matrix)							
									Weight: 12 lb	

LUMBER
 TOP CHORD 2 X 4 SYP No.2
 BOT CHORD 2 X 4 SYP No.2
 WEBS 2 X 4 SYP No.2


BRACING
 TOP CHORD Structural wood sheathing directly applied or 3-0-0 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS (lb/size) 5=188/0-8-0, 3=56/Mechanical, 4=52/Mechanical
 Max Horz 5=97(LC 6)
 Max Uplift 5=-88(LC 6), 3=-49(LC 6)

FORCES (lb) - Maximum Compression/Maximum Tension
 TOP CHORD 2-5=-128/177, 1-2=0/25, 2-3=-37/19
 BOT CHORD 4-5=-15/10

- NOTES** (8)
- 1) Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS and C-C Interior(1) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
 - 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 3) This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
 - 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
 - 5) Refer to girder(s) for truss to truss connections.
 - 6) Bearing at joint(s) 5 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
 - 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 88 lb uplift at joint 5 and 49 lb uplift at joint 3.
 - 8) Attach with (2) 16d Common Toe-Nails (0.162"x3.5") at joints 3 and 4.

LOAD CASE(S) Standard

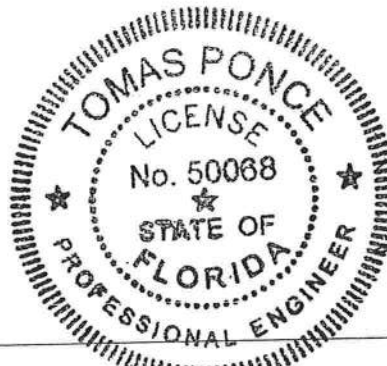

MAY 01 2008

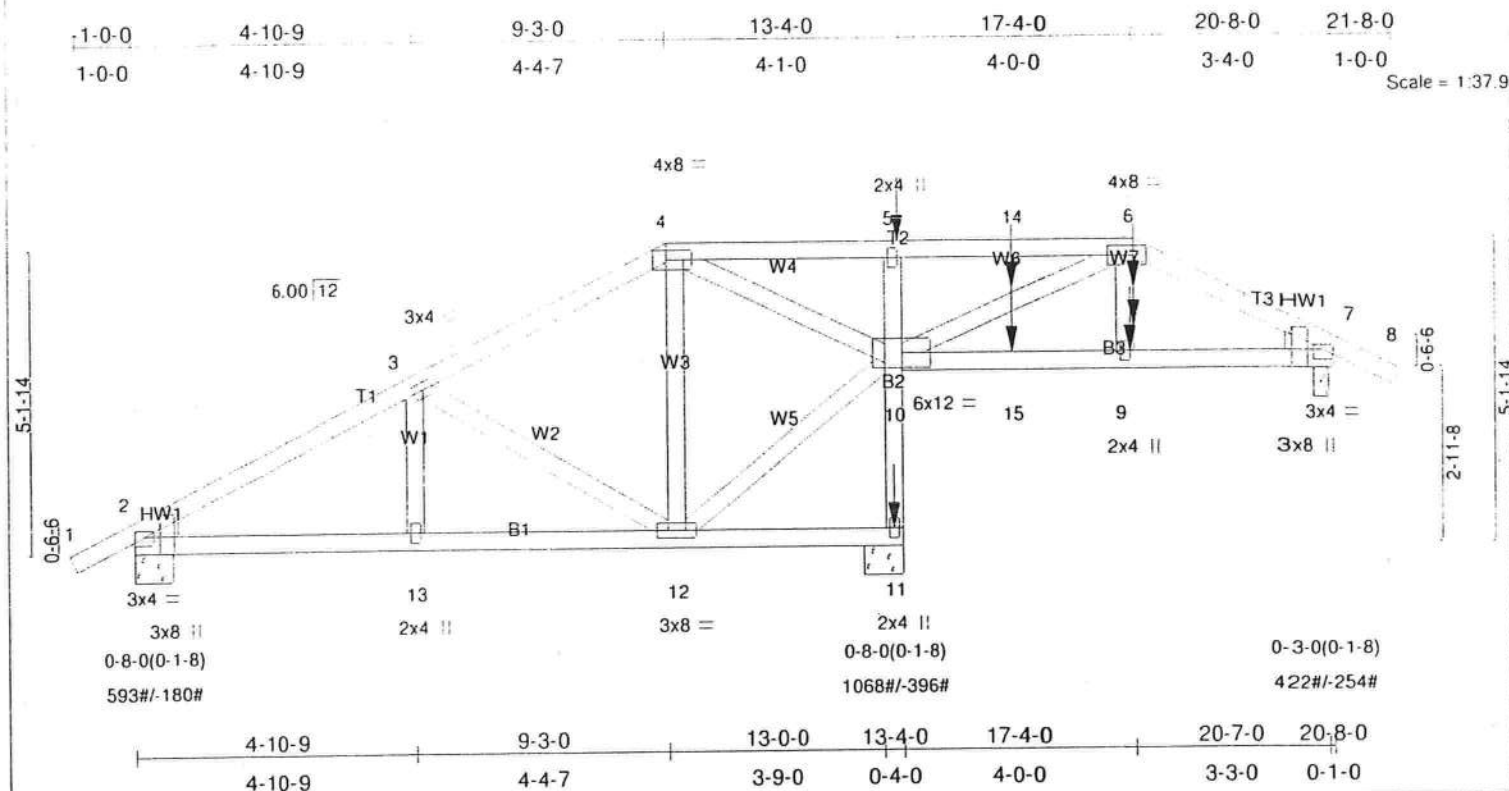


Plate Offsets (X,Y): [2:0-2-7,Edge], [2:0-0-1,0-0-12], [4:0-5-4,0-2-0], [6:0-5-4,0-2-0], [7:0-0-0,0-1-0], [7:0-2-7,Edge]

LOADING (psf)
 TCLL 16.0
 TCDL 7.0
 BCCL 10.0
 BCDL 10.0

SPACING 2-0-0
 Plates Increase 1.25
 Lumber Increase 1.25
 Rep Stress Incr NO
 Code FBC2004/TPI2002

CSI
 TC 0.21
 BC 0.24
 WB 0.17
 (Matrix)

DEFL in (loc) l/defl L/d
 Vert(LL) -0.02 2-13 >999 240
 Vert(TL) -0.04 2-13 >999 180
 Horz(TL) 0.01 11 n/a n/a

PLATES MT20
GRIP 244/190

Weight: 115 lb

LUMBER

TOP CHORD 2 X 4 SYP No.2
 BOT CHORD 2 X 4 SYP No.2
 WEBS 2 X 4 SYP No.2
 WEDGE
 Left: 2 X 4 SYP No.2, Right: 2 X 4 SYP No.2

BRACING

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing. Except: 6-0-0 oc bracing: 10-11.

REACTIONS (lb/size) 2=592/0-8-0, 11=1068/0-8-0, 7=413/0-3-0
 Max Horz 2=166(LC 5)
 Max Uplift 2=180(LC 5), 11=396(LC 7), 7=254(LC 8)
 Max Grav 2=593(LC 9), 11=1068(LC 1), 7=422(LC 10)

FORCES (lb) - Maximum Compression/Maximum Tension


TOP CHORD 1-2=0/14, 2-3=-755/112, 3-4=-354/77, 4-5=-25/145, 5-14=-2/105, 6-14=-2/104, 6-7=-512/295, 7-8=0/14
 BOT CHORD 2-13=-179/611, 12-13=-179/611, 11-12=-1/3, 10-11=-979/415, 5-10=-234/230, 10-15=-202/435, 9-15=-202/435,
 7-9=-199/413
 WEBS 3-13=0/197, 3-12=-391/152, 4-12=0/163, 10-12=-60/350, 4-10=-469/141, 6-10=-575/291, 6-9=-43/284

NOTES

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS; Lumber DOL=1.60 plate grip DOL=1.60.
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
- 6) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 180 lb uplift at joint 2, 396 lb uplift at joint 11 and 254 lb uplift at joint 7.
- 8) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 17 lb down and 95 lb up at 13-3-4, and 17 lb down and 95 lb up at 15-3-4, and 17 lb down and 95 lb up at 17-4-0 on top chord, and 22 lb down at 13-2-4, and 22 lb down at 15-3-4, and 122 lb down and 97 lb up at 17-3-4 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- 9) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard


- 1) Regular: Lumber Increase=1.25, Plate Increase=1.25
 Uniform Loads (plf)
 Vert: 1-4=-46, 4-6=-46, 6-8=-46, 2-11=-40, 7-10=-40

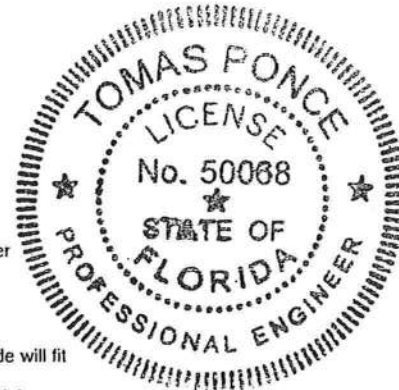

MAY 01 2008

Job	Truss	Truss Type	Qty	Ply	CHESAPEAKE_FL_125
CHESAPEAKE	STGRD	SPECIAL	1	1	Job Reference (optional)
Maronda Homes Inc., Sanford, Florida					7,000 s May 29 2007 Mitek Industries, Inc. Wed Apr 30 15:42:45 2008 Page 2

LOAD CASE(S) Standard
Concentrated Loads (lb)
Vert: 6=-17(B) 11=-22(B) 5=-17(B) 9=-122(B) 14=-17(B) 15=-22(B)

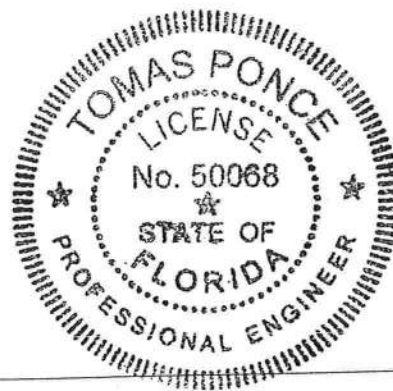

A handwritten signature in black ink, appearing to be "T. Ponce", written over the date stamp.

MAY 01 2008

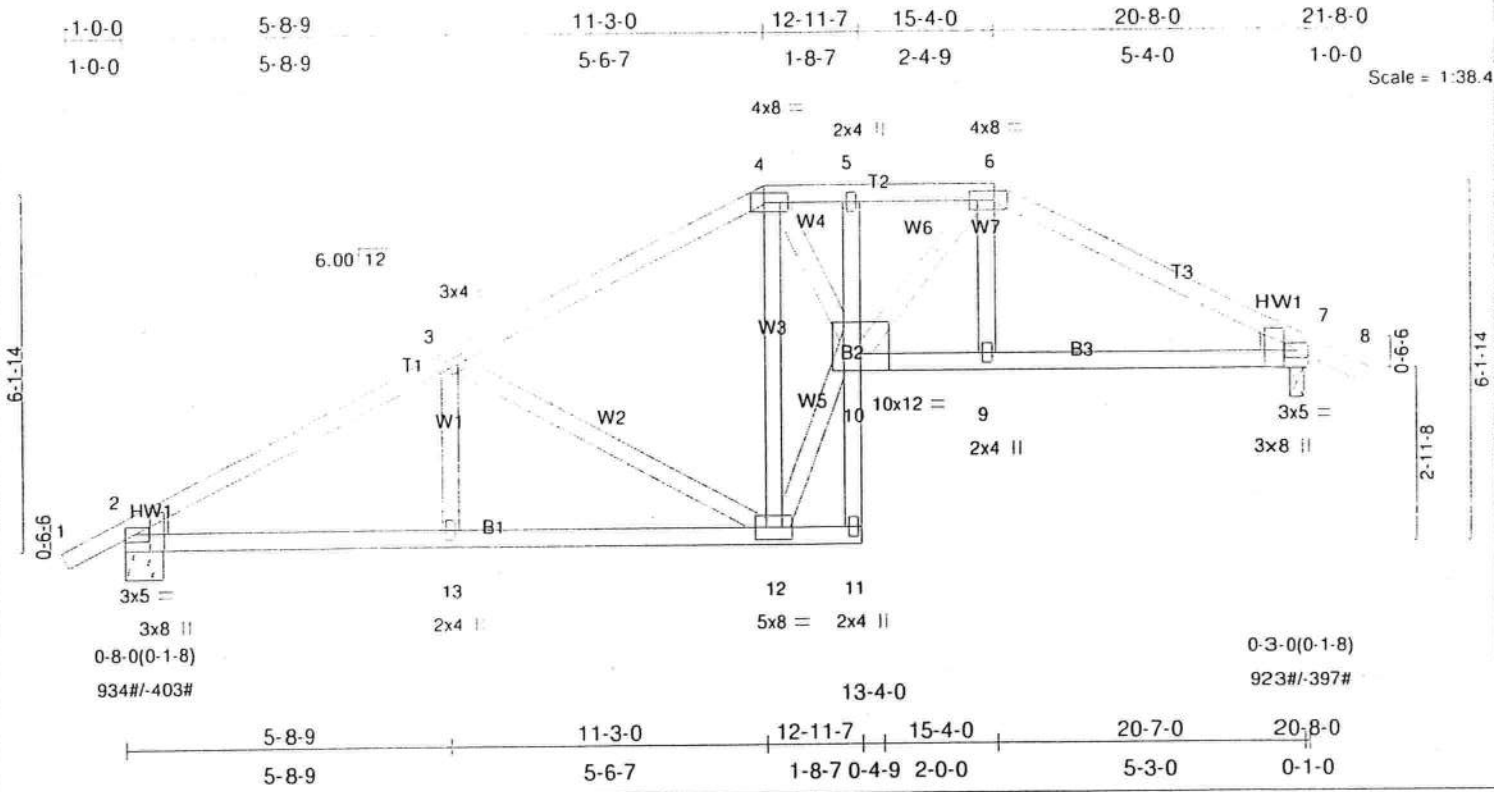


Plate Offsets (X,Y): [2:0-0-1,0-0-8], [2:0-2-7,Edge], [4:0-5-4,0-2-0], [6:0-5-4,0-2-0], [7:0-2-7,Edge], [7:0-0-1,0-0-8]									
LOADING (psf)		SPACING 2-0-0		CSI		DEFL in (loc) l/defl L/d		PLATES	GRIP
TCLL	16.0	Plates Increase 1.25		TC	0.33	Vert(LL)	-0.07 12-13	>999	240
TCCL	7.0	Lumber Increase 1.25		BC	0.41	Vert(TL)	-0.15 12-13	>999	180
BCCL	10.0	Rep Stress Incr YES		WB	0.55	Horz(TL)	0.08 7	n/a	n/a
BCDL	10.0	Code FBC2004/TPI2002		(Matrix)					
								Weight: 118 lb	

LUMBER
 TOP CHORD 2 X 4 SYP No.2
 BOT CHORD 2 X 4 SYP No.2
 WEBS 2 X 4 SYP No.2
 WEDGE
 Left: 2 X 4 SYP No.2, Right: 2 X 4 SYP No.2


BRACING
 TOP CHORD Structural wood sheathing directly applied or 5-1-11 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing. Except: 6-0-0 oc bracing: 10-11.

REACTIONS (lb/size) 2=934/0-8-0, 7=923/0-3-0
 Max Horz 2=182(LC 6)
 Max Uplift 2=-244(LC 6), 7=-190(LC 7)

FORCES (lb) - Maximum Compression/Maximum Tension
 TOP CHORD 1-2=0/14, 2-3=-1410/406, 3-4=-911/348, 4-5=-1363/496, 5-6=-1382/505, 6-7=-1424/455, 7-8=0/14
 BOT CHORD 2-13=-377/1178, 12-13=-377/1178, 11-12=-14/43, 10-11=-20/0, 5-10=-70/75, 9-10=-284/1222, 7-9=-286/1210
 WEBS 3-13=0/244, 3-12=-479/205, 4-12=-1050/337, 10-12=-405/1606, 4-10=-293/1326, 6-10=-110/321, 6-9=0/235

- NOTES**
- 1) Unbalanced roof live loads have been considered for this design.
 - 2) Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCCL=4.2psf; BCCL=6.0psf; Category II; Exp B; enclosed; MWFRS and C-C Interior(1) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
 - 3) Provide adequate drainage to prevent water ponding.
 - 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 5) This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
 - 6) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
 - 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 244 lb uplift at joint 2 and 190 lb uplift at joint 7.

LOAD CASE(S) Standard

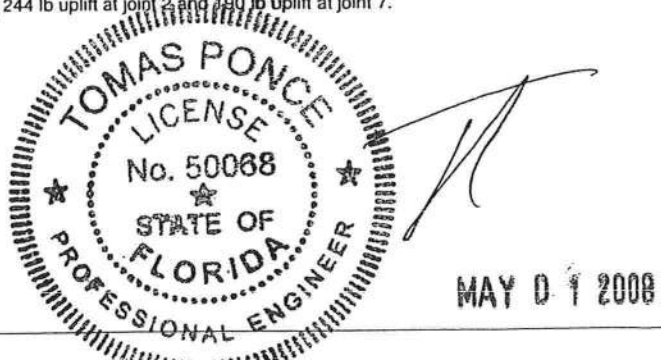

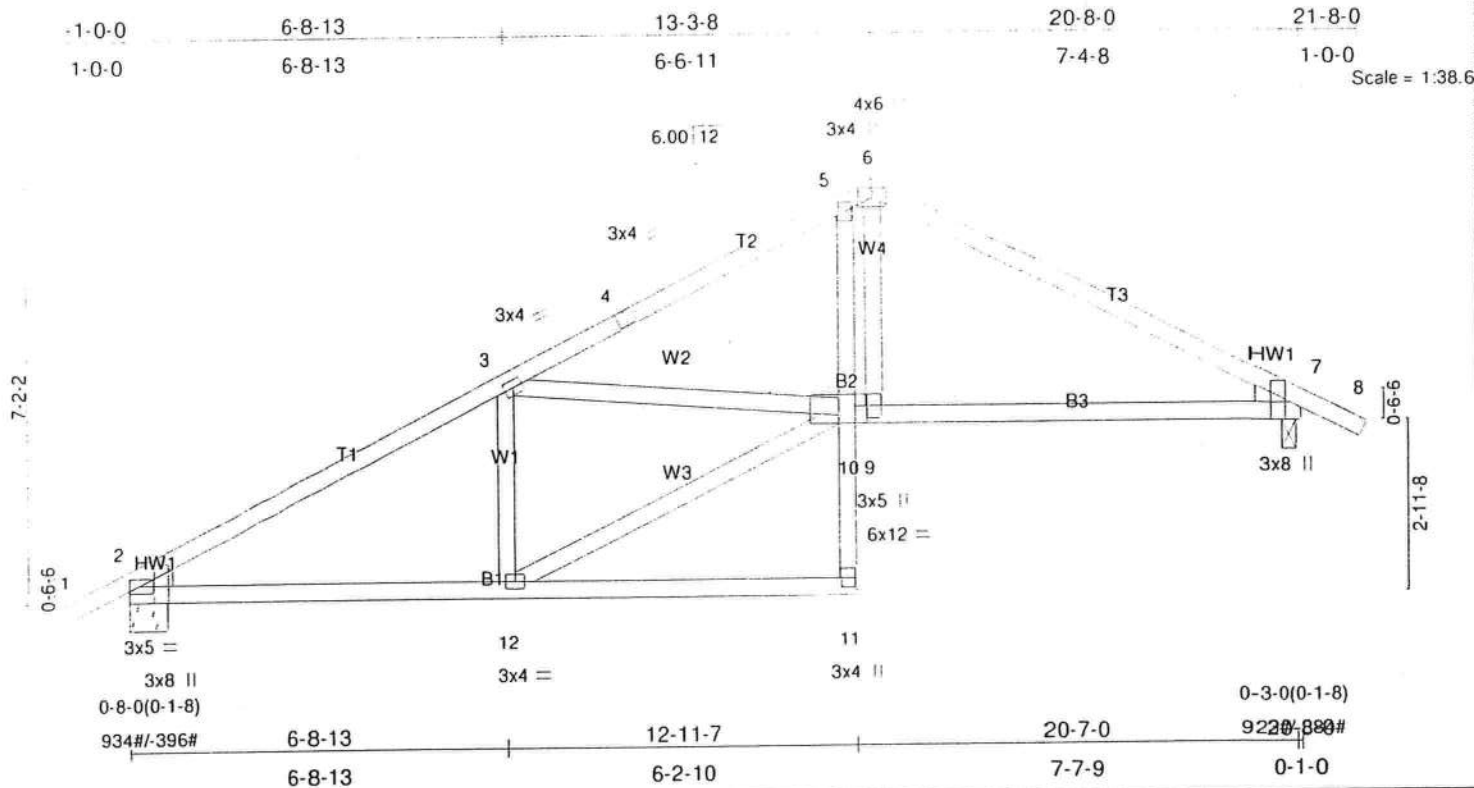


Plate Offsets (X,Y): [2:0-0-1,0-0-8], [2:0-2-7,Edge], [7:0-3-8,Edge]

LOADING (psf)	SPACING	2:0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 16.0	Plates Increase	1.25	TC 0.47	Vert(LL)	-0.10	7-9	>999	240	MT20	244/190
TCDL 7.0	Lumber Increase	1.25	BC 0.64	Vert(TL)	-0.22	7-9	>999	180		
BCLL 10.0	Rep Stress Incr	YES	WB 0.27	Horz(TL)	0.05	7	n/a	n/a		
BCDL 10.0	Code FBC2004/TPI2002		(Matrix)							
									Weight: 109 lb	

LUMBER

TOP CHORD 2 X 4 SYP No.2
 BOT CHORD 2 X 4 SYP No.2
 WEBS 2 X 4 SYP No.2
 WEDGE
 Left: 2 X 4 SYP No.2, Right: 2 X 4 SYP No.2

BRACING

TOP CHORD Structural wood sheathing directly applied or 5-0-15 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (lb/size) 2=934/0-8-0, 7=923/0-3-0
 Max Horz 2=197(LC 6)
 Max Uplift 2=-252(LC 6), 7=-207(LC 7)


FORCES (lb) - Maximum Compression/Maximum Tension

TOP CHORD 1-2=0/14, 2-3=-1370/386, 3-4=-1374/430, 4-5=-1306/450, 5-6=-1097/358, 6-7=-1354/419, 7-8=0/14
 BOT CHORD 2-12=-348/1142, 11-12=-1/62, 10-11=0/111, 5-10=-168/308, 9-10=-231/1008, 7-9=-235/1149
 WEBS 3-12=-268/254, 6-9=-16/675, 10-12=-393/1218, 3-10=-53/92

NOTES

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS and C-C Interior(1) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 252 lb uplift at joint 2 and 207 lb uplift at joint 7.

LOAD CASE(S) Standard

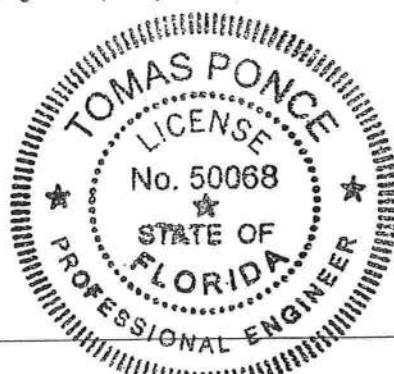

MAY 01 2008

6-8-0 13-4-0 14-4-0
 6-8-0 6-8-0 1-0-0
 Scale = 1:23.0

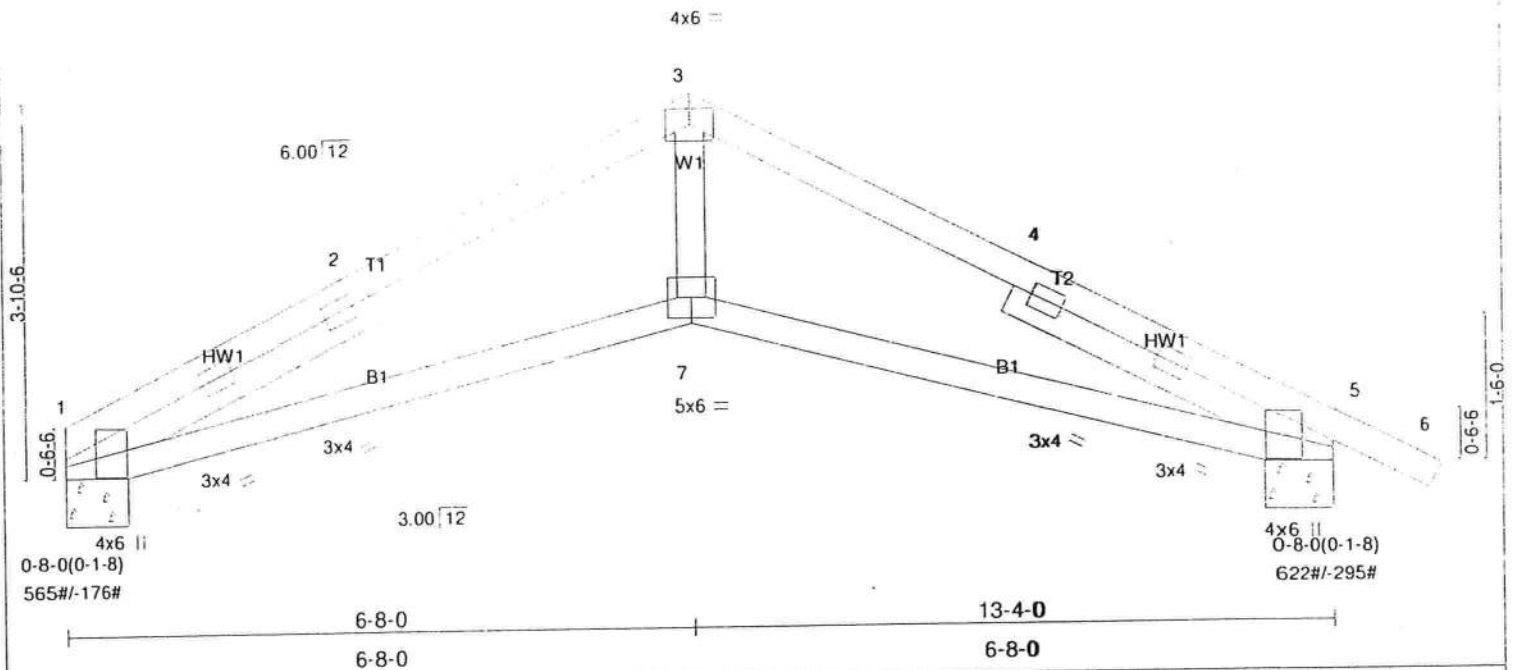


Plate Offsets (X,Y): [1:0-1-8,0-3-14], [5:0-2-5,0-3-14], [5:0-0-0,0-0-0]

LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 16.0	Plates Increase	1.25	TC 0.22	Vert(LL)	-0.06	1-7	>999	MT20	244/190
TCDL 7.0	Lumber Increase	1.25	BC 0.38	Vert(TL)	-0.13	1-7	>999		
BCLL 10.0	Rep Stress Incr	YES	WB 0.25	Horz(TL)	0.06	5	n/a		
BCDL 10.0	Code FBC2004/TPI2002		(Matrix)						Weight: 58 lb

LUMBER
 TOP CHORD 2 X 4 SYP No.2
 BOT CHORD 2 X 4 SYP No.2
 WEBS 2 X 4 SYP No.3
 SLIDER Left 2 X 4 SYP No.2 3-8-2, Right 2 X 4 SYP No.2 3-8-2


BRACING
 TOP CHORD Structural wood sheathing directly applied or 5-9-1 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (lb/size) 1=565/0-8-0, 5=622/0-8-0
 Max Horz 1=-67(LC 7)
 Max Uplift 1=-105(LC 6), 5=-173(LC 7)

FORCES (lb) - Maximum Compression/Maximum Tension
 TOP CHORD 1-2=-1218/303, 2-3=-1141/319, 3-4=-1143/322, 4-5=-1222/307, 5-6=0/8
 BOT CHORD 1-7=-176/1086, 5-7=-176/1087
 WEBS 3-7=-20/787

- NOTES**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS and C-C Interior(1) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
 - Bearing at joint(s) 1, 5 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 105 lb uplift at joint 1 and 173 lb uplift at joint 5.

LOAD CASE(S) Standard

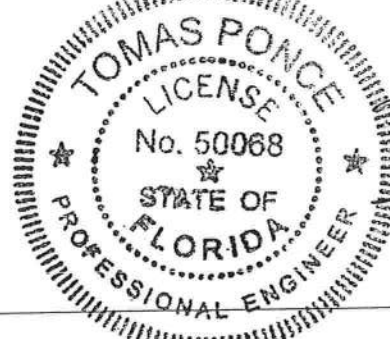

MAY 01 2008

1-0-0 5-1-1 10-0-0 14-10-15 20-0-0 21-0-0
 1-0-0 5-1-1 4-10-15 4-10-15 5-1-1 1-0-0
 Scale = 1:34.7

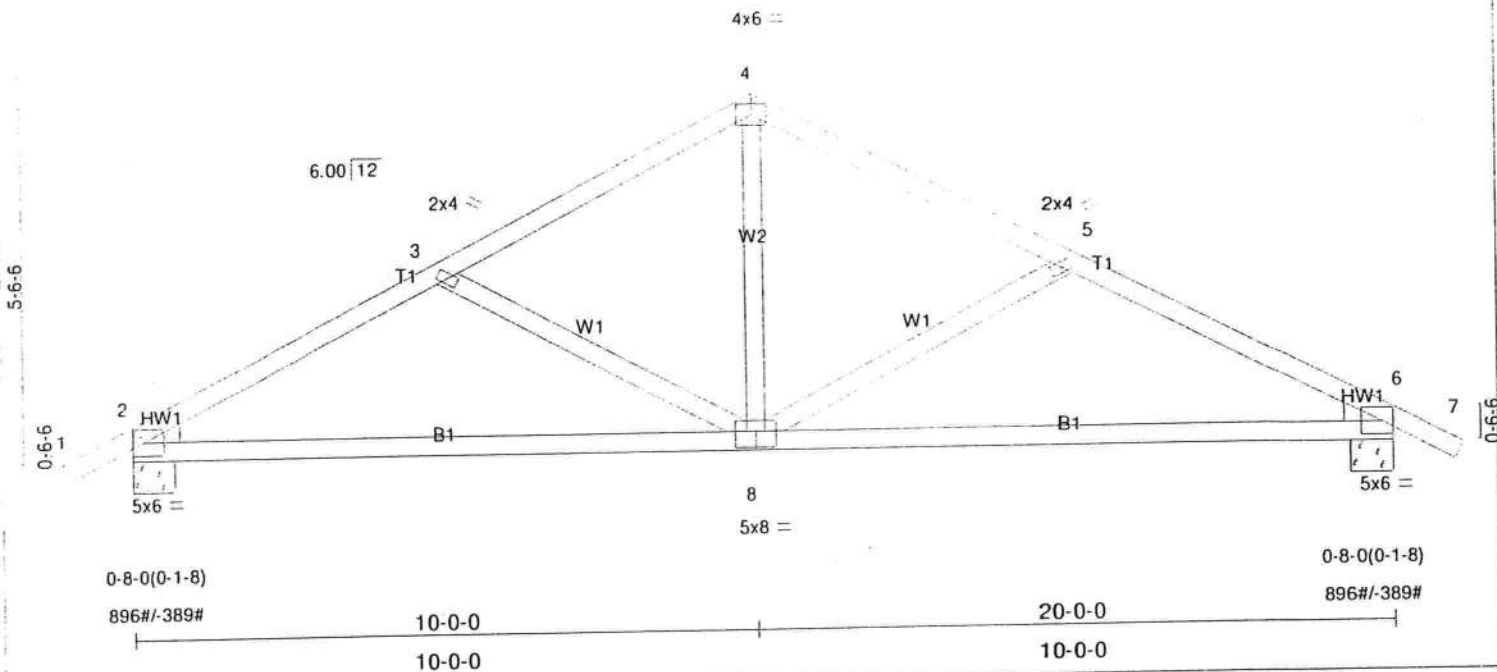


Plate Offsets (X,Y): [8:0-4-0,0-3-0]

LOADING (psf)	SPACING	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 16.0	Plates Increase 1.25	TC 0.31	Vert(LL) -0.16	6-8	>999	240		MT20	244/190
TCDL 7.0	Lumber Increase 1.25	BC 0.68	Vert(TL) -0.38	6-8	>606	180			
BCLL 10.0	Rep Stress Incr YES	WB 0.20	Horz(TL) 0.03	6	n/a	n/a			
BCDL 10.0	Code FBC2004/TPI2002	(Matrix)							
								Weight: 92 lb	

LUMBER
 TOP CHORD 2 X 4 SYP No.2
 BOT CHORD 2 X 4 SYP No.2
 WEBS 2 X 4 SYP No.3
 WEDGE
 Left: 2 X 4 SYP No.2, Right: 2 X 4 SYP No.2


BRACING
 TOP CHORD Structural wood sheathing directly applied or 5-2-3 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (lb/size) 2=896/0-8-0, 6=896/0-8-0
 Max Horz 2=-94(LC 7)
 Max Uplift 2=-238(LC 6), 6=-238(LC 7)

FORCES (lb) - Maximum Compression/Maximum Tension
 TOP CHORD 1-2=0/14, 2-3=-1221/417, 3-4=-1004/319, 4-5=-1004/319, 5-6=-1221/417, 6-7=0/14
 BOT CHORD 2-8=-249/1042, 6-8=-249/1042
 WEBS 3-8=-245/210, 4-8=-69/633, 5-8=-245/210


- NOTES**
- 1) Unbalanced roof live loads have been considered for this design.
 - 2) Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCCL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS and C-C Interior(1) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
 - 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 4) This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
 - 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
 - 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 238 lb uplift at joint 2 and 238 lb uplift at joint 6.

LOAD CASE(S) Standard

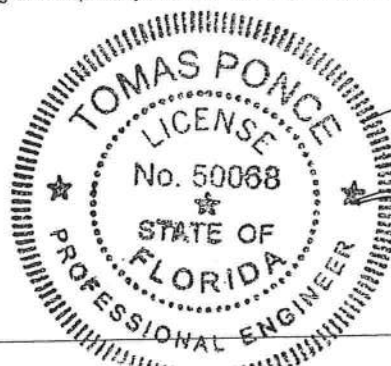

MAY 01 2008

Scale = 1:33.1

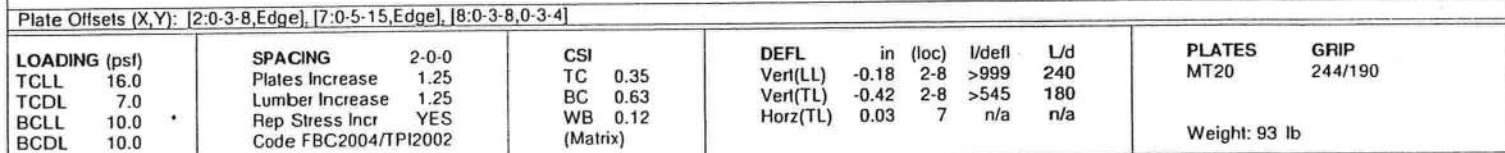

LUMBER
TOP CHORD 2 X 4 SYP No.2
BOT CHORD 2 X 4 SYP No.2
WEBS 2 X 4 SYP No.2
WEDGE
Left: 2 X 4 SYP No.2
SLIDER Right 2 X 6 SYP No.2 2-11-5

BRACING	
TOP CHORD	Structural wood sheathing directly applied or 5-2-0 oc purlins.
ROT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS (lb/size) 7=818/Mechanical, 2=887/0-8-0
Max Horz 2=100(LC 6)
Max Uplift 7=-152(LC 7), 2=-237(LC 6)

FORCES (lb) - Maximum Compression/Maximum Tension
TOP CHORD 1-2=0/14, 2-3=-1182/407, 3-4=-978/332, 4-5=-958/327, 5-6=-1082/408, 6-7=-1158/389
BOT CHORD 2-8=-265/1004, 7-8=-260/968
WEBS 3-8=-238/210, 4-8=-122/643, 5-8=-209/204

NOTES

- NOTES
- 1) Unbalanced roof live loads have been considered for this design.
 - 2) Wind: ASCE 7-02; 125mph (3-second gust); $h=25ft$; $TCDL=4.2psf$; $BCDL=6.0psf$; Category II; Exp B; enclosed; MWFRS and C-C Interior(1) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
 - 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 4) This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
 - 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
 - 6) Refer to girder(s) for truss to truss connections.
 - 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 152 lb uplift at joint 1 and 287 lb uplift at joint 2.

LOAD CASE(S) Standard

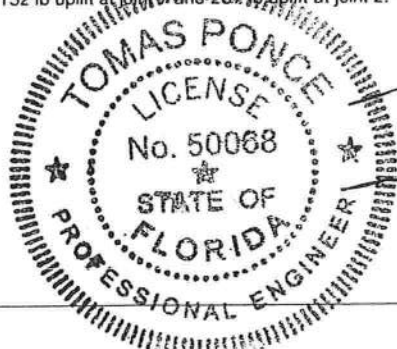

MAY 01 2008

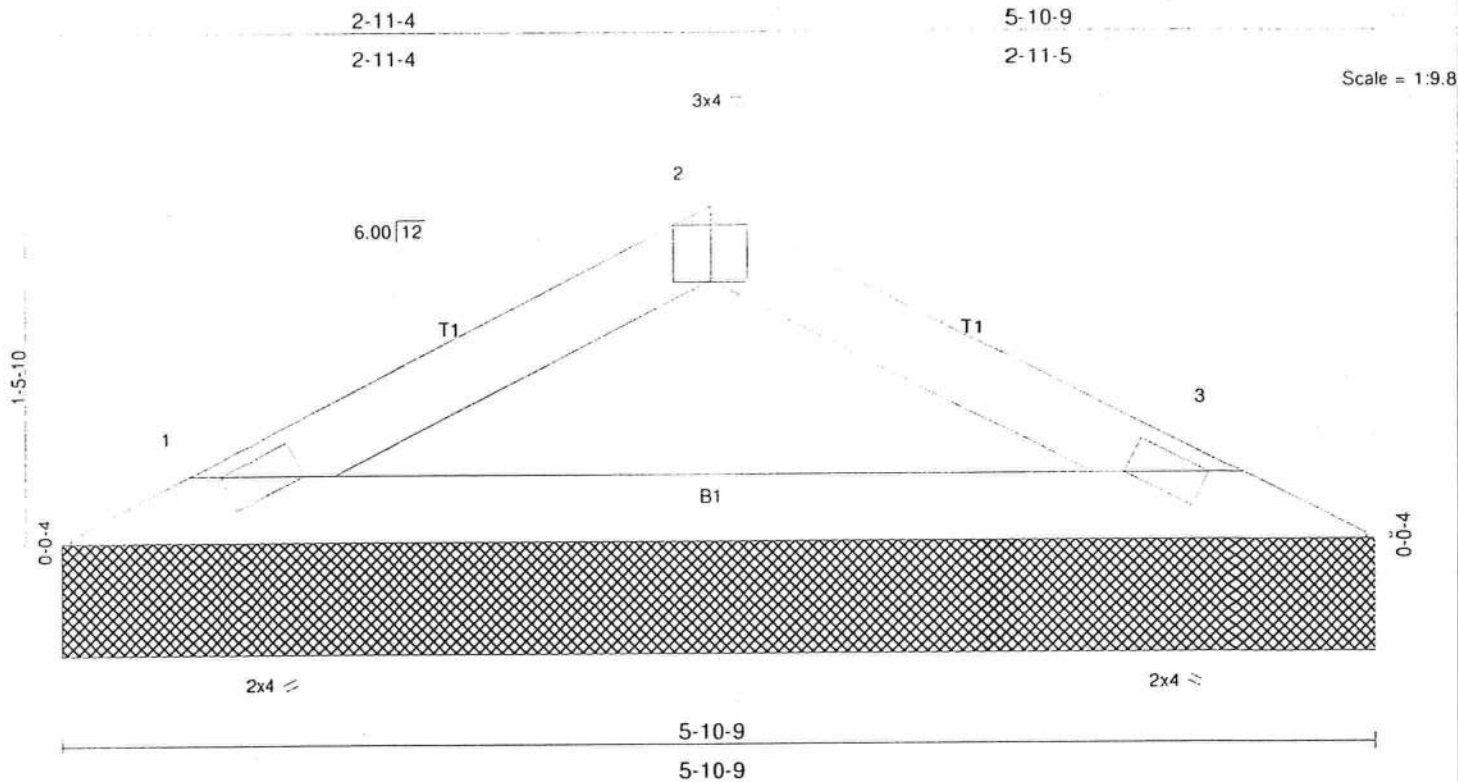


Plate Offsets (X,Y): [2:0-2:0,Edge]

LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 16.0	Plates Increase	1.25	TC 0.07	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL 7.0	Lumber Increase	1.25	BC 0.22	Vert(TL)	n/a	-	n/a	999		
BCLL 10.0	Rep Stress Incr	YES	WB 0.00	Horz(TL)	0.00	3	n/a	n/a		
BCDL 10.0	Code FBC2004/TPI2002		(Matrix)							
									Weight: 16 lb	

LUMBER

TOP CHORD 2 X 4 SYP No.2
 BOT CHORD 2 X 4 SYP No.2

BRACING

TOP CHORD Structural wood sheathing directly applied or 5-10-9 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (lb/size) 1=200/5-10-9, 3=200/5-10-9
 Max Horz 1=-19(LC 4)
 Max Uplift 1=-38(LC 6), 3=-38(LC 7)


FORCES (lb) - Maximum Compression/Maximum Tension

TOP CHORD 1-2=-139/114, 2-3=-139/114
 BOT CHORD 1-3=-70/107

NOTES

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS and C-C Interior(1) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
- 5) Gable requires continuous bottom chord bearing.
- 6) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 38 lb uplift at joint 1 and 38 lb uplift at joint 3.

LOAD CASE(S) Standard

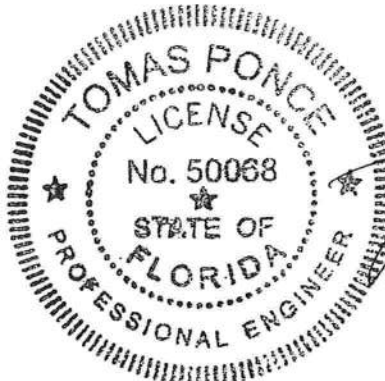

MAY 01 2008

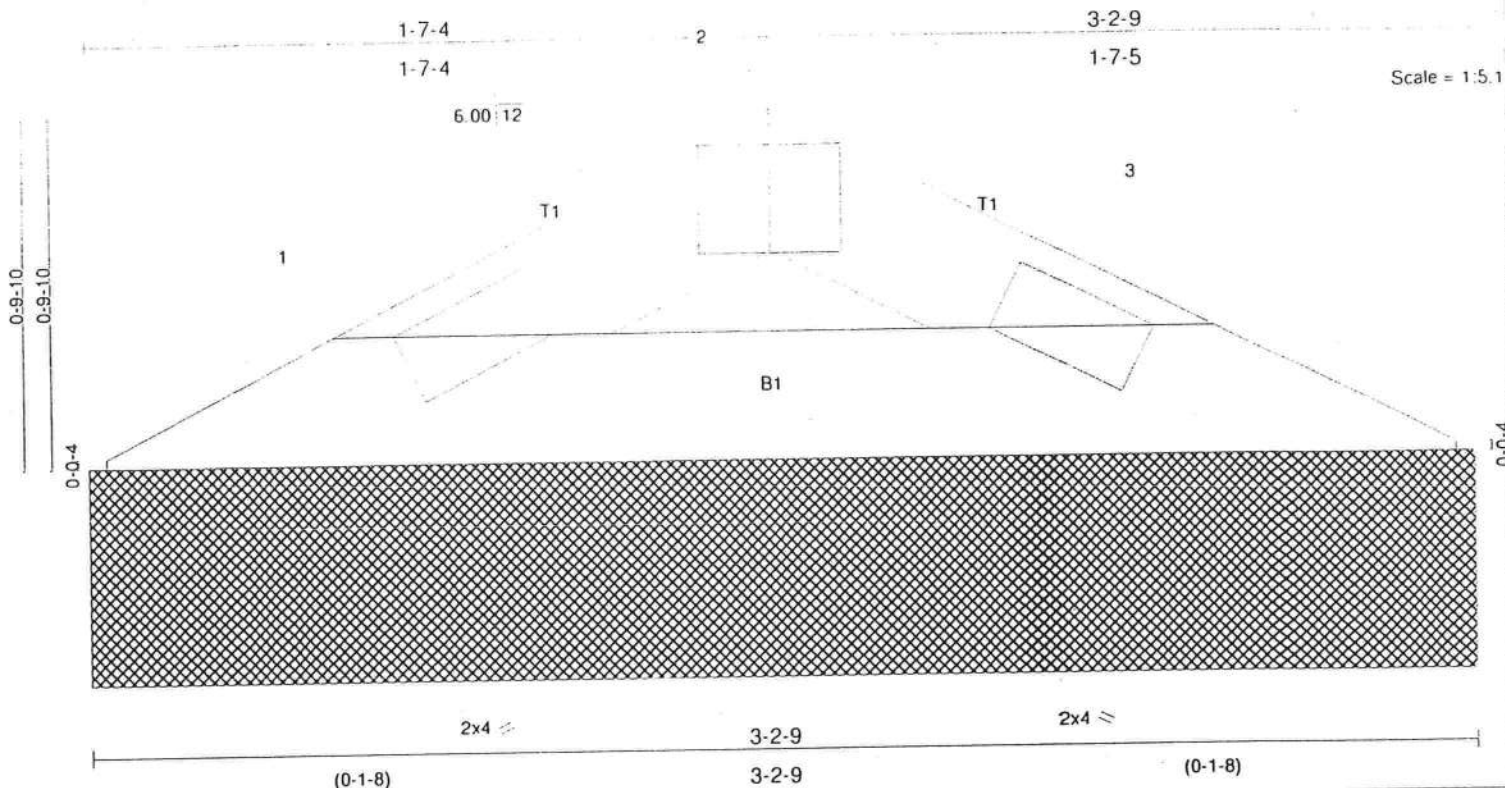


Plate Offsets (X,Y): [2:0-2-0,Edge]

LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP
TCCL 16.0	Plates 1-85/3-2-9	1.25	TC 0.02	Ver(LL)	n/a	-	n/a	999	85/3-2-9	244/190
TCDL 7.0	Lumber Increase	1.25	BC 0.04	Ver(TL)	n/a	-	n/a	999		
BCLL 10.0	Rep Stress Incr	YES	WB 0.00	Horz(TL)	0.00	3	n/a	n/a		
BCDL 10.0	Code FBC2004/TPI2002		(Matrix)						Weight: 8 lb	

LUMBER
 TOP CHORD 2 X 4 SYP No.2
 BOT CHORD 2 X 4 SYP No.2


BRACING
 TOP CHORD Structural wood sheathing directly applied or 3-2-9 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (lb/size) 1=85/3-2-9, 3=85/3-2-9
 Max Horz 1=8(LC 5)
 Max Uplift 1=16(LC 6), 3=16(LC 7)

FORCES (lb) - Maximum Compression/Maximum Tension
 TOP CHORD 1-2=-59/49, 2-3=-59/49
 BOT CHORD 1-3=-30/45

- NOTES**
- 1) Unbalanced roof live loads have been considered for this design.
 - 2) Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS and C-C Interior(1) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
 - 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 4) This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
 - 5) Gable requires continuous bottom chord bearing.
 - 6) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
 - 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 16 lb uplift at joint 1 and 16 lb uplift at joint 3.

LOAD CASE(S) Standard

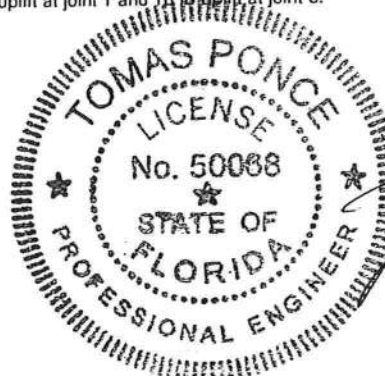


MAY 01 2008

6-11-14

6-11-14

Scale = 1:12.2

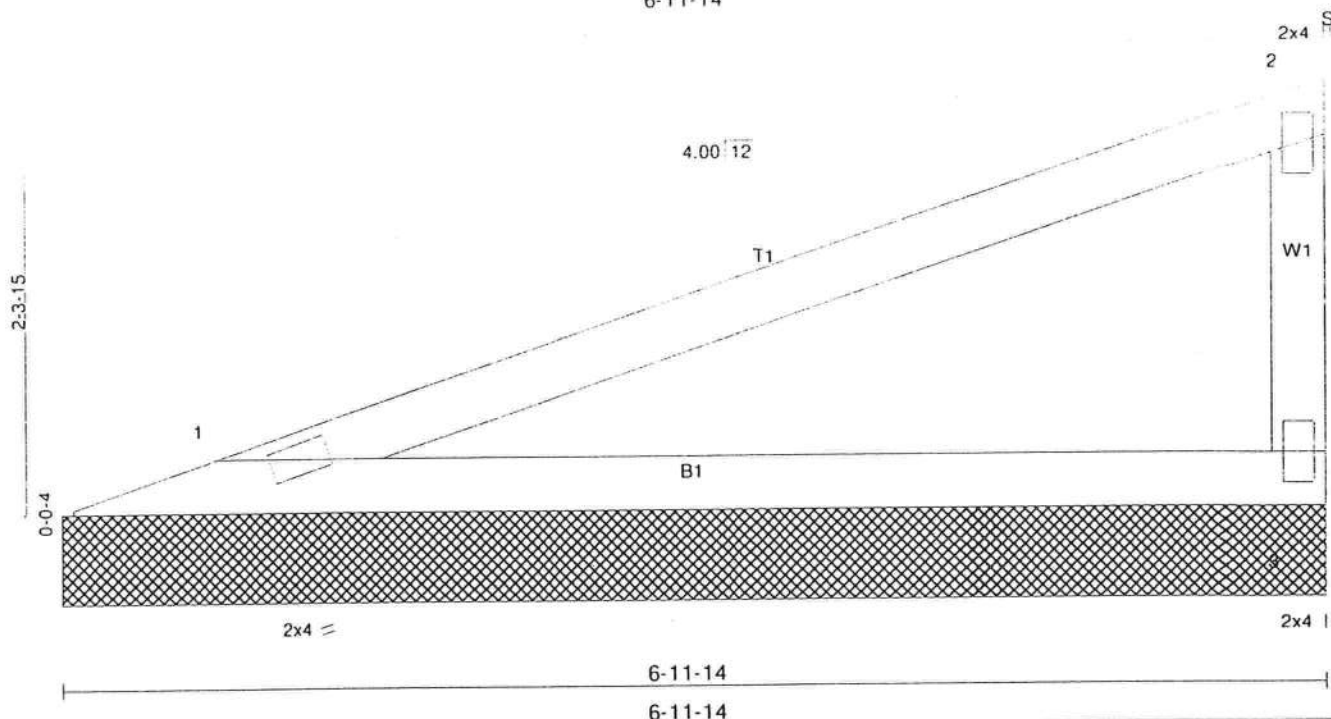

LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 16.0	Plates Increase	1.25	TC 0.37	Vert(LL)	n/a	n/a	999	MT20	244/190
TCDL 7.0	Lumber Increase	1.25	BC 0.34	Vert(TL)	n/a	n/a	999		
BCLL 10.0	Rep Stress Incr	YES	WB 0.00	Horz(TL)	0.00	n/a	n/a		
BCDL 10.0	Code FBC2004/TPI2002		(Matrix)					Weight: 22 lb	

LUMBER
 TOP CHORD 2 X 4 SYP No.2
 BOT CHORD 2 X 4 SYP No.2
 WEBS 2 X 4 SYP No.2

BRACING
 TOP CHORD Structural wood sheathing directly applied or 6-11-14 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS (lb/size) 1=256/6-11-14, 3=256/6-11-14
 Max Horz 1=82(LC 4)
 Max Uplift 1=-49(LC 4), 3=-76(LC 4)

FORCES (lb) - Maximum Compression/Maximum Tension
 TOP CHORD 1-2=-59/35, 2-3=-137/142
 BOT CHORD 1-3=0/0

NOTES

- 1) Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS and C-C Interior(1) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
- 4) Gable requires continuous bottom chord bearing.
- 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 49 lb uplift at joint 1 and 76 lb uplift at joint 3.

LOAD CASE(S) Standard

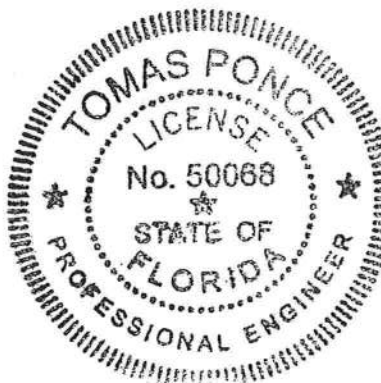

[Signature]

MAY 01 2008



Weight: 12 lb


BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

NOTES

- 1) Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS and C-C Interior(1) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
- 4) Gable requires continuous bottom chord bearing.
- 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 24 lb uplift at joint 1 and 38 lb uplift at joint 3.

A circular professional engineer seal for the State of Florida. The outer ring contains the text "TOMAS PONCE" at the top and "PROFESSIONAL ENGINEER" at the bottom, separated by two five-pointed stars. Inside this ring, the word "LICENSE" is at the top, "No. 50068" is in the center, and "STATE OF FLORIDA" is at the bottom, also separated by two five-pointed stars. The entire seal is composed of a series of small dots forming concentric circles.

MAY 01 2008

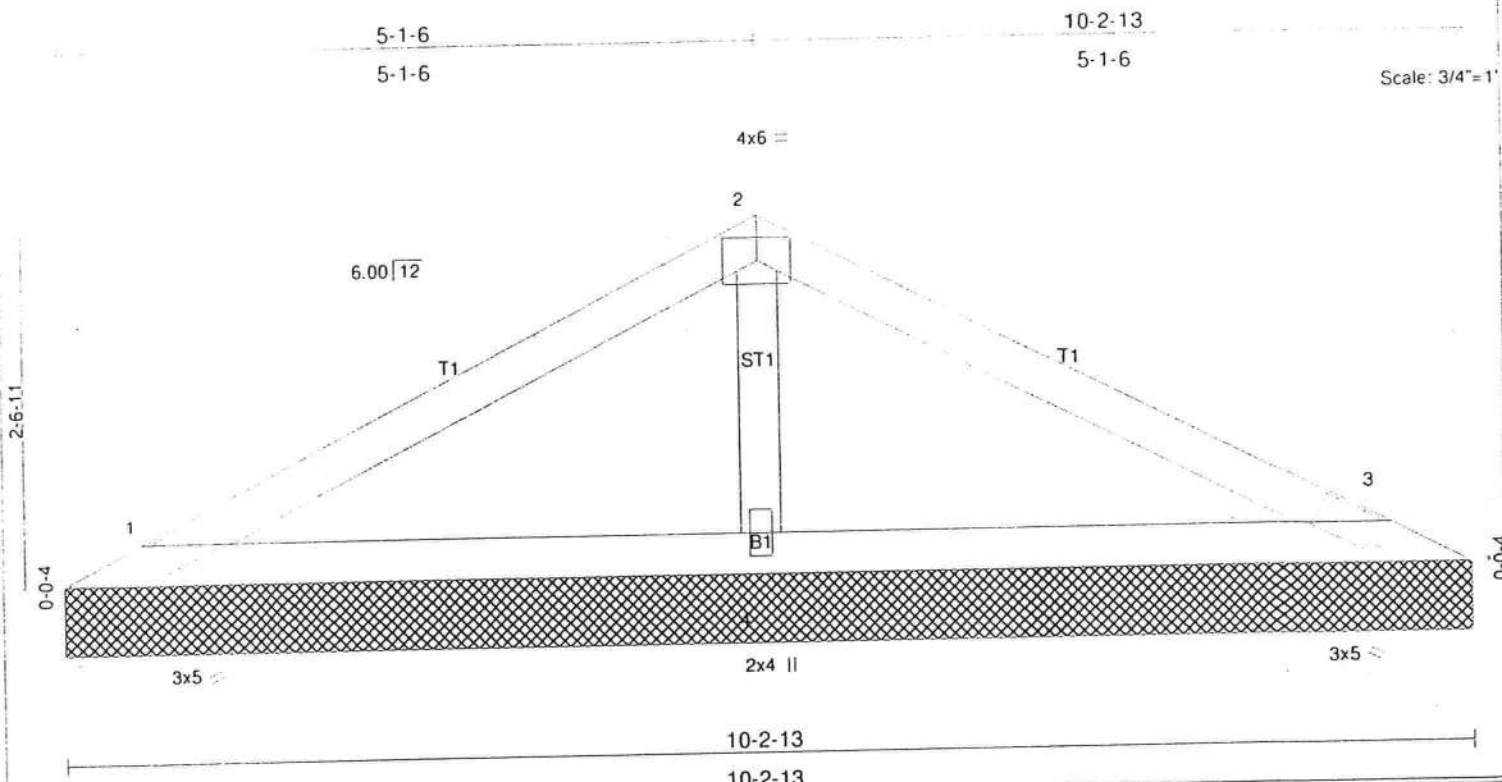

LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL 16.0	Plates Increase	1.25	TC 0.14	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL 7.0	Lumber Increase	1.25	BC 0.21	Vert(TL)	n/a	-	n/a	999		
BCLL 10.0	Rep Stress Incr	YES	WB 0.03	Horz(TL)	0.00	3	n/a	n/a		
BCDL 10.0	Code FBC2004/TPI2002		(Matrix)						Weight: 33 lb	

LUMBER
 TOP CHORD 2 X 4 SYP No.2
 BOT CHORD 2 X 4 SYP No.2
 OTHERS 2 X 4 SYP No.2


BRACING
 TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (lb/size) 1=159/10-2-13, 3=159/10-2-13, 4=455/10-2-13
 Max Horz 1=37(LC 5)
 Max Uplift 1=-41(LC 6), 3=-48(LC 7), 4=-64(LC 6)
 Max Grav 1=164(LC 10), 3=164(LC 11), 4=455(LC 1)

FORCES (lb) - Maximum Compression/Maximum Tension
 TOP CHORD 1-2=-59/52, 2-3=-59/51
 BOT CHORD 1-4=-3/29, 3-4=-3/29
 WEBS 2-4=-224/161

NOTES
 1) Unbalanced roof live loads have been considered for this design.
 2) Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS and C-C Interior(1) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 4) This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
 5) Gable requires continuous bottom chord bearing.
 6) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 41 lb uplift at joint 1, 48 lb uplift at joint 3 and 64 lb uplift at joint 4.

LOAD CASE(S) Standard

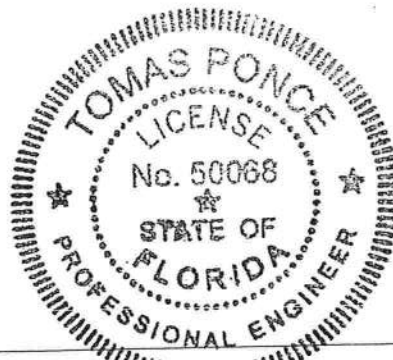

[Signature]
 MAY 01 2008

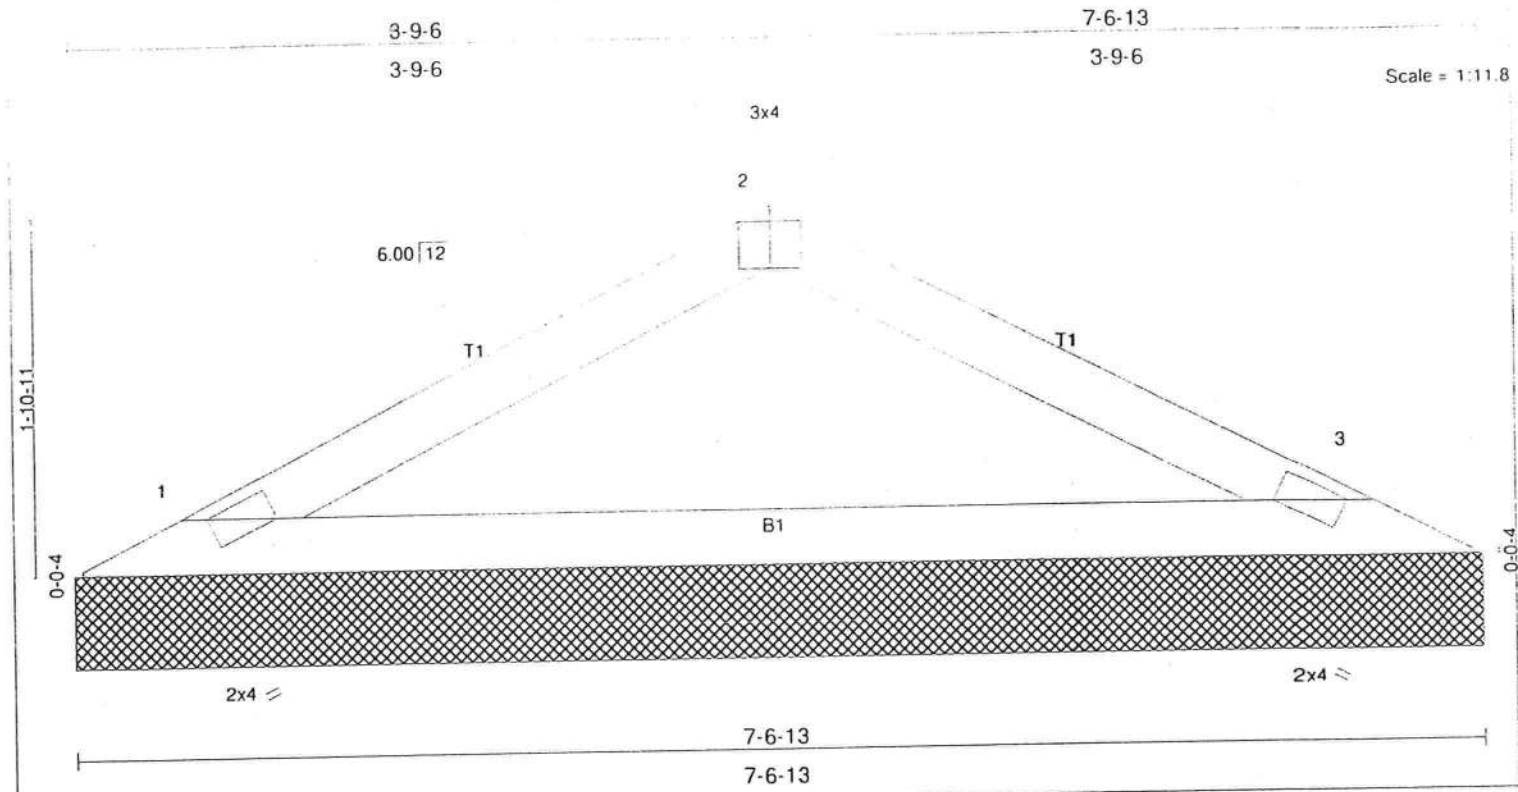


Plate Offsets (X,Y): [2:0-2-0,Edge]

LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in	(loc)	l/dell	L/d	PLATES	GRIP
TCLL 16.0	Plates Increase	1.25	TC 0.12	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL 7.0	Lumber Increase	1.25	BC 0.41	Vert(TL)	n/a	-	n/a	999		
BCLL 10.0	Rep Stress Incr	YES	WB 0.00	Horz(TL)	0.00	3	n/a	n/a		
BCDL 10.0	Code FBC2004/TPI2002		(Matrix)							
									Weight: 22 lb	

LUMBER
TOP CHORD 2 X 4 SYP No.2
BOT CHORD 2 X 4 SYP No.2


BRACING
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (lb/size) 1=272/7-6-13, 3=272/7-6-13
Max Horz 1=26(LC 5)
Max Uplift 1=-52(LC 6), 3=-52(LC 7)

FORCES (lb) - Maximum Compression/Maximum Tension
TOP CHORD 1-2=-189/153, 2-3=-189/153
BOT CHORD 1-3=-93/146

- NOTES**
- 1) Unbalanced roof live loads have been considered for this design.
 - 2) Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS and C-C Interior(1) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
 - 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 4) This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
 - 5) Gable requires continuous bottom chord bearing.
 - 6) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
 - 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 52 lb uplift at joint 1 and 52 lb uplift at joint 3.

LOAD CASE(S) Standard

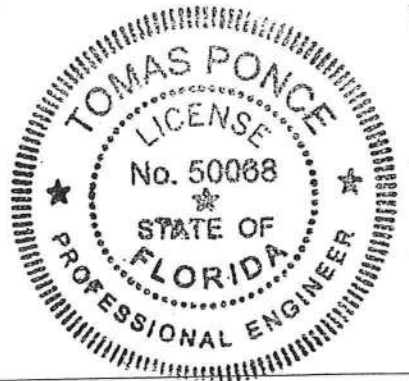

MAY 01 2008

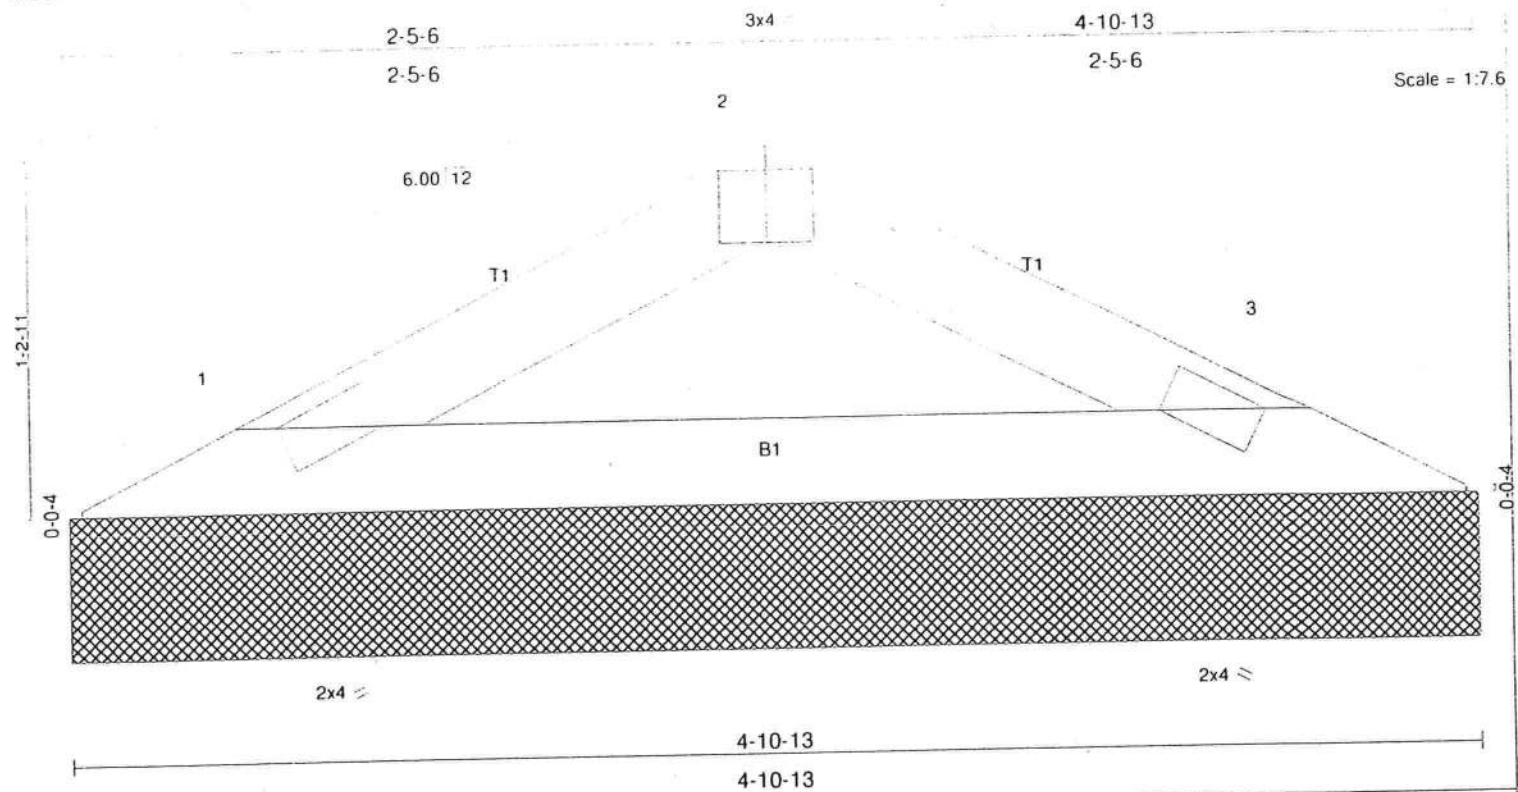


Plate Offsets (X,Y): [2:0-2:0,Edge]									
LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES
TCLL 16.0	Plates Increase	1.25	TC 0.04	Vert(LL)	n/a	-	n/a	999	MT20
TCDL 7.0	Lumber Increase	1.25	BC 0.14	Vert(TL)	n/a	-	n/a	999	GRIP
BCLL 10.0	Rep Stress Incr	YES	WB 0.00	Horz(TL)	0.00	3	n/a	n/a	244/190
BCDL 10.0	Code FBC2004/TPI2002		(Matrix)						Weight: 13 lb

LUMBER
 TOP CHORD 2 X 4 SYP No.2
 BOT CHORD 2 X 4 SYP No.2

BRACING
 TOP CHORD Structural wood sheathing directly applied or 4-10-13 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS (lb/size) 1=158/4-10-13, 3=158/4-10-13
 Max Horz 1=-15(LC 4)
 Max Uplift 1=-30(LC 6), 3=-30(LC 7)

FORCES (lb) - Maximum Compression/Maximum Tension
 TOP CHORD 1-2=-109/91, 2-3=-109/91
 BOT CHORD 1-3=-55/84

- NOTES**
- 1) Unbalanced roof live loads have been considered for this design.
 - 2) Wind: ASCE 7-02; 125mph (3-second gust); h=25ft; TCDL=4.2psf; BCDL=6.0psf; Category II; Exp B; enclosed; MWFRS and C-C Interior(1) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
 - 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 4) This truss requires plate inspection per the Tooth Count Method when this truss is chosen for quality assurance inspection.
 - 5) Gable requires continuous bottom chord bearing.
 - 6) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 1-0-0 wide will fit between the bottom chord and any other members.
 - 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 30 lb uplift at joint 1 and 30 lb uplift at joint 3.

LOAD CASE(S) Standard



[Signature]
 MAY 01 2008

LEGAL DESCRIPTION:
LOT TWO (2) OF "TIMBERLANDS, PHASE 1" AS PER
PLAT THEREOF, AS RECORDED IN PLAT BOOK "9",
PAGE 27 OF THE PUBLIC RECORDS OF COLUMBIA
COUNTY, FLORIDA.

BUD ESPENSHIP
14.00 AC±
NOT A PART

CERTIFIED TO:

1) MARONDA HOMES


BUILDING SETBACK NOTE:
BUILDING SETBACK INFORMATION FOR
"TIMBERLANDS" IS AS FOLLOWS:
FRONT 25', REAR 15', SIDE 10'

TITLE NOTE:
THIS SURVEY IS SUBJECT TO ANY FACTS THAT MAY BE
DISCLOSED BY A FULL AND ACCURATE TITLE SEARCH. THIS
SURVEYOR HAS NOT PERFORMED A SEARCH OF THE
PUBLIC RECORDS ON THIS PARCEL FOR ANY CLAIMS OF
TITLE, EASEMENTS, OR RESTRICTIONS THAT MAY EFFECT
THIS PARCEL. THE PRESENCE OR ABSENCE OF ANY SUCH
CLAIMS ARE NOT CERTIFIED HEREON.

BEARING NOTE:
BEARINGS SHOWN HEREON ARE REFERRED TO AN
ASSUMED VALUE OF N. 00°44'36" E., FOR THE
WEST PROPERTY LINE OF LOT 2.

SURVEYOR NOTES:

- 1) TO THE BEST OF MY KNOWLEDGE, THERE ARE NO
ENCROACHMENTS, BOUNDARY LINE DISPUTES,
EASEMENTS, OR CLAIMS OF EASEMENTS, OTHER THAN
ARE DEPICTED ON THIS DRAWING.
- 2) ALL UTILITIES AND OR IMPROVEMENTS, IF ANY, MAY NOT
BE SHOWN ON THIS DRAWING.
- 3) IN THE OPINION OF THIS SURVEYOR THE BOUNDARY
SHOWN HEREON BEST REPRESENTS THE LOCATION OF
THE SUBJECT PROPERTY IN RELATION TO THE
DESCRIPTION AND THOSE PROPERTY CORNERS FOUND
TO BE ACCEPTABLE TO THIS SURVEYOR.
- 4) BUILDING SETBACK LINES DEPICTED HEREON ARE
SHOWN AS PER THE RECORD PLAT, BUT ARE SUBJECT
TO CHANGE. PRIOR TO ANY NEW CONSTRUCTION, THE
APPROPRIATE GOVERNING AUTHORITY SHOULD BE
CONTACTED FOR THE CURRENT SETBACK REQUIREMENTS.
- 5) THIS MAP OF SURVEY REFLECTS CONDITIONS LOCATED
AS OF THE DATE OF FIELD WORK COMPLETION (SEE
TITLE BLOCK).
- 6) AREAS OF ENVIRONMENTAL CONCERN HAVE NOT BEEN
LOCATED BY THIS SURVEYOR, UNLESS OTHERWISE
DEPICTED HEREON.

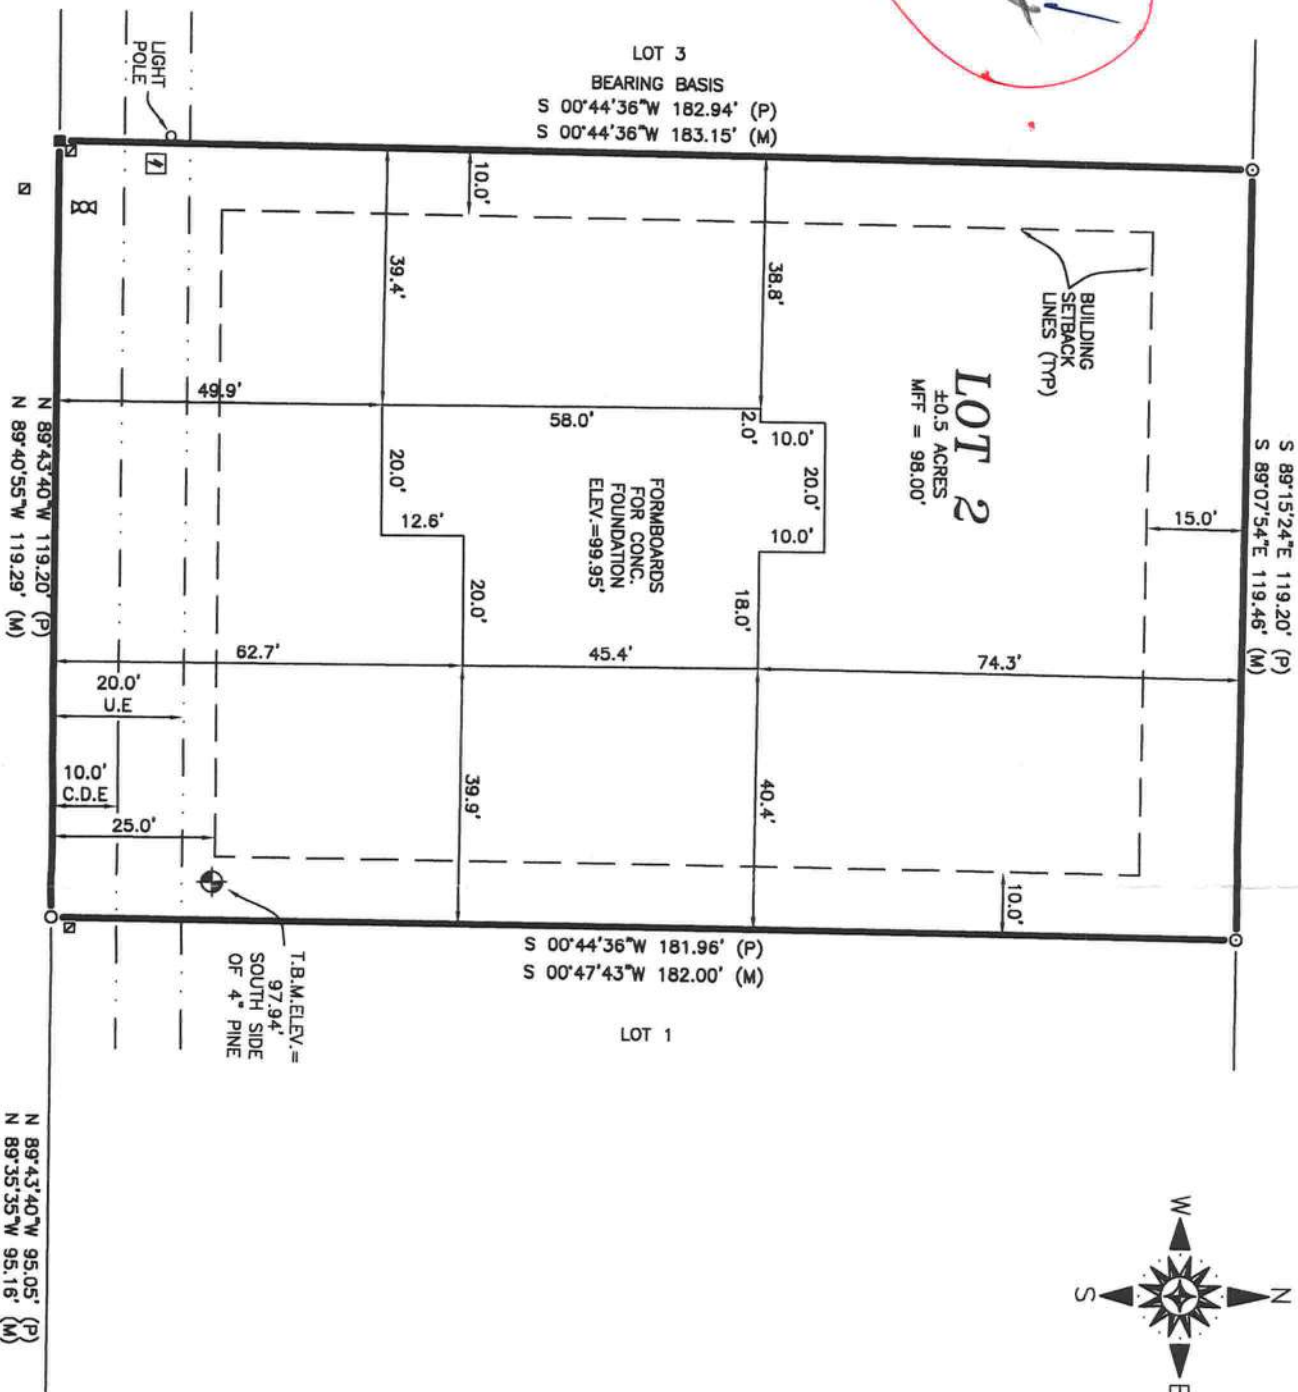

S.W. TIMBER RIDGE DRIVE

BENCHMARK NOTE:


ELEVATIONS SHOWN HEREON ARE BASED UPON A BENCHMARK SET IN A
8" PINE AT THE FRONT OF LOT 2, WITH AN ELEVATION OF 98.76'. THIS
INFORMATION WAS PROVIDED TO THIS SURVEYOR BY BRITT SURVEYING
(PLANTING SURVEYOR) DATUM UNKNOWN.

FLOOD NOTE:

IN THE OPINION OF THIS SURVEYOR, ACCORDING TO THE
NATIONAL FLOOD INSURANCE PROGRAM, FLOOD INSURANCE RATE
MAP COMMUNITY PANEL NO. 120070-0175-B, DATED 1-6-88,
THIS PROPERTY IS IN FLOOD ZONE "X" WHICH IS AN AREA
DETERMINED TO BE OUTSIDE 500-YEAR FLOOD PLAIN, AS
SCALED FROM SAID MAP. INFORMATION FROM THE FEDERAL
EMERGENCY MANAGEMENT AGENCY (FEMA) FLOOD INSURANCE
RATE MAPS, SHOWN ON THIS MAP, WAS CURRENT AS OF THE
REFERENCE DATE. MAP REVISIONS AND AMENDMENTS ARE
PERIODICALLY MADE BY LETTER AND MAY NOT BE REFLECTED
ON THE MOST CURRENT MAP.

BOUNDARY SURVEY

IN SECTION 10, TOWNSHIP 4 SOUTH, RANGE
16 EAST, COLUMBIA COUNTY, FLORIDA

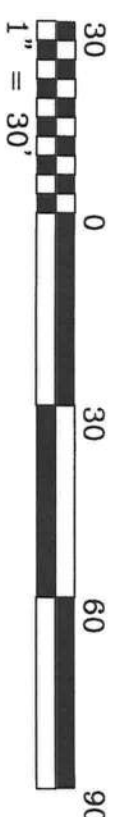

LEGEND:

- = FOUND 1/2" REBAR & CAP
- BRITT
- = SET 1/2" REBAR & CAP
- L.B. 689+4
- = FOUND 4" X 4" CONC. MON.
- NO IDENTIFICATION
- ⊗ = WATER VALVE
- ⊠ = TELEPHONE PEDESTAL
- ⊡ = ELEC METER

ABBREVIATIONS:

- A/C = AIR CONDITIONER
- ASPH = ASPHALT
- C = CALCULATED FROM MEASURED
- CATV = CABLE TELEVISION
- C/B = CONCRETE BLOCK
- CDE = CONSTRUCTION & DRAINAGE EASEMENT
- CLF = CHAIN LINK FENCE
- CM = CONCRETE MONUMENT
- CONC = CONCRETE
- ELEC = ELECTRIC
- ELEV = ELEVATION
- FND = FOUND
- FNC = FENCE
- LB = LICENSED SURVEYOR BUSINESS
- (M) = FIELD MEASURED
- MFF = MINIMUM FINISHED FLOOR
- MH = MANHOLE
- O.U. = OVERHEAD UTILITIES
- P = PLAT
- PB = PLAT BOOK
- T.B.M. = TEMPORARY BENCHMARK
- TRANS = TRANSFORMER
- TYP = TYPICAL
- U.E. = UTILITIES EASEMENT
- WM = WATER METER
- WV = WATER VALVE

CERTIFICATE OF SURVEYOR:

NOT VALID WITHOUT THE SIGNATURE AND THE ORIGINAL RAISED SEAL OF
A FLORIDA LICENSED SURVEYOR AND MAPPER. ADDITIONS OR DELETIONS
TO THIS MAP BY ANYONE OTHER THAN THIS SURVEYOR IS PROHIBITED.

I HEREBY CERTIFY THAT THE SURVEY DATA SHOWN HEREON, IS A
TRUE AND CORRECT REPRESENTATION OF A SURVEY PERFORMED UNDER
MY SUPERVISION OF THE HEREON DESCRIBED PROPERTY, AND IT MEETS
THE MINIMUM TECHNICAL STANDARDS AS SET FORTH BY THE FLORIDA
BOARD OF LAND SURVEYORS, PURSUANT TO SECTION 472.027, FLORIDA
STATUTES, AND CHAPTER 87617-8, FLORIDA ADMINISTRATIVE CODE.

BY: *James E. Brinkman*
JAMES E. BRINKMAN, PSM - F.L.A. CERT# 5582
DATE: 8/8/08



BRINKMAN SURVEYING & MAPPING INC.

4607 NW 6th STREET SUITE C, GAINESVILLE, FL 32609
PHONE: (352) 374-7707 FAX: (352) 374-8757

SCALE: 1" = 30'

"THE BENCHMARK IN QUALITY SERVICE"

DRAWN BY: ZL

DATE: 08/08/08


CHECKED BY: J.B.

FIELD WORK COMPLETED ON 08/07/08 FIELDBOOK 97, PAGE 51

PREPARED FOR: MARONDA


DRAWING NUMBER
121-08

LEGAL DESCRIPTION:
LOT TWO (2) OF TIMBERLANDS, PHASE 1" AS PER
PLAT THEREOF, AS RECORDED IN PLAT BOOK "9",
PAGE 27 OF THE PUBLIC RECORDS OF COLUMBIA
COUNTY, FLORIDA.



PROPOSED BUILDING LAYOUT

IN SECTION 10, TOWNSHIP 4 SOUTH, RANGE
16 EAST, COLUMBIA COUNTY, FLORIDA

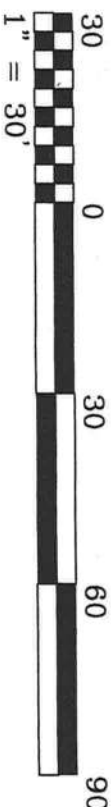

CERTIFIED TO:


1) MARONDA HOWES

BUILDING SETBACK NOTE:

BUILDING SETBACK INFORMATION FOR
"TIMBERLANDS" IS AS FOLLOWS: FRONT
25', REAR 15', SIDE 10'

SURVEYOR NOTES:

- 1) TO THE BEST OF MY KNOWLEDGE, THERE ARE NO ENCROACHMENTS, BOUNDARY LINE DISPUTES, EASEMENTS, OR CLAIMS OF EASEMENTS, OTHER THAN ARE DEPICTED ON THIS DRAWING.
- 2) ALL UTILITIES AND OR IMPROVEMENTS, IF ANY, MAY NOT BE SHOWN ON THIS DRAWING.
- 3) IN THE OPINION OF THIS SURVEYOR THE BOUNDARY SHOWN HEREON BEST REPRESENTS THE LOCATION OF THE SUBJECT PROPERTY IN RELATION TO THE DESCRIPTION AND THOSE PROPERTY CORNERS FOUND TO BE ACCEPTABLE TO THIS SURVEYOR.
- 4) BUILDING SETBACK LINES DEPICTED HEREON ARE SHOWN AS PER THE RECORD PLAT, BUT ARE SUBJECT TO CHANGE, PRIOR TO ANY NEW CONSTRUCTION, THE APPROPRIATE GOVERNING AUTHORITY SHOULD BE CONTACTED FOR THE CURRENT SETBACK REQUIREMENTS.
- 5) THIS MAP OF SURVEY REFLECTS CONDITIONS LOCATED AS OF THE DATE OF FIELD WORK COMPLETION (SEE TITLE BLOCK).
- 6) AREAS OF ENVIRONMENTAL CONCERN HAVE NOT BEEN LOCATED BY THIS SURVEYOR, UNLESS OTHERWISE DEPICTED HEREON.

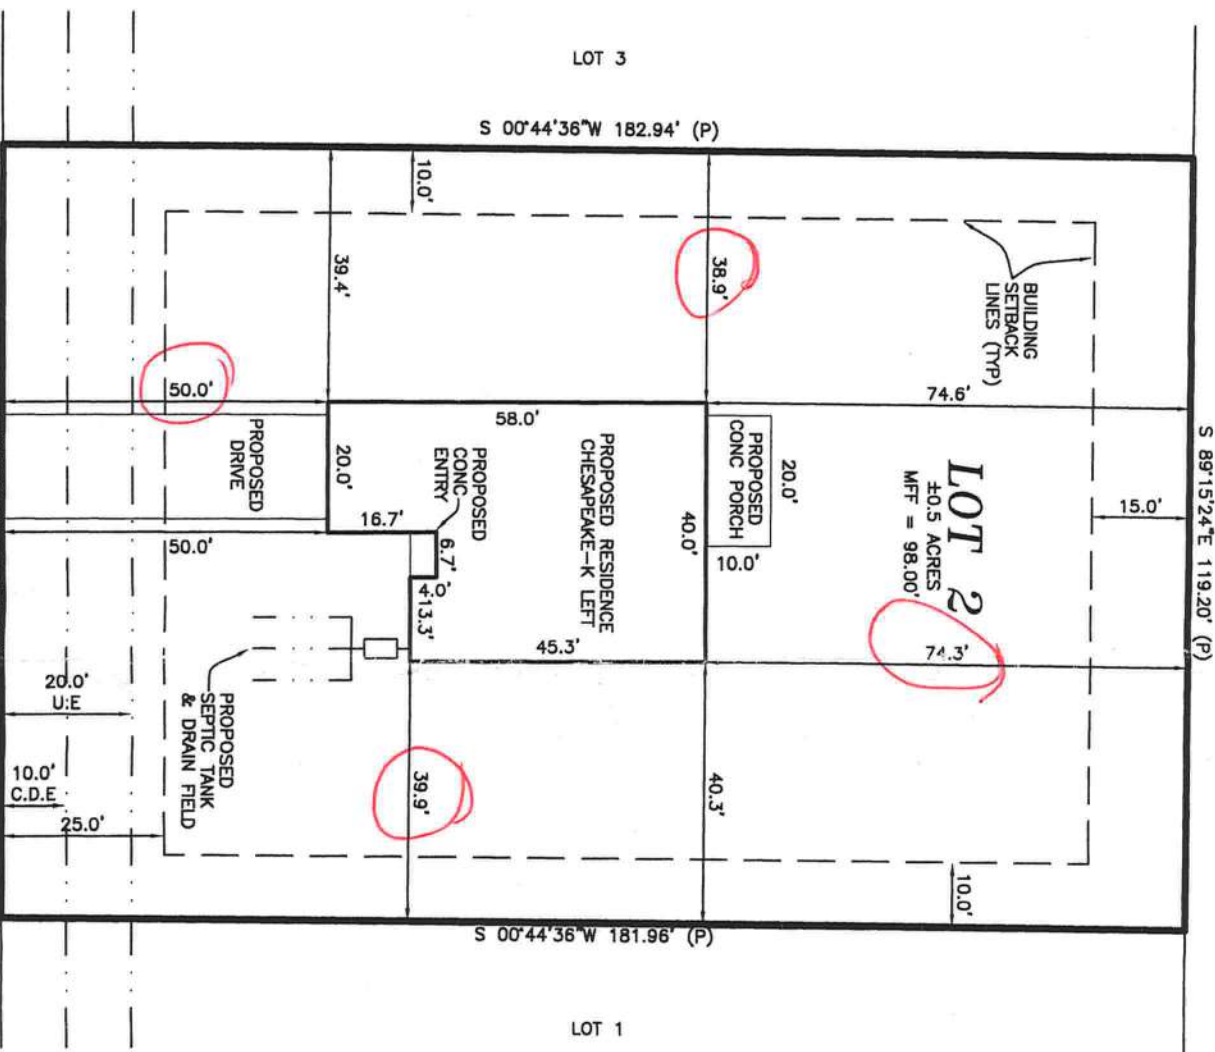

FLOOD NOTE:

IN THE OPINION OF THIS SURVEYOR, ACCORDING TO THE NATIONAL FLOOD INSURANCE PROGRAM, FLOOD INSURANCE RATE MAP COMMUNITY PANEL NO. 120070-0175-8, DATED 1-6-88, THIS PROPERTY IS IN FLOOD ZONE "X" WHICH IS AN AREA DETERMINED TO BE OUTSIDE 500-YEAR FLOOD PLAIN, AS SCALED FROM SAID MAP. INFORMATION FROM THE FEDERAL EMERGENCY MANAGEMENT AGENCY (FEMA) FLOOD INSURANCE RATE MAPS, SHOWN ON THIS MAP, WAS CURRENT AS OF THE REFERENCED DATE. MAP REVISIONS AND AMENDMENTS ARE PERIODICALLY MADE BY LETTER AND MAY NOT BE REFLECTED ON THE MOST CURRENT MAP.

S.W. TIMBER RIDGE DRIVE

60' RIGHT-OF-WAY

TITLE NOTE:

THIS SURVEY IS SUBJECT TO ANY FACTS THAT MAY BE DISCLOSED BY A FULL AND ACCURATE TITLE SEARCH. THIS SURVEYOR HAS NOT PERFORMED A SEARCH OF THE PUBLIC RECORDS ON THIS PARCEL FOR ANY CLAIMS OF TITLE, EASEMENTS, OR RESTRICTIONS THAT MAY EFFECT THIS PARCEL. THE PRESENCE OR ABSENCE OF ANY SUCH CLAIMS ARE NOT CERTIFIED HEREON.

LEGEND:

- = FOUND 1/2" REBAR NO IDENTIFICATION
 - = FOUND 1/2" REBAR & CAP L.B. 6894
 - = SET 1/2" REBAR & CAP L.B. 6894
 - = FOUND 3/4" IRON PIPE
 - = FOUND 4" X 4" CONC. MON. NO IDENTIFICATION
 - = SET 4" X 4" CONC. MON. P.S.M. 5582
 - ✕ = SET NAIL & DISK P.S.M. 5582
 - ✕ = FOUND NAIL & DISK
 - ⊠ = FOUND 6" X 6" S.R.D. R/W MON.
 - ⊞ = CATV RISER
 - ⊞ = TELEPHONE PEDESTAL
 - ⊞ = WOOD POWER POLE
- ABBREVIATIONS:**
- A/C = AIR CONDITIONER
 - ASPH = ASPHALT
 - C = CALCULATED FROM MEASURED
 - CATV = CABLE TELEVISION
 - C/B = CONCRETE BLOCK
 - CDE = CONSTRUCTION & DRAINAGE EASEMENT
 - CLF = CHAIN LINK FENCE
 - CM = CONCRETE MONUMENT
 - CONC = CONCRETE
 - ELEC = ELECTRIC
 - ELEV = ELEVATION
 - FND = FOUND
 - FNC = FENCE
 - LB = LICENSED SURVEYOR BUSINESS
 - (M) = FIELD MEASURED
 - MFF = MINIMUM FINISHED FLOOR
 - MH = MANHOLE
 - O.U. = OVERHEAD UTILITIES
 - P = PLAT
 - PB = PLAT BOOK
 - TRANS = TRANSFORMER
 - TYP = TYPICAL
 - U.E. = UTILITIES EASEMENT
 - WM = WATER METER
 - WV = WATER VALVE

THIS IS NOT A BOUNDARY SURVEY CERTIFICATE OF SURVEYOR:

NOT VALID WITHOUT THE SIGNATURE AND THE ORIGINAL RAISED SEAL OF A FLORIDA LICENSED SURVEYOR AND MAPPER. ADDITIONS OR DELETIONS TO THIS MAP BY ANYONE OTHER THAN THIS SURVEYOR IS PROHIBITED.

I HEREBY CERTIFY THAT THE SURVEY DATA SHOWN HEREON, IS A TRUE AND CORRECT REPRESENTATION OF A SURVEY PERFORMED UNDER MY SUPERVISION OF THE HEREON DESCRIBED PROPERTY, AND IT MEETS THE MINIMUM TECHNICAL STANDARDS AS SET FORTH BY THE FLORIDA BOARD OF LAND SURVEYORS, PURSUANT TO SECTION 472.027, FLORIDA STATUTES, AND CHAPTER 61G37-8, FLORIDA ADMINISTRATIVE CODE.

BY: *James E. Brinkman*
JAMES E. BRINKMAN, PSM - F.L.A. CERT# 5582

DATE: *6/11/08*

BRINKMAN SURVEYING & MAPPING INC.

4807 NW 8th STREET SUITE C, GAINESVILLE, FL 32609
PHONE: (352) 374-7707 FAX: (352) 374-8757

SCALE: 1" = 30'

DATE: 6/11/08

DRAWN BY: ZL

FIELD WORK COMPLETED ON ****

CHECKED BY: J.B.

PREPARED FOR: MARONDA

DRAWING NUMBER 121-08

**HOMETEAM**

PEST DEFENSE®

27225

TREATMENT WORKORDER

- ☐ Termite Baiting System w/Tubes-under-the slab
☐ Treat Only ☒ Tubes-under-the slab and Treat ☐ Bora-Care

DATE CALLED IN:	8-6-08	DATE OF SCHEDULE:	8-8
TIME CALLED IN:		TIME SCHEDULE:	2:00

JOB NAME:	Maronda	SUBDIVISION:	Timberland
JOB ADDRESS:	143 SW Timber Ridge Dr.		
BILLING NAME:	BILLING PHONE:		
BILLING ADDRESS:			
000027225			
CALLED IN BY:	PHONE:	PERMIT NUMBER:	

LOT & MODEL NUMBER: 2

DATE & TIME COMPLETED: 8/8/08

SQUARE FOOT: 2267 LINEAR FOOT: BLOCKVOIDS:

SLAB TYPE: mono TYPE OF FILL: dirt/sand

APPROX. DEPTH OF FOOTING: Outside: Inside:

☐ Addition ☐ Spot Treat ☐ Pool Addition ☐ Driveway☐ Final/Completion ☐ Other

PESTICIDE USED: Imox Pro TOTAL APPLIED: 115 gal

PERCENT (%) USED: 11% STICKER POSTED: 1/25

PRICE PER SQ. FT. =	TOTAL FOR P.T.		
	ADDITIONAL		
	TAX:		
/ /	TOTAL AMOUNT	\$	

X X TECHNICIAN: Casey

I hereby acknowledge the satisfactory completion of the above described work.

GT 23 / TCI

12/05

FEE:

		CODE	UNIT
ROAD IMPACT FEE	<u>\$1,046.00</u>		
10100003632400			
EMS IMPACT FEE	<u>\$29.88</u>		
10300003632210			
FIRE PROTECTION IMPACT FEE	<u>\$78.63</u>		
10200003632220			
CORRECTIONS IMPACT FEE	<u>\$409.16</u>		
00100003632200			
SCHOOL IMPACT FEE	<u>\$1,500.00</u>		
00100003632900			

TOTAL FEES CHARGED \$3,063.67 CHECK NUMBER _____