

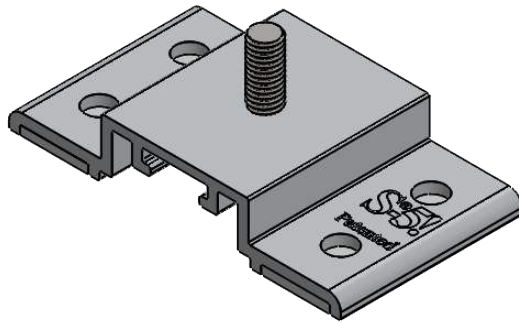


SolarFoot

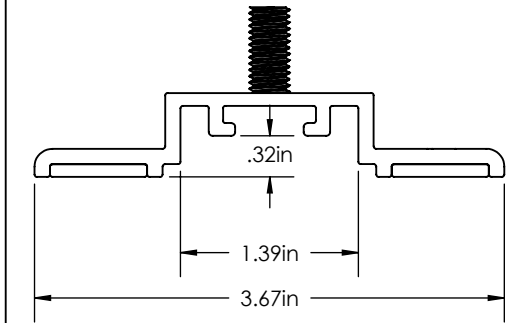

Top

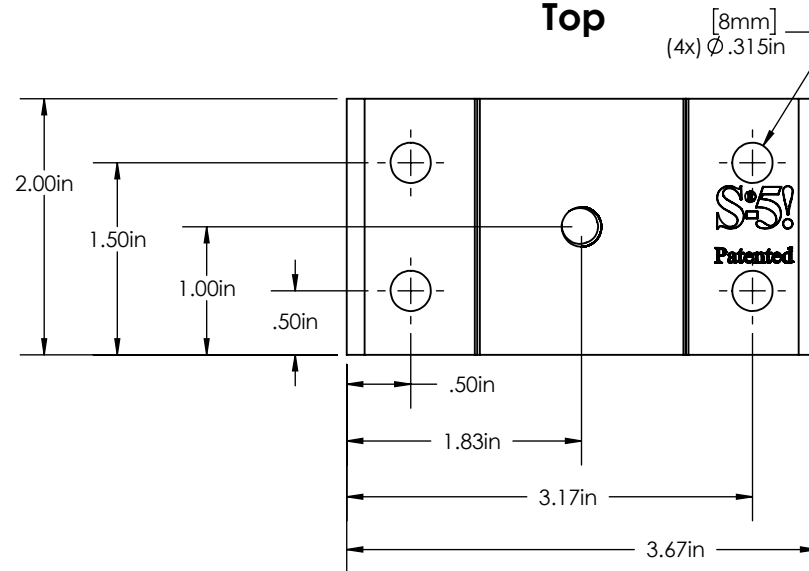





Scale 2:3

Back

Left


Front

Right

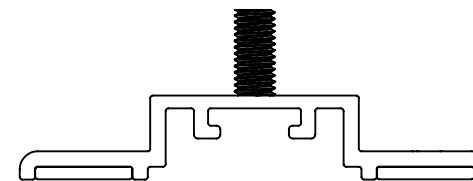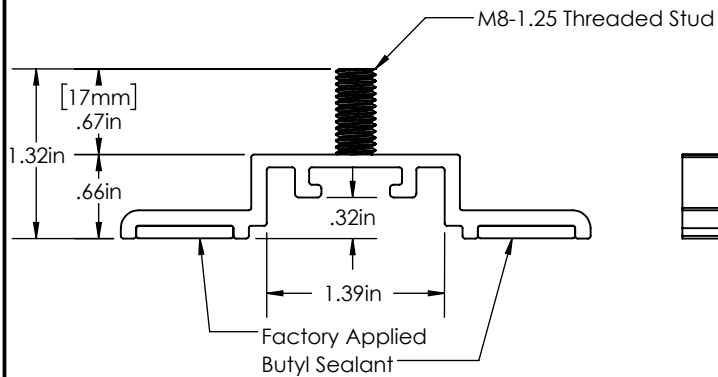


General Notes:

1. SolarFoot
2. M8-1.25 Stainless Steel Hex Flange Nut (13mm Socket)
3. Metal to Metal: 1/4-14 Self Drilling Screw 1-1/2" to 2-1/2"
Metal to Wood: 1/4-14 Type 17 AB Milled Point 1-1/2" to 2-1/2"
4. Example roof

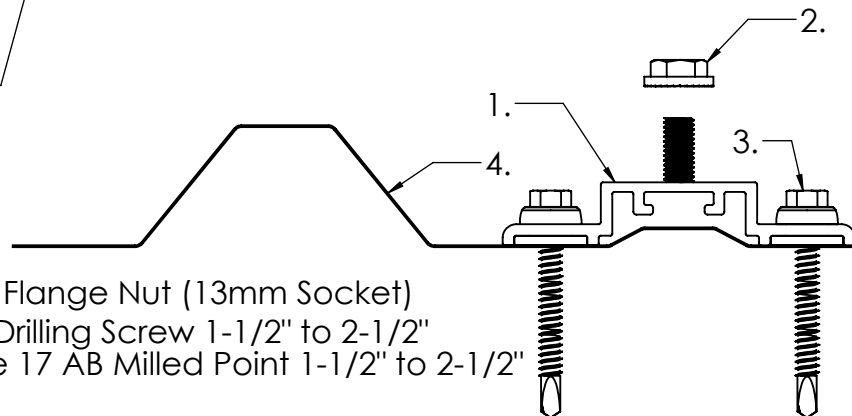

**FOR STANDING SEAM SPECIFIC MECHANICAL LOAD TEST
INFORMATION AND CLAMP INSTALLATION INFORMATION
PLEASE VISIT: WWW.S-5.COM**

MATERIAL: 6005A T61 Al	<div data-bbox="1601 1209 2139 1340">  <p>S-5! The Right Way!</p> </div> <div data-bbox="1915 1220 2139 1332"> <p>METAL ROOF INNOVATIONS, LTD. 8655 TABLE BUTTE RD COLORADO SPRINGS, CO 80908 719-495-0518 719-495-0045(FAX)</p> </div>		
EST ASSEMBLY WEIGHT: 0.248 lbs	TITLE SolarFoot [CCD]		
SUPPLIED HARDWARE: M8-1.25 Hex Flange Nut	DRAWING NO. LP66-A-0-A	DRAWN BY Paul Leitch	DATE 09/20/2017
SCALE: 2:3 EST. WEIGHT: Bracket: 0.129 lbs Fastener: 0.026 lbs Nut: 0.015 lbs			

S-5! PRODUCTS ARE PROTECTED BY MULTIPLE U.S. AND FOREIGN PATENTS.
VISIT OUR WEBSITE AT WWW.S-5.COM FOR COMPLETE INFORMATION ON PATENTS AND TRADEMARKS.