






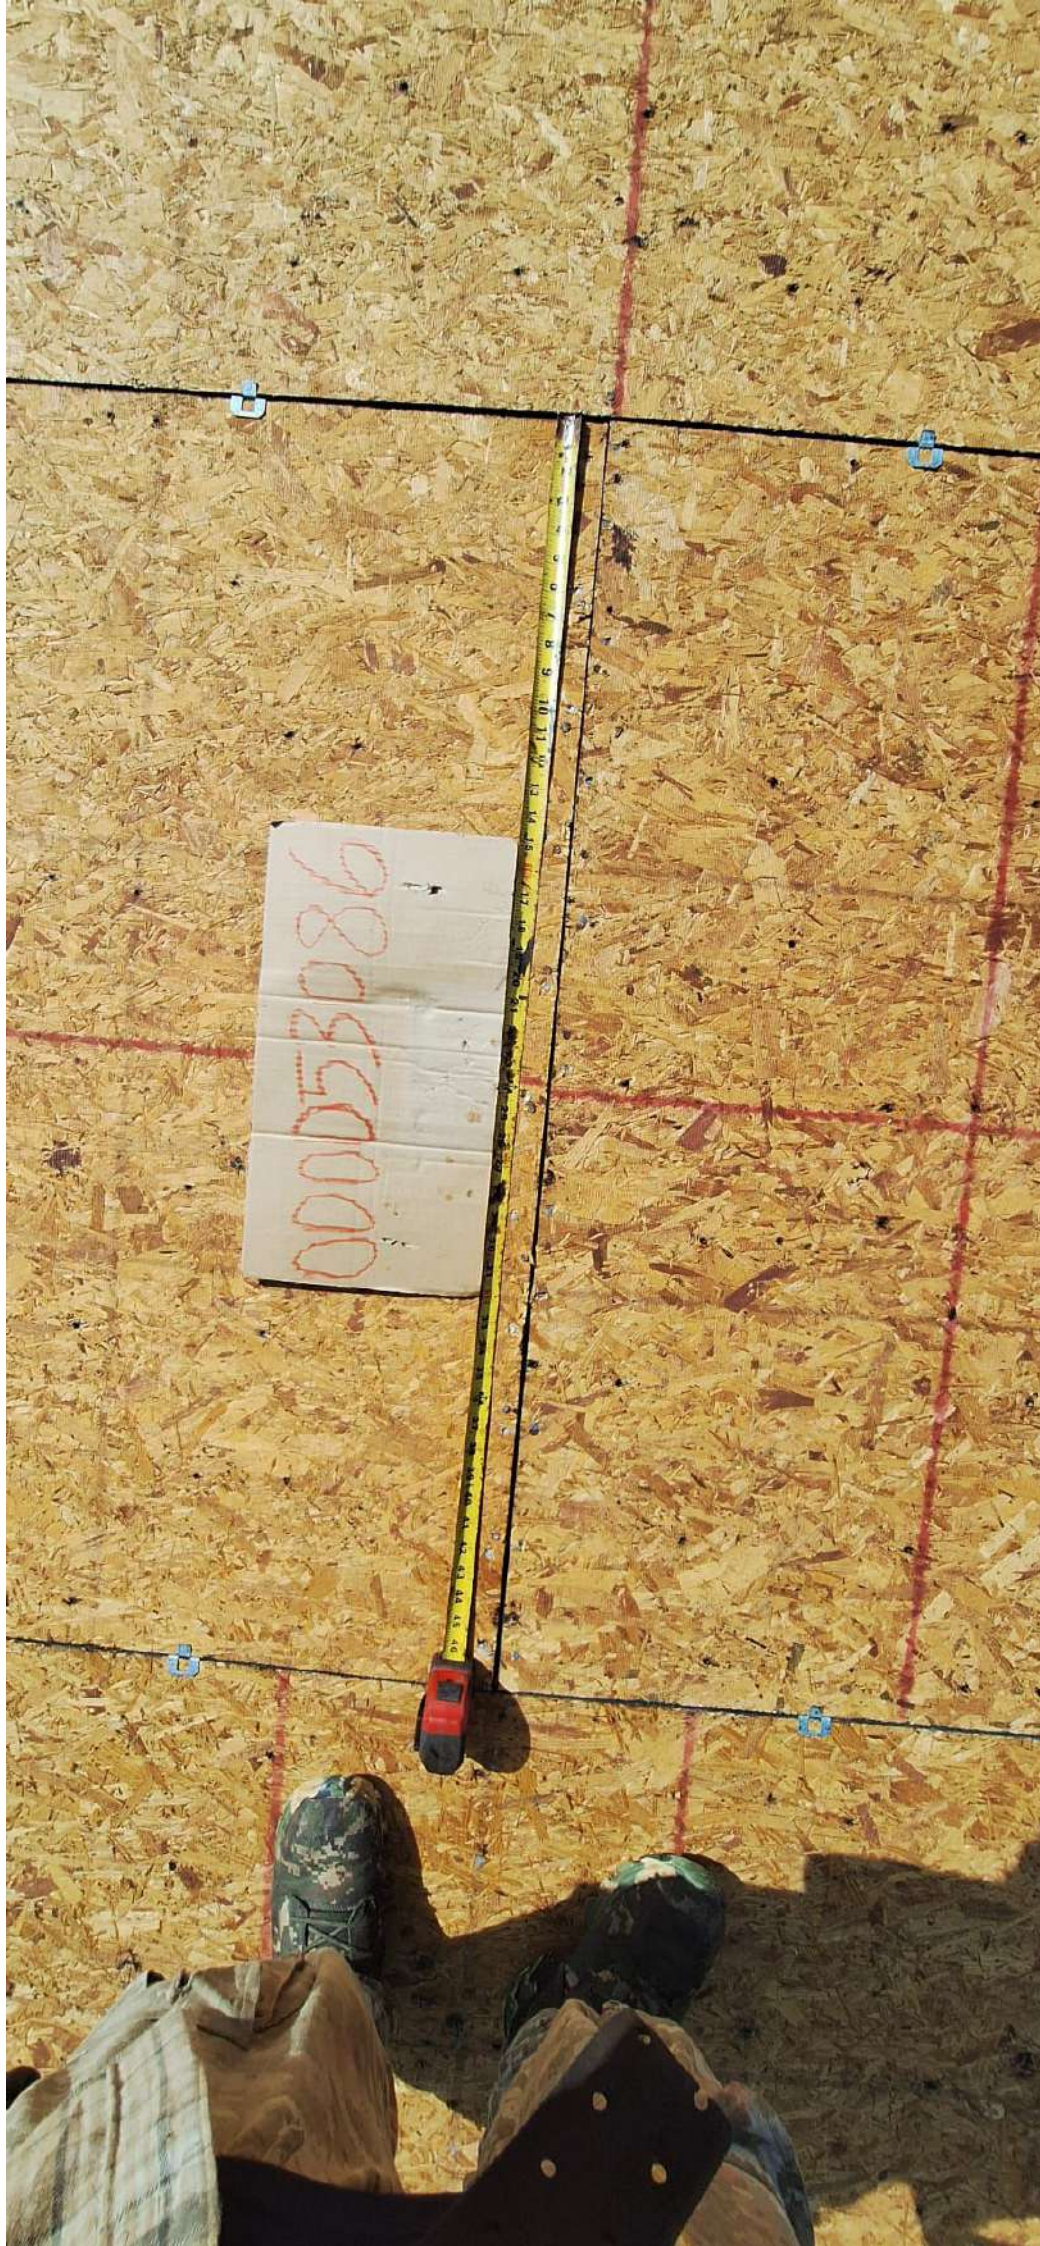

000053086

43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95






0005086

2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47

00053086



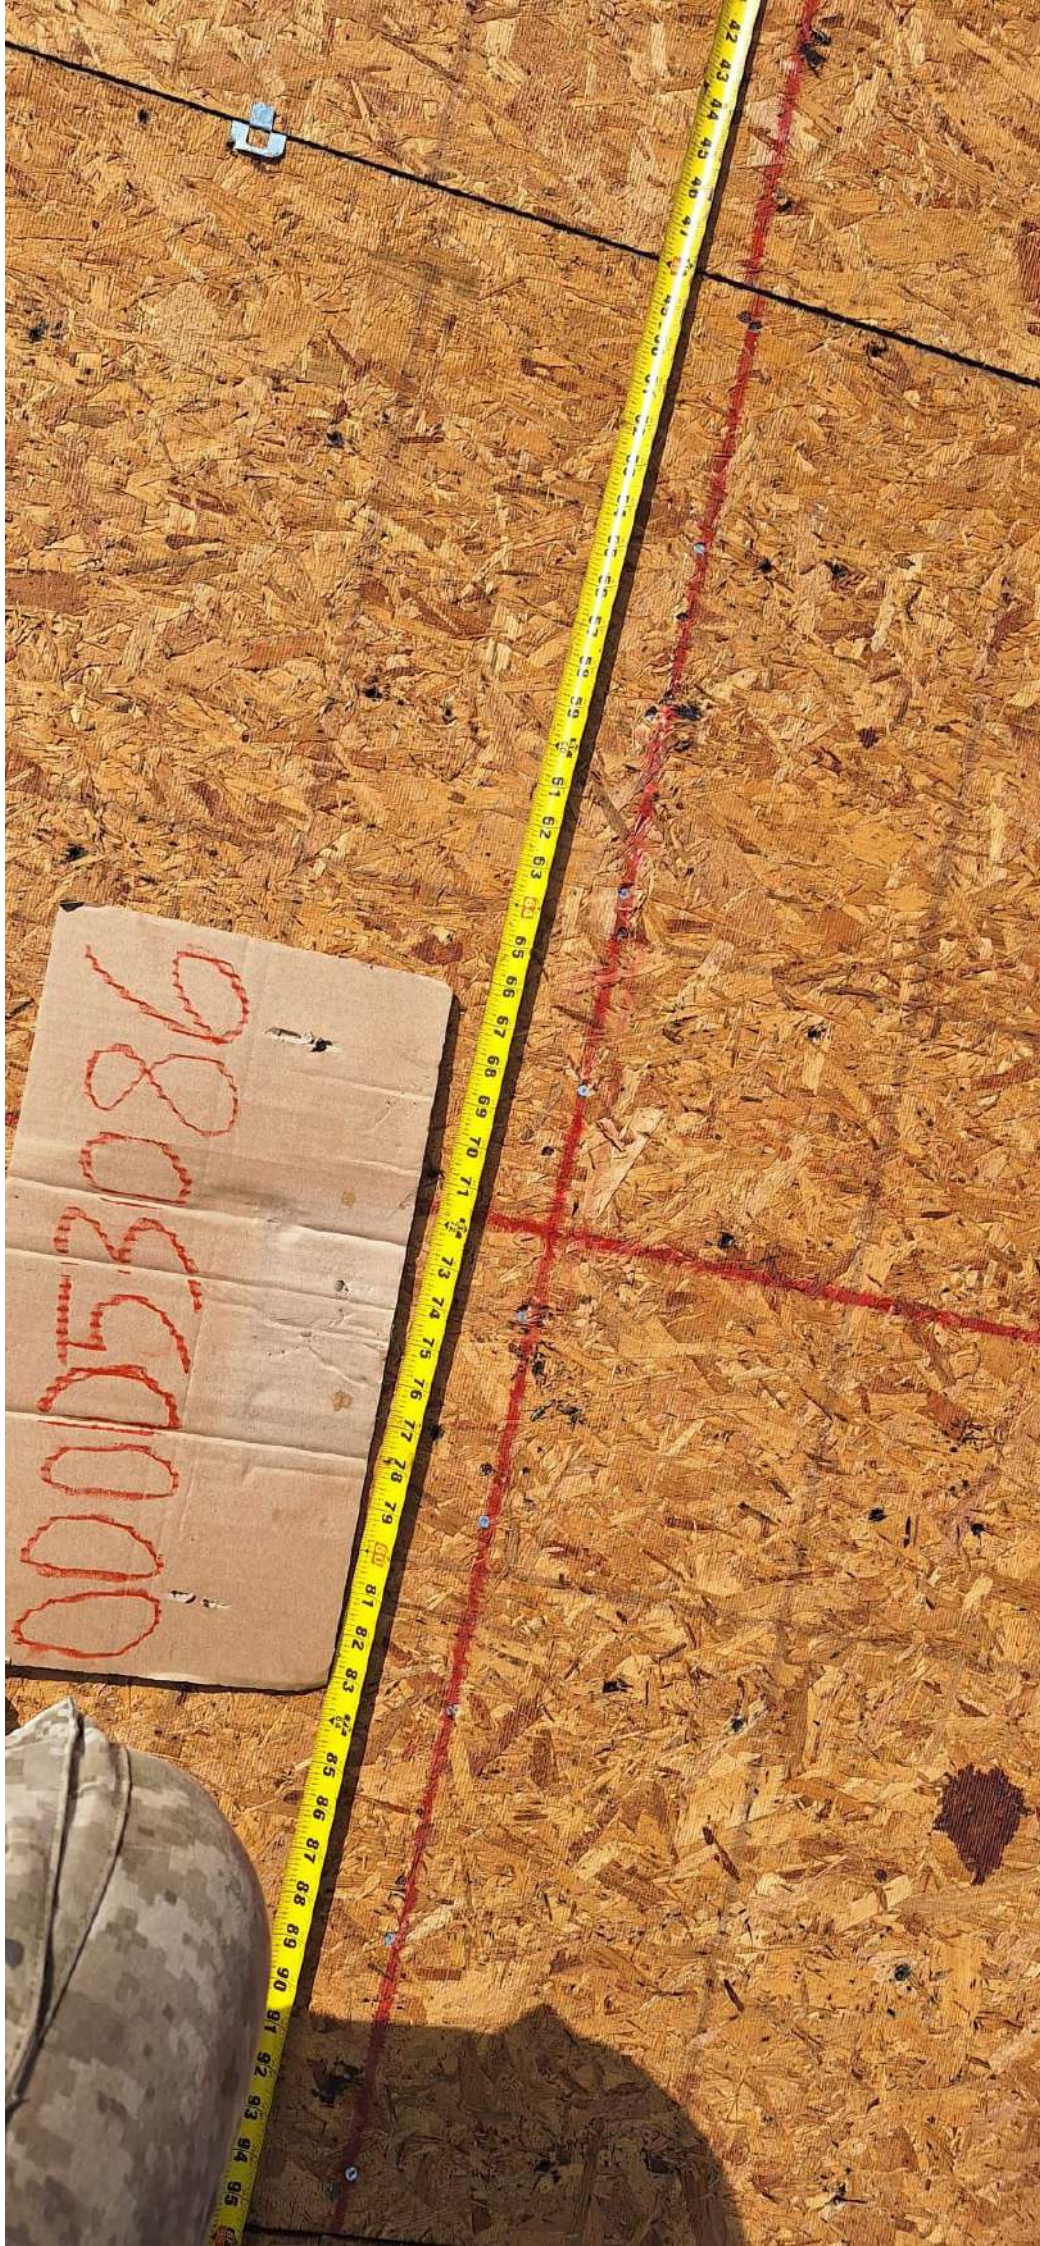



00053086



TRIBUILT

TYPE II,

Manufactured exclusively for
Beacon Sales Acquisition, Inc. by Owens Corning®

OVERLAP LINE

surface conditions, w
e variar según las co
alzado y la inclinación

LÍNEA DE S







of pitch
cle, el clima,

**MEETS OR EXCEEDS ASTM D226 TYPE II,
D4869 TYPE IV, ASTM D8257
& CAN/CSA A123.3**
www.becon.com

TRIBUILT

Manufactured exclusively for
Beacon Sales Acquisition, Inc. by Owens Corning®

TRIBUILT

TRIBUILT

OUTSTANDING
LIGHT TRANSMISSION

MAXIMUM STRENGTH

OUTSTANDING
LIGHT TRANSMISSION

MAXIMUM STRENGTH







TRIBUILT
Manufactured exclusively for
Sales Acquisition, Inc. by Owens Corning*

ECO SYNTHETIC UNDERLAYMENT

TRIBUILT

TRIBUILT

ECO SYNTHETIC UNDERLAYMENT

00053086

MEETS OR EXCEEDS ASTM D226 TYPE II,
D4869 TYPE IV, ASTM D8257
& CAN/CSA A123.3
www.becn.com

MEETS OR EXCEEDS ASTM D226 TYPE II,
D4869 TYPE IV, ASTM D8257
& CAN/CSA A123.3
www.becn.com

350 mils thick may vary with varying conditions. See label for full details.
La resistencia al traspasamiento puede variar con las condiciones de la superficie a cubrir.
at least 6 inches and 1/2 inch thick
al menos 6 pulgadas y 1/2 pulgadas de espesor

OVERLAP LINE

UNBEGUN SUPERFLOOR

LAYMENT

