


14561 - FIA ARCT

11

ASTM HERITAGE 30 AR®**LAMINATED ASPHALT SHINGLES****PRODUCT DATA**

Manufactured in Tuscaloosa, AL.

ASTM HERITAGE 30 AR® shingles feature a double-layer fiberglass mat construction with a random-cut sawtooth design. The two layers of mat are coated with asphalt and then laminated together and surfaced with mineral granules that will help protect against discoloration caused by algae. A self-sealing strip of asphalt helps provide added wind resistance.

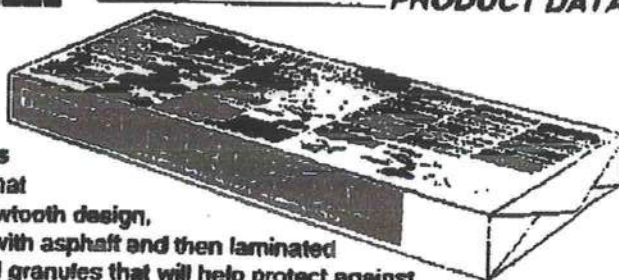

For application to roof decks with inclines of not less than 2 inches per foot. For slopes between 2 inches and 4 inches per foot, refer to wrapper instructions.

ADVANTAGES

- 30 year limited warranty, 5 year FULL START, limited transferability, winds up to 70 MPH
- Affordable upgrade from 3-tab shingles
- Superior fire resistance compared to organic shingles
- Rustic beauty of wood shakes
- Shadowtone feature adds depth and dimensional appearance
- Algae resistant granules to protect against discoloration in areas where extreme humidity is a problem
- 10 year limited warranty against discoloration caused by certain algae growth

CERTIFICATIONS

UL Class A Fire Rating
UL Wind Resistant

ASTM D 3018, Type I
ASTM E 108, Class A
ASTM D 3161, Type I (modified to 110 mph)
ASTM D 3462


Fed. Spec.: Exceeds SS-S-001534,
Class A, Type I

COLORS**Classic Heritage Colors:**

- | | | |
|------------------|----------------|-----------------------|
| • Weathered Wood | • Oxford Grey | • Olde English Pewter |
| • Rustic Cedar | • Shadow Grey | • Glacier White |
| • Rustic Hickory | • Desert Sand | • Rustic Evergreen |
| • Driftwood | • Rustic Black | |

PRODUCT DATA*

Shingle size 12" X 37"
Exposure 5"
Shingles per square 78
Bundles per square 3

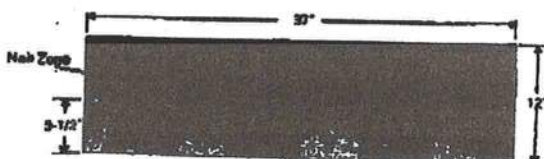

*All values stated as nominal

CAUTION: The National Institute for Occupational Safety and Health (NIOSH) has concluded that fumes of heated asphalt are a potential occupational carcinogen. Do not heat or burn this product.



TAMKO
ROOFING PRODUCTS

TAMKO® is a registered trademark of
TAMKO ROOFING PRODUCTS, INC.

Visit our Web Site at www.tamko.com

9/1/2002

Central District	220 West 4th St., Joplin, MO	64801	800-841-4691
Northeast District	4500 Tamko Dr., Frederick, MD	21701	800-368-2055
Southeast District	2300 35th St., Tuscaloosa, AL	35401	800-228-2656
Southwest District	7910 S. Central Exp., Dallas, TX	75216	800-443-1834
Western District	5300 East 43rd Ave., Denver, CO	80216	800-530-8868



Product Approval Method

Method 1 Option A

Date Submitted

02/14/2012

Date Validated

02/24/2012

Date Pending FBC Approval

Date Approved

02/29/2012

Summary of Products

PL #	Model, Number or Name	Description
1814.1	# 30 ASTM D 4869 Type I	Asphalt saturated organic felt
Limits of Use Approved for use in HVHZ: No Approved for use outside HVHZ: Yes Impact Resistant: N/A Design Pressure: N/A Other: For use under discontinuous roof i.e. asphalt shingles with slope greater than 2:12		Certification Agency Certificate FL1814_R6_C_CAC_Florida_Approval8.pdf FL1814_R6_C_CAC_Florida_Approval9.pdf Quality Assurance Contract Expiration Date 10/07/2014 Installation Instructions FL1814_R6_II_Florida_Approval8.pdf FL1814_R6_II_Florida_Approval9.pdf Verified By: Miami-Dade BCCO - CER Created by Independent Third Party: Evaluation Reports Created by Independent Third Party:
1814.2	#15 ASTM D 4869 Type I	Asphalt saturated organic felt
Limits of Use Approved for use in HVHZ: No Approved for use outside HVHZ: Yes Impact Resistant: N/A Design Pressure: N/A Other: For use under discontinuous roof i.e. asphalt shingles with slope greater than 2:12		Certification Agency Certificate FL1814_R6_C_CAC_Florida_Approval8.pdf FL1814_R6_C_CAC_Florida_Approval9.pdf Quality Assurance Contract Expiration Date 10/07/2014 Installation Instructions FL1814_R6_II_Florida_Approval8.pdf FL1814_R6_II_Florida_Approval9.pdf Verified By: Miami-Dade BCCO - CER Created by Independent Third Party: Evaluation Reports Created by Independent Third Party:
1814.3	#15 ASTM D226 Type I	Asphalt saturated organic felt
Limits of Use Approved for use in HVHZ: Yes Approved for use outside HVHZ: Yes Impact Resistant: N/A Design Pressure: N/A Other: For use under discontinuous roof i.e. asphalt shingles with slope greater than 2:12		Certification Agency Certificate FL1814_R6_C_CAC_NOA_new.pdf Quality Assurance Contract Expiration Date 04/12/2016 Installation Instructions FL1814_R6_II_NOA_new.pdf Verified By: Miami-Dade BCCO - CER Created by Independent Third Party: Evaluation Reports Created by Independent Third Party:
1814.4	#30 ASTM D-226 TYPE II	Asphalt saturated organic felt
Limits of Use Approved for use in HVHZ: Yes Approved for use outside HVHZ: Yes Impact Resistant: N/A Design Pressure: N/A Other: For use under discontinuous roof i.e. asphalt shingles with slope greater than 2:12		Certification Agency Certificate FL1814_R6_C_CAC_NOA_new.pdf Quality Assurance Contract Expiration Date 04/12/2016 Installation Instructions FL1814_R6_II_NOA_new.pdf Verified By: Miami-Dade BCCO - CER Created by Independent Third Party: Evaluation Reports Created by Independent Third Party:

Contact Us :: 1840 North Florida Street, Tallahassee FL 32309 Phone: 850-487-1824

The State of Florida is an AA/EO employer. Copyright 2007-2010 State of Florida. :: Privacy Statement :: Accessibility Statement :: Refund Statement

Under Florida law, e-mail addresses are public records. If you do not want your e-mail address released in response to a public records request, do not send electronic mail to this entity. Instead, contact the office by phone or by traditional mail. If you have any questions regarding DQPR's ADA web accessibility, please contact our Web Master at webmaster@dqpr.state.fl.us.

Product Approval Acceptance

Product Approval Meeting

Method: Option A

Approval Status:

Approved

Date of Review:

10/20/2005

Date of Approval:

10/20/2005

Date of Approval by the Board:


Page

30

Page 1/1

App/Seq #	Product Model # or Name	Model Description	Limits of Use
→ 1955.1	Elite Glass-Seal AR	A heavy weight 3 tab asphalt shingle.	Asphalt shingles shall be used only on roof slopes of 2:12 or greater. Not approved for use in HVHZ.
1956.2	Glass-Seal AR	A 3 tab asphalt shingle.	Asphalt shingles shall be used only on roof slopes of 2:12 or greater. Not approved for use in HVHZ.
→ 1955.3	Heritage 30 AR	A heavy weight dimensional asphalt shingle.	Asphalt shingles shall be used only on roof slopes of 2:12 or greater. Not approved for use in HVHZ.
1956.4	Heritage 40 AR	A heavy weight dimensional asphalt shingle.	Asphalt shingles shall be used only on roof slopes of 2:12 or greater. Not approved for use in HVHZ.
1956.5	Heritage 50 AR	A heavy weight dimensional asphalt shingle.	Asphalt shingles shall be used only on roof slopes of 2:12 or greater. Not approved for use in HVHZ.
1956.6	Heritage Declaration	A heavy weight triple laminate asphalt shingle.	Asphalt shingles shall be used only on roof slopes of 2:12 or greater. Not approved for use in HVHZ.
1956.7	Heritage XL	A heavy weight dimensional asphalt shingle.	Asphalt shingles shall be used only on roof slopes of 2:12 or greater. Not approved for use in HVHZ.

Next:



Copyright 2005 by the State of Florida. All rights reserved.



Florida Building Code Online

Page 1 of 3

Business
ProfessionalProduct Approval
USER: Public User
[Home](#) [Log In](#) [User Registration](#) [Test Tools](#) [Submit Surcharge](#) [State & Fees](#) [Applications](#) [FRC Staff](#) [BCIS Site Map](#) [Links](#) [Search](#)

User Account Security

[Home](#) [Log In](#) [User Registration](#) [Test Tools](#) [Submit Surcharge](#) [State & Fees](#) [Applications](#) [FRC Staff](#) [BCIS Site Map](#) [Links](#) [Search](#) [Application Detail](#)

FL # FL1814-R6
Application Type Revision
Code Version 2010
Application Status Approved
Comments *Approved by DCA. Approvals by DCA shall be reviewed and ratified by the POC and/or the Commission if necessary.
Archive

Product Manufacturer WOODLAND INDUSTRIES, INC.
Address/Phone/Email 1520 KALAMAZOO DRIVE
 GRIFFIN, GA 30224
 (770) 228-6102
 dina.crownover@gmail.com

Authorized Signature DINA CROWNOWER
 dina.crownover@gmail.com

Technical Representative DINA CROWNOWER
Address/Phone/Email 1520 KALAMAZOO DRIVE
 GRIFFIN, GA 30224
 DPCWOODLAND@AOL.COM

Quality Assurance Representative
Address/Phone/Email

Category Roofing
Subcategory Underlayments

Compliance Method Certification Mark or Listing

Certification Agency Miami-Dade BCCO - CER
Validated By Miami-Dade BCCO - VAL

Referenced Standard and Year (of Standard)	Standard	Year
	ASTM D 4869	2005
	ASTM D-226	2006

Equivalence of Product Standards
Certified By

Approved Certification Agency
[FL1814 R6 Equiv Florida Approval8.pdf](#)
[FL1814 R6 Equiv Florida Approval9.pdf](#)
[FL1814 R6 Equiv NOA new.pdf](#)

