


Typ. Exterior Door Jamb Details

SCALE : NONE

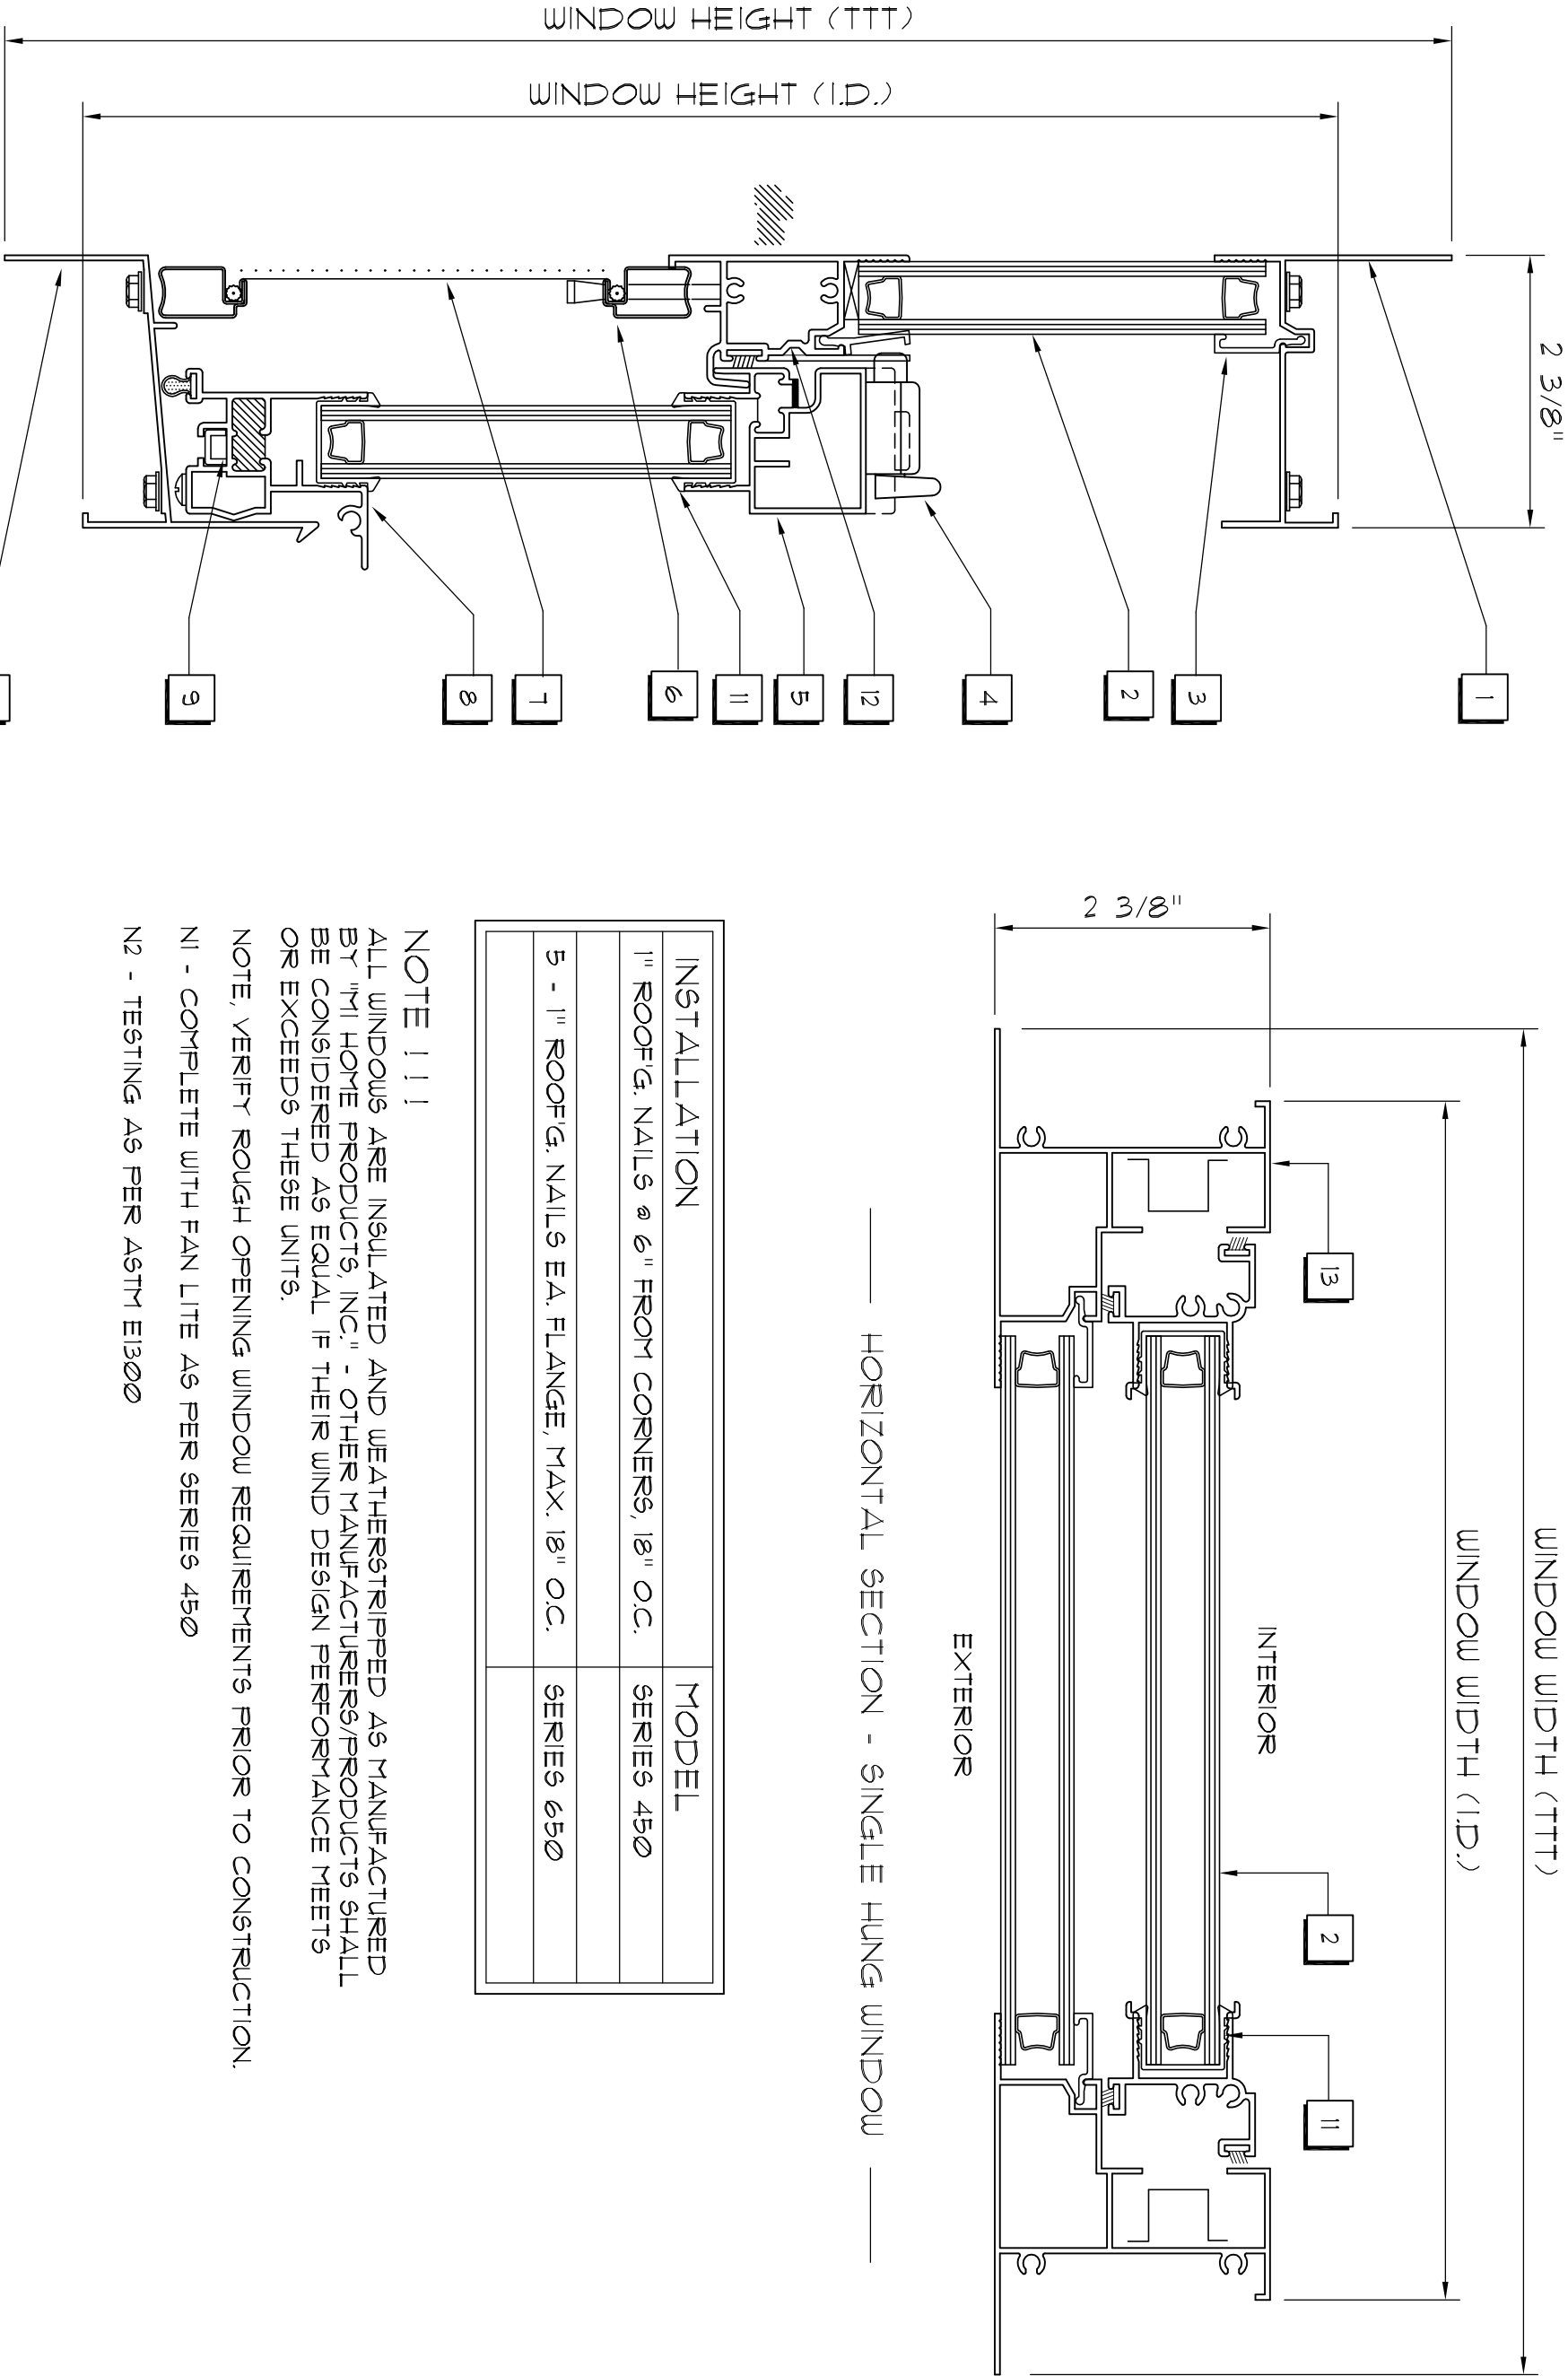

Typ. Window Jamb Details

SCALE : NONE

Door Notes

- A STEEL SKIN - 16 GA.
- B POLYURETHANE FOAM CORE
- C COMPRESSION WEATHER STRIP
- D WOOD HEAD JAMB
- E ALUMINUM BUMPER THRESHOLD
- F #10-24 X 1/2" F.H.W.S. (4) SCREWS PER HINGE INTO DOOR
- G #10 X 2" F.H.W.S. (5) SCREWS THROUGH HINGE JAMB 8" DOWN FROM TOP, MAX. 18" O.C. THEREAFTER
- H #10 X 2" F.H.W.S. (10) SCREWS THROUGH STRIKE JAMB INTO SIDELITE JAMB, 4" DOWN FROM TOP, MAX. 18" O.C. THEREAFTER
- J #10 X 2" F.H.W.S. (4) SCREWS THROUGH EACH HINGE INTO DOOR JAMB
- K #10 X 2" F.H.W.S. (6) SCREWS THROUGH EACH SIDELITE JAMB INTO SIDELITE, 4" DOWN FROM TOP, MAX. 18" O.C. THEREAFTER
- L #10 F.H.W.S. W/ MIN. 1 1/2" EMBEDMENT OR 3/16" FPH TAPCONS W/ MIN. 1 1/2" EMBEDMENT, (14) PER HEAD & SILL, (6) PER JAMB
- M #6 X 1 3/4" F.H.W.S. (3) PER SIDE FROM JAMB INTO THRESHOLD
- N SHERWIN WILLIAMS 8504 EXTERIOR GRADE LATEX CAULK
- O TEMPERED / INSULATED GLASS WINDOW

DESIGN PRESSURE RATINGS *		
POSITIVE	+16.0 PSF	
NEGATIVE	+16.0 PSF	

NOTE !!!
EXTERIOR DOORS SHALL MEET OR EXCEED THE WIND RESISTANCE OF THE FOLLOWING PRODUCT:
SERIES ENERGY 6-8 W/IE INSULING OPERABLE RESIDENTIAL INSULATED STEEL DOOR W/ STEEL FRAME AS PROVIDED BY "PREMIER ENTRY SYSTEMS"

Window Notes

NOTE !!!
OTHER MANUFACTURERS/PRODUCTS SHALL BE CONSIDERED AS EQUAL IF THEIR WIND DESIGN PERFORMANCE MEETS OR EXCEEDS THESE UNITS.

- 1 FLANGED HEAD
- 2 INSULATED GLASS
- 3 GLAZING BEAD
- 4 LOCK
- 5 SASH TOP RAIL
- 6 SCREEN FRAME
- 7 FIBERGLASS MESH
- 8 BOTTOM SASH RAIL
- 9 PIVOT BAR
- 10 FLANGED SILL
- 11 MARINE GLAZING
- 12 FIXED MEETING RAIL
- 13 FLANGED JAMB

WINDOW FASTENER SCHEDULE

SIZE	DESCRIPTION	INSTALLATION	MODEL
40x40	SINGLE HUNG ALUM. SASH W/INSUL. GLASS	1" ROOF G. NAILS 2 @ 6" FROM CORNERS, 18" O.C.	SERIES 450
40x20	SINGLE HUNG ALUM. SASH W/INSUL. GLASS	1" ROOF G. NAILS 2 @ 6" FROM CORNERS, 18" O.C.	SERIES 450
30x46	SINGLE HUNG ALUM. SASH W/INSUL. GLASS	1" ROOF G. NAILS 2 @ 6" FROM CORNERS, 18" O.C.	SERIES 450
18x60	SINGLE HUNG ALUM. SASH W/INSUL. GLASS	1" ROOF G. NAILS 2 @ 6" FROM CORNERS, 18" O.C.	SERIES 450
28x60	SINGLE HUNG ALUM. SASH W/INSUL. GLASS	1" ROOF G. NAILS 2 @ 6" FROM CORNERS, 18" O.C.	SERIES 450
30x60	SINGLE HUNG ALUM. SASH W/INSUL. GLASS	1" ROOF G. NAILS 2 @ 6" FROM CORNERS, 18" O.C.	SERIES 450
2-30x60	TWIN - SINGLE HUNG ALUM. SASH W/INSUL. GLASS	5 - 1" ROOF G. NAILS EA. FLANGE, MAX. 18" O.C.	SERIES 650

ALL WINDOWS ARE INSULATED AND WEATHERSTRIPPED AS MANUFACTURED BY "MI HOME PRODUCTS, INC." - OTHER MANUFACTURERS/PRODUCTS SHALL BE CONSIDERED AS EQUAL IF THEIR WIND DESIGN PERFORMANCE MEETS OR EXCEEDS THESE UNITS
NOTE, VERIFY ROUGH OPENING WINDOW REQUIREMENTS PRIOR TO CONSTRUCTION.
N1 - COMPLETE WITH PAN LITE AS PER SERIES 450
N2 - TESTING AS PER ASTM E1300

CUSTOM DESIGNED HOME FOR:
Aaron & Lisa Butler
COLUMBIA COUNTY, FLORIDA
Door & Window Details

DAVID J. ROYAL
ARCHITECTURAL DESIGNER
Bradford, Florida • 386-365-2391

1758 NW Brown Rd.
Lake City, FL 32055
386-365-4355
N.C.A.R.B. Certified

DATE: 09/22/2023
COMPI: A.11
SHEET: 11 OF 15

Digitally signed by: N. P. GEISLER
DN: CN = N. P. GEISLER C = US O =
AR0007005 OU = ARCHITECT
Date: 2023.09.14 14:10:50 -05'00'

12

11

AR0007005