

76 North Meadowbrook Drive Alpine, UT 84004 office (201) 874-3483 swyssling@wysslingconsulting.com

June 28, 2022 revised August 19, 2022

Lumio Solar 12600 Challenger Parkway, Suite 200 Orlando, FL 32826

> Re: Engineering Services Lopez Residence 795 Southwest El Prado Avenue, Lake City FL 12.400 kW System

To Whom It May Concern:

We have received information regarding solar panel installation on the roof of the above referenced structure. Our evaluation of the structure is to verify the existing capacity of the roof system and its ability to support the additional loads imposed by the proposed solar system.

A. Site Assessment Information

- 1. Site visit documentation identifying attic information including size and spacing of framing for the existing roof structure.
- Design drawings of the proposed system including a site plan, roof plan and connection details for the solar panels. This information will be utilized for approval and construction of the proposed system.

B. Description of Structure:

Roof Framing: 2 x 6 dimensional lumber spaced at 24" on center with purlin supports at

midspan.

Roof Material: Metal Roofing Roof Slopes: 27 +/- degrees Accessible Foundation: Permanent

C. Loading Criteria Used

- Dead Load
 - Existing Roofing and framing = 7 psf
 - New Solar Panels and Racking = 3 psf
 - TOTAL = 10 PSF
- Live Load = 20 psf (reducible) 0 psf at locations of solar panels
- Ground Snow Load = 0 psf
- Wind Load based on ASCE 7-16
 - Ultimate Wind Speed = 120 mph (based on Risk Category II)
 - Exposure Category B

Analysis performed of the existing roof structure utilizing the above loading criteria is in accordance with the FBC 2020 7th Edition, including provisions allowing existing structures to not require strengthening if the new loads do not exceed existing design loads by 105% for gravity elements and 110% for seismic elements. This analysis indicates that the existing framing will support the additional panel loading without damage, if installed correctly.

D. Solar Panel Anchorage

- 1. The solar panels shall be mounted in accordance with the most recent "S-5 Installation Manual". If during solar panel installation, the roof framing members appear unstable or deflect non-uniformly, our office should be notified before proceeding with the installation.
- 2. System will be attached to the metal roofing material utilizing the patented S-5 connection. Installation of the connections shall be in accordance with the manufacturer's recommendations.
- 3. Considering the wind speed, roof slopes, size and spacing of framing members, and condition of the roof, the panel supports shall be placed no greater than 48" on center.
- 4. Panel supports connections shall be staggered to distribute load to adjacent framing members.

Based on the above evaluation, this office certifies that with the racking and mounting specified, the existing roof system will adequately support the additional loading imposed by the solar system. This evaluation is in conformance with the *FBC 2020 7th Edition*, current industry standards and practice, and is based on information supplied to us at the time of this report.

Should you have any questions regarding the above or if you require further information do not hesitate to contact me.

1. -01

Scott E. Wyssling, PE Florida License No. 8 153 THIS PLAN HAS BEEN ELECTRONICALLY SIGNED AND SEALED BY SCOTT WYSSLING, PE USING A DIGITAL SIGNATURE AND DATE. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES

Wyssling Consulting, PLLC
76 N Meadowbrook Drive Alpine UT 84084
Rerida License # 8734912

Date Signed 08-19-22





GUIDELINES FOR SUITABLE FONT SIZES, WORDS, COLORS, SYMBOLS, AND LOCATION REQUIREMENTS FOR LABELS. NEC 110.21(B)(1). THE LABEL SHALL BE OF SUFFICIENT DURABILITY TO WITHSTAND

THE ENVIRONMENT INVOLVED. NEC 110.21(B)(3). ADHESIVE FASTENED SIGNS MAY BE ACCEPTABLE IF PROPERLY

ADHERED. VINYL SIGNS SHALL BE WEATHER RESISTANT.

A WARNING A FLECTRIC SHOCK HAZARD

OAD SIDES MAY BE ENERGIZED

IN THE OPEN POSITION

ENCLOSURES/ AC DISCONNECT/ MAIN SERVICE PANEL RMINALS ON BOTH THE LINE AND

EMERGENCY RESPONDER SOLAR PV SYSTEM EQUIPPED

OWN THE ENTIRE PY SYSTEM

LABEL LOCATION: RAPID SHUTDOWN (AC DISCONNECT) PER CODE: NEC 690.56 (C)(1) & NFPA1 11.12.2.1.1.1.1, 11.12.2.1.4

RNING: PHOTOVOLTAI POWER SOURCE

37.5 240

RAPID SHUTDOWN SWITCH FOR SOLAR PV SYSTEM

L WARNING A **DUAL POWER SOURCE**

ABEL LOCATION:

CONDUIT/ RACEWAY/ ENCLOSURES/ COMBINER BOX/ AC DISCONNECT PER CODE: NEC2017, 690.31(G)(3)(4)


LABEL LOCATION: AC DISCONNECT/ BREAKER/ POINTS OF CONNECTION PER CODE: NEC2017, 690.13(B)

AC DISCONNECT PER CODE: NEC2017, 690.53

(AC DISCONNECT) PER CODE: NEC 690.58 (C)(3)

LABEL LOCATION: POINT OF INTERCONNECTION PER CODE: NEC 2017, 705.12(B)

SW EL PRADO AVE FRONT OF RESIDENCE

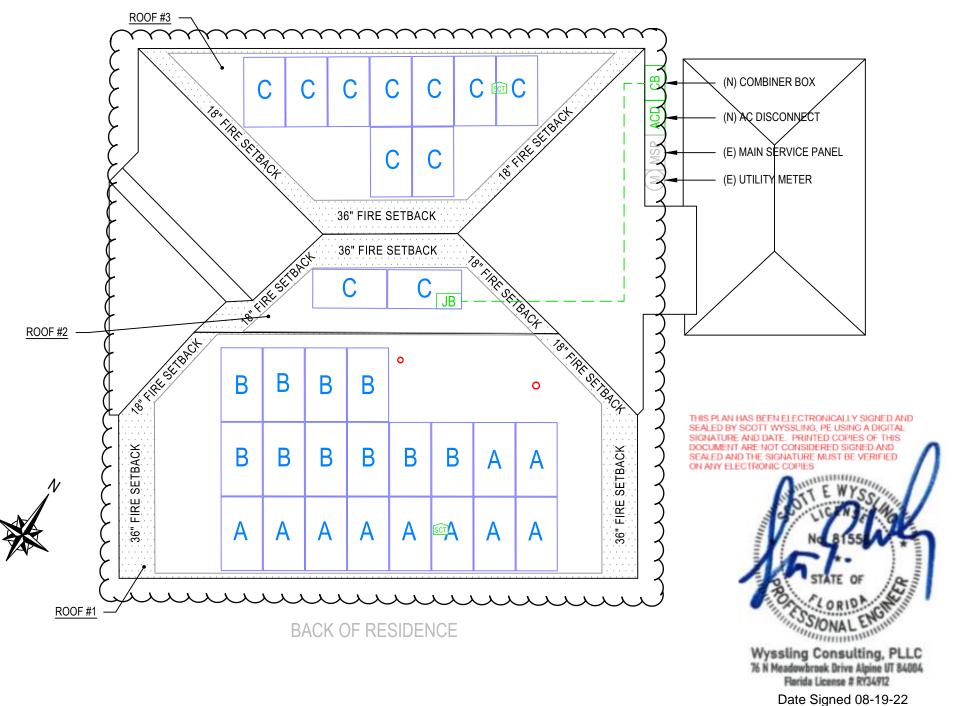

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY SCOTT WYSSLING ON THE DATE ADJACENT TO THE SEAL. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEAL, AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES

ROOF PLAN WITH STRING LAYOUT E-1

SOLAR ATLANTIC KEY ENERGY LLC 7006 STAPOINT CT WINTER PARK, FL 32792 +1 (407) 988-0273 PROJECT NAME & ADDRESS

> JULIAN LOPEZ RESIDENCE 795 SW EL PRADO AVE LAKE CITY,

ENGINEER CONTACT INFORMATION

SCOTT WYSSLING LICENSE# 81558 76 N MEADOWBROOK DR. ALPINE, UT 84004

SIGNATURE WITH SEAL

REVISIONS DESCRIPTION DATE REV LAYOUT CHANGE 8/19/22 Α

S.W.

6/28/22

Drawn by: Checked by:

SHEET NAME

STRING LAYOUT & **SIGNAGE** SHEET NUMBER

E-1