

Website: www.forceengineeringtesting.com

Product Evaluation Report FREEDOM MANUFACTURING AND ROOFING SUPPLY, LLC.

29 Ga. Freedom Tuff Roof Panel over 1x4 Wood Purlins

Florida Product Approval # 33548.3 R1

Florida Building Code 2023 Per Rule 61G20-3 Method: 1-D

Category: Roofing Subcategory: Metal Roofing Compliance Method: 61G20-3.005(1)(d) **NON HVHZ**

Product Manufacturer:

Freedom Manufacturing and Roofing Supply, LLC. 18504 SE Highway 19 Cross City, Florida 32628

Engineer Evaluator:

Johnathan Green, P.E. #88223 Florida Evaluation ANE ID: 12901

Contents:

Evaluation Report: Page 1-4 Installation Detail: Page 5



THIS DOCUMENT HAS BEEN DIGITALLY SIGNED AND SEALED BY JOHNATHAN GREEN ON THE DATE ADJACENT TO THE SEAL.

PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.



Humble, Texas 77338 Phone: (281) 540-6603 FAX: (281) 540-9966 Website: www.forceengineeringtesting.com

Compliance Statement: The product as described in this report has demonstrated compliance with the

Florida Building Code 2023, Sections 1504.3.2, 1504.7.

Product Description: Freedom Tuff, 29 Ga. Steel, 36" coverage, through fastened roof panel over 1x4

wood purlins over one layer of asphalt shingles (optional) over min. 7/16" OSB

decking. Non-Structural Application.

Panel Material/Standards: Material: Minimum 29 Ga. Steel conforming to Florida Building Code 2023

Section 1507.4.3.

Yield Strength: Min. 80.0 ksi

Corrosion Resistance: Panel Material shall comply with Florida Building Code

2023, Section 1507.4.3.

Panel Dimension(s): Thickness: 0.014" min.

Width: 36" maximum coverage Rib Height: ¾" major rib at 9" O.C.

Panel Fastener: #10-16 x 1 1/2" WoodZip HiLo TP-17 with sealing washing or approved equal.

Corrosion Resistance: Per Florida Building Code 2023, Section 1507.4.4.

Substrate Description: Min. 1x4 No. 2 wood purlins over maximum one layer of asphalt shingles/felt

paper (optional) over min. 7/16" OSB decking over supports at maximum 24" O.C. The 1x4 wood purlins attached through decking into rafters with (2) #9 x 3" deck screws (Min. 1 $\frac{1}{2}$ " screw penetration into rafters) at 24" O.C. maximum.

Substrate must be designed in accordance w/ Florida Building Code.

Allowable Design Uplift Pressures:

Table "A"

Maximum Allowable Uplift Design Pressure:	78.5 psf	127.3 psf	176.0 psf
Fastener Pattern:	9"-9"-9"-6"-3"	9"-9"-9"-6"-3"	9"-9"-9"-6"-3"
Fastener Pattern / 1x4 Purlin Spacing:	24" O.C.	18" O.C.	12" O.C.

^{*}Design Pressure includes a Safety Factor = 2.0.



Humble, Texas 77338 Phone: (281) 540-6603 FAX: (281) 540-9966 Website: www.forceengineeringtesting.com

Code Compliance: The product described herein has demonstrated compliance with

The Florida Building Code 2023, Section 1504.3.2, 1504.7.

Evaluation Report Scope: The product evaluation is limited to compliance with the structural wind load

requirements of the Florida Building Code 2023, as relates to Rule 61G20-3.

Performance Standards: The product described herein has demonstrated compliance with:

UL 580-06 - Test for Uplift Resistance of Roof Assemblies

UL 1897-2015 - Uplift Test for Roof Covering Systems

FM 4471-92 - Foot Traffic Resistance Test

1. UL 580-06 / 1897-2012 Uplift Test

Force Engineering & Testing (FBC Organization # TST-5328) Report No. 731-0141T-20.

2. FM 4471-10, Section 4.4 Foot Traffic Resistance Test Force Engineering & Testing (FBC Organization # TST-5328)

Report No. 731-0141T-20.

Certificate of Independence

By Johnathan Green, P.E. #88223

The FM 4471-10, Foot Traffic Resistance test standard is equivalent to the **Test Standard Equivalency:**

FM 4471-92, Foot Traffic Resistance test standard.

The UL 1897-2012, Uplift Test for Roof Covering Systems test standard is

equivalent to the UL 1897-2015, Uplift Test for Roof Covering Systems test

standard

Reference Data:

The manufacturer has established compliance of roof panel products in **Quality Assurance Entity:**

> accordance with the Florida Building Code and Rule 61G20-3.005 (3) for manufacturing under a quality assurance program audited by an approved

quality assurance entity.

Minimum Slope Range: Minimum Slope shall comply with Florida Building Code 2023, including Section

1507.4.2 and in accordance with Manufacturers recommendations. For slopes

less than 3:12, lap sealant must be used in the panel side laps.

Humble, Texas 77338 Phone: (281) 540-6603 FAX: (281) 540-9966 Website: www.forceengineeringtesting.com

Installation: Install per manufacturer's recommended details.

Underlayment: Per Florida Building Code 2023, Section 1507.1 and manufacturer's installation

guidelines.

Roof Panel Fire Classification: Fire classification is not part of this evaluation.

Shear Diaphragm: Shear diaphragm values are outside the scope of this report.


Design Procedure: Based on the dimensions of the structure, appropriate wind loads are

determined using Chapter 16 of the Florida Building Code 2023 for roof cladding wind loads. These component wind loads for roof cladding are compared to the allowable pressure listed above. The design professional shall select the appropriate erection details to reference in his drawings for proper fastener attachment to his structure and analyze the panel fasteners for pullout and pullover. Support framing must be in compliance with Florida Building Code 2023 Chapter 22 for steel, Chapter 23 for wood and Chapter 16 for structural loading.



19530 Ramblewood Drive Humble, Texas 77338 Phone: (281) 540-6603 FAX: (281) 540-9966 Website: www.forceengineeringtesting.com

FASTENER PATTERN AT PANEL INTERIOR

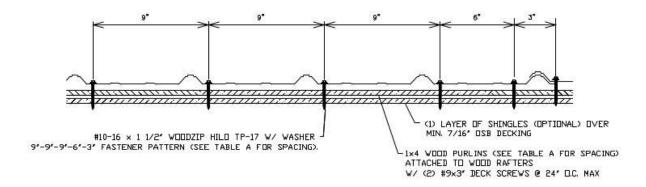

FASTENER PATTERN AT PANEL ENDS

