



SEE ELEV. TRUSS ANCHORAGE HEADER DETAIL SCALE: 1" = 1'-0"


CON	NECTOR SC	HEDULE FO	R TRUSS ANCHO	RAGE
CONNECTOR	TRUSS	TOP PLATE	UPLIFT PROVIDED	MANUFACTURER
H2.5	5-8d NAILS	5-8d NAILS	365 LBS	SIMPSON
H10	8-8d NAILS	8-8d NAILS	850 LBS	SIMPSON
MTS12	7-10d NAILS	7-10d NAILS	1,000 LBS	SIMPSON
H16	2-10d NAILS	10-10d NAILS	1,300 LBS	SIMPSON
(2)HTS20	10-10d NAILS	10-10d NAILS	2 x 1,450 = 2,900 LBS	SIMPSON

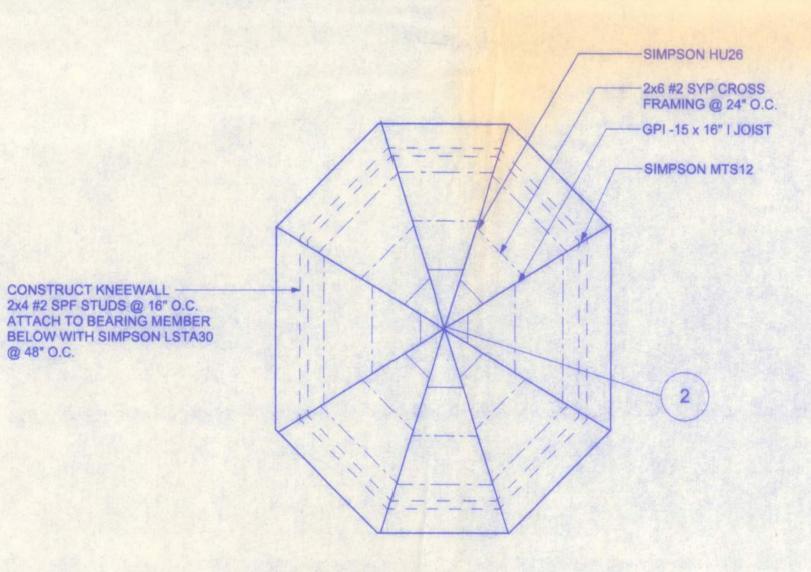

CONSTRUCT KNEEWALL -

@ 48" O.C.



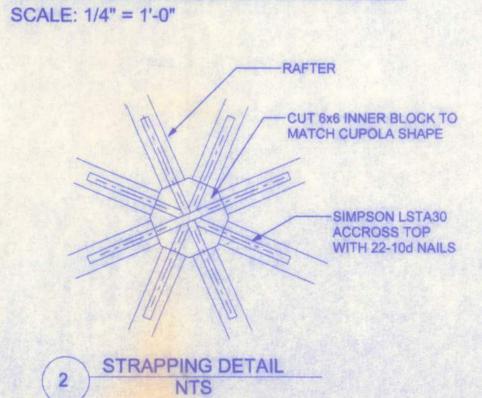

GIRDER TRUSS, UPLIFT & REACTION (DOWN) LOADS PER MANUFACTURER		PLATE WASHER 1/8" THICK HEX NUT		
DOUBLE 2X TOP PLATE			NOTE: A SOLID MEMBER GREATER SIZE TH MEMBERS MAY BE IF RATED SHEATH TO NARROW EDGI EACH STUD AT 12' THE LAMINATION I	AN MULTIPLE USED. ING IS APPLIED ES, NAILED TO O.C. MAXIMUM,
ONE STUD FOR EACH PLY OF GIRDER TRUSS (2 MINIMUM)		THREAD ROD	HERE IS NOT REQ	
P.T. BOTTOM PLATE	ENDS, FF	ROM OPPOSITE SIDES, NTER MAX. STAGGERED	1"	1"
		— 2"x2"x 1/8" STEEL PLATE WASHER	o	to.
			0-	å
			END (TOP OR	воттом)

SCALE: 1/2" = 1'-0"

GIRDER COLUMN DETAIL SCALE: 1/2" = 1'-0"

SHEARWALL NOTES:

- 1. ALL SHEARWALLS SHALL BE TYPE 2 SHEARWALLS
- AS DEFINED BY STD 10-99 305.4.3. 2. THE WALL SHALL BE ENTIRELY SHEATHED WITH 7/16" O.S.B. INCLUDING AREAS ABOVE AND BELOW
- 3. ALL SHEATHING SHALL BE ATTACHED TO FRAMING ALONG ALL FOUR EDGES WITH JOINTS FOR ADJACENT PANELS OCCURING OVER COMMON FRAMING MEMBERS
- OR ALONG BLOCKING. 4. NAIL SPACING SHALL BE 6" O.C. EDGES AND
- 12" O.C. IN THE FIELD.
- 5. TYPE 2 SHEARWALLS ARE DESIGNED FOR THE OPENING IT CONTAINS. MAXIMUM HEIGHT OF OPENING SHALL BE 5/6 TIMES THE WALL HEIGHT. THE MINIMUM DISTANCE BETWEEN OPENINGS SHALL BE THE WALL HEIGHT/3.5 ie. FOR 8'-0" WALLS - (2'-3").

OPENING WIDTH	SILL PLATES	16d TOE NAILS EACH END
UP TO 6'-0"	(1) 2x4 OR (1) 2x6	1
> 6' TO 9'-0"	(3) 2x4 OR (1) 2x6	2
> 9' TO 12'-0"	(5) 2x4 OR (2) 2x6	3

