
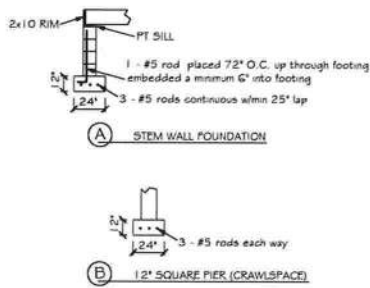


47155

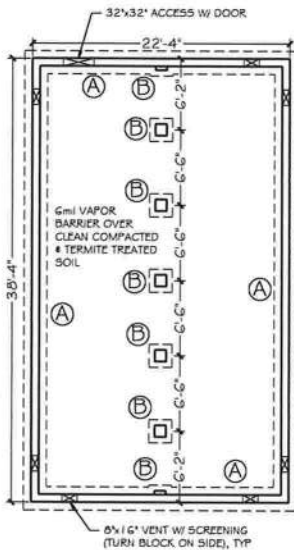

FOUNDATION NOTES

1. CRAWLSPACE SHALL HAVE 6-MIL POLY VAPOR BARRIER W/ 6" LAPS SEALED W/ POLY TAPE OVER TERMITE-TREATED SOIL
2. BOTTOM OF EXTERIOR FOOTINGS SHALL BE A MINIMUM OF 12" BELOW UNDISTURBED SOIL OR ENGINEERED FILL PER FBC-RES. SECTION R403.1.4

NOTE:
SOIL UNDER FOOTING SHALL BE COMPRESSED TO 2000 PSF AT 95% DENSITY. CONCRETE STRENGTH SHALL BE 2500 PSI



Carol Chadwick, PE
cnc=Carol Chadwick,
PE, cnc=This item has
been electronically
signed and sealed
by Carol Chadwick,
PE using a digital
signature, cnc
email=cchadwick@
mail.com, cnc=US
2020.07.25 14:56:48
-0400

CAROL CHADWICK, P.E. PROFESSIONAL ENGINEER STATE OF FLORIDA NO. 120139 EXPIRATION DATE: 07/25/2020	
PROJECT: PEREZ LOG CABIN FOUNDATION PLAN 277 SW BUSSEY GLEN, FORT WHITE, FL	
DATE: JULY 25, 2020 VERSION: 001	SHEET: 5-1