

1011 N Causeway Blvd, Suite 19 ♦ Mandeville, Louisiana 70471 ♦ Phone: 985.624.5001 ♦ Fax: 985.624.5303

September 2021

Property Owner: David Miller

Property Address: 178 Southwest Hastings Way, Lake City, FL 32024

RE: Photovoltaic System Roof Installations

I have reviewed the existing structure referenced above to determine the adequacy of the existing structure support the proposed installation of an array of solar panels on the roof.

Based on my review, the existing structure is adequate to support the proposed solar panel installation. This assessment is based on recent on-site inspection by SunPro Solar inspectors and photographs of the existing structure. The photovoltaic system is designed to withstand uplift and downward forces; our assessment is regarding the structure's support of the array. Stresses induced by the introduction of individual mount loads on the rafters are within acceptable limits as shown on the attached calculations. The structural considerations used in our review and assessment include the following:

Evaluation Criteria:

Applied Codes: ASCE 7-16 FBC 2020 NEC 2017

Risk Category: II

Design Wind Speed (3-second gust): 165 MPH

Wind Exposure Category: C Ground Snow Load: 0 PSF Seismic Design Category: D

Existing Structure:

Roof Material: Shingle

Roofing Structure: 2x6 rafters @ 24" O.C.

Roof Slope: 2/12

Connection of Array to Structure:

Manufacturer: UNIRAC Mount: Flashloc Comp Kit

Mounting Connection: Flashloc Comp Kit 5/16" lag screw w/min 2.5" embedment into framing

Zone 1: 3 rails 3'-0" o.c. mounts Zone 2: 4 rails 3'-0" o.c. mounts Zone 3: 4 rails 3'-0" o.c. mounts

PRINCIPAL ENGINEERING, INC.

1011 N. CAUSEWAY BLVD. STE 19

MANDEVILLE, LA 70471

985.624.5001

INFO@PI-AEC.COM

FLORIDA FIRM NO. 30649

This item has been digitally signed and sealed by Henry I. DiFranco, Jr., P.E. on September 23, 2021 Printed copies of this document are not considered signed and sealed and the

signature must be verified

on any electronic copies.

Mo. 71950

STATE OF

ONAL

PRINCIPAL Infrastructure®

Architecture ♦ Engineering ♦ Construction

Page 2 of 3

Effect of the Solar Array on Structure Loading:

Gravity Loads:

Per IBC Section 1607.12.5.1, the areas of the roof where solar panels are located are considered inaccessible, and therefore not subject to roof live loading. Live load in these areas is replaced by the dead load of the solar array, 3 psf. The total gravity load on the structure is therefore reduced and the structure may remain unaltered. Connections of the mounts to the underlying structure are to be installed in a staggered pattern, except at the array ends, to distribute the loading evenly to the roof structure. The stresses within the rafters due to the introduction of discrete mount loads are within acceptable limits, as shown on the attached calculations.

Wind Load:


The solar panel array will be flush mounted (no more than 6" above the surrounding roof surface, and parallel to the roof surface. Any additional wind loading on the structure due to the presence of the array is negligible. The array structure is designed by the manufacturer to withstand uplift and downward forces resulting from wind and snow loads. The attached calculations verify the capacity of the connection of the solar array to the roof to resist uplift due to wind loads, the governing load case.

Snow Load:

The reduced friction of the glass surface of the solar panels allows for the lower slope factor (C_s) per Section 7.4 of ASCE 7-16 resulting in a reduced design snow load for the structure. This analysis conservatively considered the snow load to be unchanged.

Seismic Load:

Analysis shows that additional seismic loads due to the array installation will be small. Even conservatively neglecting the wall materials, the solar panel installation represents an increase in the total weight of the roof and corresponding seismic load of less than 10%. This magnitude of additional forces meets the requirements of the exception in Section 11B.4 of ASCE 7-16. The existing lateral force resisting system of the structure is therefore allowed to remain unaltered.



This item has been digitally signed and sealed by Henry I. DiFranco, Jr., P.E. on September 23, 2021 Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

PRINCIPAL Engineering

Architecture ♦ Engineering ♦ Construction

Page 3 of 3

Conclusion:

To the best of my professional knowledge and belief, the subject construction and photovoltaic system installation will be in compliance with all state and local building codes and guidelines in effect at the time of our review.

Limitations:

Engineer's assessment of the existing structure is based on recent field reports and current photographs of the elements of the structure that were readily accessible at the time of inspection. The design of the solar panel racking (mounts, rails, connectors, etc.), connections between the racking and panels, and electrical engineering related to the installation are the responsibility of others. The photovoltaic system installation must be by competent personnel in accordance with manufacturer recommendations and specifications and should meet or exceed industry standards for quality. The contractor is responsible for ensuring that the solar array is installed according to the approved plans and must notify the engineer of any undocumented damage or deterioration of the structure, or of discrepancies between the conditions depicted in the approved plans and those discovered on site so that the project may be reevaluated and altered as required. Engineer does not assume any responsibility for improper installation of the proposed photovoltaic system.



This item has been digitally signed and sealed by Henry I. DiFranco, Jr., P.E. on September 23, 2021 Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Uplift and Wind Downforce Calculation Summary (ASCE 7-16) Mount, Rack, & Panel Proportioning Point Load Check and Rafter Stress Analysis

Property Owner:	David Miller	Max. Individual Panel Dimensions		
Project Address:	178 Southwest Hastings Way	Length (in)	Width (in)	Area (sf)
City, State:	Lake City, FL 32024	77	39	20.85

Building Characteristics, Design Input, and Adjustment Factors						
Roof Dimensions: Length	: 75		Greater Dimension		75	
Width	: 66		Least Dimension:		66	
Roof Height (h):	15	Fig 30.4-1, va	lid under 60°	√		
Pitch: 2 on 12 =	9.5°	Must be less	than 45°	\checkmark		
Roof Configuration	Gable					
Roof Structure	2x Rafters					
Roof Material	Plywood					
Risk Category:	II					
Basic Wind Speed:	165	From 26.5-1				
Exposure Category:	С	Fig. 26.7				
Topographic Factor (K _{zt})	1.0	Fig. 26.8-1				
Wind Pressure @ h=30, p _{net30} See Table Below			Fig. 30.4-1			
Ht. & Exposure Adjustment (λ) 0.82		Fig. 30.4-1				
Adjusted Wind Pressures, p _{net}	See Table	Below	Eq. 30.4-1			
Effective Wind Area (sf):	10.43	(Area per ind	ividual mount)			
Roof Zone Strip (a), in ft, Fig.	30.4-1, Note 5				
1 - Least Roof Horizontal Dimension (L or W) x 0.10			6.6			
2 - Roof Height x 0.4			6			
3 - Least Roof Horizontal Dimension (L or W) x 0.04			2.64			
4 - Least of (1) and (2)			6			
5 - Greater of (3) and (4)			6			
6 - Greater of (5) and 3 feet		a=	6			

DIFRANCO
CENS
No. 71950

STATE OF

ONAL

This item has been digitally signed and sealed by Henry I. DiFranco, Jr., P.E. on September 23, 2021 Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

	Net Design Pressures, p _{net} (Fig 30.4-1), Components & Cladding				
	Uplift (-psf)		Factored Pressure		
		P _{30net}	IK _{zt} P _{30net}	(0.6W, ASCE 7-16)	θ
gable /hip /flat					
	Zone 1 & 2e	85.4	70.1	42.0	
	Zone 2n,2r,3e	124.7	102.2	61.3	7° < θ ≤ 20°
	Zone 3r	148.2	121.5	72.9	
Gable					27 - 11 - 27
Hip					
Ī					201 < 9 = 271
					277 - 0 - 459
	conera conera				



This item has been digitally signed and sealed by Henry I. DiFranco, Jr., P.E. on September 23, 2021 Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Snow Load				
Ground Snow Load, p _g	0.0	From ASCE 7 or AHJ		
Terrain Category:	С	Para 6.5.6.3		
Exposure	Fully			
Exposure FactorCe	0.9	Table 7-2		
Thermal Factor, Ct	1.0	Table 7-3		
Importance Factor, I _s	1.0	Table 1.5.2		
Roof Configuration	Gable			
Roof Slope	09.5°			
Distance from Eave to Ridge	33.0			
p _m , Minimum required Snow Load	0.00 psf	Para. 7.3.4		
pf, Calculated Snow Load	0.00	Eq. 7.3-1		
pf, Design Snow Load	0.00 psf			

Rail & Mount Selection (FS=3.0)			
Manufacturer:	S5!	Allowable Mount Spacing by Uplift Pressure	
Model:	Protea Bracket	< 38 psf : 2 rails, mounts @ 3 ft. o.c.	
Substrate	Corrugated Panel	38 to 57 psf : 3 rails, mounts @ 3 ft. o.c.	
Connector:	4- 6mm self-piercing screws	57 to 0 psf : 4 rails, mounts @ 3 ft. o.c.	
		> 0 psf :	
Allowable Uplift:	366 lb., max.	> 76 psf : Mount capacity exceeded	

Rail & Mount Layout by Zone				
Zone 1:	3 rails, mounts @ 3 ft. o.c.	Zone 2r:	4 rails, mounts @ 3 ft. o.c.	
Zone 1':	N/A	Zone 3:	N/A	
Zone 2:	N/A	Zone 3e:	4 rails, mounts @ 3 ft. o.c.	
Zone 2e:	3 rails, mounts @ 3 ft. o.c.	Zone 3r:	4 rails, mounts @ 3 ft. o.c.	
Zone 2n:	4 rails, mounts @ 3 ft. o.c.			
(From rail analysis, allowable spacing and number of rails are controlled by individual mount pullout before rail bending)				



This item has been digitally signed and sealed by Henry I. DiFranco, Jr., P.E. on September 23, 2021 Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

NEW PHOTOVOLTAIC SYSTEM 13.88 KW DC 178 SW HASTINGS WAY, LAKE CITY, FL 32024



VICINITY MAP

SATELLITE VIEW

SHEET INDEX

ELECTRICAL PLAN

ATTACHMENT PLAN

STRUCTURAL PLAN

LOAD CALCULATIONS

RESOURCE DOCUMENT

ELECTRICAL CALCULATIONS

LINE DIAGRAM

PLACARD

COVER PAGE

SITE PLAN

NOTES

G-001

G-002

A-101

A-102

A-103

A-104

E-601

E-602

E-603

E-604

R-001

R-002

R-003

R-004

R-005

R-006

R-007

R-008

R-009

R-010

louse of One in Faith



CONTRACTOR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

DAVID MILLER


178 SW HASTINGS WAY, LAKE CITY, FL 32024

COUNTY:-COLUMBIA COUNTY

SYSTEM SIZE

DC SIZE: 13.875 KW DC-(STC) AC SIZE: 10.730 KW AC

ENGINEER:



This item has been digitally signed and sealed by Henry I. DiFranco, Jr., P.E. on September 23, 2021 Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

PRINCIPAL ENGINEERING, INC. 1011 N. CAUSEWAY BLVD. STE 19 MANDEVILLE, LA 70471 985.624.5001 INFO@PI-AEC.COM FLORIDA FIRM NO. 30649

SHEET TITLE

COVER PAGE

DRAWN DATE 9/23/2021 **DRAWN BY** VS

SHEET NUMBER

G-001

GENERAL NOTES

1.1.1 PROJECT NOTES:

1.1.2 THIS PHOTOVOLTAIC (PV) SYSTEM SHALL COMPLY WITH THE NATIONAL ELECTRIC CODE (NEC) ARTICLE 690, ALL MANUFACTURERS'S LISTING AND INSTALLATION INSTRUCTIONS, AND THE RELEVANT CODES AS SPECIFIED BY THE AUTHORITY HAVING JURISDICTION'S (AHJ) APPLICABLE CODES.

1.1.3 THE UTILITY INTERCONNECTION APPLICATION MUST BE APPROVED AND PV SYSTEM INSPECTED PRIOR TO PARALLEL OPERATION 1.1.4 GROUND FAULT DETECTION AND INTERRUPTION (GFDI) DEVICE IS INTEGRATED WITH THE MICRO-INVERTER IN ACCORDANCE WITH NEC 690.41(B)

1.1.5 ALL PV SYSTEM COMPONENTS: MODULES, UTILITY-INTERACTIVE INVERTERS, AND SOURCE CIRCUIT COMBINER BOXES ARE IDENTIFIED AND LISTED FOR USE IN PHOTOVOLTAIC SYSTEMS AS REQUIRED BY NEC 690.4: PV MODULES: UL1703, IEC61730, AND IEC61215, AND NFPA 70 CLASS C FIRE INVERTERS: UL 1741 CERTIFIED, IEEE 1547, 929, 519 COMBINER BOX(ES): UL 1703 OR UL 1741 ACCESSORY 1.1.6 MAX DC VOLTAGE CALCULATED USING MANUFACTURER PROVIDED TEMP COEFFICIENT FOR VOC. IF UNAVAILABLE, MAX DC VOLTAGE

CALCULATED ACCORDING TO NEC 690.7. 1.1.7 ALL INVERTERS, PHOTOVOLTAIC MODULES, PHOTOVOLTAIC PANELS, AND SOURCE CIRCUIT COMBINERS INTENDED FOR USE IN A PHOTOVOLTAIC POWER SYSTEM WILL BE IDENTIFIED AND LISTED FOR THE APPLICATION PER 690.4. SHALL BE INSTALLED ACCORDING TO ANY INSTRUCTIONS FROM LISTING OR LABELING [NEC 110.3]. 1.1.8 ALL SIGNAGE TO BE PLACED IN ACCORDANCE WITH LOCAL

BUILDING CODE. IF EXPOSED TO SUNLIGHT. IT SHALL BE UV RESISTANT. ALL PLAQUES AND SIGNAGE WILL BE INSTALLED AS REQUIRED BY THE NEC AND AHJ.

1.2.1 SCOPE OF WORK:

1.2.2 PRIME CONTRACTOR IS RESPONSIBLE FOR THE DESIGN AND SPECIFICATIONS OF THE GRID-TIED PHOTOVOLTAIC SYSTEM RETROFIT. PRIME CONTRACTOR WILL BE RESPONSIBLE FOR COLLECTING EXISTING ONSITE REQUIREMENTS TO DESIGN. SPECIFY, AND INSTALL THE EXTERIOR ROOF-MOUNTED PORTION OF THE PHOTOVOLTAIC SYSTEMS DETAILED IN THIS DOCUMENT

1.3.1 WORK INCLUDES:

1.3.2 PV RACKING SYSTEM INSTALLATION - UNIRAC SOLAR

1.3.3 PV MODULE AND INVERTER INSTALLATION - LG ELECTRONICS LG375N1C-A6 / ENPHASE IQ7PLUS-72-2-US INVERTER

- 1.3.4 PV EQUIPMENT ROOF MOUNT
- 1.3.5 PV SYSTEM WIRING TO A ROOF-MOUNTED JUNCTION BOX
- 1.3.6 PV LOAD CENTERS (IF INCLUDED)
- 1.3.7 PV METERING/MONITORING (IF INCLUDED)
- 1.3.8 PV DISCONNECTS
- 1.3.9 PV GROUNDING ELECTRODE & BONDING TO (E) GEC
- 1.3.10 PV FINAL COMMISSIONING
- 1.3.11 (E) ELECTRICAL EQUIPMENT RETROFIT FOR PV
- 1.3.12 SIGNAGE PLACED IN ACCORDANCE WITH LOCAL BUILDING CODE

PROJECT INFORMATION

NAME: DAVID MILLER

CONTRACTOR NAME

MARC JONES CONSTRUCTION. LLC DBA SUNPRO SOLAR

SCOPE OF WORK

PTC: 37 x 347.3W = 12.85 kW DC (37) LG ELECTRONICS LG375N1C-A6 (37) ENPHASE IQ7PLUS-72-2-US

ATTACHMENT TYPE: ROOF MOUNT

UTILITY METER UPGRADE: NO

CONSTRUCTION: SINGLE-FAMILY ZONING: **RESIDENTIAL**

APPLICABLE CODES & STANDARDS

BUILDING:

ELECTRICAL: NEC 2017 FIRE: IFC 2020

OWNER

PROJECT MANAGER NAME: SHAHIN HAYNES PHONE: 8665071461

PHONE: 5052180838

SYSTEM SIZE: STC:37 X 375W= 13.88 kW DC

MSP UPGRADE: NO

AUTHORITIES HAVING JURISDICTION

BUILDING: COLUMBIA COUNTY ZONING: COLUMBIA COUNTY UTILITY: CLAY ELECTRIC CO-OP

DESIGN SPECIFICATION

OCCUPANCY:

GROUND SNOW LOAD: REFER STRUCTURAL LETTER REFER STRUCTURAL LETTER WIND EXPOSURE:

WIND SPEED: 165 MPH

IBC 2018, IRC 2018, FBC 2020 (7TH EDITION)

2.1.1 SITE NOTES:

- 2.1.2 A LADDER WILL BE IN PLACE FOR INSPECTION IN COMPLIANCE WITH OSHA REGULATIONS.
- 2.1.3 THE PV MODULESARECONSIDERED NON-COMBUSTIBLE AND THIS SYSTEM IS A UTILITY INTERACTIVE SYSTEM WITH NO STORAGE BATTERIES.
- 2.1.4 THE SOLAR PV INSTALLATION WILL NOT OBSTRUCT ANY PLUMBING, MECHANICAL, OR BUILDING ROOF VENTS.
- 2.1.5 PROPERACCESS AND WORKING CLEARANCE AROUND EXISTING AND PROPOSED ELECTRICAL EQUIPMENT WILL BE PROVIDED AS PERSECTION NEC 110.26.
- 2.1.6 ROOF COVERINGS SHALL BE DESIGNED, INSTALLED, AND MAINTAINED IN ACCORDANCE WITH THIS CODE AND THE APPROVED MANUFACTURER'S INSTRUCTIONS SUCH THAT THE ROOF COVERING SERVES TO PROTECT THE BUILDING OR STRUCTURE.
- 2.2.1 EQUIPMENT LOCATIONS:
- 2.2.2 ALL EQUIPMENT SHALL MEET MINIMUM SETBACKS AS REQUIRED BY 2.5.5 EQUIPMENT GROUNDING CONDUCTORS SHALLBE SIZED NEC 110.26.
- 2.2.3 WIRING SYSTEMS INSTALLED IN DIRECT SUNLIGHT MUST BE RATED MANUFACTORERS' INSTRUCTIONS. FOR EXPECTED OPERATING TEMPERATURE AS SPECIFIED BY NEC 690.31 2.5.6 EACH MODULE WILL BE GROUNDED USING WEEB (A),(C) AND NEC TABLES 310.15 (B)(2)(A) AND 310.15 (B)(3)(C).
- 2.2.4 JUNCTION AND PULL BOXES PERMITTED INSTALLED UNDER PV MODULES ACCORDING TO NEC 690.34.
- 2.2.5 ADDITIONAL AC DISCONNECT(S) SHALL BE PROVIDED WHERE THE INVERTER IS NOT WITHIN SIGHT OF THE AC SERVICING DISCONNECT. 2.2.6 ALL EQUIPMENT SHALL BE INSTALLED ACCESSIBLE TO QUALIFIED PERSONNEL ACCORDING TO NEC APPLICABLE CODES.
- 2.2.7 ALL COMPONENTS ARE LISTED FOR THEIR PURPOSE AND RATED FOR OUTDOOR USAGE WHEN APPROPRIATE.

2.3.1 STRUCTURAL NOTES:

- 2.3.2 RACKING SYSTEM & PV ARRAY WILL BE INSTALLED ACCORDING TO CODE-COMPLIANT INSTALLATION MANUAL. TOP CLAMPS REQUIRE A DESIGNATED SPACE BETWEEN MODULES, AND RAILS MUSTALSO EXTEND A MINIMUM DISTANCE BEYOND EITHER EDGE OF THE ARRAY/SUBARRAY, ACCORDING TO RAI MANUFACTURER'S INSTRUCTIONS.
- 2.3.3 JUNCTION BOX WILL BE INSTALLED PER MANUFACTURERS' SPECIFICATIONS. IF ROOF-PENETRATING TYPE, IT SHALL BE FLASHED & SEALED PER LOCAL REQUIREMENTS.
- 2.3.4 ROOFTOP PENETRATIONS FOR PV RACEWAY WILLBE COMPLETED AND SEALED W/ APPROVED CHEMICAL SEALANT PER CODE BY A LICENSED CONTRACTOR.
- 2.3.5 ALL PV RELATED ROOF ATTACHMENTS TO BE SPACED NO GREATER THAN THE SPAN DISTANCE SPECIFIED BY THE RACKING MANUFACTURER.
- 2.3.6 WHEN POSSIBLE, ALL PV RELATED RACKING ATTACHMENTS WILL BE STAGGERED AMONGST THE ROOF FRAMING MEMBERS.

2.4.1 WIRING & CONDUIT NOTES:

- 2.4.2 ALL CONDUIT AND WIRE WILL BE LISTED AND APPROVED FOR THEIR PURPOSE. CONDUIT AND WIRE SPECIFICATIONS AREBASED ON MINIMUM CODE REQUIREMENTS AND ARE NOT MEANT TO LIMIT UP-SIZING.
- 2.4.3 CONDUCTORS SIZED ACCORDING TO NEC 690.8, NEC 690.7.
- 2.4.4 VOLTAGE DROP LIMITED TO 1.5%.
- 2.4.5 DC WIRING LIMITED TO MODULE FOOTPRINT. MICROINVERTER WIRING SYSTEMS SHALL BE LOCATED AND SECURED UNDER THE ARRAY W/ SUITABLE WIRING CLIPS.

2.4.6 AC CONDUCTORS COLORED OR MARKED AS FOLLOWS: PHASE A OR L1- BLACK PHASE B OR L2- RED. OR OTHER CONVENTION IF THREE PHASE PHASE C OR L3- BLUE. YELLOW, ORANGE**, OR OTHER CONVENTION NEUTRAL-WHITE OR GREY IN 4-WIRE DELTA CONNECTED SYSTEMS THE PHASE WITH HIGHER VOLTAGE TO BE MARKED ORANGE [NEC 110.15].

2.5.1 GROUNDING NOTES:

2.5.2 GROUNDING SYSTEM COMPONENTS SHALL BE LISTED FOR THEIR PURPOSE, AND GROUNDING DEVISES EXPOSED TO THE ELEMENTS SHALL BE RATED FOR SUCH USE.

2.5.3 PV EQUIPMENT SHALL BE GROUNDED ACCORDING TO NEC 690.43 AND MINIMUM NEC TABLE 250.122.

2.5.4 METAL PARTS OF MODULE FRAMES, MODULE RACKING, AND ENCLOSURES CONSIDERED GROUNDED IN ACCORD WITH 250.134 AND 250.136(A).

ACCORDING TO NEC 690.45 AND MICROINVERTER

GROUNDING CLIPS AS SHOWN IN

MANUFACTURERDOCUMENTATION AND APPROVED BY THE AHJ. IF WEEBS ARE NOT USED, MODULE GROUNDING LUGS MUST BE INSTALLED AT THE SPECIFIED GROUNDING LUG HOLES PER THE MANUFACTURERS' INSTALLATION REQUIREMENTS.

2.5.7 THE GROUNDING CONNECTION TO A MODULE SHALL BE ARRANGED SUCH THAT THE REMOVAL OFA MODULE DOES NOT INTERRUPT A GROUNDING CONDUCTOR TO ANOTHER MODULE. 2.5.8 GROUNDING AND BONDING CONDUCTORS, IF INSULATED, SHALL BE COLORED GREEN OR MARKED GREEN IF #4 AWG OR LARGER [NEC 250.119]

2.5.9 THE GROUNDING ELECTRODE SYSTEM COMPLIES WITH NEC 690.47 AND NEC 250.50 THROUGH 250.106. IF EXISTING SYSTEM IS INACCESSIBLE. OR INADEQUATE. A GROUNDING ELECTRODE SYSTEM PROVIDED ACCORDING TO NEC 250, NEC 690,47 AND

2.5.10 GROUND-FAULT DETECTION SHALL COMPLY WITH NEC 690.41(B)(1) AND (2) TO REDUCE FIRE HAZARDS

2.6.1 DISCONNECTION AND OVER-CURRENT PROTECTION NOTES:

2.6.2 DISCONNECTING SWITCHES SHALL BE WIRED SUCH THAT WHENTHE SWITCH IS OPENED THE CONDUCTORS REMAINING ENERGIZED ARECONNECTED TO THE TERMINALS MARKED "LINE SIDE" (TYPICALLY THE UPPER TERMINALS). 2.6.3 DISCONNECTS TO BE ACCESSIBLE TO QUALIFIED UTILITY PERSONNEL, BE LOCKABLE, AND BE A VISIBLE-BREAK SWITCH 2.6.4 PV SYSTEM CIRCUITS INSTALLED ON OR IN BUILDINGS SHALL INCLUDE A RAPID SHUTDOWN FUNCTION TO REDUCE SHOCK HAZARD FOR EMERGENCY RESPONDERS IN ACCORDANCE WITH 690.12(A) THROUGH (D). 2.6.5 ALL OCPD RATINGS AND TYPES SPECIFIED ACCORDING TO NEC 690.8, 690.9, AND 240.

2.6.6 MICROINVERTER BRANCHES CONNECTED TO A SINGLE BREAKER OR GROUPED FUSES IN ACCORDANCE WITH NEC 110.3(B).

2.6.7 IF REQUIRED BY AHJ. SYSTEM WILL INCLUDE ARC-FAULT CIRCUIT PROTECTION ACCORDING TO NEC 690.11 AND UL1699B.

2.7.1 INTERCONNECTION NOTES:

2.7.2 LOAD-SIDE INTERCONNECTION SHALL BE IN ACCORDANCE WITH [NEC 705.12 (B)] 2.7.3 THE SUM OF THE UTILITY OCPD AND INVERTER CONTINUOUS OUTPUT MAY NOT EXCEED 120% OF BUSBAR RATING [NEC 705.12(B)(2)(3)(b)]. 2.7.4 THE SUM OF 125 PERCENT OF THE POWER SOURCE(S) OUTPUT CIRCUIT CURRENT AND THE RATING OF THE OVERCURRENT DEVICE PROTECTING THE BUSBAR SHALL NOT EXCEED 120 PERCENT OF THE AMPACITY OF THE BUSBAR, PV DEDICATED BACKFEED BREAKERS MUST BE LOCATED OPPOSITE END OF THE BUS FROM THE UTILITY SOURCE OCPD [NEC 705.12(B)(2)(3)].

2.7.5 AT MULTIPLE ELECTRIC POWER SOURCES OUTPUT

COMBINER PANEL. TOTAL RATING OF ALL OVERCURRENT DEVICES SHALL NOT EXCEED AMPACITY OF BUSBAR, HOWEVER, THE COMBINED OVERCURRENT DEVICE MAY BE EXCLUDED ACCORDING TO NEC 705.12 (B)(2)(3)(C). 2.7.6 FEEDER TAP INTERCONECTION (LOADSIDE) ACCORDING TO NEC 705.12 (B)(2)(1) 2.7.7 SUPPLY SIDE TAP INTERCONNECTION ACCORDING TO NEC 705.12 (A) WITH SERVICE ENTRANCE CONDUCTORS IN ACCORDANCE WITH NEC 230.42 2.7.8BACKFEEDING BREAKER FOR ELECTRIC POWER SOURCES OUTPUT IS EXEMPT FROM ADDITIONAL FASTENING [NEC 705.12 (B)(5)].

CONTRACTOR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

DAVID MILLER


178 SW HASTINGS WAY.LAKE CITY. FL 32024

COUNTY:-COLUMBIA COUNTY

SYSTEM SIZE

DC SIZE: 13.875 KW DC-(STC) AC SIZE: 10.730 KW AC

ENGINEER:



This item has been digitally signed and sealed by Henry I. DiFranco, Jr., P.E. on September 23, 2021 Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

PRINCIPAL ENGINEERING, INC. 1011 N. CAUSEWAY BLVD. STE 19 MANDEVILLE, LA 70471 985.624.5001 INFO@PI-AEC.COM FLORIDA FIRM NO. 30649


SHEET TITLE

NOTES

DRAWN DATE	9/23/2021	
DRAWN BY	VS	

SHEET NUMBER

G-002

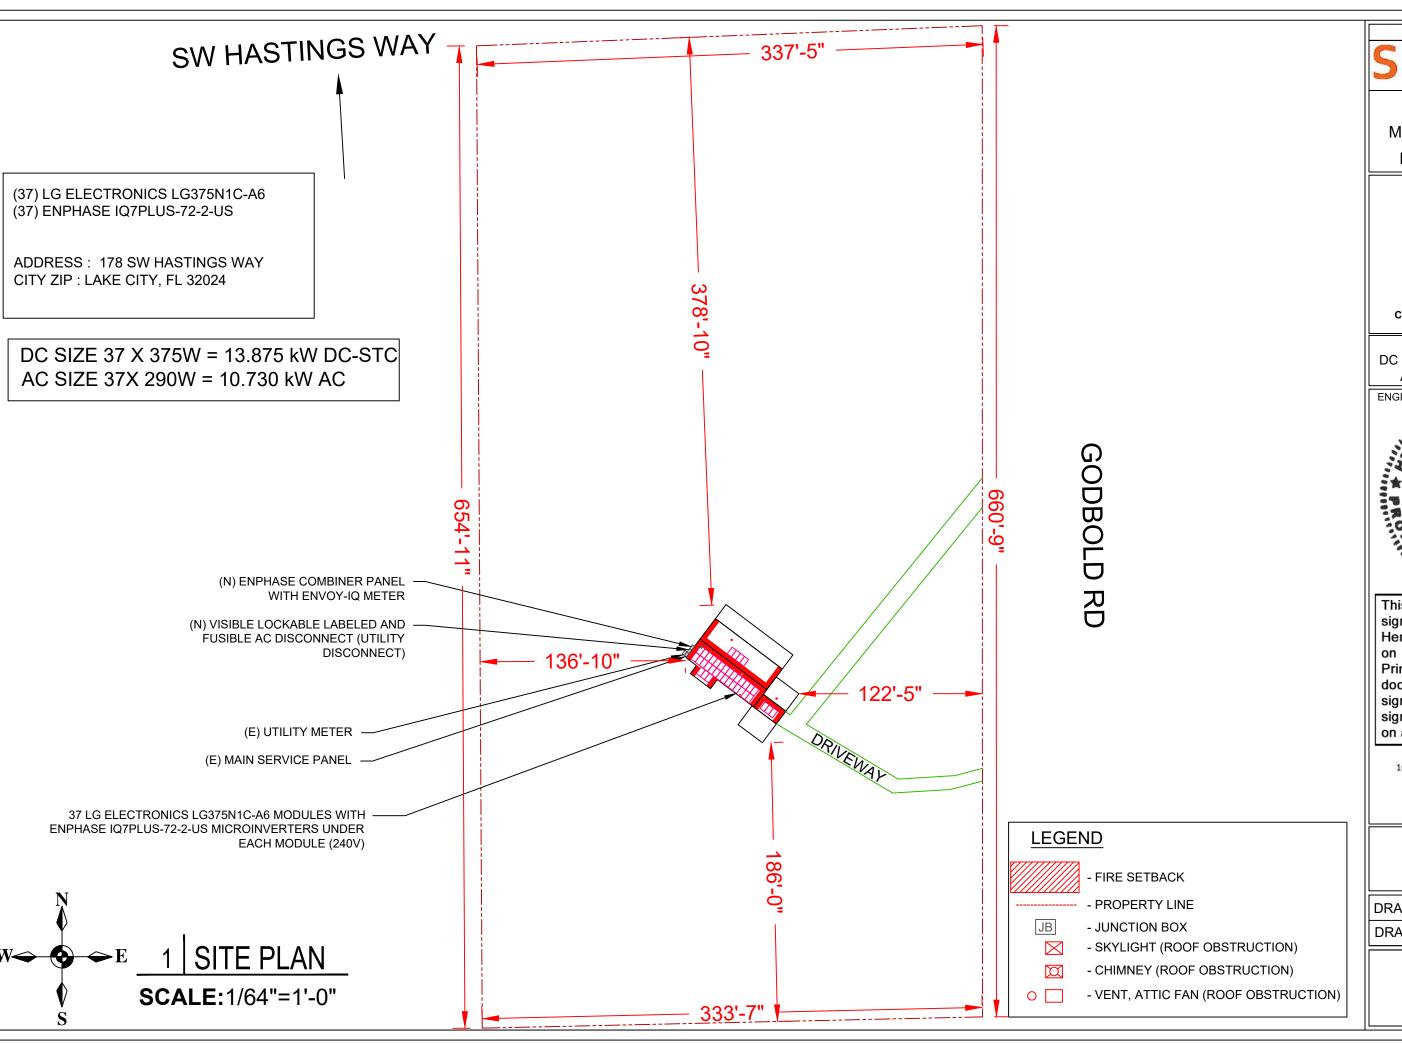

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

DAVID MILLER

178 SW HASTINGS WAY,LAKE CITY, FL 32024

COUNTY:-COLUMBIA COUNTY

SYSTEM SIZE

DC SIZE: 13.875 KW DC-(STC) AC SIZE: 10.730 KW AC

ENGINEER:



This item has been digitally signed and sealed by Henry I. DiFranco, Jr., P.E. on September 23, 2021 Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

PRINCIPAL ENGINEERING, INC. 1011 N. CAUSEWAY BLVD. STE 19 MANDEVILLE, LA 70471 985.624.5001 INFO@PI-AEC.COM FLORIDA FIRM NO. 30649


SHEET TITLE

SITE PLAN

DRAWN DATE	9/23/2021
DRAWN BY	VS

SHEET NUMBER

A-101

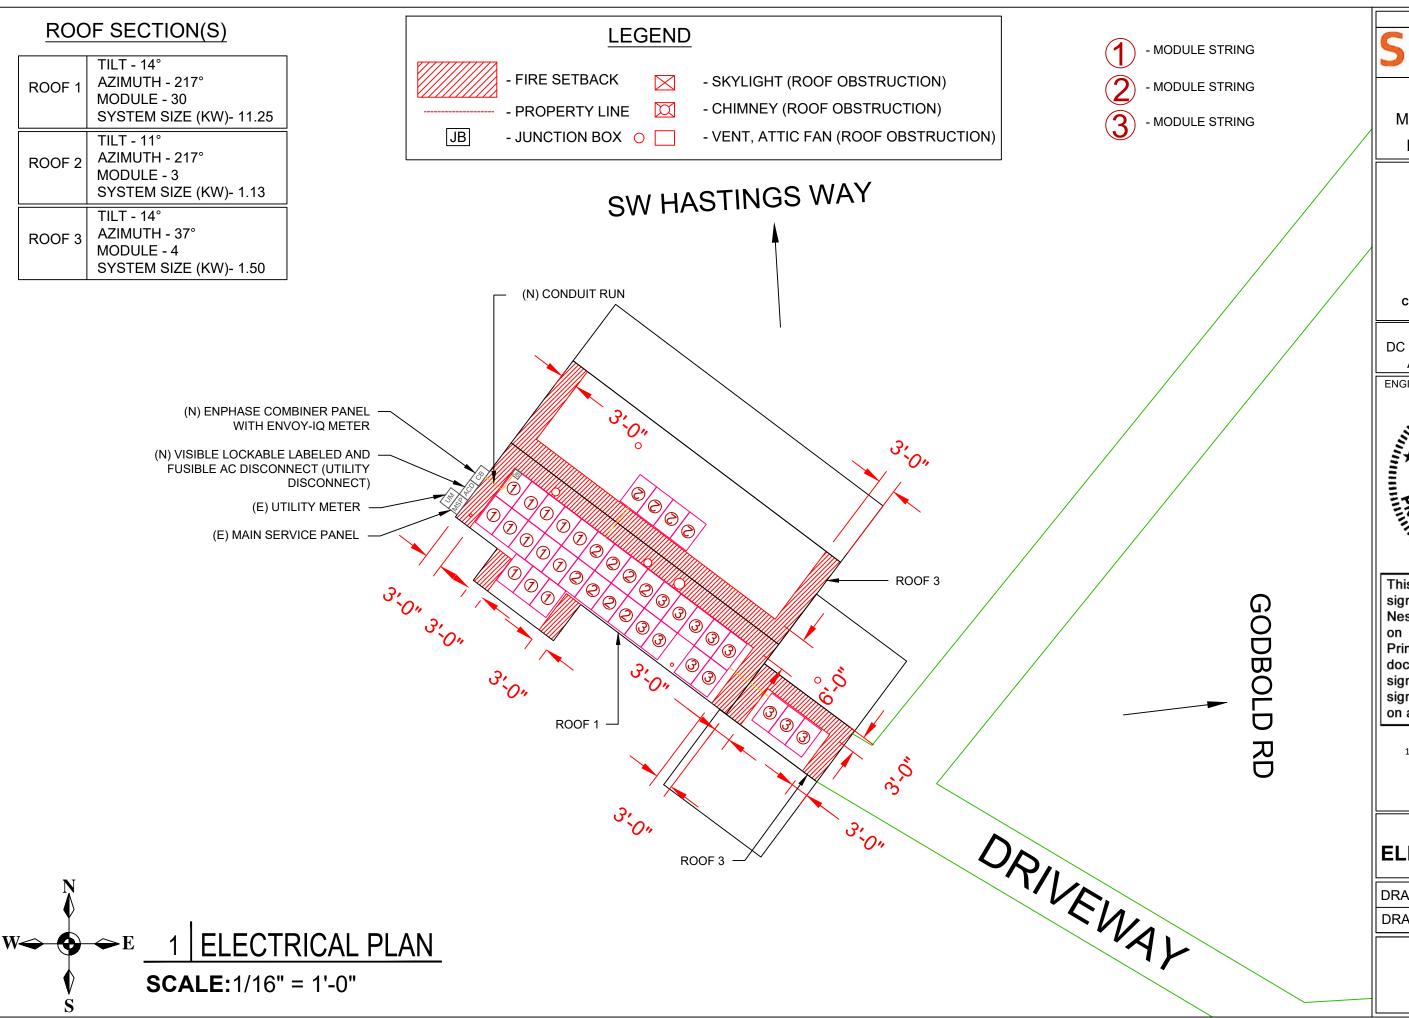

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

DAVID MILLER

178 SW HASTINGS WAY,LAKE CITY, FL 32024

COUNTY:-COLUMBIA COUNTY

SYSTEM SIZE

DC SIZE: 13.875 KW DC-(STC) AC SIZE: 10.730 KW AC

ENGINEER:



This item has been digitally signed and sealed by Nestor J. Houghton, P.E. on September 23, 2021 Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

PRINCIPAL ENGINEERING, INC.
1011 N. CAUSEWAY BLVD. STE 19
MANDEVILLE, LA 70471
985.624.5001
INFO@PI-AEC.COM
FLORIDA FIRM NO. 30649

SHEET TITLE

ELECTRICAL PLAN

DRAWN DATE	9/23/2021
DRAWN BY	VS


SHEET NUMBER

A-102

TOTAL MOUNT COUNT - 100

Note 1: Windspeed value is design 3-sec gust in accordance with ASCE 7-16

Note 2: a) Metal roof brackets require screws into purlins and deck



c) Installers must verify metal panels are 26 gauge or thicker before use of proteabracket




- CLAMP


- PROTEA BARACKET
- RAIL
- TRAPEZOIDAL METAL SEAM @ 12" O.C.


ARRAY 1 TILT- 14 DEG AZIMUTH - 217 DEG Note 3: These drawings were prepared under my supervison. I have researched the code and to the best of my knowledge And belief, these drawings comply with the 2020 Florida Building Code.

Note 4: Installer shall adjust mount spacing by zone to match

TILT- 11 DEG
AZIMUTH - 217 DEG

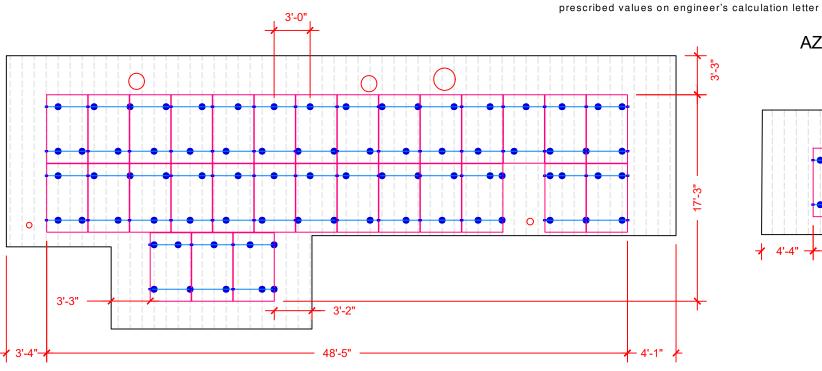

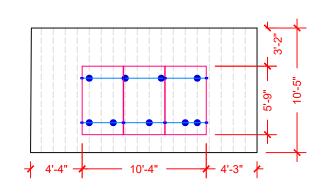

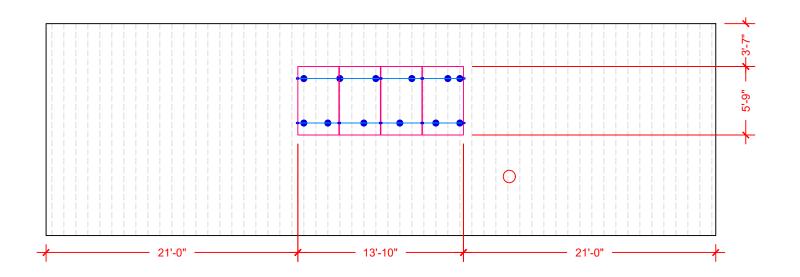

1 ATTACHMENT PLAN

SCALE:1/8"=1'-0"

ARRAY 3 TILT- 14 DEG AZIMUTH - 37 DEG

CONTRACTOR SUNPR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

DAVID MILLER

178 SW HASTINGS WAY,LAKE CITY, FL 32024

COUNTY:-COLUMBIA COUNTY

SYSTEM SIZE

DC SIZE: 13.875 KW DC-(STC) AC SIZE: 10.730 KW AC

ENGINEER:



This item has been digitally signed and sealed by Henry I. DiFranco, Jr., P.E. on September 23, 2021 Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

PRINCIPAL ENGINEERING, INC. 1011 N. CAUSEWAY BLVD. STE 19 MANDEVILLE, LA 70471 985.624.5001 INFO@PI-AEC.COM FLORIDA FIRM NO. 30649

SHEET TITLE

ATTACHMENT PLAN

DRAWN DATE 9/23/2021
DRAWN BY VS

SHEET NUMBER

A-103

SOLAR MODULE SPECIFICATIONS		
MANUFACTURER / MODEL #	LG ELECTRONICS LG375N1C-A6	
VMP	35.3V	
IMP	10.63A	
VOC	41.8V	
ISC	11.35A	
TEMP. COEFF. VOC	-0.26%/°C	
MODULE DIMENSION	68.50"L x 41"W x 1.57"D (In Inch)	


INVERTER SPECIFICATIONS		
MANUFACTURER / MODEL #	ENPHASE IQ7PLUS-72-2-US MICROINVERTER	
MIN/MAX DC VOLT RATING	22V MIN/ 60V MAX	
MAX INPUT POWER	235W-440W	
NOMINAL AC VOLTAGE RATING	240V/ 211-264V	
MAX AC CURRENT	1.21A	
MAX MODULES PER STRING	13 (SINGLE PHASE)	
MAX OUTPUT POWER	290 VA	

	WIRE /CONDUIT SCHEDULE		
TAG	DESCRIPTION		
1	#12/2 ROMEX IN ATTIC/ #12 THWN-2 ON EXTERIOR		
	& (1)#6 THWN-2 GROUND / (GN)		
2	#6 THWN-2 & (1)#6 THWN-2 GROUND / (GN)		
3	#6 THWN-2 & (1)#6 THWN-2 GROUND / (GN)		
4	(1)#6 BARE GROUND		

DC SIZE 37 X 375W = 13.875 kW DC-STC AC SIZE 37X 290W = 10.730 kW AC

> ENPHASE IQ7PLUS-72-2-US — MICROINVERTERS ONE UNDER EACH PANEL(240V)

(GN) GENERAL CONDUIT NOTE: CONDUIT TO BE UL LISTED FOR WET LOCATIONS AND UV PROTECTED (EX. -EMT,SCH 80 PVC OR RMC)*FMC MAYBE USED IN INDOOR APPLICATIONS WHERE PERMITTED BY NEC ART .348

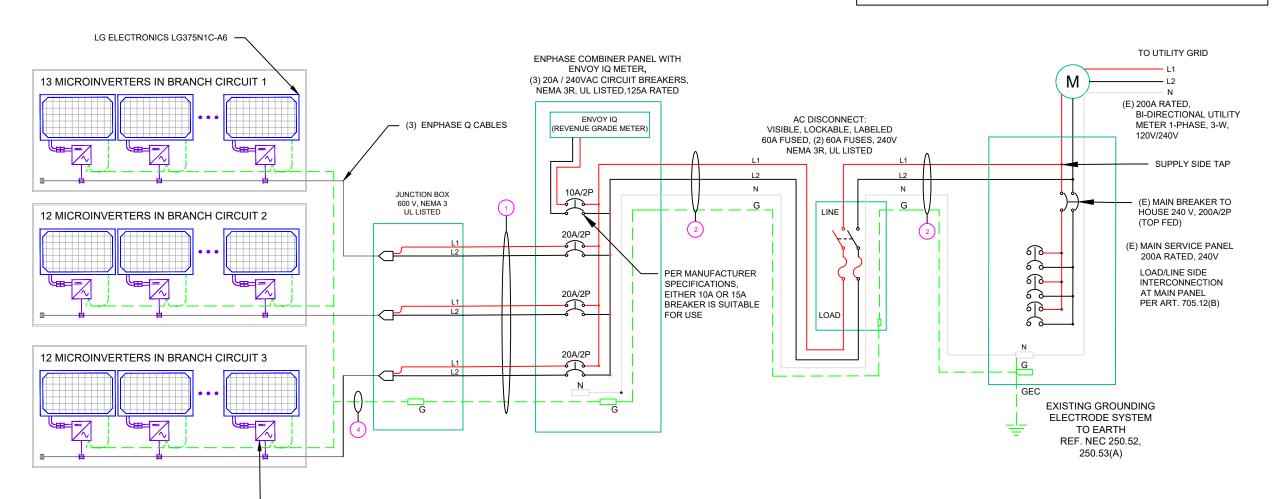

CONTRACTOR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

DAVID MILLER

178 SW HASTINGS WAY, LAKE CITY, FL 32024

COUNTY:-COLUMBIA COUNTY

SYSTEM SIZE

DC SIZE: 13.875 KW DC-(STC) AC SIZE: 10.730 KW AC

ENGINEER:



This item has been digitally signed and sealed by Nestor J. Houghton, P.E. on September 23, 2021 Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

PRINCIPAL ENGINEERING, INC. 1011 N. CAUSEWAY BLVD. STE 19 MANDEVILLE, LA 70471 985.624.5001 INFO@PI-AEC.COM FLORIDA FIRM NO. 30649

SHEET TITLE

LINE DIAGRAM

DRAWN DATE	9/23/2021
DRAWN BY	VS

SHEET NUMBER

AMBIENT TEMPERATURE SPECS			
RECORD LOW TEMP	-5°		
AMBIENT TEMP (HIGH TEMP 2%)	34°		
CONDUIT HEIGHT	0.5"		
CONDUCTOR TEMPERATURE RATE	90°		

PERCENT OF VALUES	NUMBER OF CURRENT CARRYING CONDUCTORS
.80	4-6
.70	7-9
.50	10-20

CALCULATIONS:

- 1. CURRENT CARRYING CONDUCTOR
- (A) <u>BEFORE IQ COMBINER PANEL</u>
 AMBIENT TEMPERATURE (34)°C ...NEC 310.15(B)(3)(c)
 TEMPERATURE DERATE FACTOR 0.96 ...NEC
 310.15(B)(2)(a)
 GROUPING FACTOR 0.8...NEC 310.15(B)(3)(a)

CONDUCTOR AMPACITY

- $= (INV O/P CURRENT) \times 1.25 / A.T.F / G.F ...NEC 690.8(B)$
- $= [(13 \times 1.21) \times 1.25] / [0.96 \times 0.8]$
- = 25.60A

SELECTED CONDUCTOR - #12 THWN-2 ...NEC 310.15(B)(16)

(B) AFTER IQ COMBINER PANEL
TEMPERATURE DERATE FACTOR - 0.96
GROUPING FACTOR - 1

CONDUCTOR AMPACITY

- $= (TOTAL INV O/P CURRENT) \times 1.25 / 0.96 / 1 ... NEC 690.8(B)$
- $= [(37 \times 1.21) \times 1.25] / [0.96 \times 1]$
- = 58.29 A

SELECTED CONDUCTOR - #6 THWN-2 ...NEC 310.15(B)(16)

2. PV OVER CURRENT PROTECTIONNEC 690.9(D)
= TOTAL INVERTER O/P CURRENT x 1.25
= (37 x 1.21) x 1.25 = 55.96 A

SUNPR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

DAVID MILLER

178 SW HASTINGS WAY,LAKE CITY, FL 32024

COUNTY:-COLUMBIA COUNTY

SYSTEM SIZE

DC SIZE: 13.875 KW DC-(STC) AC SIZE: 10.730 KW AC

ENGINEER:



This item has been digitally signed and sealed by Nestor J. Houghton, P.E. on September 23, 2021 Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

PRINCIPAL ENGINEERING, INC. 1011 N. CAUSEWAY BLVD. STE 19 MANDEVILLE, LA 70471 985.624.5001 INFO@PI-AEC.COM FLORIDA FIRM NO. 30649

SHEET TITLE ELECTRICAL CALCULATIONS


DRAWN DATE	9/23/2021
DRAWN BY	VS

SHEET NUMBER

WARNING: PHOTOVOLTAIC POWER SOURCE

SOLAR PV SYSTEM EQUIPPED WITH RAPID SHUTDOWN

TURN RAPID SHUTDOWN SWITCH TO THE 'OFF' **POSITION TO SHUT** DOWN PV SYSTEM AND REDUCE SHOCK HAZARD IN THE ARRAY



AC DISCONNECT



DO NOT TOUCH TERMINALS. TERMINALS ON BOTH LINE AND LOAD SIDES MAY BE ENERGIZED IN THE **OPEN POSITION**

PHOTOVOLTAIC SYSTEM **AC DISCONNECT**

OPERATING VOLTAGE: VOLTS OPERATING CURRENT: AMPS

> SOLAR **BREAKER**

AC COMBINER BOX

PHOTOVOLTAIC MICROINVERTERS LOCATED UNDER **EACH PV MODULE IN ROOFTOP ARRAY**

PHOTOVOLTAIC SYSTEM **EQUIPPED WITH RAPID SHUTDOWN**

RATED AC OUTPUT CURRENT: NOM. OPERATING VOLTAGE:

DUAL POWER SOURCES

SOURCES: UTILITY GRID AND PV SOLAR ELECTRIC SYSTEM

KW SOLAR DISCONNECT LOCATED






⚠ WARNING ⚠ INVERTER OUTPUT CONNECTION DO NOT RELOCATE THIS **OVERCURRENT DEVICE**

SOLAR CONNECTION LINE SIDE TAP

CAUTION

POWER TO THIS BUILDING IS ALSO SUPPLIED FROM THE FOLLOWING SOURCES WITH **DISCONNECTS LOCATED AS SHOWN:**

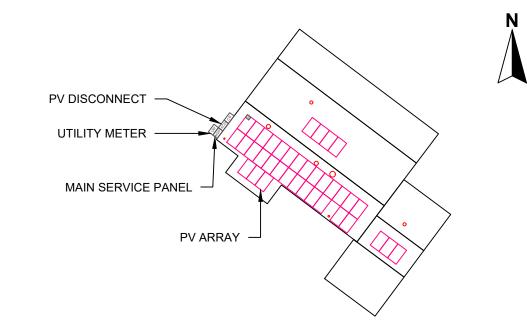

CONTRACTOR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS


DAVID MILLER

178 SW HASTINGS WAY, LAKE CITY, FL 32024

COUNTY:-COLUMBIA COUNTY

SYSTEM SIZE

DC SIZE: 13.875 KW DC-(STC) AC SIZE: 10.730 KW AC



This item has been digitally signed and sealed by Nestor J. Houghton, P.E. on September 23, 2021 Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.


PRINCIPAL ENGINEERING, INC. 1011 N. CAUSEWAY BLVD. STE 19 MANDEVILLE, LA 70471 985.624.5001 INFO@PI-AEC.COM FLORIDA FIRM NO. 30649

SHEET TITLE

PLACARD

DRAWN DATE	9/23/2021	
DRAWN BY	VS	

SHEET NUMBER

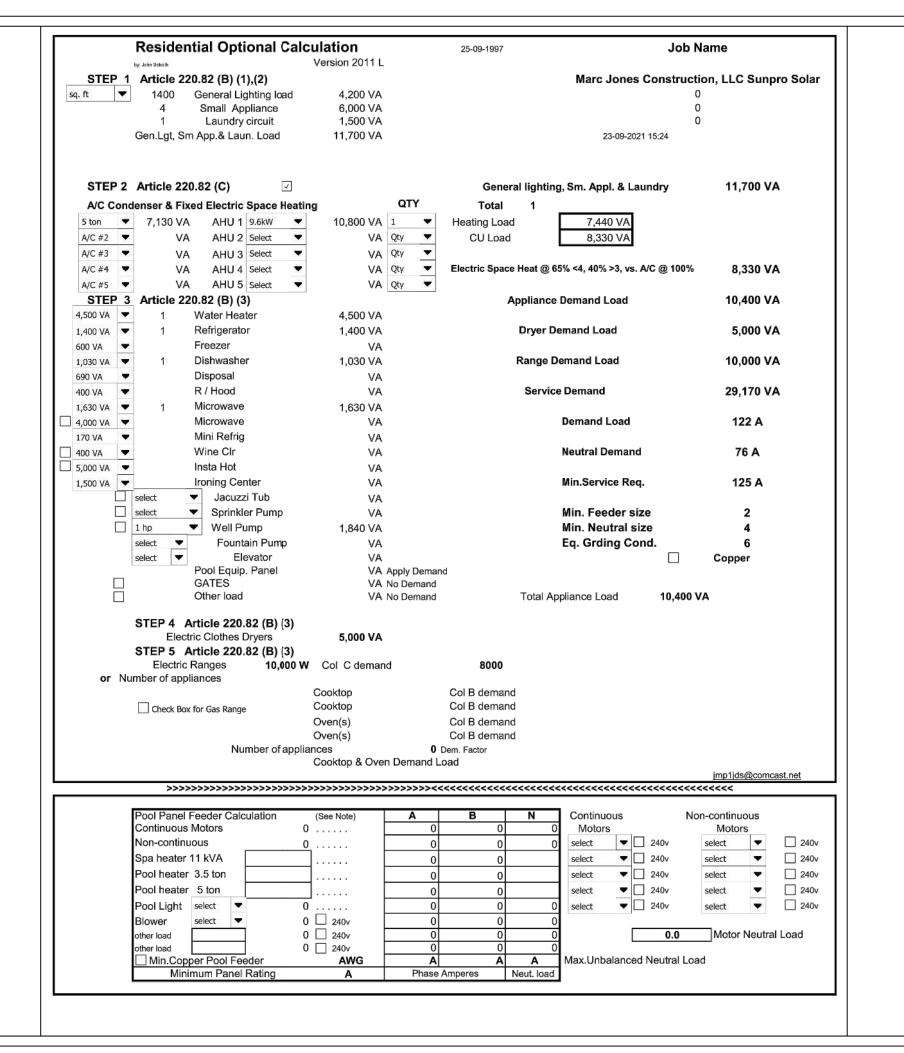

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

DAVID MILLER

178 SW HASTINGS WAY,LAKE CITY, FL 32024

COUNTY:-COLUMBIA COUNTY

SYSTEM SIZE

DC SIZE: 13.875 KW DC-(STC) AC SIZE: 10.730 KW AC

ENGINEER:

SHEET TITLE LOAD CALCULATIONS

DRAWN DATE 9/23/2021
DRAWN BY VS

SHEET NUMBER

LG NeON[®]2

LG370N1C-A6

| LG375N1C-A6

LG380N1C-A6 Preliminary



370W | 375W | 380W

The LG NeON® 2 is LG's best selling solar module and one of the most powerful and versatile modules on the market today. The cells are designed to appear all-black at a distance, and the performance warranty guarantees 90.6% of labeled power output at 25 years.









Features



Enhanced Performance Warranty

LG NeON® 2 has an enhanced performance warranty. After 25 years, LG NeON® 2 is guaranteed at least 90.6% of initial performance.



25-Year Limited Product Warranty

The NeON® 2 is covered by a 25-year limited product warranty. In addition, up to \$450 of labor costs will be covered in the rare case that a module needs to be repaired or replaced.



Solid Performance on Hot Days

LG NeON® 2 performs well on hot days due to its low temperature coefficient.



Roof Aesthetics

LG NeON® 2 has been designed with aesthetics in mind using thinner wires that appear all black at a distance.

When you go solar, ask for the brand you can trust: LG Solar

About LG Electronics USA, Inc.

LG Electronics is a global leader in electronic products in the clean energy markets by offering solar PV panels and energy storage systems. The company first embarked on a solar energy source research program in 1985, supported by LG Group's vast experience in the sem-conductor, LCD, chemistry and materials industries. In 2010, LG Solar successfully released its first MonoX® series to the market, which is now available in 32 countries. The NeON® (previous MonoX® NeON), NeON®2, NeON®2, DeON®2 BiFacial won the "Intersolar AWARD" in 2013, 2015 and 2016, which demonstrates LG steadership and innovation in the solar industry.



LG NeON®2



Preliminary

LG370N1C-A6 | LG375N1C-A6 | LG380N1C-A6

General Data

Cell Properties (Material/Type)	Monocrystalline/N-type
Cell Maker	LG
Cell Configuration	60 Cels (6 x 10)
Module Dimensions (L x W x H)	1,740mm x 1,042mm x 40mm
Weight	18.6 kg
Glass (Material)	Tempered Glass with AR Coating
Backsheet (Color)	White
Frame (Material)	Anodized Aluminium
Junction Box (Protection Degree)	IP 68 with 3 Bypass Diodes
Cables (Length)	1,100mm x 2EA
Connector (Type/Maker)	MC 4/MC

Certifications and Warranty

Certifications**	IEC 61215-1/-1-1/2 : 2016, IEC 61730-1/2 : 2010 UL 61730-1 : 2017, UL 61730-2 : 2017		
	ISO 9001, ISO 14001, ISO 50001		
	OHSAS 18001		
Salt Mist Corrosion Test	IEC 61701:2012 Severity 6		
Ammonia Corrosion Test	IEC 62716 : 2013		
Module Fire Performance	Type 1 (UL 61730)		
Fire Rating	Class C (UL 790, ULC/ORD C 1703)		
Solar Module Product Warranty	25 Year Limited		
Solar Module Output Warranty	Linear Warranty*		

NMOT*	[°C]	42 ± 3	
Pmax	[%/°C]	-0.34	
Voc	[%/°C]	-0.26	
Isc	[%/°C]	0.03	


*NMOT (Nominal Module Operating Temperature): Irradiance 800 W/m², Ambient temperature 20°C, Wind speed 1 m/s, Spectrum AM 1.5

Electrical Properties (NMOT)

Temperature Characteristics

Model		LG370N1C-A6	LG375N1C-A6	LG380N1C-A6	
Maximum Power (Pmax)	[W]	277	281	285	
MPP Voltage (Vmpp)	[V]	32.8	33.2	33.5	
MPP Current (Impp)	[A]	8.46	8.48	8.49	
Open Circuit Voltage (Voc)	[V]	39.3	39.4	39.4	
Short Circuit Current (Isc)	[A]	9.09	9.13	9.16	

I-V Curves



Electrical Properties (STC*)

Model		LG370N1C-A6	LG375N1C-A6	LG380N1C-A6
Maximum Power (Pmax)	[W]	370	375	380
MPP Voltage (Vmpp)	[V]	34.9	35.3	35.7
MPP Current (Impp)	[A]	10.61	10.63	10.65
Open Circuit Voltage (Voc, ± 5%)	[V]	41.7	41.8	41.9
Short Circuit Current (Isc, ± 5%)	[A]	11.31	11.35	11.39
Module Efficiency	[%]	20.4	20.7	21.0
Bifaciality Coefficient of Power	[%]		10	
Power Tolerance	[%]		0-+3	

*STC (Standard Test Condition): Irradiance 1000 W/m², cell temperature 25°C, AM 1.5

Operating Conditions


Operating Temperature	[°C]	-40 ~+85	
Maximum System Voltage	[V]	1,000	
Maximum Series Fuse Rating	[A]	20	
Mechanical Test Load' (Front)	[Pa/psf]	5,400	
Mechanical Test Load* (Rear)	[Pa/psf]	4,000	

*Based on IEC 61215-2:2016 (Test Load – Design Load x Safety Factor (1.5)) Mechanical Test Loads 6,000Pa / 5,400Pa based on IEC 61215:2005

Packaging Configuration

Number of Modules per Pallet	[EA]	25	
Number of Modules per 40' Container	[EA]	650	
Number of Modules per 53' Container	[EA]	850	
Packaging Box Dimensions (L x W x H)	[mm]	1,790 x 1,120 x 1,213	
Packaging Box Dimensions (Lx Wx H)	[in]	70.5 x 44.1 x 47.8	
Packaging Box Gross Weight	[kg]	500	
Packaging Box Gross Weight	[lb]	1,102	

Dimensions (mm/inch)

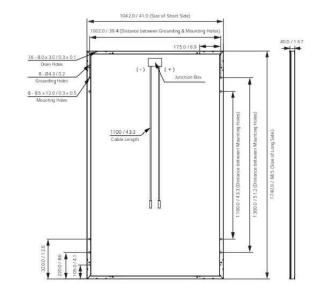

Product specifications are subject to change without notice. LG370-380N1C-A6_AUS.pdf

© 2020 LG Electronics USA, Inc. All rights reserved

CONTRACTOR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

DAVID MILLER

178 SW HASTINGS WAY, LAKE CITY, FL 32024

COUNTY:-COLUMBIA COUNTY

SYSTEM SIZE

DC SIZE: 13.875 KW DC-(STC) AC SIZE: 10.730 KW AC

ENGINEER:

SHEET TITLE **RESOURCE DOCUMENT**

DRAWN DATE	9/23/2021
DRAWN BY	VS

SHEET NUMBER

Data Sheet Enphase Microinverters Region: AMERICAS

Enphase IQ 7 and IQ 7+ Microinverters

The high-powered smart grid-ready Enphase IQ 7 Micro™ and Enphase IQ 7+ Micro™ dramatically simplify the installation process while achieving the highest system efficiency.

Part of the Enphase IQ System, the IQ 7 and IQ 7+ Microinverters integrate with the Enphase IQ Envoy™, Enphase IQ Battery™, and the Enphase Enlighten™ monitoring and analysis software.

IQ Series Microinverters extend the reliability standards set forth by previous generations and undergo over a million hours of power-on testing, enabling Enphase to provide an industry-leading warranty of up to 25 years.



Easy to Install

- · Lightweight and simple
- · Faster installation with improved, lighter two-wire cabling
- Built-in rapid shutdown compliant (NEC 2014 & 2017)

Productive and Reliable

- · Optimized for high powered 60-cell and 72-cell* modules
- · More than a million hours of testing
- · Class II double-insulated enclosure
- UL listed

Smart Grid Ready

- · Complies with advanced grid support, voltage and frequency ride-through requirements
- · Remotely updates to respond to changing grid requirements
- · Configurable for varying grid profiles
- Meets CA Rule 21 (UL 1741-SA)
- * The IQ 7+ Micro is required to support 72-cell modules.



To learn more about Enphase offerings, visit enphase.com



Enphase IO 7 and IO 7+ Microinverters

INPUT DATA (DC)	1Q7-60-2-US		IQ7PLUS-72-2	-US	
Commonly used module pairings*	235 W - 350 W +		235 W - 440 W +		
Module compatibility	60-cell PV mod	ules only	60-cell and 72-c	cell PV modules	
Maximum input DC voltage	48 V	100	60 V		
Peak power tracking voltage	27 V - 37 V		27 V - 45 V		
Operating range	16 V - 48 V		16 V - 60 V		
Min/Max start voltage	22 V / 48 V		22 V / 60 V		
Max DC short circuit current (module Isc)	15 A		15 A		
Overvoltage class DC port	11		11		
DC port backfeed current	0 A		0 A		
PV array configuration		ed array; No additio			
OUTPUT DATA (AC)	IQ 7 Microinve	erter	IQ 7+ Microin	verter	
Peak output power	250 VA		295 VA		
Maximum continuous output power	240 VA		290 VA		
Nominal (L-L) voltage/range ²	240 V / 211-264 V	208 V / 183-229 V	248 V / 211-264 V	208 V / 183-229 V	
Maximum continuous output current	1.0 A (240 V)	1.15 A (208 V)	1.21 A (240 V)	1.39 A (208 V)	
Nominal frequency	60 Hz		60 Hz	-2 -3	
Extended frequency range	47 - 68 Hz		47 - 68 Hz		
AC short circuit fault current over 3 cycles	5.8 Arms		5.8 Arms		
Maximum units per 20 A (L-L) branch circuit*	16 (240 VAC)	13 (208 VAC)	13 (240 VAC)	11 (208 VAC)	
Overvoltage class AC port	III		III		
AC port backfeed current	0 A		0 A		
Power factor setting	1.0		1.0		
Power factor (adjustable)	0.85 leading (0.85 lagging	0.85 leading (0.85 lagging	
EFFICIENCY	@240 V	@208 V	@240 V	@208 V	
Peak efficiency	97.6 %	97.6 %	97.5 %	97.3 %	
CEC weighted efficiency	97.0 %	97.0 %	97.0 %	97.0 %	
MECHANICAL DATA					
Ambient temperature range	-40°C to +65°C				
Relative humidity range	4% to 100% (cor	ndensing)			
Connector type (IQ7-60-2-US & IQ7PLUS-72-2-US)	A Proposition of the Control of the		dditional Q-DCC-5	adapter)	
Dimensions (WxHxD)	212 mm x 175 m	nm x 30.2 mm (with	nout bracket)		
Weight	1.08 kg (2.38 lb	s)			
Cooling	Natural convect	tion - No fans			
Approved for wet locations	Yes				
Pollution degree	PD3				
Enclosure	Class II double-	insulated, corrosio	n resistant polyme	ric enclosure	
Environmental category / UV exposure rating	NEMA Type 6 /	outdoor			
FEATURES	rivin				
Communication	Power Line Con	nmunication (PLC)			
Monitoring	Enlighten Manager and MyEnlighten monitoring options. Both options require installation of an Enphase IQ Envoy,				
Disconnecting means				approved by UL for use as the lo	ad-break

No enforced DC/AC ratio. See the compatibility calculator at https://enphase.com/en-us/support/module-compatibility
 Nominal voltage range can be extended beyond nominal if required by the utility.
 Limits may vary. Refer to local requirements to define the number of microinverters per branch in your area.

disconnect required by NEC 690.

CAN/CSA-C22.2 NO. 107.1-01

UL 62109-1, UL1741/IEEE1547, FCC Part 15 Class B, ICES-0003 Class B,

This product is UL Listed as PV Rapid Shut Down Equipment and conforms with NEC-2014 and NEC-2017 section 690.12 and C22.1-2015 Rule 64-218 Rapid Shutdown of PV Systems, for AC and DC conductors, when installed according manufacturer's instructions.

CA Rule 21 (UL 1741-SA)

Compliance

To learn more about Enphase offerings, visit enphase.com

© 2019 Enphase Energy. All rights reserved. All trademarks or brands used are the property of Enphase Energy, Inc.



CONTRACTOR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

DAVID MILLER

178 SW HASTINGS WAY, LAKE CITY, FL 32024

COUNTY:-COLUMBIA COUNTY

SYSTEM SIZE

DC SIZE: 13.875 KW DC-(STC) AC SIZE: 10.730 KW AC

ENGINEER:

SHEET TITLE **RESOURCE DOCUMENT**

DRAWN DATE 9/23/2021 DRAWN BY VS

SHEET NUMBER

Data Sheet Enphase Networking

Enphase IQ Combiner 3

(X-IQ-AM1-240-3)

The Enphase IQ Combiner 3™ with Enphase IQ Envoy" consolidates interconnection equipment into a single enclosure and streamlines PV and storage installations by providing a consistent, pre-wired solution for residential applications. It offers up to four 2-pole input circuits and Eaton BR series busbar assembly.



Smart

- Includes IQ Envoy for communication and control
- · Flexible networking supports Wi-Fi, Ethernet, or cellular
- · Optional AC receptacle available for PLC bridge
- · Provides production metering and optional consumption monitoring
- · Supports Ensemble Communications Kit for communication with Enphase Encharge" storage and Enphase Enpower™ smart switch

Simple

- · Reduced size from previous combiner
- · Centered mounting brackets support single stud mounting
- Supports back and side conduit entry
- · Up to four 2-pole branch circuits for 240 VAC plug-in breakers (not included)
- · 80 A total PV or storage branch circuits

Reliable

- . Durable NRTL-certified NEMA type 3R enclosure
- · Five-year limited warranty
- UL listed



Enphase IQ Combiner 3

MODEL NUMBER

COMMS-KIT-01

1Q Combiner 3 with Enphase IQ Envoy* printed circuit board for integrated revenue grade PV production metering (ANSI C12.20 +/- 0.5%) and optional* consumption monitoring (+/- 2.5%). X-IQ-AM1-240-3

ACCESSORIES and REPLACEMENT PARTS (not included, order separately)

Enphase Mobile Connect CELLMODEM-03 (4G/12-year data plan) CELLMODEM-D1 (3G/5-year data plan)

Consumption Monitoring* CT CT-200-SPLIT

Ensemble Communications Kit

CELLMODEM-M1 (4G based LTE-M/5-year data plan) where there is adequate cellular service in the installation area.) Split core current transformers enable whole home consumption metering (+/- 2.5%).

> ing is required for Enghase Storage System Installed at the IQ Envoy. For communications with Enphase Encharge" storage and Enphase Enpower* smart switch Includes USB cable for connection to IQ Envoy or Enphase IQ Combiner* and allows wireless communication with Encharge and Enpower.

microinverters. (Available in the US, Canada, Mexico, Puerto Rico, and the US Virgin Islands,

Plug and play industrial grade cellular modern with data plan for systems up to 60

Circuit Breakers Supports Eaton BR210, BR215, BR220, BR230, BR240, BR250, and BR260 circuit breakers. Circuit breaker, 2 pole, 10A, Eaton BR210

BRK-10A-2-240 BRK-15A-2-240 Circuit breaker, 2 pole, 15A, Eaton BR215 BRK-20A-2P-240 Circuit breaker, 2 pole, 20A, Eaton BR220 EPLC-01 Power line carrier (communication bridge pair), quantity - one pair

XA-SOLARSHIELD-ES Replace the default solar shield with this Ensemble Combiner Solar Shield to match the look and feel of the Enphase Enpower" smart switch and the Enphase Encharge" storage system XA-PLUG-120-3 Accessory receptacle for Power Line Carrier in IQ Combiner 3 (required for EPLC-01)

XA-ENV-PCBA-3 Replacement IQ Envoy printed circuit board (PCB) for Combiner 3.

ELECTRICAL SPECIFICATIONS

ELECTRICALE OF EGILICATION	
Rating	Continuous duty
System voltage	120/240 VAC, 60 Hz
Eaton BR series busbar rating	125 A
Max. continuous current rating (output to grid)	65 A
Max. fuse/circuit rating (output)	90 A
Branch circuits (solar and/or storage)	Up to four 2-pole Eaton BR series Distributed Generation (DG) breakers only (not included)
Max. continuous current rating (input from PV)	64 A
Max. total branch circuit breaker rating (in put)	80 A of distributed generation / 95 A with IQ Envoy breaker included
Envoy breaker	10A or 15A rating GE Q-line/Siemens Type QP /Eaton BR series included
Production Metering CT	200 A solid core pre-installed and wired to IQ Envoy
MECHANICAL DATA	
Dimensions (WxHxD)	49.5 x 37.5 x 16.8 cm (19.5" x 14.75" x 6.63"). Height is 21.06" (53.5 cm with mounting brackets)
Weight	7.5 kg (16.5 lbs)
Ambient temperature range	-40° C to +46° C (-40° to 115° F)
Cooling	Natural convection, plus heat shield

Outdoor, NRTL-certified, NEMA type 3R, polycarbonate construction Enclosure environmental rating Wire sizes · 20 A to 50 A breaker inputs: 14 to 4 AWG copper conductors 60 A breaker branch input: 4 to 1/0 AWG copper conductors Main lug combined output: 10 to 2/0 AWG copper conductors Neutral and ground: 14 to 1/0 copper conductors

Always follow local code requirements for conductor sizing To 2000 meters (6,560 feet)

INTERNET CONNECTION OPTIONS

Integrated Wi-Fi	802.11b/g/n
Ethernet	Optional, 802.3, Cat5E (or Cat 6) UTP Ethernet cable (not included)
Cellular	CELLMODEM-M1 4G based LTE-M cellular modem (not included). Note that an Enphase Mobile Connect cellular modem is required for all Ensemble installations.
COMPLIANCE	
Compliance, Combiner	UL 1741, CAN/CSA C22.2 No. 107.1, 47 CFR, Part 15, Class B, ICES 003

Production metering: ANSI C12.20 accuracy class 0.5 (PV production) UL 60601-1/CANCSA 22.2 No. 61010-1 Compliance, IQ Envoy

To learn more about Enphase offerings, visit enphase.com

© 2021 Enphase Energy. All rights reserved. Enphase, the Enphase logo, IQ. Combiner 3, and other trademarks or service names are the trademarks of Enphase Energy, Inc. Data subject to change. 2021-05-20.



CONTRACTOR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

DAVID MILLER

178 SW HASTINGS WAY, LAKE CITY, FL 32024

COUNTY:-COLUMBIA COUNTY

SYSTEM SIZE

DC SIZE: 13.875 KW DC-(STC) AC SIZE: 10.730 KW AC

ENGINEER:

SHEET TITLE RESOURCE **DOCUMENT**


9/23/2021 DRAWN DATE **DRAWN BY** VS


SHEET NUMBER

R-003



To learn more about Enphase offerings, visit enphase.com

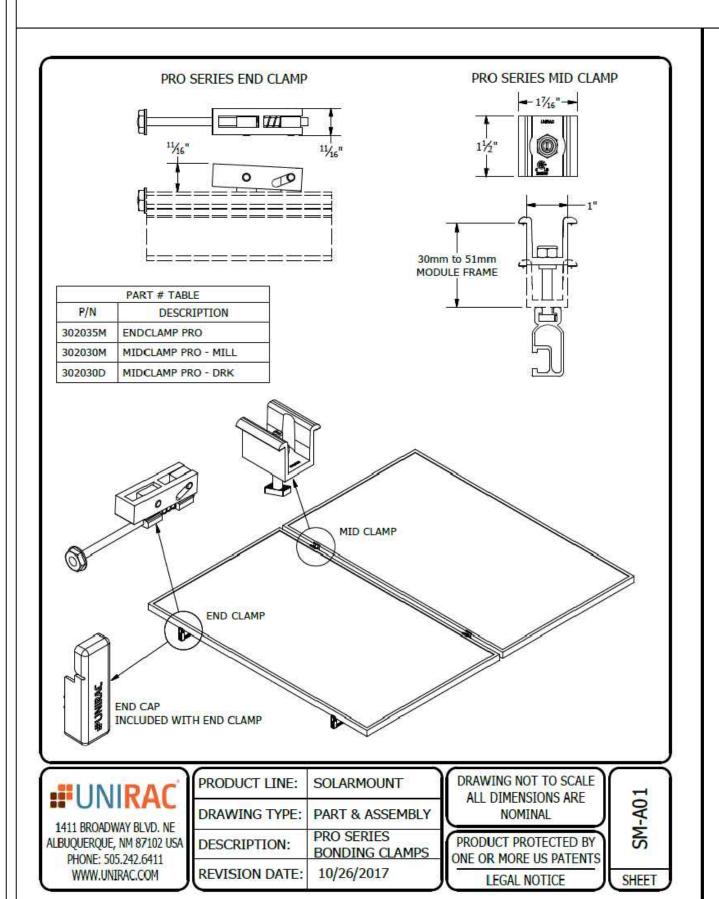

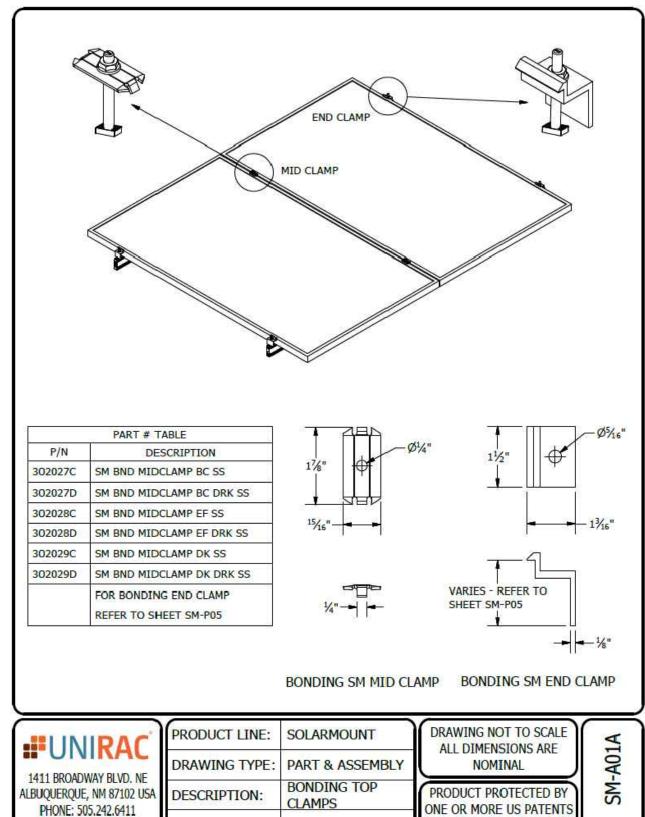

10/26/2017

WWW.UNIRAC.COM

REVISION DATE:

CONTRACTOR SUNPR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

DAVID MILLER

178 SW HASTINGS WAY,LAKE CITY, FL 32024

COUNTY:-COLUMBIA COUNTY

SYSTEM SIZE

DC SIZE: 13.875 KW DC-(STC) AC SIZE: 10.730 KW AC

ENGINEER:


SHEET TITLE
RESOURCE
DOCUMENT

DRAWN DATE 9/23/2021
DRAWN BY VS

SHEET

LEGAL NOTICE

SHEET NUMBER

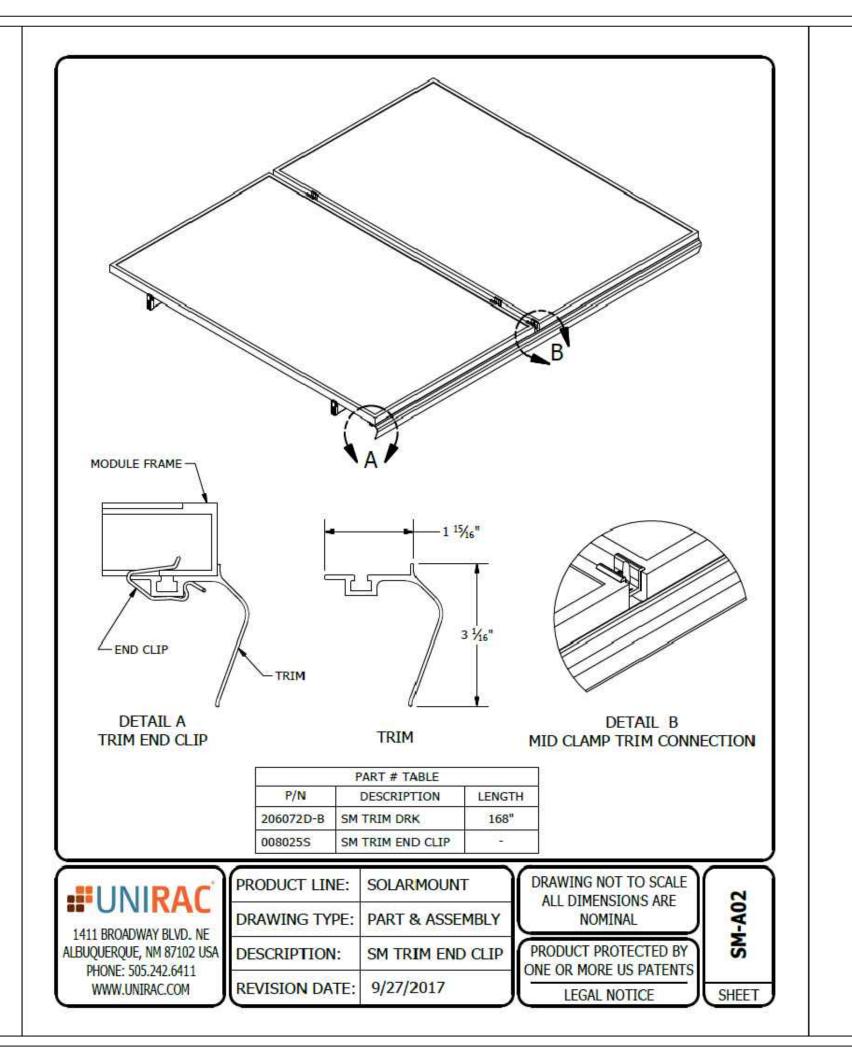

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

DAVID MILLER

178 SW HASTINGS WAY,LAKE CITY, FL 32024

COUNTY:-COLUMBIA COUNTY

SYSTEM SIZE


DC SIZE: 13.875 KW DC-(STC)
AC SIZE: 10.730 KW AC


ENGINEER:

SHEET TITLE RESOURCE DOCUMENT

DRAWN DATE	9/23/2021
DRAWN BY	VS

SHEET NUMBER

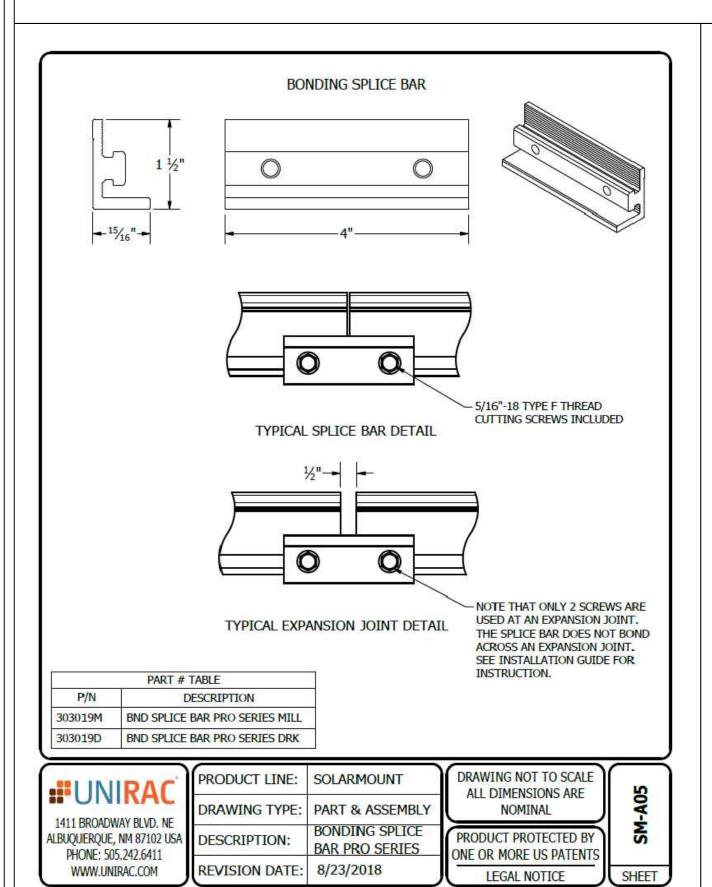

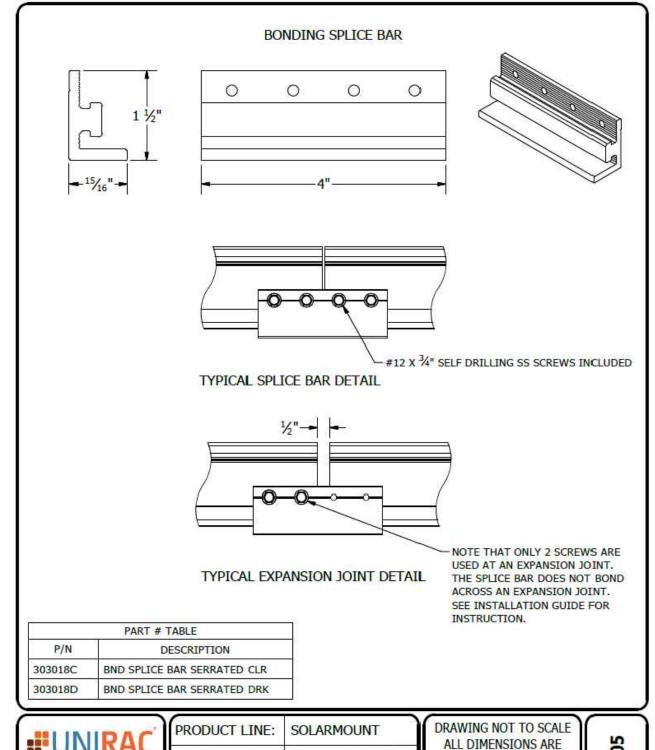

PART & ASSEMBLY

BONDING SPLICE

BAR

9/27/2017

NOMINAL

PRODUCT PROTECTED BY

ONE OR MORE US PATENTS

LEGAL NOTICE

SHEET

DRAWING TYPE:

REVISION DATE:

DESCRIPTION:

1411 BROADWAY BLVD, NE

ALBUQUERQUE, NM 87102 USA

PHONE: 505.242.6411

WWW.UNIRAC.COM

SHEET TITLE
RESOURCE
DOCUMENT

CONTRACTOR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

DAVID MILLER

178 SW HASTINGS WAY,LAKE CITY, FL 32024

COUNTY:-COLUMBIA COUNTY

SYSTEM SIZE


DC SIZE: 13.875 KW DC-(STC)

AC SIZE: 10.730 KW AC

ENGINEER:

DRAWN DATE 9/23/2021
DRAWN BY VS

SHEET NUMBER

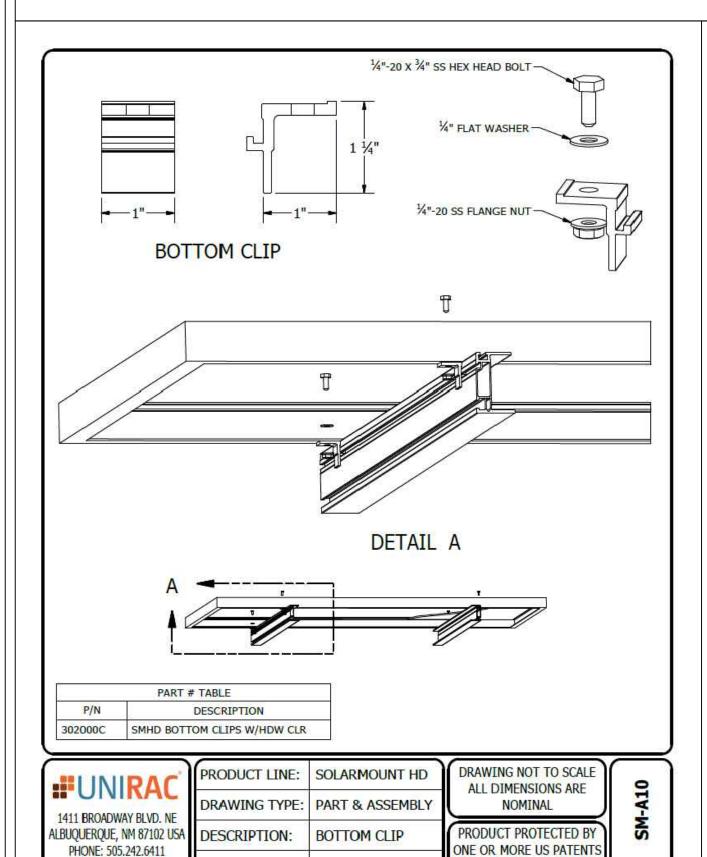


9/27/2017

LEGAL NOTICE

SHEET

WWW.UNIRAC.COM

REVISION DATE:

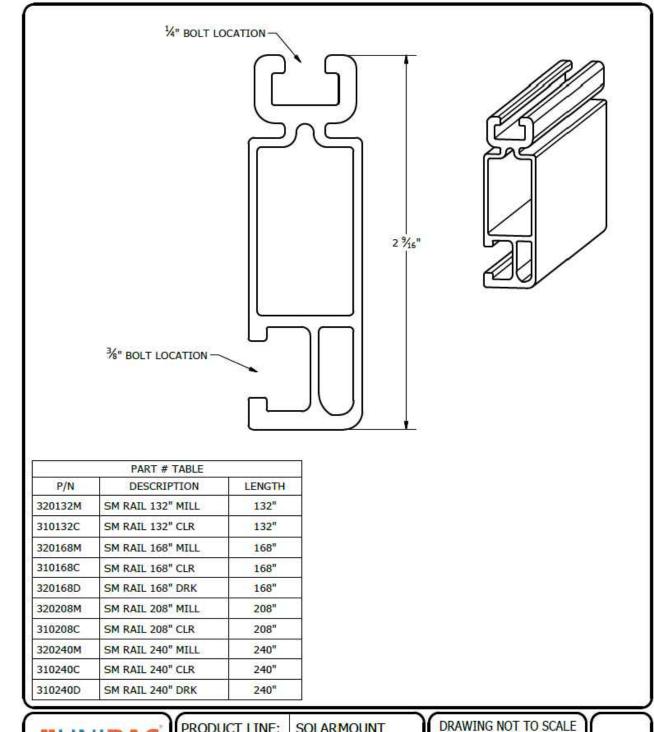

SOLARMOUNT

PART DETAIL

9/11/2017

STANDARD RAIL

ALL DIMENSIONS ARE

NOMINAL

PRODUCT PROTECTED BY

ONE OR MORE US PATENTS

LEGAL NOTICE

ᄗ

SHEET

PRODUCT LINE:

DRAWING TYPE:

REVISION DATE:

DESCRIPTION:

1411 BROADWAY BLVD. NE

ALBUQUERQUE, NM 87102 USA

PHONE: 505.242.6411 WWW.UNIRAC.COM

CONTRACTOR 22171 MCH RD

MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

DAVID MILLER

178 SW HASTINGS WAY, LAKE CITY, FL 32024

COUNTY:-COLUMBIA COUNTY

SYSTEM SIZE


DC SIZE: 13.875 KW DC-(STC) AC SIZE: 10.730 KW AC


ENGINEER:

SHEET TITLE **RESOURCE DOCUMENT**


DRAWN DATE 9/23/2021 DRAWN BY VS

SHEET NUMBER

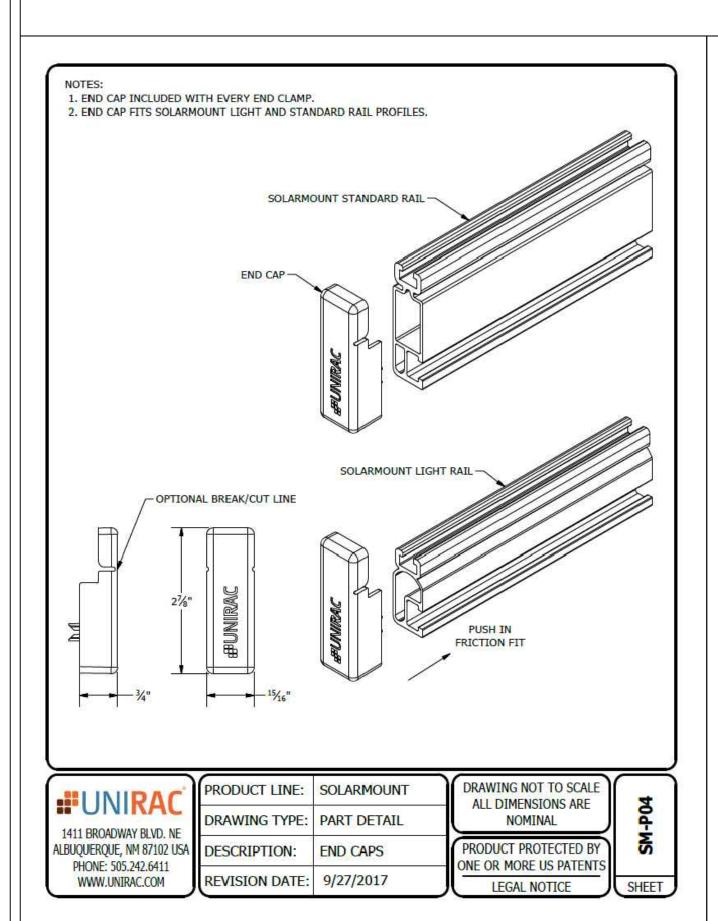

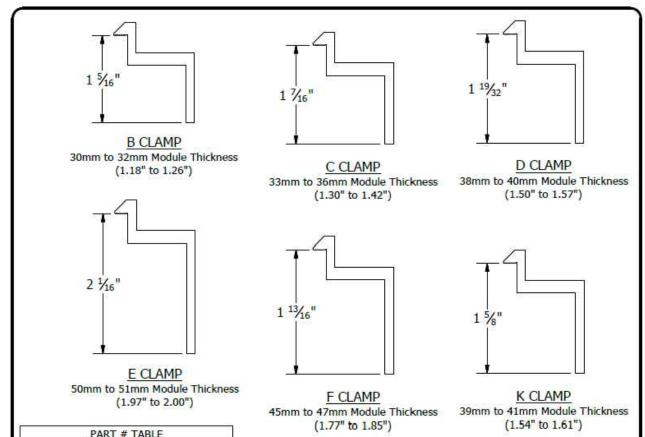

PART # TABLE	
P/N	DESCRIPTION
302021C	SM ENDCLAMP B CLR AL
302021D	SM ENDCLAMP B DRK AL
302022C	SM ENDCLAMP C CLR AL
302022D	SM ENDCLAMP C DRK AL
302023C	SM ENDCLAMP D CLR AL
302023D	SM ENDCLAMP D DRK AL
303024C	SM ENDCLAMP E CLR AL
302024D	SM ENDCLAMP E DRK AL
302025C	SM ENDCLAMP F CLR AL
302025D	SM ENDCLAMP F DRK AL
302026C	SM ENDCLAMP K CLR AL
302026D	SM ENDCLAMP K DRK AL

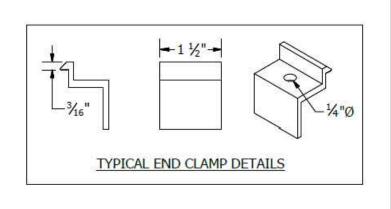



PHONE: 505.242.6411

WWW.UNIRAC.COM

PRODUCT LINE: SOLARMOUNT

DRAWING TYPE: PART DETAIL

DESCRIPTION: END CLAMPS - TOP MOUNTING

REVISION DATE: 9/27/2017

DRAWING NOT TO SCALE ALL DIMENSIONS ARE NOMINAL

PRODUCT PROTECTED BY ONE OR MORE US PATENTS LEGAL NOTICE

SHEET

SHEET TITLE
RESOURCE
DOCUMENT

DRAWN DATE 9/23/2021
DRAWN BY VS

CONTRACTOR

22171 MCH RD

MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

178 SW HASTINGS

WAY, LAKE CITY,

FL 32024

COUNTY:-COLUMBIA COUNTY

SYSTEM SIZE


DC SIZE: 13.875 KW DC-(STC)


AC SIZE: 10.730 KW AC

ENGINEER:

DAVID MILLER

SHEET NUMBER

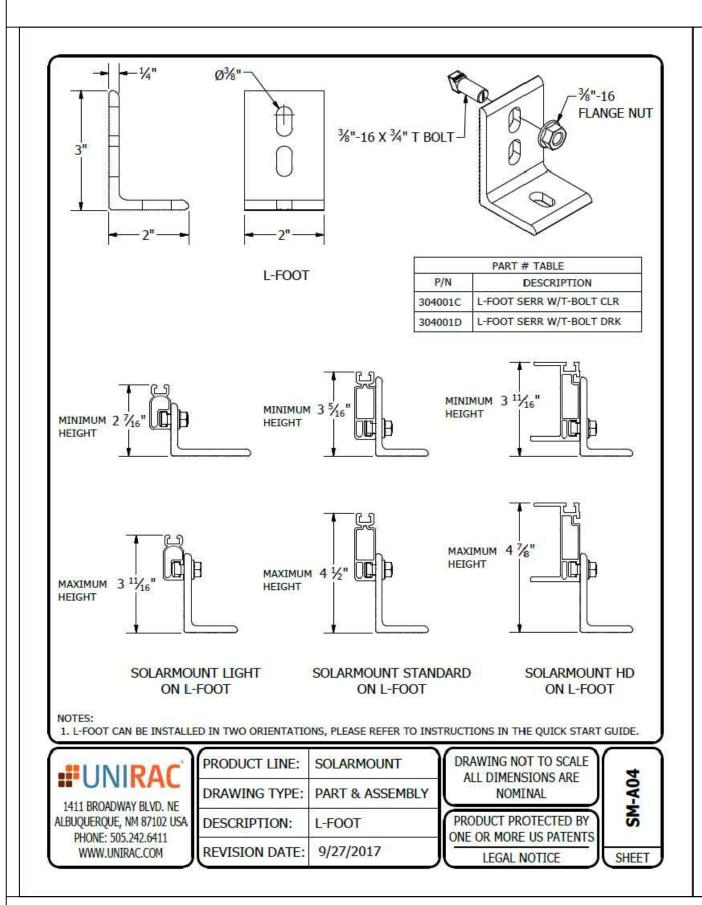

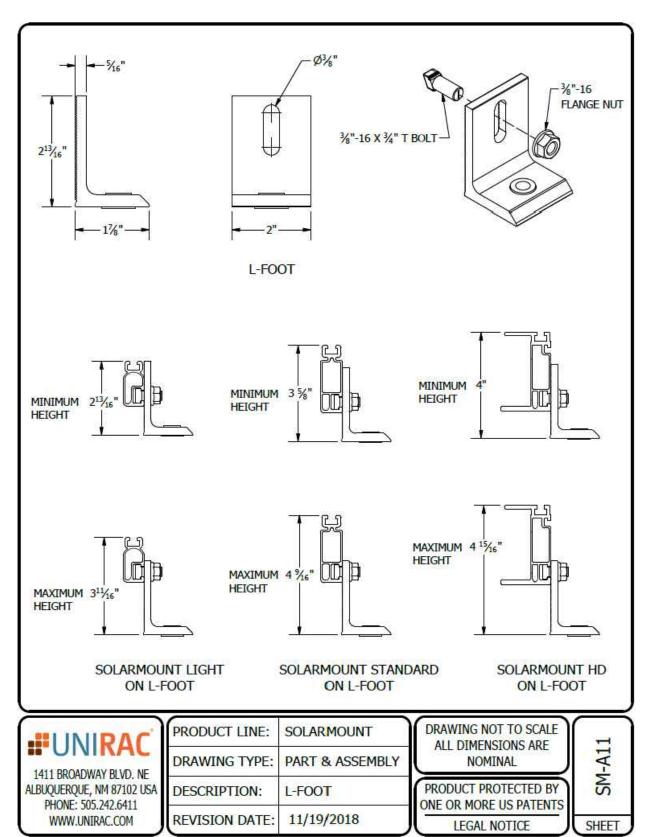

CONTRACTOR SUNPR

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

DAVID MILLER

178 SW HASTINGS WAY,LAKE CITY, FL 32024

COUNTY:-COLUMBIA COUNTY

SYSTEM SIZE


DC SIZE: 13.875 KW DC-(STC) AC SIZE: 10.730 KW AC

ENGINEER:

SHEET TITLE
RESOURCE
DOCUMENT

DRAWN DATE 9/23/2021
DRAWN BY VS

SHEET NUMBER

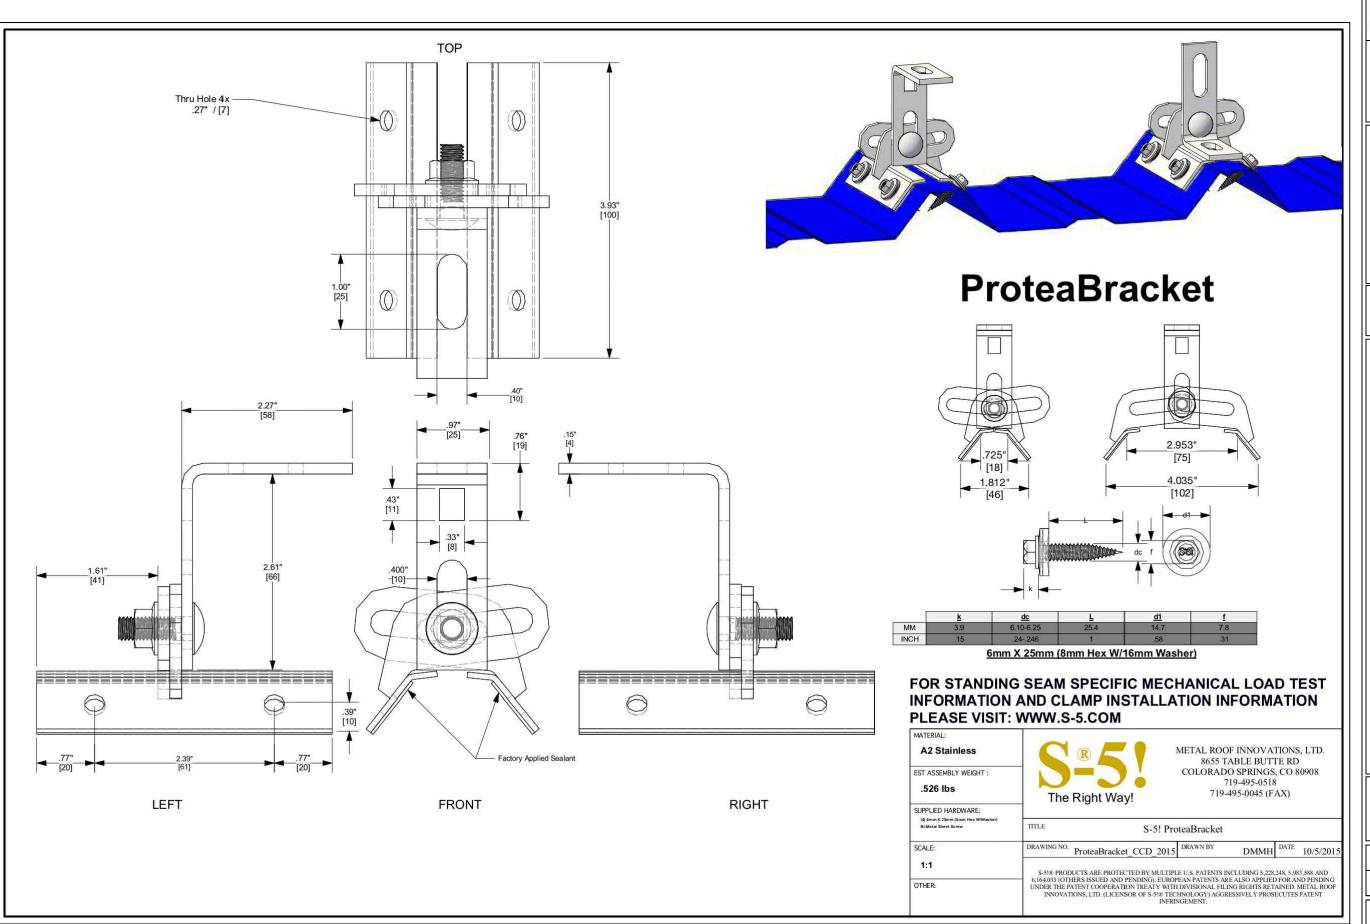

22171 MCH RD MANDEVILLE, LA 70471

PHONE: 9152011490

PROJECT NAME & ADDRESS

DAVID MILLER

178 SW HASTINGS WAY,LAKE CITY, FL 32024

COUNTY:-COLUMBIA COUNTY

SYSTEM SIZE

DC SIZE: 13.875 KW DC-(STC) AC SIZE: 10.730 KW AC

ENGINEER:

SHEET TITLE RESOURCE DOCUMENT

DRAWN DATE 9/23/2021
DRAWN BY VS

SHEET NUMBER