

As required by Florida Statute 553.842 and Florida Administrative Code 9B-72, please provide the information and approval numbers on the building components listed below if they will be utilized on the construction project for which you are applying for a building permit. We recommend you contact your local product supplier should you not know the product approval number for any of the applicable listed products. Statewide approved products are listed online @ www.floridabuilding.org

Category/Subcategory	Manufacturer	Product Description	Approval Number(s)
1. EXTERIOR DOORS			
A. SWINGING			
B. SLIDING			
C. SECTIONAL/ROLL UP			
D. OTHER			
2. WINDOWS			
A. SINGLE/DOUBLE HUNG			
B. HORIZONTAL SLIDER			
C. CASEMENT			
D. FIXED			
E. MULLION			
F. SKYLIGHTS			
G. OTHER			
3. PANEL WALL			
A. SIDING			
B. SOFFITS			
C. STOREFRONTS			
D. GLASS BLOCK			
E. OTHER			
4. ROOFING PRODUCTS			
A. ASPHALT SHINGLES			
B. NON-STRUCT METAL			
C. ROOFING TILES			
D. SINGLE PLY ROOF			
E. OTHER			
5. STRUCT COMPONENTS			
A. WOOD CONNECTORS			
B. WOOD ANCHORS			
C. TRUSS PLATES			
D. INSULATION FORMS			
E. LINTELS			
F. OTHERS			
6. NEW EXTERIOR ENVELOPE PRODUCTS			

The products listed below did not demonstrate product approval at plan review. I understand that at the time of inspection of these products, the following information must be available to the inspector on the jobsite; 1) copy of the product approval, 2) performance characteristics which the product was tested and certified to comply with, 3) copy of the applicable manufacturers installation requirements.

Further, I understand these products may have to be removed if approval cannot be demonstrated during inspection.

NOTES: _____



MIAMI-DADE COUNTY, FLORIDA
PRODUCT CONTROL SECTION
 11805 SW 26 Street, Room 208
 Miami, Florida 33175-2474
 T (786) 315-2590 F (786) 315-2599
www.miamidade.gov/building

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)
 BOARD AND CODE ADMINISTRATION DIVISION
NOTICE OF ACCEPTANCE (NOA)

PGT Industries, Inc.
1070 Technology Drive
North Venice, FL 34275

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER - Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami-Dade County) and/or the AHJ (in areas other than Miami-Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Series "SH-5400" PVC Single Hung Window – N.I.

APPROVAL DOCUMENT: Drawing No. MD-SH5400-01 titled "Single Hung Window Installation - NI", sheets 1 through 12 of 12, dated 05/15/15, with revision C dated 03/10/20, prepared by manufacturer, signed and sealed by Anthony Lynn Miller, P.E., bearing the Miami-Dade County Product Control Revision stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: None

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state, model/series, and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **revises and renews** NOA No. 17-0630.06 and consists of this page 1 and evidence pages E-1, E-2, E-3 and E-4, as well as approval document mentioned above.

The submitted documentation was reviewed by **Manuel Perez, P.E.**



MP
 7/16/20

NOA No. 20-0401.04
 Expiration Date: July 30, 2025
 Approval Date: July 23, 2020
 Page 1

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA's

A. DRAWINGS


1. Manufacturer's die drawings and sections.
(Submitted under NOA No. 15-0519.06)
2. Drawing No. **MD-SH5400-01** titled "Single Hung Window Installation - NI", sheets 1 through 12 of 12, dated 05/15/15, with revision **B** dated 06/06/17, prepared by manufacturer, signed and sealed by Anthony Lynn Miller, P.E.
(Submitted under NOA No. 17-0630.06)

B. TESTS

1. Test reports on: 1) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94
2) Large Missile Impact Test per FBC, TAS 201-94
3) Cyclic Wind Pressure Loading per FBC, TAS 203-94
along with marked-up drawings and installation diagram of a PVC sliding glass door, a PVC fixed window and an aluminum sliding glass door, using: Kodispace 4SG TPS spacer system, Duraseal[®] spacer system, Super Spacer[®] NXT[™] spacer system and XL Edge[™] spacer system at insulated glass, prepared by Fenestration Testing Laboratory, Inc., Test Reports No. **FTL-8717**, **FTL-8968** and **FTL-8970**, dated 11/16/15, 06/07/16 and 06/02/16 respectively, all signed and sealed by Idalmis Ortega, P.E.
(Submitted under previous NOA No. 16-0714.04)
2. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94
2) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
3) Water Resistance Test, per FBC, TAS 202-94
4) Forced Entry Test, per FBC 2411.3.2.1, and TAS 202-94
5) Large Missile Impact Test per FBC, TAS 201-94
6) Cyclic Wind Pressure Loading per FBC, TAS 203-94
along with marked-up drawings and installation diagram of a series 5500 PVC single hung window, prepared by Fenestration Testing Laboratory, Inc., Test Report No. **FTL-7964**, dated 11/15/14, signed and sealed by Idalmis Ortega, P.E.
(Submitted under NOA No. 15-0519.06)

C. CALCULATIONS

1. Anchor verification calculations and structural analysis, complying with **FBC 5th Edition (2014)**, dated 05/15/15 and 08/29/17, prepared by manufacturer, signed and sealed by Anthony Lynn Miller, P.E.
(Submitted under NOA No. 15-0519.06)
2. Glazing complies with **ASTM E1300-09**


Manuel Pérez, P.E.
Product Control Examiner
NOA No. 20-0401.04
Expiration Date: July 30, 2025
Approval Date: July 23, 2020

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA's (CONTINUED)

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS


1. Notice of Acceptance No. **16-0712.03** issued to ENERGI Fenestration Solutions USA for their "**White Rigid PVC Exterior Extrusions for Windows and Doors**" dated 08/10/17, expiring on 02/28/18.
2. Notice of Acceptance No. **16-0712.04** issued to ENERGI Fenestration Solutions USA, Inc. for their "**Bronze and Lighter Shades of Cap Coated White Rigid PVC Exterior Extrusions for Windows and Doors**" dated 09/15/16, expiring on 04/16/20.
3. Notice of Acceptance No. **16-0712.05** issued to ENERGI Fenestration Solutions USA, Inc. for their "**Performance Core Rigid PVC Exterior Extrusions for Windows and Doors**" dated 09/15/16, expiring on 04/16/20.

F. STATEMENTS

1. Statement letter of conformance, complying with **FBC 5th Edition (2014)** and **FBC 6th Edition (2017)**, dated June 22, 2017, issued by manufacturer, signed and sealed by Anthony Lynn Miller, P.E.
(Submitted under NOA No. 17-0630.06)
2. Statement letter of no financial interest, dated June 22, 2017, issued by manufacturer, signed and sealed by Anthony Lynn Miller, P.E.
(Submitted under NOA No. 17-0630.06)
3. Proposal No. **16-0125** issued by the Product Control Section, dated March 09, 2016, signed by Ishaq Chanda, P.E.
(Submitted under NOA No. 16-0714.04)
4. Proposal issued by Product Control, dated 6/26/14 and revised on 8/19/14, signed by Jaime Gascon, P.E. Supervisor, Product Control Section.
(Submitted under NOA No. 15-0519.06)

G. OTHERS

1. Notice of Acceptance No. **16-0714.04**, issued to PGT Industries, Inc. for their Series "5400" PVC Single Hung Window - N.I. approved on 08/18/16 and expiring on 07/30/20.


Manuel Pérez, P.E.
Product Control Examiner
NOA No. 20-0401.04
Expiration Date: July 30, 2025
Approval Date: July 23, 2020

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

2. NEW EVIDENCE SUBMITTED

A. DRAWINGS

1. Drawing No. **MD-SH5400-01** titled "Single Hung Window Installation - NI", sheets 1 through 12 of 12, dated 05/15/15, with revision **C** dated 03/10/20, prepared by manufacturer, signed and sealed by Anthony Lynn Miller, P.E.

B. TESTS

1. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94
2) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94
3) Water Resistance Test, per FBC, TAS 202-94
4) Large Missile Impact Test per FBC, TAS 201-94
5) Cyclic Wind Pressure Loading per FBC, TAS 203-94
6) Forced Entry Test, per ASTM F588 and TAS 202-94


along with marked-up drawings and installation diagram of all PGT Industries, Inc. representative units listed below and tested to qualify **Dowsil 791** and **Dowsil 983** silicones, prepared by Fenestration Testing Laboratory, Inc., Test Reports No.: **FTL-7897**, PGT PW5520 PVC Fixed Window (unit 6 in proposal), dated 09/03/14 **FTL-20-2107.1**, PGT SGD780 Aluminum Sliding Glass Door (unit 7 in proposal) **FTL-20-2107.2**, PGT CA740 Alum. Outswing Casement Window (unit 8 in proposal) **FTL-20-2107.3**, PGT PW7620A Aluminum Fixed Window (unit 9 in proposal) and **FTL-20-2107.4**, PGT PW7620A Aluminum Fixed Window (unit 10 in proposal) dated 07/13/20, all signed and sealed by Idalmis Ortega, P.E

C. CALCULATIONS

1. Anchor verification calculations and structural analysis, complying with **FBC 5th Edition (2014)**, dated 05/15/15, 08/29/17 and updated on 03/10/20 to the **FBC 7th Edition (2020)**, prepared by manufacturer, signed and sealed by Anthony Lynn Miller, P.E.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

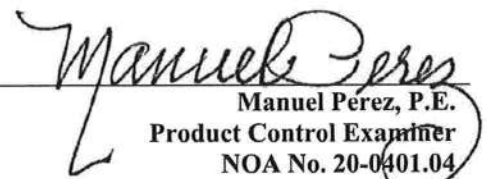
Manuel Pérez, P.E.
Product Control Examiner
NOA No. 20-0401.04
Expiration Date: July 30, 2025
Approval Date: July 23, 2020

PGT Industries, Inc.

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

2. NEW EVIDENCE SUBMITTED (CONTINUED)

E. MATERIAL CERTIFICATIONS


1. Notice of Acceptance No. **18-0122.02**, issued to **ENERGI Fenestration Solutions USA, Inc.**, for their **White Rigid PVC Exterior Extrusions for Windows and Doors**, approved on 03/08/18, expiring on 02/28/23.
2. Notice of Acceptance No. **18-1217.15**, issued to **ENERGI Fenestration Solutions USA, Inc.**, for their **Bronze and Lighter Shades of Cap Coated Rigid PVC Exterior Extrusions for Windows and Doors**, approved on 01/17/19, expiring on 04/16/20.
3. Notice of Acceptance No. **18-1217.16**, issued to **ENERGI Fenestration Solutions USA, Inc.**, for their **Performance Core Rigid PVC Exterior Extrusions for Windows and Doors**, approved on 01/17/19, expiring on 02/04/21.


F. STATEMENTS

1. Statement letter of conformance, complying with **FBC 6th Edition (2017)** and the **FBC 7th Edition (2020)**, dated March 10, 2020, issued by manufacturer, signed and sealed by Anthony Lynn Miller, P.E.
2. Statement letter of no financial interest, dated March 10, 2020, issued by manufacturer, signed and sealed by Anthony Lynn Miller, P.E.
3. Proposal No. **19-1155 TP** issued by the Product Control Section, dated January 10, 2020, signed by Ishaq Chanda, P.E.

G. OTHERS

1. Notice of Acceptance No. **17-0630.06**, issued to PGT Industries, Inc. for their Series "SH-5400" PVC Single Hung Window - N.I. approved on 11/30/17 and expiring on 07/30/20.


Manuel Perez, P.E.
Product Control Examiner
NOA No. 20-0401.04
Expiration Date: July 30, 2025
Approval Date: July 23, 2020

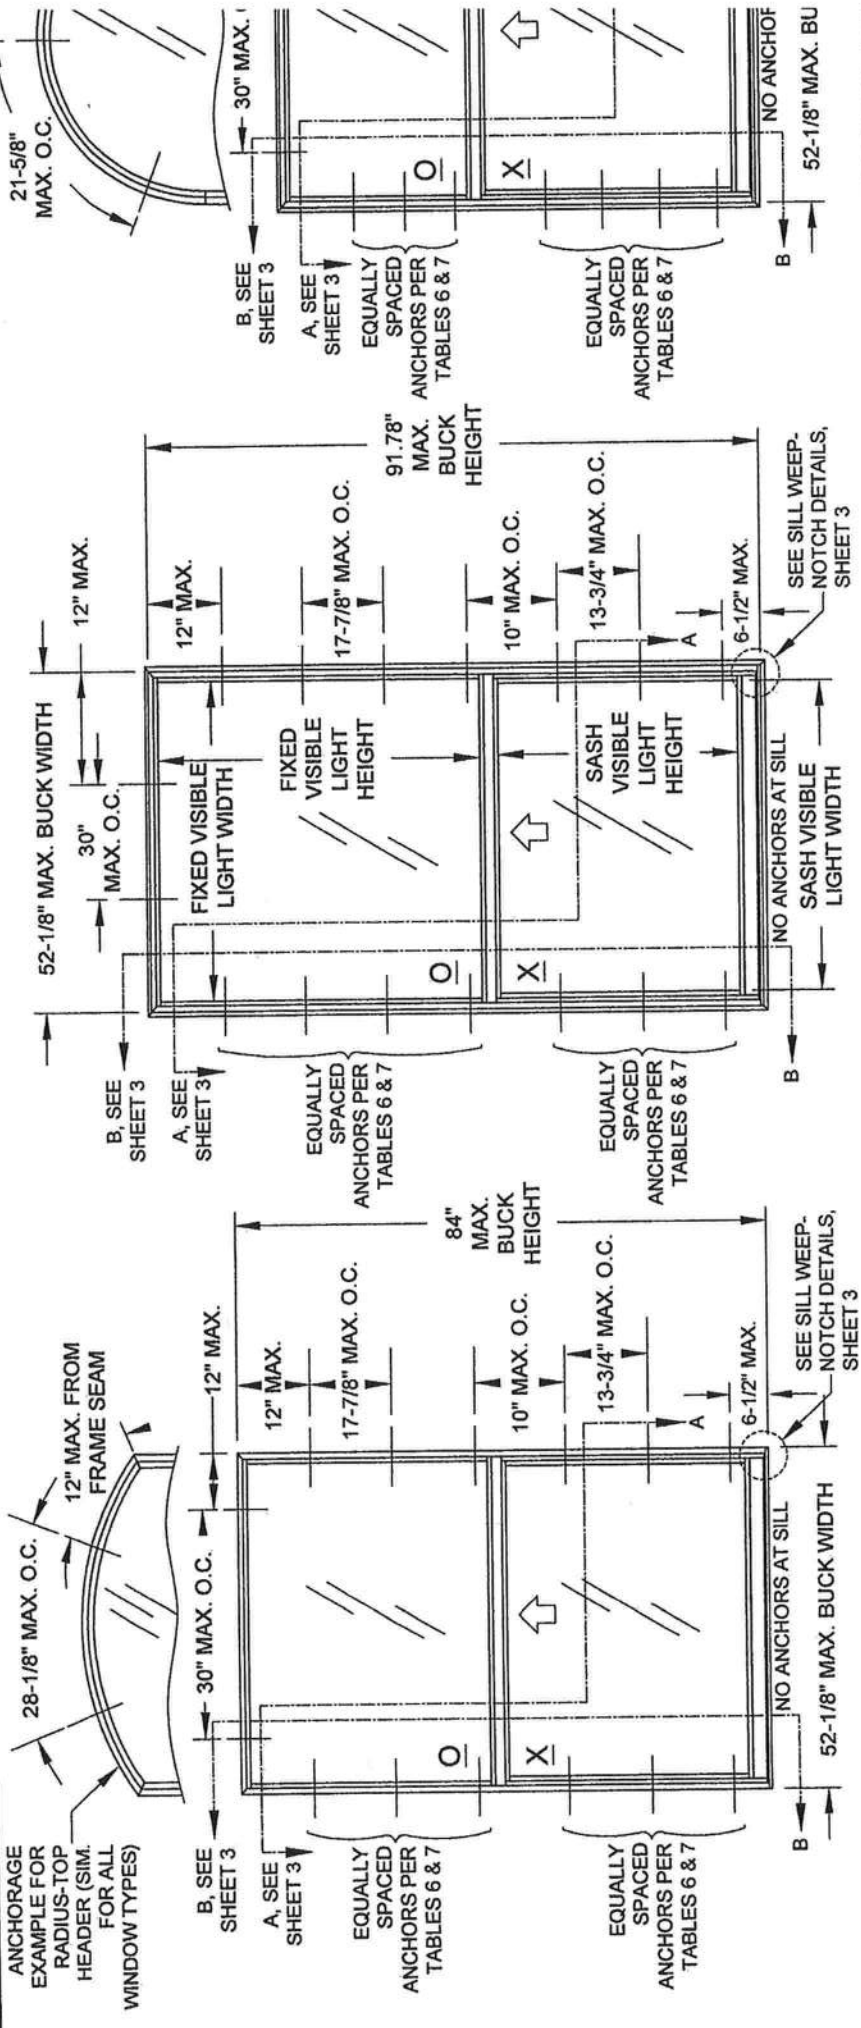

ELEVATION FOR TYP. EQUAL LEG FRAME
SHOWN WITH EQUAL-LITE CONFIGURATION

ELEVATION FOR TYP. FLANGE FRAME
SHOWN WITH ORIEL/PROVIEW CONFIGURATION

ELEVATION FOR TYP.
SHOWN WITH STANDARD C
FOR CUSTOM COTTAGE C
75" HEIGHT SEE

GENERAL NOTES: SERIES 5400 NON-IMPACT RESISTANT SINGLE HUNG WINDOW

- 1) THIS PRODUCT HAS BEEN DESIGNED & TESTED TO COMPLY WITH THE REQUIREMENTS OF THE FLORIDA BUILDING CODE, INCLUDING THE HIGH VELOCITY HURRICANE ZONE (HVHZ).
- 2) SHUTTERS ARE REQUIRED WHEN USED IN WIND-BORNE DEBRIS REGIONS.
- 3) FOR MASONRY APPLICATIONS IN MIAMI-DADE COUNTY, USE ONLY MIAMI-DADE COUNTY APPROVED MASONRY ANCHORS. MATERIALS USED FOR ANCHOR EVALUATIONS WERE SOUTHERN ASTM C90 CONCRETE MASONRY UNITS AND CONCRETE WITH MIN. KSI PER ANCHOR TYPE.
- 4) ALL WOOD BUCKS LESS THAN 1-1/2" THICK ARE TO BE CONSIDERED 1X INSTALLATIONS. 1X WOOD BUCKS ARE OPTIONAL IF UNIT IS INSTALLED DIRECTLY TO SUBSTRATE. WOOD BUCKS DEPICTED AS 2X ARE 1-1/2" THICK OR GREATER. 1X AND 2X BUCKS (WHEN USED) SHALL BE DESIGNED AND SECURED TO PROPERLY TRANSFER LOADS TO THE STRUCTURE. WOOD BUCK AND INSTALLATION IS THE RESPONSIBILITY OF THE ENGINEER, (EOR) OR ARCHITECT OF RECORD, (AOR).
- 5) ANCHOR EMBEDMENT TO BASE MATERIAL SHALL BE BEYOND WALL DRESSING OR STUCCO. USE ANCHORS OF SUFFICIENT LENGTH TO ACHIEVE REQUIRED MIN. EMBEDMENT. INST. ANC SHOULD BE SEALED. OVERALL SEALING/FLASHING STRATEGY FOR WATER RESISTANCE OF INSTALLATION SHALL BE DONE BY OTHERS AND IS BEYOND THE SCOPE OF THESE INSTRUCTIONS.
- 6) 1/4" MAX. SHIMS ARE REQUIRED AT EACH ANCHOR LOCATION WHERE THE PRODUCT IS NOT FLUSH TO THE SUBSTRATE. USE SHIMS CAPABLE OF TRANSFERRING APPLIED LOADS.
- 7) DESIGN PRESSURES:
 - A. NEGATIVE DESIGN LOADS BASED ON STRUCTURAL TESTING AND GLASS PER ASTM E1300.
 - B. POSITIVE DESIGN LOADS BASED ON WATER TEST PRESSURE, STRUCTURAL TESTING AND GLASS PER ASTM E1300.
 - C. DESIGN LOADS ARE BASED ON ALLOWABLE STRESS DESIGN, ASD.
- 8) THE ANCHORAGE METHODS SHOWN HAVE BEEN DESIGNED TO RESIST THE WINDLOADS CORRESPONDING TO THE REQUIRED DESIGN PRESSURE. THE 33-1/3% STRESS INCREASE HAS NOT BEEN USED IN THE DESIGN OF THIS PRODUCT. THE 1.6 LOAD DURATION FACTOR WAS USED FOR THE EVALUATION OF ANCHORS INTO WOOD. ANCHORS THAT COME INTO CONTACT WITH OTHER DISSIMILAR MATERIALS SHALL MEET THE REQUIREMENTS OF THE FLORIDA BUILDING CODE FOR CORROSION RESISTANCE.
- 9) METAL SUBSTRATE TO MEET MIN. STRENGTH AND THICKNESS REQUIREMENTS PER CURRENT FLORIDA BUILDING CODE AND TO BE REVIEWED BY THE AUTHORITY HAVING JURISDICTION.
- 10) REFERENCES: TEST REPORTS FTL-7964; ELCO ULTRACON NOA; DEWALT ULTRACON+; ELCO/DEWALT CRETIFLEX NOA; ELCO/DEWALT AGGREGATOR NOA;

TABLE 1: ALLOWABLE GLASS TYPES

Glass Type	Description (Listed from Exterior to Interior)	Design Pressure	
		Table #	Sheet #
1	3/4" I.G.: 1/8" A Exterior Cap + 1/2" Air Space + 1/8" A Exterior Cap	4	6
2	3/4" I.G.: 1/8" T Exterior Cap + 1/2" Air Space + 1/8" T Exterior Cap	4, 5	6, 7
3	3/4" I.G.: 3/16" A Exterior Cap + 3/8" Air Space + 3/16" A Exterior Cap	4, 5	6, 7
4	3/4" I.G.: 3/16" T Exterior Cap + 3/8" Air Space + 3/16" T Exterior Cap	4, 5	6, 7

"A" = ANNEALED; "T" = TEMPERED

TABLE 2: ALLOWABLE ANCHORS THROUGH THE FRAME

Group	Anchor	Substrate	Min. Edge Distance	Min. Embedment*
A	#10 SMS (steel, 18-8 S.S. or 410 S.S.)	P.T. Southern Pine (SG=0.55)	7/16"	1-3/8"
		Steel, A36*	3/8"	0.050"
		Steel Stud, A653 Gr. 33*	3/8"	0.0451" (18 Ga.)
		Aluminum, 6063-T5*	3/8"	0.050"
		P.T. Southern Pine (SG=0.55)	7/16"	1-3/8"
B	#12 SMS (steel, 18-8 S.S. or 410 S.S.)	Concrete (min. 3 ksi)	1"	1-3/8"
		Ungrouted CMU, (ASTM C-90)	2-1/2"	1-1/4"
		Ungrouted CMU, (ASTM C-90)	1"	1-1/4"
		P.T. Southern Pine (SG=0.55)	9/16"	1-3/8"
		Steel, A36*	3/8"	0.050"
C	1/4" steel Ultracon or Ultracon+	Steel Stud, A653 Gr. 33*	3/8"	0.0451" (18 Ga.)
		Aluminum, 6063-T5*	3/8"	0.063"
		P.T. Southern Pine (SG=0.55)	1"	1-3/8"
		P.T. Southern Pine (SG=0.55)	1"	1-3/8"
		P.T. Southern Pine (SG=0.55)	1"	1-3/8"
D	1/4" steel Creteflex	Concrete (min. 2.85 ksi)	1"	1-3/4"
		Ungrouted CMU, (ASTM C-90)	2-1/2"	1-1/4"
		Concrete (min. 3 ksi)	1-3/16"	1-3/4"
		Concrete (min. 3.35 ksi)	1"	1-1/4"
		Concrete (min. 2.85 ksi)	1"	1-3/4"
E	1/4" steel Ultracon or Ultracon+	Concrete (min. 2.85 ksi)	2-1/2"	1-3/4"
		Concrete (min. 3 ksi)	2-1/2"	1-3/4"
		Ungrouted CMU, (ASTM C-90)	2-1/2"	1-1/4"
		Concrete (min. 3.35 ksi)	2-1/2"	1-3/4"
		Ungrouted CMU, (ASTM C-90)	2-1/2"	1-1/4"
F	1/4" steel Aggre-Gator	Concrete (min. 3.275 ksi)	1-1/2"	1-3/8"
		Groufed CMU, (ASTM C-90)	2"	2"

TABLE 3: ALLOWABLE ANCHORS THROUGH THE INTEGRAL FIN

Group	Anchor	Substrate	Min. Edge Distance	Min. Embedment*

Frame Types (see Fig B)	Glass Options (see Table 1)	F C (see Table 1)
Flange (#2)	1 - 4	Ec Ori &
Box / Equal-Leg (#4)	1 - 4	Ec Ori &
J-Channel (#1)	1 - 4	Ec Ori &
Integral Fin (#3)	1 - 4	Ec Ori &

Material	Min. F _y	Min. F _u
Steel Screw	92 ksi	120 ksi
18-8 Screw	60 ksi	95 ksi
410 Screw	90 ksi	110 ksi
Elcor/DeWalt Aggre-Gator®	57 ksi	96 ksi
Elco UltraCon®	155 ksi	177 ksi
3/16" DeWalt UltraCon+®	117 ksi	164 ksi
1/4" DeWalt UltraCon+®	148 ksi	164 ksi
410 SS Elcor/DeWalt CreteFlex®	127.4 ksi	189.7 ksi
6063-T5 Aluminum	16 ksi	22 ksi
A36 Steel	36 ksi	58 ksi
Gr. 33 Steel Stud	33 ksi	45 ksi

FIGURE A: FRAME CONFIGURATIONS


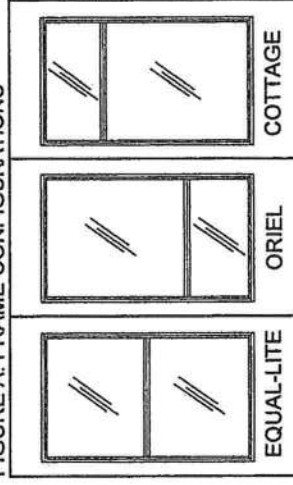


FIGURE C: FRAME SHAPES

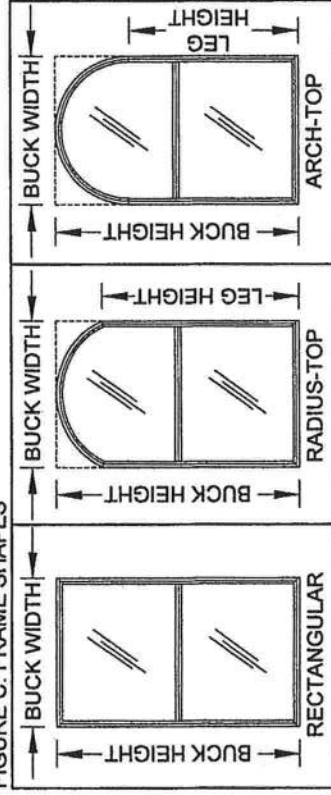


WINDOW SHAPES AS ABOVE OR SIMILAR ARE APPROVED. SHAPES MAY BE USED BY INSCRIBING THE SHAPE IN A BLOCK AND OBTAINING DESIGN PRESSURES AND ANCHORAGE FOR THAT BLOCK SIZE FROM

INSTALLATION DETAILS FOR FLANGE & EQUAL-LEG/BOX FRAMES

INSTALLATION OPTION 1

ANCHORED THROUGH FRAME INTO 2X WOOD FRAME OR BUCKSTRIP. SEE NOTE 2, THIS SHEET.

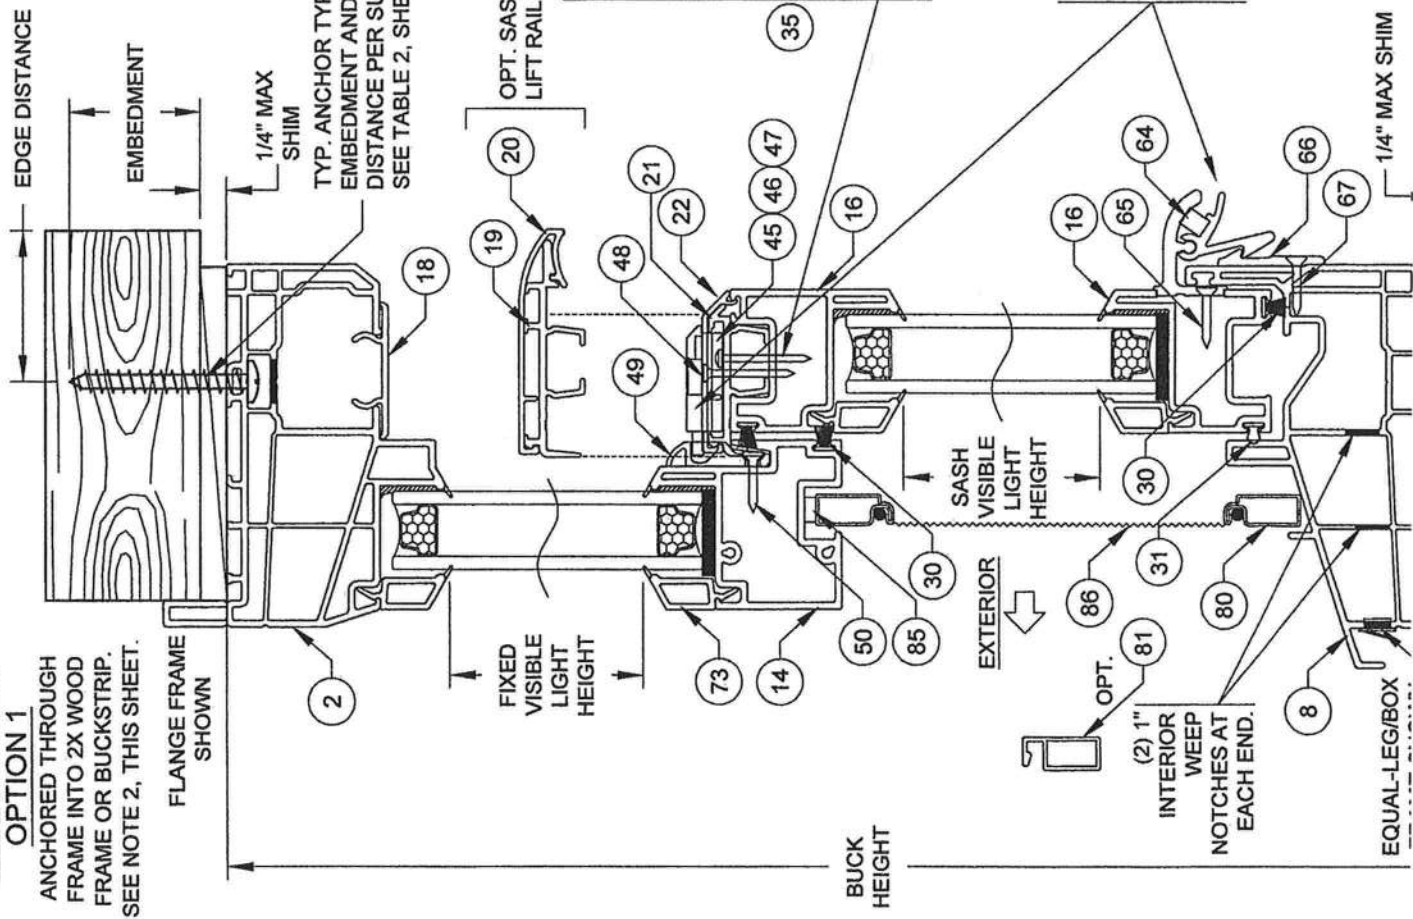


FOR ALL WINDOWS:
 1) ANCHOR @ 3.55" FROM END AND AT CENTER.
 FOR WINDOWS OVER 36" WIDE: ADD ADDITIONAL SCREWS @ 16-3/8" FROM END.
 FOR WINDOWS WITH BOTTOM LOCKS: ADD ADDITIONAL SCREWS @ 8-3/8" FROM END.

USE EITHER LATCH OR BOTTOM LOCK. TESTED UNIT LOCATION: 6-5/8" FROM SASH END.

INSTALLATION OPTION 2

ANCHORED THROUGH FRAME DIRECTLY INTO CONCRETE/CMU.

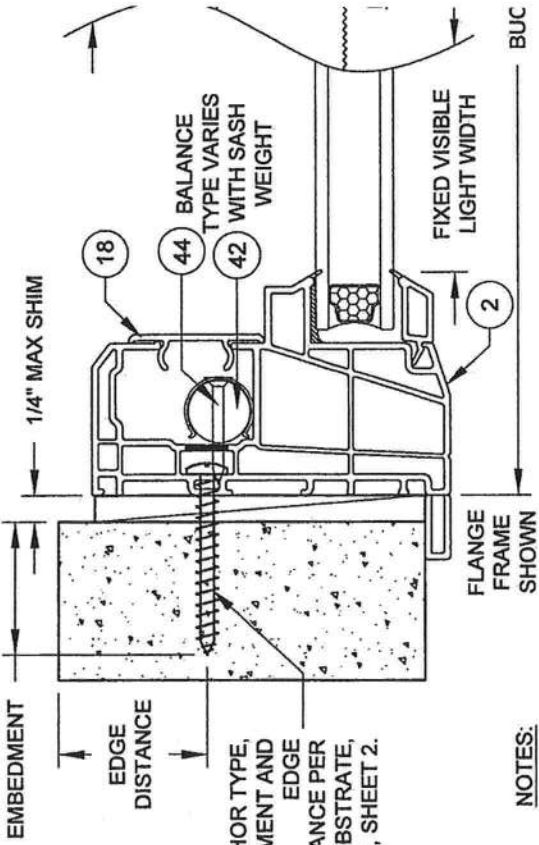


TYP. ANCHOR TYPE, EMBEDMENT AND EDGE DISTANCE PER SUBSTRATE, SEE TABLE 2, SHEET 2.

NOTES:

- 1) USE ONLY SUBSTRATE-APPROPRIATE ANCHORS LISTED ON TABLE 2, SHEET 2. FOLLOW EMBEDMENT AND EDGE DISTANCE LIMITS. ANY INSTALLATION OPTION SHOWN MAY BE USED ON ANY SIDE OF THE WINDOW.
- 2) MASONRY ANCHORS MAY BE USED INTO WOOD AS PER TABLE 2, SHEET 2. ALL WOOD BUCKS LESS THAN 1-1/2" THICK ARE TO BE CONSIDERED 1X INSTALLATIONS. 1X WOOD BUCKS ARE OPTIONAL IF UNIT IS INSTALLED DIRECTLY TO SUBSTRATE. WOOD BUCKS DEPICTED AS 2X ARE 1-1/2" THICK OR GREATER. 1X AND 2X BUCKS (WHEN USED) SHALL BE DESIGNED TO PROPERLY TRANSFER LOADS TO THE STRUCTURE. WOOD BUCK DESIGN AND INSTALLATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD.
- 3) VISIBLE LIGHT WIDTH OR HEIGHT (ALSO REFERRED TO AS DAYLIGHT OPENING) IS MEASURED FROM BEADING TO BEADING.

HORIZONTAL

DADE APPROVED MULLION MAY BE VERTICAL OR HC


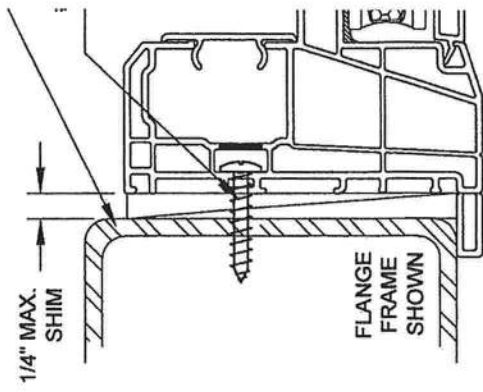


INSTALLATION OPTION 4


ANCHORED THROUGH FRAME INTO METAL

INSTALLATION DETAILS FOR INTEGRAL FIN & J-CHANNEL FRAMES

INSTALLATION OPTION 5
 ANCHORED THROUGH INTEGRAL
 FIN INTO 2X WOOD FRAME OR
 BUCK-STRIP. SEE NOTE 2, THIS
 SHEET.

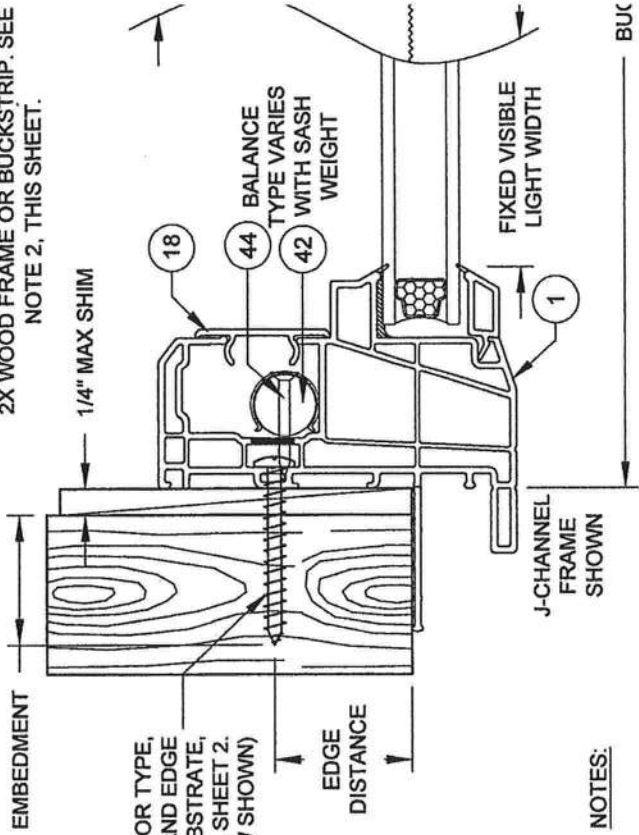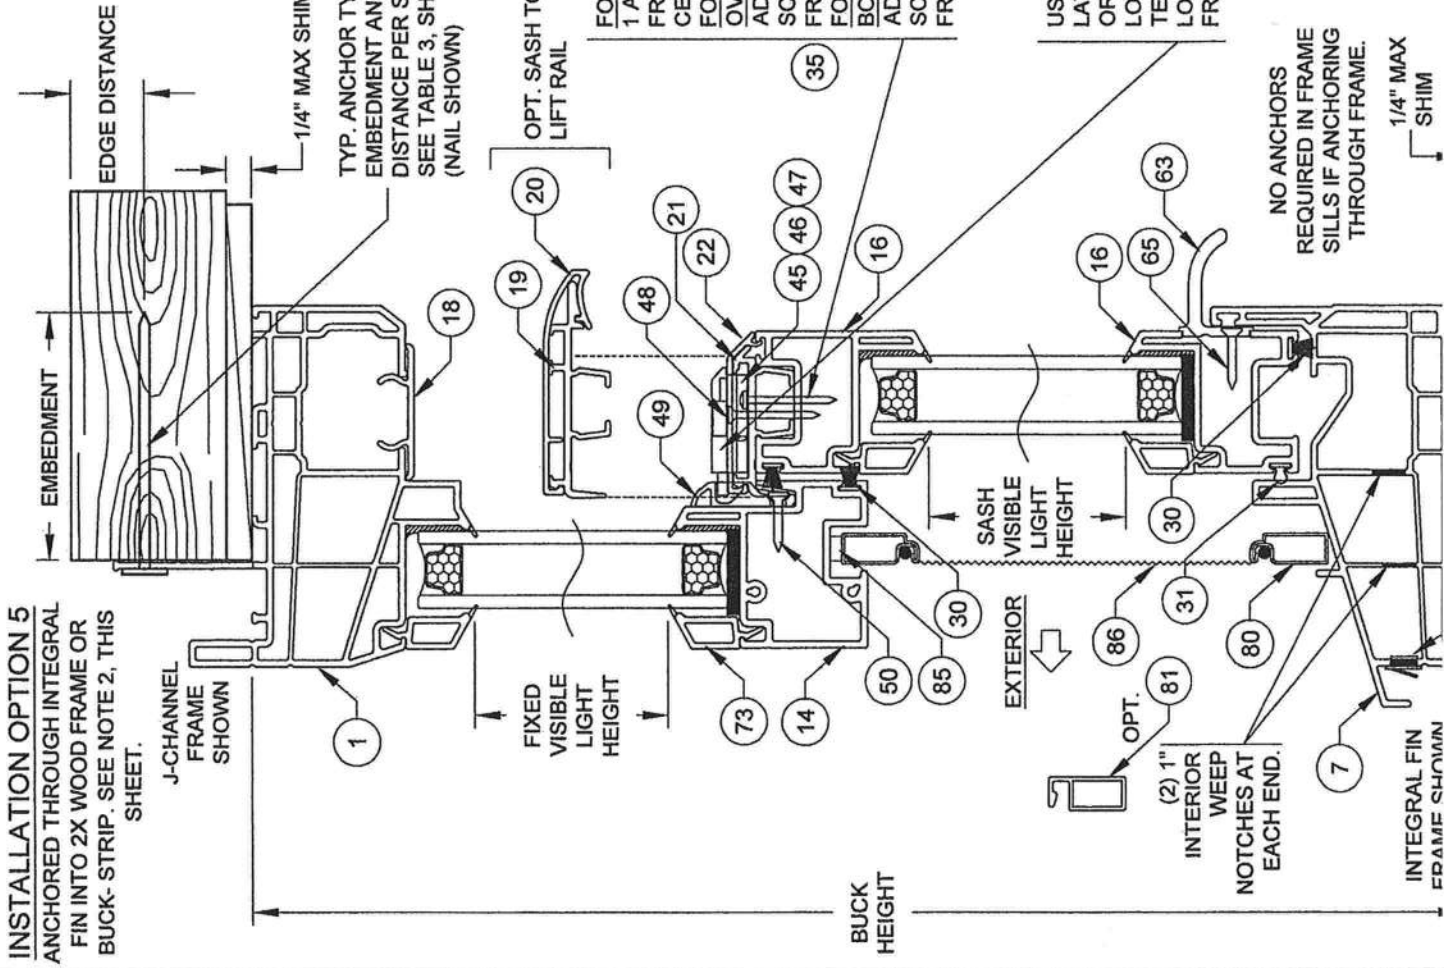

HORIZONTAL

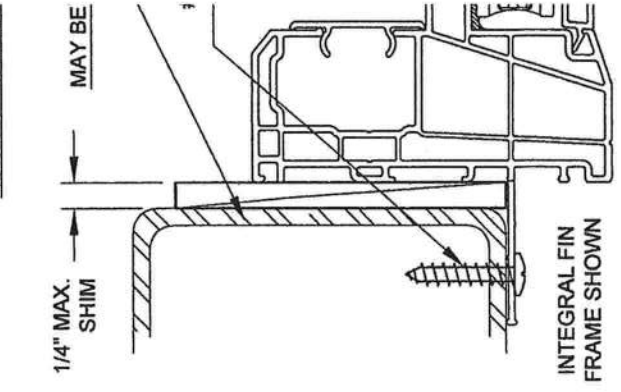

NOTES:

- 1) USE ONLY SUBSTRATE-APPROPRIATE ANCHORS LISTED ON TABLES 2 & 3 OF SHEET 2. FOLLOW EMBEDMENT AND EDGE DISTANCE LIMITS. ANY INSTALLATION OPTION SHOWN MAY BE USED ON ANY SIDE OF THE WINDOW.
- 2) MASONRY ANCHORS MAY BE USED INTO WOOD AS PER TABLE 2, SHEET 2. ALL WOOD BUCKS LESS THAN 1-1/2" THICK ARE TO BE CONSIDERED 1X INSTALLATIONS. 1X WOOD BUCKS ARE OPTIONAL IF UNIT IS INSTALLED DIRECTLY TO SUBSTRATE. WOOD BUCKS DEPICTED AS 2X ARE 1-1/2" THICK OR GREATER. 1X AND 2X BUCKS (WHEN USED) SHALL BE DESIGNED TO PROPERLY TRANSFER LOADS TO THE STRUCTURE. WOOD BUCK DESIGN AND INSTALLATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD.
- 3) VISIBLE LIGHT WIDTH OR HEIGHT (ALSO REFERRED TO AS DAYLIGHT OPENING) IS MEASURED FROM BEADING TO BEADING.


FOR ALL WINDOWS:
 1 ANCHOR @ 3.55" FROM END AND AT CENTER.
FOR WINDOWS OVER 36" WIDE:
 ADD ADDITIONAL SCREWS @ 16-3/8" FROM END.
FOR WINDOWS WITH BOTTOM LOCKS:
 ADD ADDITIONAL SCREWS @ 8-3/8" FROM END.

USE EITHER LATCH (SHOWN) OR BOTTOM LOCK (SHEET 3). TESTED UNIT LOCATION: 6-5/8" FROM SASH END.


NO ANCHORS REQUIRED IN FRAME SILLS IF ANCHORING THROUGH FRAME.

INSTALLATION OPTION 6
 ANCHORED THROUGH FRAME INTO 2X WOOD FRAME OR BUCKSTRIP. SEE NOTE 2, THIS SHEET.


INSTALLATION OPTION 7
 ANCHORED THROUGH INTEGRAL FIN INTO MET/

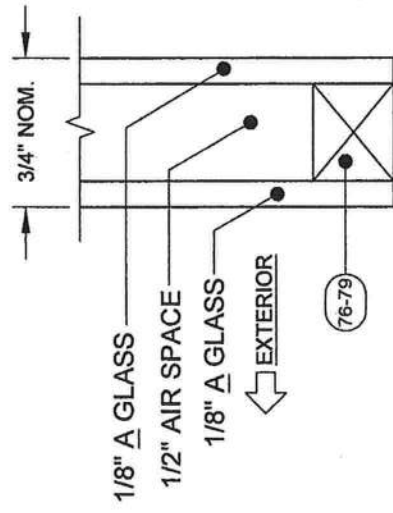

GLASS TYPE 1

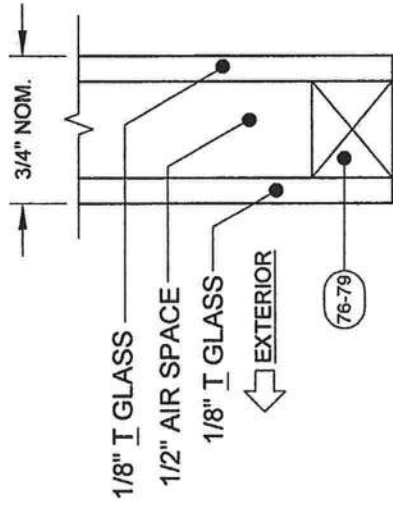

GLASS TYPE 2

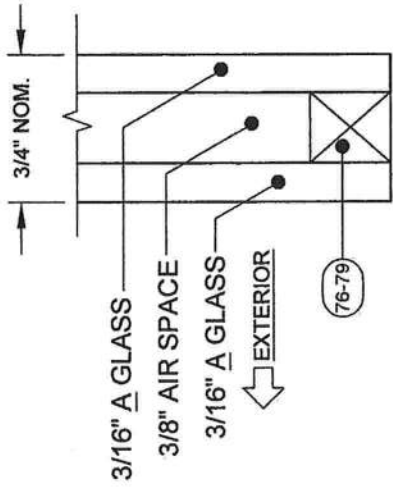

GLASS TYPE 2


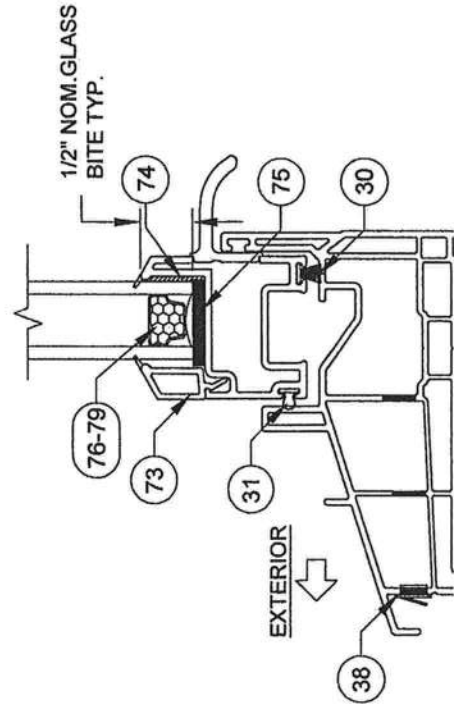


TABLE 4:

Glass Types 1 - 4	Bottom Sash Description for given Range @ Window Height Shown	Sash Height Range (in)	Design Pressure (lbs/ft ²)											
			Window Buck Width (in)											
			18	24	32	36	40	48	52.125					
23.5	Equal-ite	11.384	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-99.0	+50.0	-92.0
	Standard Collage	14.517 - 15.870	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-97.0	+50.0	-90.0
	Equal-ite	11.583 - 14.516	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-97.1
	Standard Preview	11.377 - 11.582	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-88.0	+50.0	-84.0
37.375	Tallest	23.517 - 25.286	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-88.6	+50.0	-78.1
	Standard Collage	20.968 - 23.516	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-86.6	+50.0	-78.0
	Equal-ite	17.517 - 20.957	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-84.2	+50.0	-75.2
	Standard Preview	14.517 - 17.516	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-83.0	+50.0	-73.6
44	Shortest	11.377 - 14.516	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-76.0	+50.0	-71.0
	Tallest	27.583 - 31.911	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-82.3	+50.0	-73.9
	Custom Size	26.517 - 27.582	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-79.0	+50.0	-70.9
	Standard Collage	23.517 - 26.516	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-78.3	+50.0	-70.3
48	Equal-ite	20.517 - 23.516	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-78.5	+50.0	-70.4
	Standard Preview	17.517 - 20.516	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-79.5	+50.0	-71.2
	Custom Size	14.517 - 17.516	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-74.9	+50.0	-69.1
	Shortest	11.377 - 14.516	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-73.8	+50.0	-65.8
49.625	Tallest	33.208 - 37.536	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-71.6	+50.0	-63.9
	Standard Collage	26.517 - 33.207	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-71.1	+50.0	-63.3
	Equal-ite	23.517 - 26.516	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-72.8	+50.0	-65.1
	Standard Preview	17.517 - 20.516	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-73.9	+50.0	-65.8
62	Custom Size	14.517 - 17.516	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-75.1	+50.0	-67.1
	Custom Size	12.517 - 14.516	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-72.2	+50.0	-67.3
	Shortest	11.377 - 12.516	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-68.5	+50.0	-64.4
	Tallest	36.517 - 41.644	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-66.1	+50.0	-58.2
75	Standard Collage	31.517 - 36.516	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-64.2	+50.0	-56.6
	Equal-ite	26.517 - 31.516	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-63.7	+50.0	-56.3
	Standard Preview	20.517 - 26.516	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-65.4	+50.0	-57.8
	Custom Size	17.517 - 20.516	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-64.8	+50.0	-58.8
84	Custom Size	14.517 - 17.516	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-60.5	+50.0	-55.6
	Custom Size	13.017 - 14.516	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-59.9	+50.0	-52.6
	Shortest	11.864 - 13.016	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-52.4	+50.0	-51.5
	Tallest	39.517 - 41.644	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-51.8	+50.0	-50.0
91.78	Custom Size	38.517 - 39.516	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-60.6	+50.0	-53.0
	Equal-ite	35.517 - 38.516	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-60.7	+50.0	-53.1
	Standard Preview	29.517 - 35.516	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-60.2	+50.0	-52.4
	Custom Size	26.517 - 29.516	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-59.2	+50.0	-53.0
84	Shortest	24.864 - 26.516	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-53.5	+50.0	-51.5
	Equal-ite	38.517 - 41.644	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-51.4	+50.0	-50.6
	Custom Size	35.517 - 38.516	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-50.8	+50.0	-50.5
	Standard Preview	33.864 - 35.516	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-50.0	+50.0	-50.0
91.78	Tallest	** - 41.644	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-50.0	+50.0	-50.0
	Shortest	** - 41.644	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-100.0	+50.0	-50.0	+50.0	-50.0

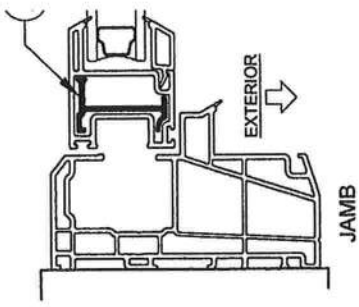


SECTION DET
LEVEL R1 REINFC
(REINFORC
ABOVE AP

SEE TABLE 6, SHEET 8 FOR ANCHOR GROUP AND QUANTITY.
** MIN. SASH HEIGHT = WINDOW BUCK HEIGHT - 50.136
(APPLIES TO ANY HEIGHT 91.78" OR LESS)

TABLE 5:

Glass Types 2 - 4 Reinf. Level RZ	Bottom Sash Description for given Range @ Window Height Shown	Sash Height Range (in)	Design Pressure (lbs/ft ²)											
			Window Buck Width (in)											
			18	24	32	36	40	48	52.125					
23.5	Equal-Lite	11.394	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-129.0	+65.0	-129.0	+65.0	-120.0
	Standard Cottage	14.517 - 15.870	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-127.0	+65.0	-127.0	+65.0	-118.0
	Equal-Lite	11.583 - 14.516	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0
	Standard Cottage	11.377 - 11.582	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-122.0	+65.0	-122.0	+65.0	-123.0
28	Tallest	23.517 - 25.286	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-124.6	+65.0	-124.6	+65.0	-113.0
	Standard Cottage	20.958 - 23.516	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-121.2	+65.0	-121.2	+65.0	-109.3
	Equal-Lite	17.517 - 20.957	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-116.0	+65.0	-116.0	+65.0	-93.0
	Standard Cottage	14.517 - 17.516	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-110.2	+65.0	-110.2	+65.0	-107.0
37.375	Shortest	11.377 - 14.516	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-116.0	+65.0	-116.0	+65.0	-103.4
	Tallest	27.583 - 31.911	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-115.3	+65.0	-115.3	+65.0	-99.2
	Custom Size	26.517 - 27.582	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-109.6	+65.0	-109.6	+65.0	-98.4
	Standard Cottage	23.517 - 26.516	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-109.9	+65.0	-109.9	+65.0	-99.7
44	Equal-Lite	20.517 - 23.516	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-111.3	+65.0	-111.3	+65.0	-101.7
	Standard Cottage	17.517 - 20.516	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-113.8	+65.0	-113.8	+65.0	-93.0
	Custom Size	14.517 - 17.516	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-106.8	+65.0	-106.8	+65.0	-88.6
	Shortest	11.377 - 14.516	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-104.8	+65.0	-104.8	+65.0	-93.7
48	Tallest	31.583 - 35.911	+65.0	-130.0	+65.0	-127.2	+65.0	-125.1	+65.0	-116.0	+65.0	-116.0	+65.0	-93.0
	Standard Cottage	26.517 - 31.582	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-103.3	+65.0	-103.3	+65.0	-89.5
	Equal-Lite	20.517 - 26.516	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-100.2	+65.0	-100.2	+65.0	-89.5
	Standard Cottage	17.517 - 20.516	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-93.7	+65.0	-93.7	+65.0	-88.6
49.625	Custom Size	12.517 - 17.516	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-104.8	+65.0	-104.8	+65.0	-93.7
	Custom Size	12.517 - 17.516	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-109.6	+65.0	-109.6	+65.0	-98.4
	Shortest	11.377 - 14.516	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-101.9	+65.0	-101.9	+65.0	-92.1
	Tallest	33.208 - 37.536	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-99.6	+65.0	-99.6	+65.0	-88.6
62	Standard Cottage	26.517 - 33.207	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-101.9	+65.0	-101.9	+65.0	-91.1
	Equal-Lite	23.517 - 26.516	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-102.0	+65.0	-102.0	+65.0	-91.2
	Custom Size	20.517 - 23.516	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-103.2	+65.0	-103.2	+65.0	-92.1
	Standard Cottage	17.517 - 20.516	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-105.4	+65.0	-105.4	+65.0	-93.9
75	Custom Size	14.517 - 17.516	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-109.6	+65.0	-109.6	+65.0	-97.4
	Custom Size	12.517 - 14.516	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-113.2	+65.0	-113.2	+65.0	-100.4
	Shortest	11.377 - 12.516	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-109.6	+65.0	-109.6	+65.0	-91.5
	Tallest	36.517 - 41.644	+65.0	-130.0	+65.0	-123.6	+65.0	-121.2	+65.0	-119.9	+65.0	-119.9	+65.0	-78.8
84	Standard Cottage	31.517 - 36.516	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-120.4	+65.0	-120.4	+65.0	-81.0
	Equal-Lite	26.517 - 31.516	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-103.1	+65.0	-103.1	+65.0	-82.4
	Standard Cottage	23.517 - 26.516	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-99.3	+65.0	-99.3	+65.0	-84.5
	Custom Size	20.517 - 23.516	+65.0	-130.0	+65.0	-130.0	+65.0	-130.0	+65.0	-92.1	+65.0	-92.1	+65.0	-84.5
91.78	Custom Size	14.517 - 17.516	+65.0	-125.4	+65.0	-102.2	+65.0	-98.7	+65.0	-82.4	+65.0	-79.8	+65.0	-78.2
	Custom Size	13.017 - 14.516	+65.0	-120.6	+65.0	-98.0	+65.0	-92.6	+65.0	-75.4	+65.0	-73.4	+65.0	-70.4
	Shortest	11.864 - 13.016	+65.0	-117.1	+65.0	-94.9	+65.0	-99.7	+65.0	-84.9	+65.0	-84.9	+65.0	-74.2
	Tallest	39.517 - 41.644	+65.0	-130.0	+65.0	-115.6	+65.0	-108.4	+65.0	-103.7	+65.0	-103.7	+65.0	-74.3
97.5	Custom Size	38.517 - 39.516	+65.0	-130.0	+65.0	-124.2	+65.0	-119.9	+65.0	-109.6	+65.0	-109.6	+65.0	-73.6
	Equal-Lite	35.517 - 38.516	+65.0	-130.0	+65.0	-119.5	+65.0	-113.1	+65.0	-109.6	+65.0	-109.6	+65.0	-74.3
	Custom Size	32.517 - 35.516	+65.0	-130.0	+65.0	-119.5	+65.0	-113.1	+65.0	-109.6	+65.0	-109.6	+65.0	-73.6
	Standard Cottage	29.517 - 32.516	+65.0	-130.0	+65.0	-108.5	+65.0	-108.5	+65.0	-96.3	+65.0	-96.3	+65.0	-74.3
104	Custom Size	26.517 - 29.516	+65.0	-122.1	+65.0	-99.3	+65.0	-93.9	+65.0	-87.7	+65.0	-85.2	+65.0	-74.9
	Shortest	24.864 - 26.516	+65.0	-119.1	+65.0	-96.6	+65.0	-91.4	+65.0	-84.9	+65.0	-84.9	+65.0	-71.9
	Equal-Lite	38.517 - 41.644	+65.0	-130.0	+65.0	-108.5	+65.0	-108.5	+65.0	-91.8	+65.0	-91.8	+65.0	-70.6
	Custom Size	35.517 - 38.516	+65.0	-122.1	+65.0	-99.3	+65.0	-93.9	+65.0	-87.7	+65.0	-85.2	+65.0	-71.1
112	Standard Cottage	33.864 - 35.516	+65.0	-117.1	+65.0	-94.9	+65.0	-89.5	+65.0	-81.0	+65.0	-81.0	+65.0	-70.0
	Tallest	** - 41.644	+65.0	-117.1	+65.0	-94.9	+65.0	-89.5	+65.0	-72.5	+65.0	-72.5	+65.0	-70.0
	Custom Size	** - 41.644	+65.0	-117.1	+65.0	-94.9	+65.0	-89.5	+65.0	-70.0	+65.0	-70.0	+65.0	-70.0
	Shortest	** - 41.644	+65.0	-117.1	+65.0	-94.9	+65.0	-89.5	+65.0	-70.0	+65.0	-70.0	+65.0	-70.0

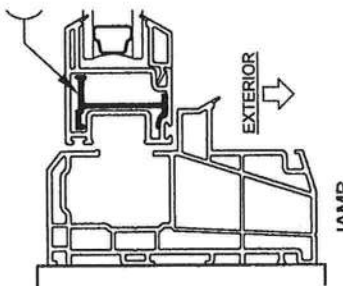

SECTION DET
LEVEL R2 REINFC
(REINFORC
ABOVE AF

SEE TABLE 7, SHEET 9 FOR ANCHOR GROUP AND QUANTITY.
** MIN. SASH HEIGHT = WINDOW BUCK HEIGHT - 50.136
(APPLIES TO ANY HEIGHT 91.78" OR LESS)

TABLE 6:

Glass Types 1, 2, 3 & 4 Relif. Level R1	Anchor Group A										Anchor Group B																									
	18" Wide		24" Wide		32" Wide		36" Wide		40" Wide		48" Wide		52-1/8" Wide		18" Wide		24" Wide		32" Wide		36" Wide		40" Wide		48" Wide		52-1/8" Wide		18" Wide		24" Wide					
	Jamb	Header	Below MR	Header	Below MR	Header	Below MR	Header	Below MR	Header	Below MR	Header	Below MR	Header	Below MR	Header	Below MR	Header	Below MR	Header	Below MR	Header	Below MR	Header	Below MR	Header	Below MR	Header	Below MR	Header	Below MR	Header	Below MR			
23.5	Equal-Lite	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2			
	Standard Cottage	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2			
	Equal-Lite	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2			
	Tallest	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2		
37.375	Standard Cottage	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2			
	Equal-Lite	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2		
	Shortest	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2		
	Tallest	1	3	1	4	1	4	1	4	1	4	1	4	1	4	1	4	1	4	1	4	1	4	1	4	1	4	1	4	1	4	1	4	1	4	
44	Standard Cottage	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	
	Equal-Lite	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2		
	Standard Preview	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2
	Custom Size	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2
48	Standard Cottage	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2
	Equal-Lite	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3
	Standard Preview	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2
	Custom Size	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2
49.625	Standard Cottage	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2
	Equal-Lite	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3
	Standard Preview	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2
	Custom Size	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2
62	Standard Cottage	4	2	1	4	2	1	4	2	1	4	2	1	4	2	1	4	2	1	4	2	1	4	2	1	4	2	1	4	2	1	4	2	1	4	2
	Equal-Lite	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3
	Standard Preview	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2
	Custom Size	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2
75	Standard Cottage	4	2	1	4	2	1	4	2	1	4	2	1	4	2	1	4	2	1	4	2	1	4	2	1	4	2	1	4	2	1	4	2	1	4	2
	Equal-Lite	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3
	Standard Preview	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2
	Custom Size	4	3	1	4	3	1	4	3	1	4	3	1	4	3	1	4	3	1	4	3	1	4	3	1	4	3	1	4	3	1	4	3	1	4	3
84	Standard Cottage	4	3	1	4	3	1	4	3	1	4	3	1	4	3	1	4	3	1	4	3	1	4	3	1	4	3	1	4	3	1	4	3	1	4	3
	Equal-Lite	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3	1	3
	Standard Preview	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2	1	3	2
	Custom Size	4	3	1	4	3	1	4	3	1	4	3	1	4	3	1	4	3	1	4	3	1	4	3	1	4	3	1	4	3	1	4	3	1	4	3
91.78	Tallest	4	4	1	4	4	1	4	4	1	4	4	1	4	4	1	4	4	1	4	4	1	4	4	1	4	4	1	4	4	1	4	4	1	4	

SEE TABLE 4, SHEET 6 FOR DESIGN PRESSURES WHEN USING THIS TABLE.
 ** MIN. SASH HEIGHT = WINDOW BUCK HEIGHT - 50.136
 (APPLIES TO ANY HEIGHT 91.78" OR LESS)

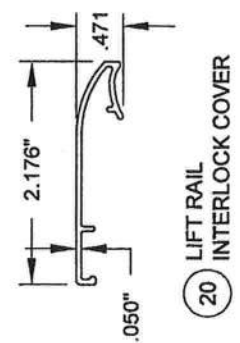
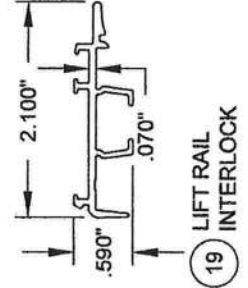
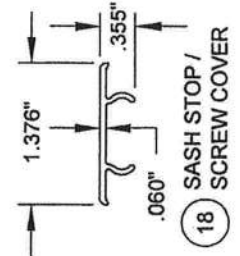
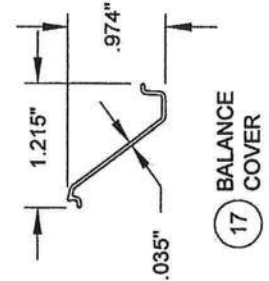
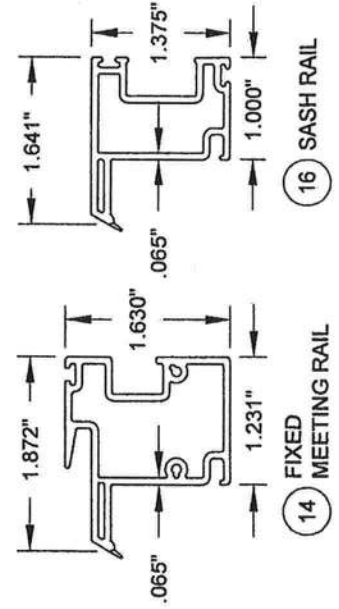
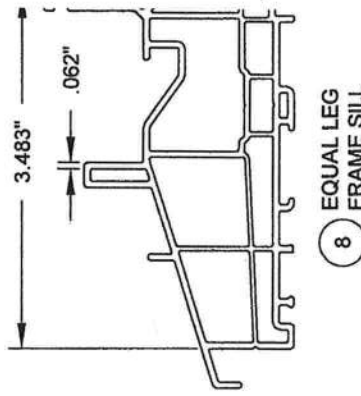
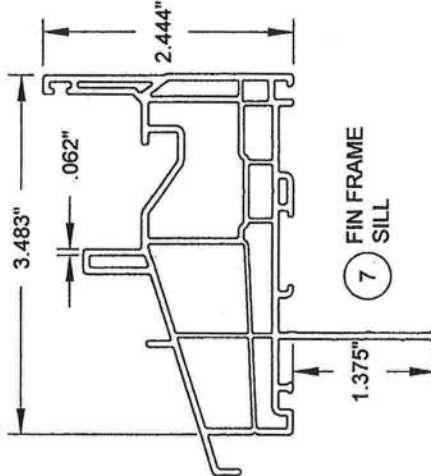
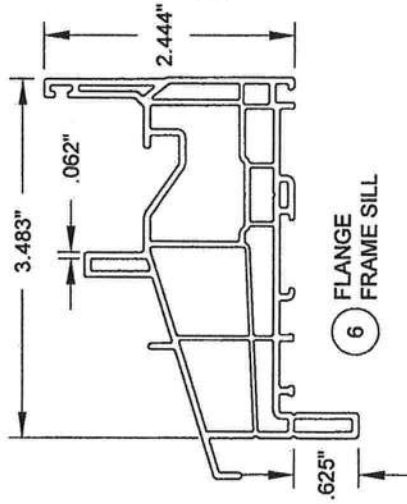
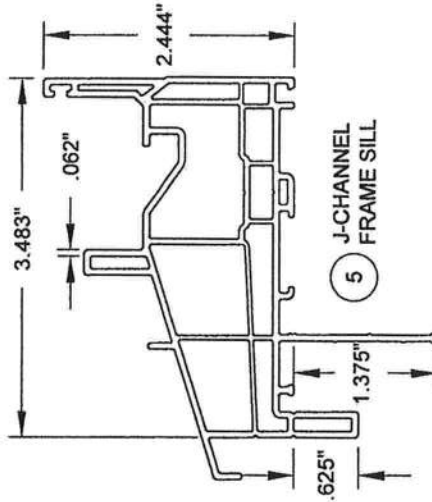
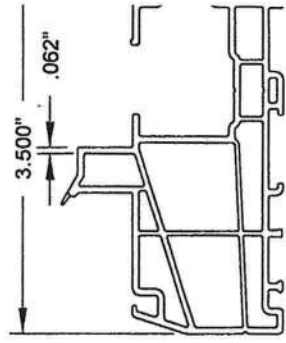
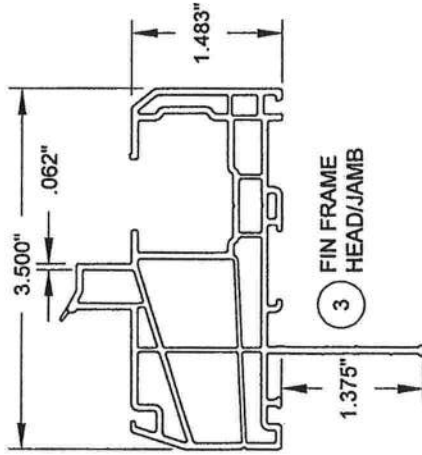
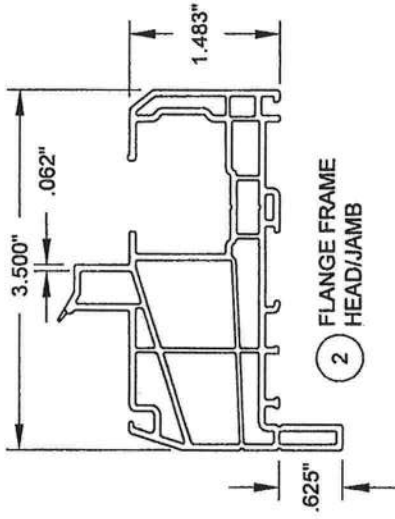
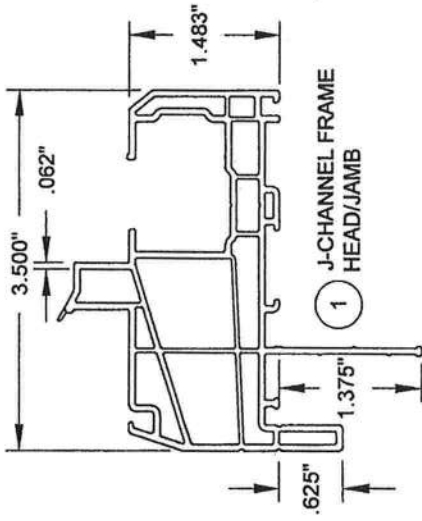


TABLE 8, CONT.:

Bill of Material			Material
#	Part #	Description	Material
1	620101	Single Hung Frame Head & Jambes - J-Channel	PVC
2	620102	Single Hung Frame Head & Jambes - Flange	PVC
3	620103	Single Hung Frame Head & Jambes - Fin	PVC
4	620104	Single Hung Frame Head & Jambes - Equal Leg/Box	PVC
5	620105	SH/DH Frame Sill - J-Channel	PVC
6	620106	SH/DH Frame Sill - Flange	PVC
7	620107	SH/DH Frame Sill - Fin	PVC
8	620108	SH/DH Frame Sill - Equal Leg/Box	PVC
14	620131	Fixed Meeting Rail	PVC
16	620129	Sash Rail (Sides, Top & Bottom)	PVC
17	620134	Balance Cover	PVC
18	620133	Sash Stop/Screw Cover	PVC
19	620156	Pull Rail Interlock	6005 T5 Al
20	620144	Pull Rail Interlock Cover	PVC
21	620157	Beveled Interlock	6005 T5 Al
22	620145	Beveled Interlock Cover	PVC
23	620150	Light Sash Reinforcement	6063 T6 Al
26	620153	Standard Meeting Rail Reinforcement	6005 T5 Al
27	620154	HD Meeting Rail Reinforcement	6005 T5 Al
30	61644	Weatherstrip, .187" x .270" Fin Pile	
31	6Q300	Weatherstrip, .190" x .300" Foam Bulb	Flex PVC
32	61719	Weatherstrip, .187" x .220" Poly/Pile	
33	61825	Weatherstrip Plug, .220" Finseal	
35	78X1MTT	#8 x 1" Ph. PH SDS (Interlock Mounting Screw)	
36	78X3THPX	#8 x 3" Ph. PH SMS (Meeting Rail Screw)	410 SS
37	71669SP	Meeting Rail Screw Support Plate	6063 T6 Al
38	720210	Weep Hole Cover	PVC
40	720XXXX	Constant Force Balance	
41		#8 x 3/4" Ph. FH SMS (Con. Force Balance Screw)	SS
42		Spiral Balance	
43	720205	Spiral Balance Shoe	Nylon
44	78X114FPAX	#8 x 1-1/4" Ph. FH SMS (Spiral Balance Screw)	410 SS

Bill of Material, cont.

#	Part #	Description	Material
45	720197	Auto Lock Mechanism	C Ste
46	720198&9	Sweep Lock	Cast Z
47	720195&6	Auto Lock Cover Assembly	Cast Z
48	76X1180PTX	#6 x 1-1/8" Ph. FH SDS (Auto and Sweep Lock Screw)	SS
49	720200	Auto and Sweep Lock Keeper	Cast Z
50	76X34PPA	#6 x 3/4" Ph. PH SDS (Keeper Screw)	SS
51	420181 L/R	Beveled Tilt Latch Corner Key	PVC
52	420182 L/R	Pull Rail Tilt Latch Corner Key	PVC
53	7634PHFL	#6 x 3/4" Ph. FH SDS (Corner Key Screw)	SS
54	420183	Tilt Latch	PVC
55	420184	Tilt Latch Retainer	PVC
56	720207	1" Tilt Latch Spring	SS
57	420186	Plastic Tilt Latch Finger Pull	PVC
58	720192	Metal Tilt Latch Finger Pull	Cast Z
59	420180	Pivot Bar Corner Key	PVC
60	720206	Pivot Bar	SS
63	720191	Sash Pull Handle	Cast Z
64	720194	Sash Pull Handle With Latch Assembly	Cast Z
65	7834FPT	#8 x 3/4" Ph. FH SDS (Pull Handle Screw)	SS
66	420188	Bottom Latch Strike Plate	Cast Z
67	7858B	#8 x 5/8" Ph. FH SMS (Strike Plate Screw)	SS
73	720136	I.G. Bead	PVC
74		Backbedding, GE 7700 or Dow 791 or Dow 983	Silico
75	71646N	Setting Block (7/8" x 1" x 1/8"), 85 +/- 5 duro.	EPD
80	61012	Extruded Screen Frame	Alun
81	61011	Roll-Formed Screen Frame	Alun
82	7CKGLB21	Screen Corner Key for Extruded Frame	PVC
83	47042	Screen Corner Key with Pull Ring	PVC
84	47041	Screen Corner Key without Pull Ring	PVC
85	7CASPMP	Tension Spring	SS
86	61816C48	Screen Cloth	Fibergrl
87	61635/61614	.140" Screen Spine (Machine/Hand Rolled)	Viny

Part #	Description	Material
76	Kommerling 4SG TPS Spacer System	See this

OPT. SWEEP LOCK

OPT. PULL H WITH LAT

SASH
ASSEMBLY
DETAILS

ATTACHES TO BALANCE

