




Jy Kry

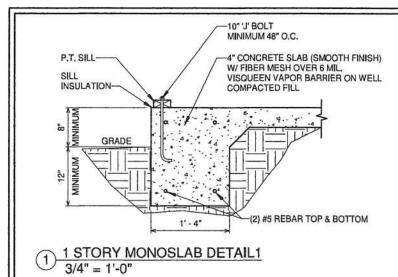

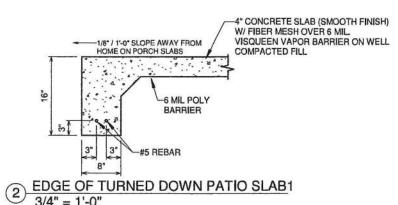

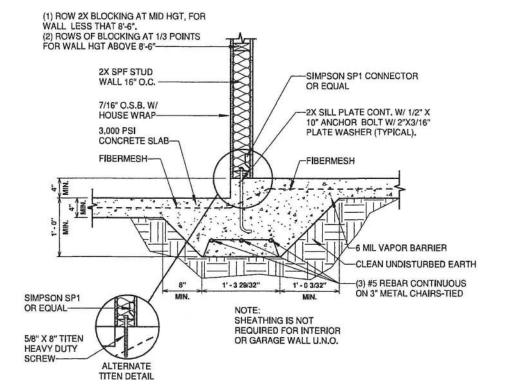

BEARING WALL AT STEP1

SATISFACTORY FILL MATERIAL SHALL BE FREE OF VEGETATION AND ORGANIC MATTER, WITH NOT MORE THAN 20 PERCENT BY WEIGHT PASSING THE 200 SIEVE.

FILL LIFTS SHALL BE 12 INCHES MAXIMUM.

ALL TOP SOIL CONTAINING UNSUITABLE MATERIAL SHALL BE REMOVED PRIOR TO THE PLACEMENT OF CLEAN FILL MATERIAL.

COMPACTION TEST RESULTS SHALL BE PROVIDED TO THE CITY/COUNTY INSPECTOR AND THE ENGINEER FOR APPROVAL PRIOR TO THE PLACEMENT OF ANY CONCRETE, STRUCTURES, BUILDING FOUNDATIONS, PAVEMENTS, OR OTHER MATERIALS., EACH LAYER OF CLEAN FILL SHALL BE ADEQUATELY COMPACTED TO AT LEAST 95% OF OPTIMUM DRY DENSITY AS DETERMINED BY THE MODIFIED PROCTOR TEST.

James Zaleski P.E 51544 2305 Haverhill Rd Tallahassee,FI 32312 PH 850-766-7778

MONOSLAB FOUNDATION DETAILS FOR AREAS 43, 59, 66, 73

OPT. PAPER SIZE: for 1/4" =1"-0" on 24"x36" PAPER SIZE ENLARGE PRINTS TO 200% PERMIT CONSTRUCTION PLANS

PAPER SIZE: 11" x 17" SCALE: 3/4" = 1'-0"

BRIDGEWATER

FALLER

ROB

EXTERIOR WALLS 66-21-047

S

TO REPORT COPYRIGHT VIOLATIONS CALL (770)532-1128 THE USE OF THIS PLAN BY ANYONE OTHER THAN AN AGENT OF "AMERICA'S HOME PLACE, INC." IS IN VIOLATION OF THE FEDERAL COPYRIGHT VIOLATION ACT, \$1000 REWARD FOR RECOVERING AN ACTUAL COPYRIGHT INFRINGEMENT, © COPYRIGHT-ALL RIGHTS RESERVED NOTE: VIOLATORS OF THE COPYRIGHT WILL BE PROSECUTED TO THE FULLEST EXTENT OF THE LAW, THIS WORK IS THE INTELLECTUAL PROPERTY OF AMERICA'S HOME PLACE AND SHALL NOT BE REPRODUCED WITHOUT PERMISSION.