

General Notes



General

The swimming pools and spas consist of one-piece fiberglass construction shop-formed over a mold. The material is fiberglass reinforced plastic (FRP), a minimum of 1/4 inch (6.4 mm) thick, composed of isophtalic resin, vinyl ester resin, and fiberglass. The surface finish is a neo pentyl glycol gel coat. Viking Pools produces various styles of swimming pools and spas. When installed in accordance to Viking Pools installation procedures, the pools and spas comply with applicable requirements of the following codes:

- 2018/2021 International Building Code® (IBC)
- 2018/2021 International Residential Code (IRC)
- 2018/2021 International Plumbing Code® (IPC)
- 2018/2021 IAPMO Uniform Plumbing Code (IAPMO UPC)
- 1997 Uniform Building Code (UBC)
- BOCA® National Building Code/2003 (BNBC)

- 2023 Florida Building Code 8th Edition
- 2023 Florida Plumbing Code 8th Edition
- 2023 Florida Fuel/Gas Code 8th Edition
- 2023 Florida Mechanical Code 8th Edition
- 2023 Florida Residential Code 8th Edition
- 2020 National Electric Code (NEC)

- 2007 ANSI/ASME-A112.19.8
- 2014 (R2023) ANSI/APSP/ICC-3 Permanently Installed Residential Spas and Swim Spas
- 2011 (R2022) ANSI/NSPI-5 Residential Inground Swimming Pools
- 2020 ANSI/APSP/ICC-7 Suction Entrapment Avoidance
- 2017 (PA2021) ANSI/APSP/ICC-16 Suction Outlet Fitting Assemblies
- 2024 International Swimming Pool and Spa Code - (ISPSC-ICC)
- 2024 Uniform Swimming Pool, Spa, Hot tub Code (IAPMO)

The overall pool dimensions, depths and capacities are shown in Table 1. The units comply with ANSI/NSPI-5, specified in Section AG103.1 of the IRC, and IAPMO IGC-2000\*, specified in the UPC. Models described in Table 2 and Table 3 can be placed up to 19-1/2 inches (49.5mm) above ground. These pools and spas may be placed with or without concrete or wood decking. Unless elevated portions of the units are protected from sunlight by soil berms, decking, etc., these portions must be coated with a UV-inhibiting opaque paint that is compatible with the laminate. All plumbing and electrical work must comply with the referenced codes in effect at the construction site. The pool and spa must remain full of water at all times. A permanent sign, bearing the following statement, must be attached to the pumping equipment: Notice-The pool or spa is designed to remain full of water at all times. The pool shell may be damaged if the water level is allowed to drop below the skimmer. When appreciable draw-down is noticed or if it becomes necessary to drain the pool or spa, contact Viking Pools or its dealers for instructions. A permanent label must be installed adjacent to the above sign indicating the Viking Pools dealer's name, address and telephone number.

Installation Procedure:

Viking pools and spas may be installed without a soil investigation by a registered design professional(RDP), subject to the building official's approval, provided none of the following conditions are encountered at the site:

- 1. The existence of uncontrollable groundwater within the depth of the pool or spa excavation.
- 2. The existence of an uncompacted fill in contact with any portion of the pool or spa.
- 3. The existence of any soil types with an angle of repose that will not support the walls of the excavation at desired slopes.
- 4. Danger to adjacent structures posed by the proposed pool or spa location
- 5. The existence of any cracks or openings in soil that would not confine sand or 1/2" clean gravel bedding.

If any of the conditions above is encountered, excavation must cease immediately. The specified conditions at the site must then be reviewed and recommendations made by the RDP. The building official must approve the RDP's report before work is completed.

The pool or spa excavation profile must coincide with the contours of the pool. The over excavation is minimum 6 inches (152mm) on the sides and ends. The over excavation at the pool bottom is minimum 4 inches (102mm). The backfill for the pool or spa bottom is a layer of 3-inch-thick (76mm) bedding sand matching the pool or spa profile.

This sand layer is compacted using a manual tamper and water. The pool or spa is then set into place using a crane, excavator or manually and be within 1 inch (25mm) of level. Simultaneous waterfill and sand backfill operations then commence. The sand is compacted with a tamper and water. The installer must ensure that the backfill level and water level are approximately the same throughout this procedure.

After completion of the backfill and plumbing, the decking is placed. Decks are prepared as indicated in Figures 1 though 4:

- 1. Cantilevered concrete decks are constructed as noted in Figure 1 in all cases.
- 2. Cantilevered decks are constructed with brick or stone as noted Figure 2 in all cases.
- 3. Raised bond beams are constructed as noted in Figure 3 in all cases.
- 4. Aboveground installations are constructed as noted in Figure 4 in all cases.

Barriers are required where pools are on premises of UBC Group R, Division 3, Occupancies or IBC Group R Occupancies. The barriers must comply with Appendix Chapter 4, Division 1, of the UBC or Section 3109.4 of the IBC and 2023 Florida Building Code, Residential, 8th Ed., Section R4501.17, R4501.17.1.1 through R4501.17.1.15

Expansive soils:

For installation of pools or spas in expansive soils, the following additional installation details must be followed subject to code official's approval:

- 1. All surfaces adjacent to the pool or spas must be excavated to a minimum depth of 12 inches (305 mm) beneath the pool bottom and minimum 6 inches (152 mm) behind the pool walls.
- 2. Any soft or loose soils exposed by step 1 must be removed until exposed material is solid. If the soil is still soft and loose, the upper 6 inches (152 mm) of all horizontal excavation surfaces must be scarified and compacted with mechanical equipment. The compacted surfaces and the excavated wall surfaces must be maintained in a moist condition until the first lift of backfill or fill is placed against the surface. The term compaction implies any method necessary to consolidate the native and fill materials to keep the pool or structure from settling.

- 3. The excavated bottom area of the pool or spa must be backfilled with granular import material to approximately 6 inches (152 mm) below the bottom of the pool or spa, wetted and compacted.
- 4. The remaining 6 inches (152 mm) must be backfilled beneath the pool or spa and outside the pool walls with compacted clean sand. The pool or spa must be filled with water as backfilling progresses to a level equivalent to that of the backfill. The backfill must be placed in compacted layers of approximately 6 inches (152 mm) while a uniform height of backfill is maintained around the pool or spa.
- 5. Positive surface drainage away from the perimeter of the pool and surrounding deck is required and critical to installations in highly expansive soils. Surface area drains and surface drainage swales or subdrains must be placed as needed to prevent ponding or saturation of the soil around the perimeter and vicinity of the pool to prevent excessive shrink-swell or volume changes in the soil.

Identification:

Viking pools and spas are identified by the following information imprinted on the top step of the pool or spa: manufacturer's name (Viking Pools) and address, pool or spa model designation, a coded serial number and the evaluation report number (ESR-2014).

The units also bear the label of the quality control agency, Columbia Research & Testing Corporation (AA-527).

**Findings:** That the fiberglass one piece swimming pools and spas are in compliance with the above listed codes as noted in ESR-2014 subject to the following conditions.

- 1. The construction and pool/spa installation comply with this report and the manufacturer's instructions.
- 2. Electrical and plumbing installation comply with the respective codes in effect at the construction site.
- 3. That all pools are installed in accordance with manufacturer's recommendations.
- 4. The pools and spas produced by Viking Pools Northeast, Inc. 176 Viking Drive Industrial Park, Jane Lew, West Virginia; Viking Pools Central, Inc., 10600 West Interstate 20 East, Midland, Texas; and Viking Pools, Inc., 121 Crawford Road, Williams,California; Viking Pools Southeast,40119 Country Road 54E, Zephyrhills, FL are manufactured under a quality control program with inspections by Columbia Research &Testing Corporation (AA-527).

Length, width and depth may vary up to 3% - all dimensions are to outside edge of coping, measured from parallel lines.

This item has been digitally signed and sealed by Donald R. Poindexter, PE on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

NOTE: When installed in accordance with Viking Pools installation procedures, the pools and spas comply with applicable requirements of the 2023 Florida Building Code, Residential, 8th Edition, Section R4501, R4501.6 and R4501.6.1, including ANSI/ APSP/ICC3, ANSI/APSP/ICC4, ANSI/APSP/ ICC5, ANSI/APSP/ICC6 AND ANSI/APSP/ ICC7.

The installation must comply with mandatory energy consumption requirements of Section R403.10, R403.10.1 through R403.10.3, Energy Consumption of Pools and Spas.



Table of Contents

Page	Content
C-001.....	General Notes
C-002.....	Tables 1-3
C-003.....	Figures 1-8
C-004.....	Pool Models
C-005.....	Pool Models
C-006.....	Pool Models
C-007.....	Spa Models - Tanning Ledges
C-008.....	Alternative Recirculation Systems

Reviewed by:

Donald R. Poindexter, PE  
Florida Lic. No. 64901  
4119 Trinity Dr Santa Rosa CA 95405  
Phone 707-494-8761

Seal:

Project Name and Address

Rob Chapman  
174 NW Harris Lake Dr  
Lake City, FL 32055

Contractor

Paragon Pools  
Model: Corinthian 12 Pool  
Date: 07/10/2025  
LP2044

Latham Pool Products Inc.  
DBA Latham Grand, Latham Select  
Viking Pool, Blue Hawaiian Pools, Trilogy Pools  
ICC Evaluation Report Number (ESR-2014)

Latham, NY Phone: (800) 833-3800  
Jane Lew, WV Phone: (304) 884-8954 Fax: (304) 884-7198  
Midland, TX Phone: (432) 561-9933 Fax: (432) 561-9934  
Williams, CA Phone: (530) 473-5319 Fax: (530) 473-5393  
Zephyrhills, FL Phone: (813) 783-7439 Fax: (813) 783-7214

TABLE 1- POOLS

POOL	CODE	SIZE	DEPTHS	GALLONS	SQUARE PAGE		POOL
		WIDTH x LENGTH	SHALLOW, DEEP	APPROX.	FEET	NUMBER	
Aruba	ARU	11' x 22'	3'-6" , 5'	5,200	177	Page 4	Type 0
Axiom 12	CRUM	12' x 26'	4' x 5'	5,300	214	Page 4	Type 0
Axiom 12 Deluxe	CRUD	12' x 26'	3' x 4'-7"	4,400	209	Page 4	Type 0
Axiom 14	CRUL	14' x 30'	4' x 6'	8,000	297	Page 4	Type 0
Axiom 16	CRUJ	16' x 35'	4'-6" , 6'-6"	11,600	395	Page 4	Type 0
Bay Isle	BHBY	14'-6" x 29'-10"	3' , 6'-6"	10,000	318	Page 4	Type 0
Bermuda	AL	12' x 26'	3'-6" , 5'-6"	7,000	226	Page 4	Type 0
Cape Cod	CA	14' x 31'	3'-6" , 6'	12,000	325	Page 4	Type 0
Claremont	V	14' x 33'	3'-7" , 5'-4"	11,700	416	Page 4	Type 0
Corinthian 12	RT12	12' x 25'	3'-6" , 5'-5"	5,100	254	Page 4	Type 0
Corinthian 14	RT14	14' x 30'	3'-6" , 6'	8,200	365	Page 4	Type 0
Coronado	BHBI	15' x 34'	3'-6" , 6'-6"	13,000	410	Page 4	Type 0
Delray	B	11'-10" x 25'-5"	4'-6"	8,100	264	Page 4	Type 0
Enchantment 9.17	NIR05	9'-1" x 17'-5"	4'-9"	3,200	129	Page 4	Type 0
Enchantment 9.21	NIR06	9'-1" x 20'-7"	4'-9"	4,000	154	Page 4	Type 0
Enchantment 9.24	NIR07	9'-1" x 23'-10"	4'-9"	4,800	180	Page 4	Type 0
Freeport	FP	12' x 25'-1"	3'-7" , 5'-5"	6,000	213	Page 5	Type 0
Jamaica	LD	9'-10" x 19'-9"	3'-2" , 5'	3,750	138	Page 5	Type 0
Java	JV	12' x 26'-9"	3'-6" , 5'-5"	6,800	233	Page 5	Type 0
Key West	BFF	12' x 25'-7"	3'-7" , 6'	9,000	230	Page 5	Type 0
Laguna	LG	14' x 30'	3'-6" , 6'	10,000	310	Page 5	Type 0
Laguna Deluxe	LGX	14' x 30'	4' , 6'	9,000	300	Page 5	Type 0
Milan	CTL	10' x 16'	4'	2,450	135	Page 5	Type 0
Olympia 12	FR12	12' x 26'	3'-6" , 5'-8"	7,600	275	Page 5	Type 0
Olympia 14	FR14	14' x 30'	3'-6" , 6'	1,120	377	Page 5	Type 0
Pleasant Cove	BHPL	11'-6" , 21'-7"	3'-5" , 5'-6"	5,000	453	Page 5	Type 0
Providence 14	SE14	14' x 30'	3'-6" , 6'-1"	7,900	371	Page 5	Type 0
Rockport	RP	14' x 30'	3'-7" , 5'-11"	12,800	314	Page 5	Type 0
St. Lucia	CM	12'-3" x 23'-11"	3'-6" , 5'	6,000	211	Page 5	Type 0
St. Thomas	L	14' x 31'-6"	3'-7" , 7'	13,700	396	Page 5	Type 0
Sunset Bay	BHSY	14' x 32'	4' , 6'-6"	10,000	377	Page 6	Type 0
Tuscan 11.20	SYM06	11'-1" x 20'-3"	3'-11" , 5' 2"	5,000	168	Page 6	Type 0
Tuscan 13.24	SYM07	12'-10" x 23'-7"	3'-11" , 5' 5"	6,100	229	Page 6	Type 0
Tuscan 14.27	SYM08	13'-9" x 26'-10"	3'-11" , 5' 9"	7,900	288	Page 6	Type 0
Tuscan 14.30	SYM09	13'-9" x 30'-4"	3'-11" , 5' 11"	10,000	325	Page 6	Type 0
Tuscan 14.40	SYM12	13'-9" x 39'-11"	3'-11" , 6' 8"	12,200	459	Page 6	Type 0
Valencia	ST	14'-4" x 27'-7"	3'-7" , 5'-10"	10,000	288	Page 6	Type 0
Vista Isle	BHVI	12' x 28'	3' , 6'-10"	8,000	294	Page 6	Type 0
Astoria 14	FRX14	14' x 35'	3'-6" , 6'-6"	10,700	434	Page 4	Type 0
Astoria 16	FRX	15'-10" x 40'	3'-6" , 7'	15,600	548	Page 3	Type 0
Barcelona	BAR	16' x 38'	3'-6" , 7'	18,500	518	Page 4	Type 0
Cancun	CC	16' x 35'	3'-6" , 6'-6"	14,000	397	Page 4	Type 0
Corinthian 16	RT16	15'-10" x 40'	3'-6" , 7'	15,400	563	Page 4	Type 0
Fiji	FJI	15' x 34'	3'-6" , 6'	12,000	375	Page 4	Type 0
Kingston	AP	16' x 38'	3'-6" , 5'-8"	17,000	555	Page 5	Type 0
Olympia 16	FR16	16' x 35'	3'-6" , 6'-6"	15,250	510	Page 5	Type 0
Apollo 14	CR14	13'-10" x 32'	3'-7" , 6'-1"	7,700	391	Page 4	Type 0

TABLE 3- SPAS

SPAS	CODE	SIZE	DEPTHS	GALLONS	SQUARE	PAGE
		WIDTH x LENGTH	SHALLOW, DEEP	APPROX.	FEET	NUMBER
Mystic	M	10' x 10'	3'-4"	550	64	7
Mystic Spillover	MSW	10' x 11'	3'-4"	550	64	7
Placid	BOS	8'-4" x 8'-4"	3'	475	45	7
Placid Spillover	BOSSW	8'-4" x 9'-4"	3'	475	45	7
Regal	RG	8' x 10'	3'-4"	600	52	7
Regal Spillover	RGSW	9' x 10'	3'-4"	600	52	7
Royal	RY	8' x 10'	3'-4"	600	63	7
Royal Spillover	RYSW	8'-10" x 10'	3'-4"	600	63	7
Shasta	LRS	7' x 7'	3'	420	31	7
Shasta Spillover	LRSSW	7' x 8'	3'	420	31	7
Superior	CS	8' x 12'-5"	3'	700	73	7
Superior Spillover	CSSW	9' x 12'-5"	3'	700	73	7
Tahoe	LOS	7'-6" x 7'-6"	3'	450	37	7
Tahoe Spillover	LOSSW	7'-6" x 8'-6"	3'	450	37	7
Hermosa	VFTL	6'-10" x 10'-7"	10"	200	50	7
Semicircle	TSCT	8'-4" x 16'	10"	400	92	7

TABLE 2- POOLS

ABOVE GROUND INSTALLATION	
CODES	CODES
ARU	AL
CP	SP
RT12	B
CRUM	FR12
FP	LD
JV	BFF
CRUD	MTK
CTL	BHPL
BH38	

NOTES


Latham Pool Products Inc.  
DBA Latham Grand, Latham Select  
Viking Pool, Blue Hawaiian Pools, Trilogy Pools  
ICC Evaluation Report Number (ESR-2014)

Latham, NY Phone: (800) 833-3800  
Jane Lew, WV Phone: (304) 884-6954 Fax: (304) 884-7198  
Midland, TX Phone: (432) 561-9933 Fax: (432) 561-9934  
Williams, CA Phone: (530) 473-5319 Fax: (530) 473-5393  
Zephyrhills, FL Phone: (813) 783-7439 Fax: (813) 783-7214

Reviewed by:

Donald R. Poindexter, PE  
Florida Lic. No. 64901  
4119 Trinity Dr Santa Rosa CA 95405  
Phone 707-494-8761

Seal:

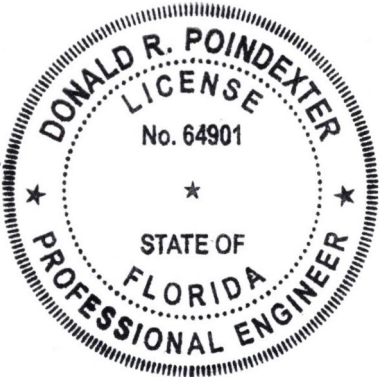










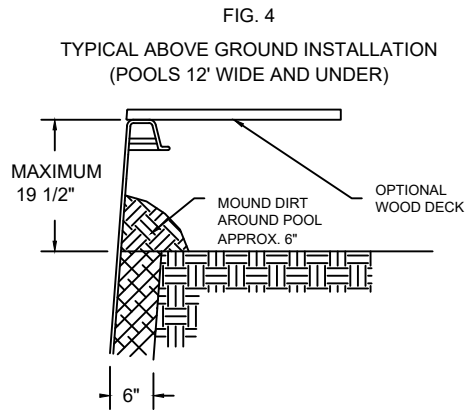


FIG. 5  
TYPICAL BOND BEAM WITH SPA

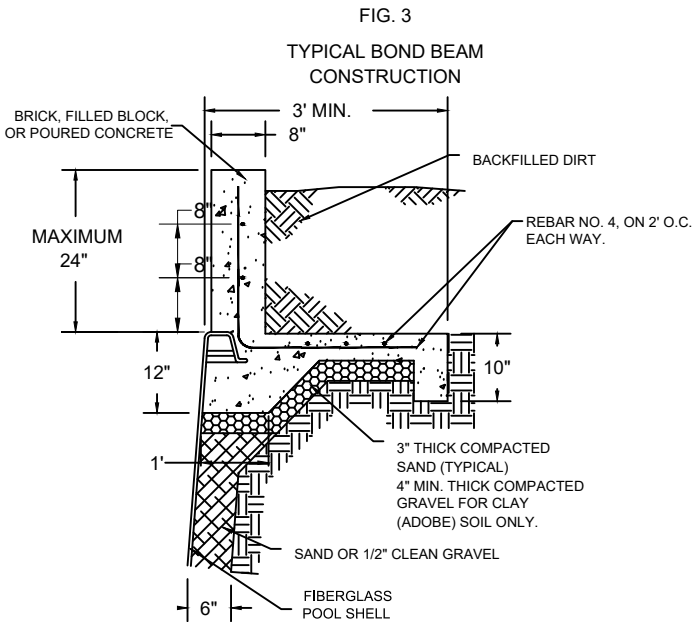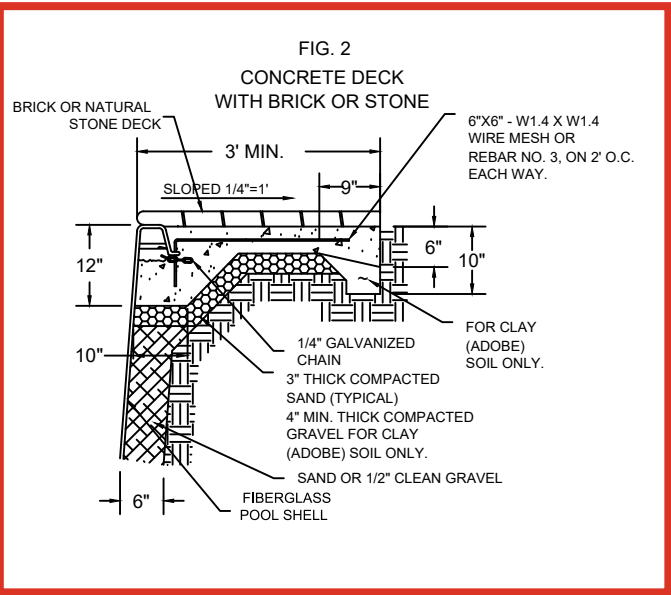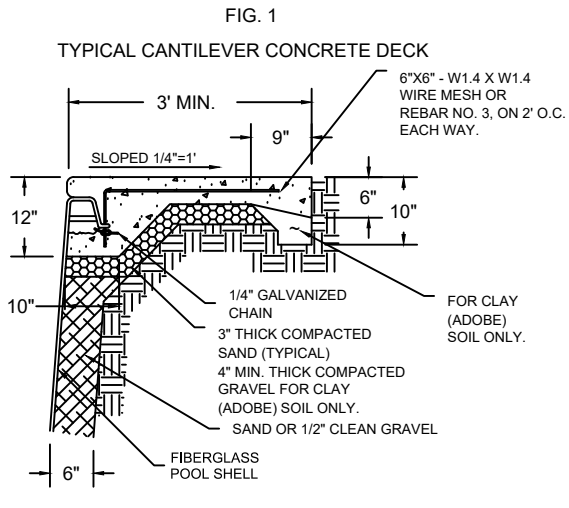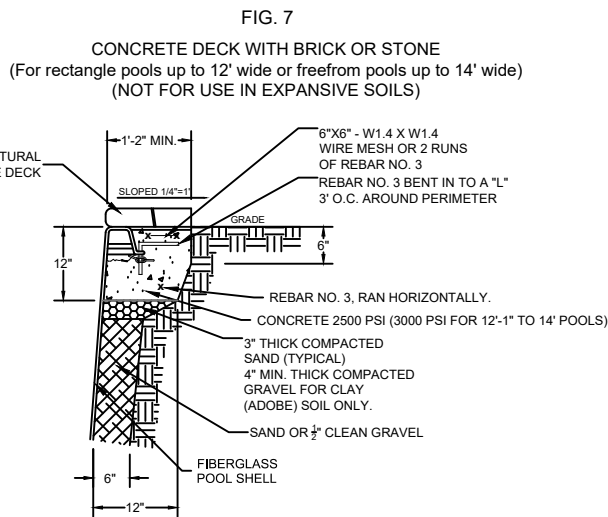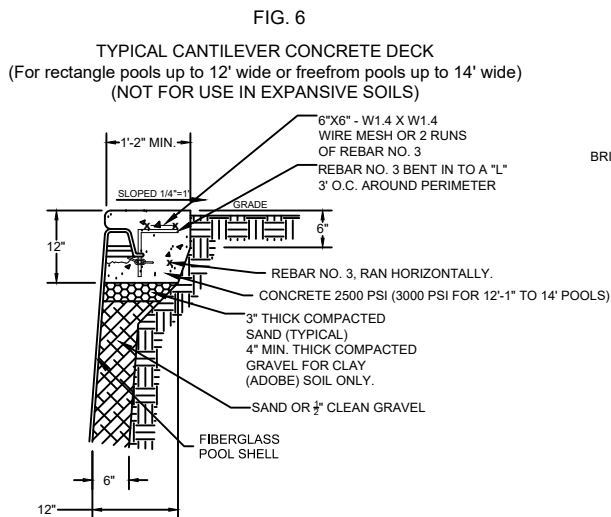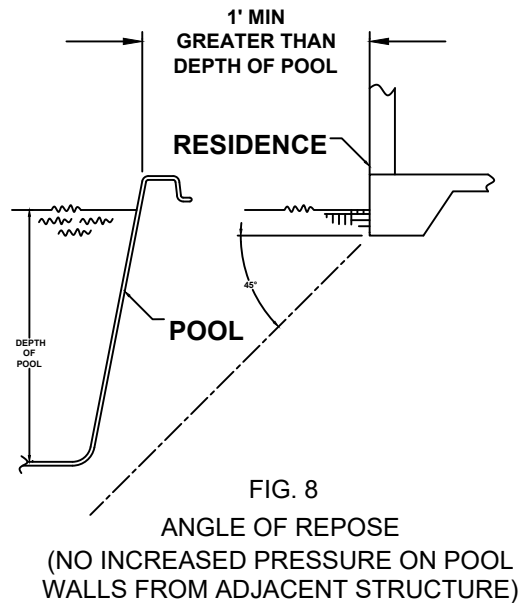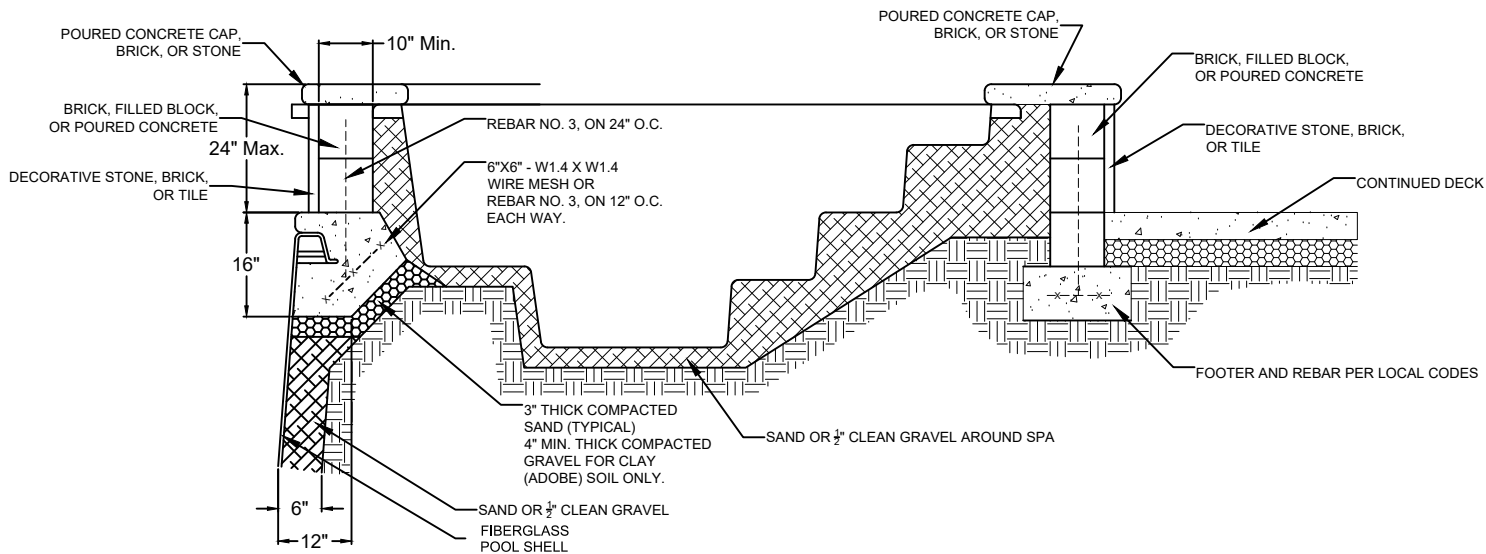

NOTES


**Latham Pool Products Inc.**  
DBA Latham Grand, Latham Select  
Viking Pool, Blue Hawaiian Pools, Trilogy Pools  
ICC Evaluation Report Number (ESR-2014)

Latham, NY Phone: (800) 833-3800  
Jane Lew, WV Phone: (304) 884-8954 Fax: (304) 884-7198  
Midland, TX Phone: (432) 561-9933 Fax: (432) 561-9934  
Williams, CA Phone: (530) 473-5319 Fax: (530) 473-5393  
Zephyrhills, FL Phone: (813) 783-7439 Fax: (813) 783-7214


Reviewed by:

Donald R. Poindexter, PE  
Florida Lic. No. 64901  
4119 Trinity Dr Santa Rosa CA 95405  
Phone 707-494-8761


Seal:

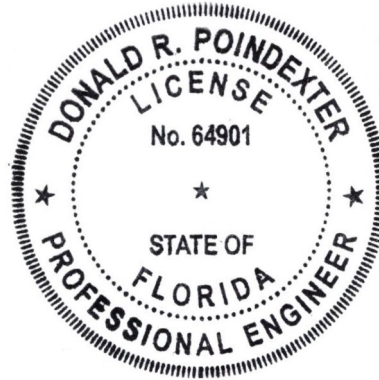


Length, width and depth may vary up to 3% - all dimensions are to outside edge of coping, measured from parallel lines.




ARUBA - ARU  
5,200 Gal. Approx.

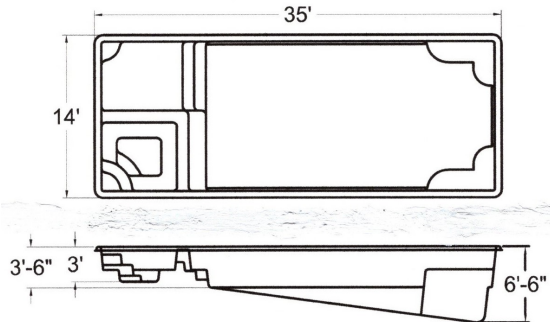


ASTORIA - FRX14  
10,700 Gal. Approx.

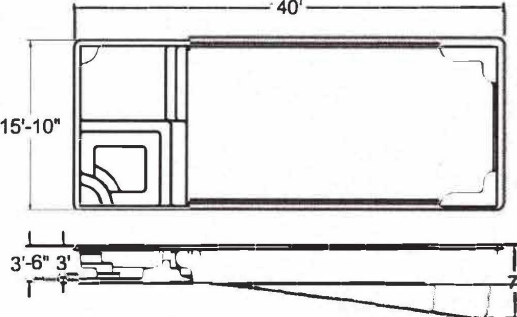


ASTORIA 16 - FRX  
15,600 Gal. Approx.




AXIOM 12/ECLIPSE - CRUM  
5,300 gal. approx.




AXIOM 12 DELUXE/MALIBU - CRUD  
4,400 Gal. Approx.

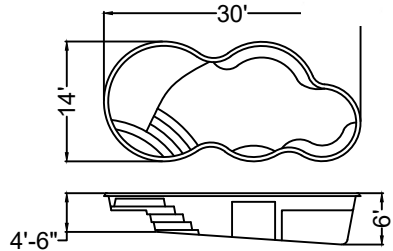


AXIOM 14/NEBULA - CRUL  
8,000 gal. approx.




Barcelona - BAR  
18,500 gal. approx.




BAY ISLE - BHBY  
10,000 Gal. Approx.




BERMUDA - AL  
7,000 gal. approx.




CANCUN - CC  
14,000 gal. approx.




CAPE COD - CA  
12,000 gal. approx.




CLAREMONT - V  
11,700 Gal. Approx.

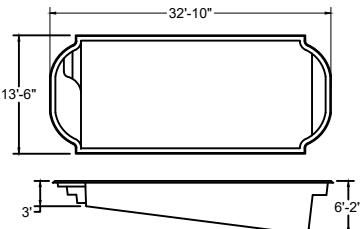


CLASSIC COVE - BHCC  
11,300 Gal. Approx.

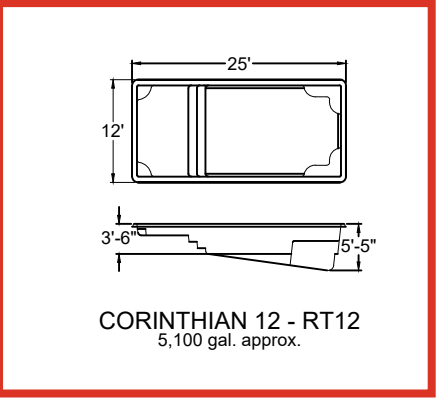


CORINTHIAN 12 - RT12  
5,100 gal. approx.




CORINTHIAN 14 - RT14  
8,200 gal. approx.

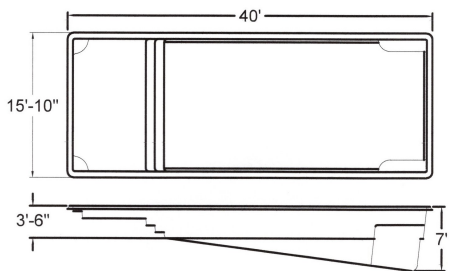


CORINTHIAN 16 - RT16  
15,400 Gal. Approx.

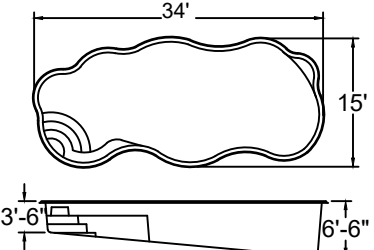


CORONADO - BHBI  
13,000 Gal. Approx.




DELRAY - B  
8,100 gal. approx.




ENCHANTMENT 9.17 - NIV05  
3,200 gal. approx.




ENCHANTMENT 9.21 - NIV06  
4,000 gal. approx.



ENCHANTMENT 9.24 - NIV06  
4,800 gal. approx.

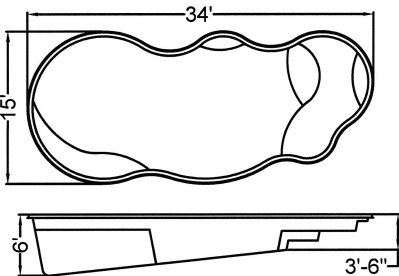

FIJI - FJI  
12,000 gal. approx.

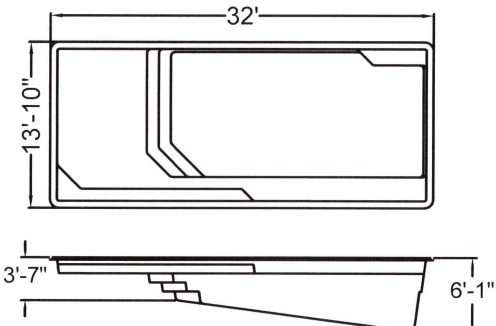

APOLLO 14 - CR14  
7,700 gal. approx.


NOTES

Latham Pool Products Inc.  
DBA Latham Grand, Latham Select  
Viking Pool, Blue Hawaiian Pools, Trilogy Pools  
ICC Evaluation Report Number (ESR-2014)
















Latham, NY Phone: (800) 833-3800  
Jane Lew, WV Phone: (304) 884-6954 Fax: (304) 884-7198  
Midland, TX Phone: (432) 561-9933 Fax: (432) 561-9934  
Williams, CA Phone: (530) 473-5319 Fax: (530) 473-5393  
Zephyrhills, FL Phone: (813) 783-7439 Fax: (813) 783-7214

Reviewed by:  
Donald R. Poindexter, PE  
Florida Lic. No. 64901  
4119 Trinity Dr Santa Rosa CA 95405  
Phone 707-494-8761

Seal:

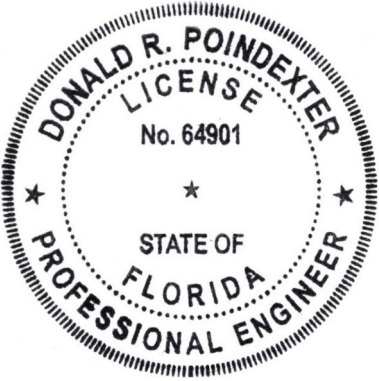

Length, width and depth may vary up to 3% - all dimensions are to outside edge of coping, measured from parallel lines.

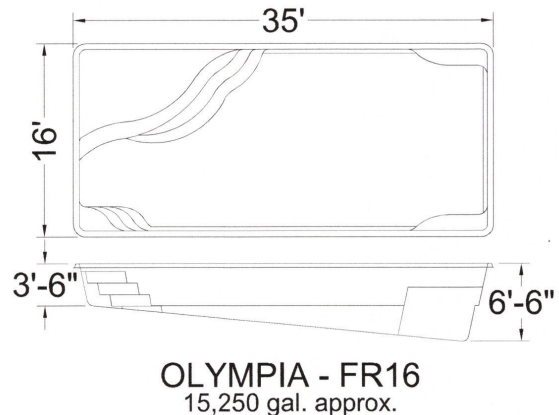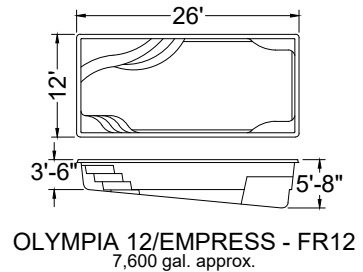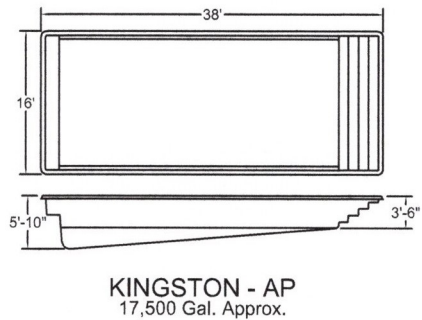

NOTES


**Latham Pool Products Inc.**  
DBA Latham Grand, Latham Select  
Viking Pool, Blue Hawaiian Pools, Trilogy Pools  
ICC Evaluation Report Number (ESR-2014)

Latham, NY Phone: (800) 833-3800  
Jane Lew, WV Phone: (304) 884-6954 Fax: (304) 884-7198  
Midland, TX Phone: (432) 561-9933 Fax: (432) 561-9934  
Williams, CA Phone: (530) 473-5319 Fax: (530) 473-5393  
Zephyrhills, FL Phone: (813) 783-7439 Fax: (813) 783-7214

Reviewed by:

Donald R. Poindexter, PE  
Florida Lic. No. 64901  
4119 Trinity Dr Santa Rosa CA 95405  
Phone 707-494-8761

Seal:

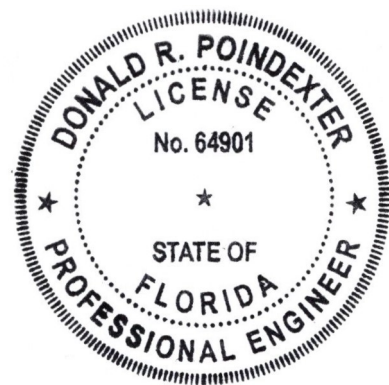


Page 5 of 8

Pool Models


C-005




Length, width and depth may vary up to 3% - all dimensions are to outside edge of coping, measured from parallel lines.




SUNSET BAY - BHSY  
10,000 Gal. Approx.




TUSCAN 14.30 - SYM09  
10,000 gal. approx.




TUSCAN 11.20 - SYM06  
5,000 gal. approx.

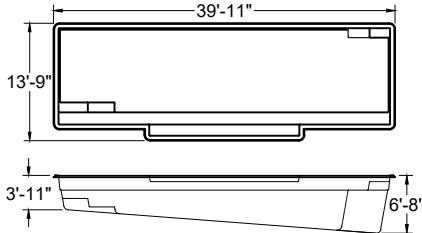


TUSCAN 14.40 - SYM12  
12,200 gal. approx.




TUSCAN 13.24 - SYM07  
6,100 gal. approx.



VALENCIA - ST  
10,000 gal. approx.



TUSCAN 14.27 - SYM08  
7,900 gal. approx.




VISTA ISLE - BHVI  
8,000 Gal. Approx.

NOTES


**Latham Pool Products Inc.**  
DBA Latham Grand, Latham Select  
Viking Pool, Blue Hawaiian Pools, Trilogy Pools  
ICC Evaluation Report Number (ESR-2014)

Latham, NY Phone: (800) 833-3800  
Jane Lew, WV Phone: (304) 884-6954 Fax: (304) 884-7198  
Midland, TX Phone: (432) 561-9933 Fax: (432) 561-9934  
Williams, CA Phone: (530) 473-5319 Fax: (530) 473-5393  
Zephyrhills, FL Phone: (813) 783-7439 Fax: (813) 783-7214


Reviewed by:  
Donald R. Poindexter, PE  
Florida Lic. No. 64901  
4119 Trinity Dr Santa Rosa CA 95405  
Phone 707-494-8761

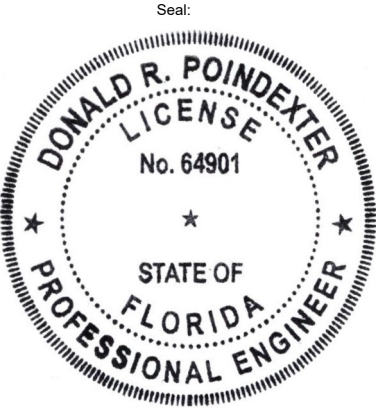


Length, width and depth may vary up to 3% - all dimensions are to outside edge of coping, measured from parallel lines.




PLACID - BOS  
475 Gal. Approx.




ROYAL - RY  
600 Gal. Approx.




REGAL - RG  
600 Gal. Approx.




TAHOE - LOS  
450 Gal. Approx.




SUPERIOR - CS  
700 Gal. Approx.




SHASTA - LRS  
420 Gal. Approx.




MYSTIC - M  
550 Gal. Approx.




PLACID SPILLWAY- BOSSW  
475 Gal. Approx.




ROYAL SPILLWAY- RSW  
600 Gal. Approx.




REGAL SPILLWAY- RGSW  
600 Gal. Approx.




TAHOE SPILLWAY- LOSSW  
450 Gal. Approx.




SUPERIOR SPILLWAY- CSSW  
700 Gal. Approx.




SHASTA SPILLWAY - LRSSW  
420 Gal. Approx.



MYSTIC SPILLWAY- MSW  
550 Gal. Approx.

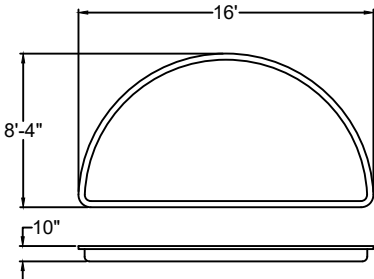

SEMI CIRCLE TANNING LEDGE - TSCT  
400 Gal. Approx.



HERMOSA - VFTL  
200 Gal. Approx.

NOTES


**Latham Pool Products Inc.**  
DBA Latham Grand, Latham Select  
Viking Pool, Blue Hawaiian Pools, Trilogy Pools  
ICC Evaluation Report Number (ESR-2014)

Latham, NY Phone: (800) 833-3800  
Jane Lew, WV Phone: (304) 884-8954 Fax: (304) 884-7198  
Midland, TX Phone: (432) 561-9933 Fax: (432) 561-9934  
Williams, CA Phone: (530) 473-5319 Fax: (530) 473-5393  
Zephyrhills, FL Phone: (813) 783-7439 Fax: (813) 783-7214

Reviewed by:

Donald R. Poindexter, PE  
Florida Lic. No. 64901  
4119 Trinity Dr Santa Rosa CA 95405  
Phone 707-494-8761

Seal:

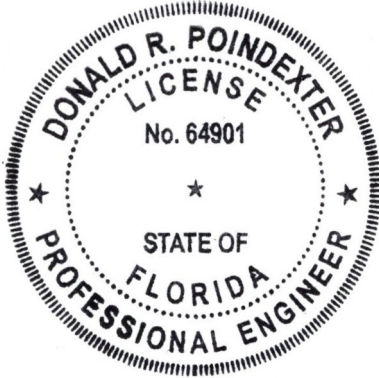











- GENERAL NOTES



- LEGEND

	FIBER OPTIC LIGHT		T-JOINT
	SKIMMER		3" MAIN DRAIN
	RETURN		3-WAY VALVE
	SPILLOVER		PLUMBING



1. Entrapment protection for suction outlets must be installed in accordance with ANSI/APSP/ICC-7, R4501.6.6. 2.
2. Components must provide a complete turnover of pool water in 12 hours or less, R4501.20.
3. Main suction outlet velocity must comply with ANSI/APSP/ICC 7, R4501.6.3. Water velocity shall not exceed 10 FPS for pressure piping and 8 FPS for suction piping. Water velocity in copper piping shall not exceed 8 FPS. (See General Notes, No. 8).
4. Inlet fittings for the return of recirculated water shall be one per 300 SF of surface area. Minimum distance between two required inlets is 10 ft., R4501.21.5.
5. Surface skimmers shall be one per 800 SF of surface area or fraction thereof, and each have a flow rate of at least 25 gallons per minute, R4501.21.2.
6. Pool electrical wiring, installation, bonding, and grounding shall comply with 2023 FBC-Building and Residential, 8th Ed. and NFPA 70, 2020 Ed., R4501.16.

A circular professional engineer seal for Donald R. Poindexter. The outer ring contains the text "DONALD R. POINDEXTER" at the top and "PROFESSIONAL ENGINEER" at the bottom, separated by three stars. The inner circle contains the text "LICENSE" at the top, "No. 64901" in the center, and "STATE OF FLORIDA" at the bottom, also separated by three stars. The seal is rendered in a high-contrast, black-and-white style.

**Latham Pool Products Inc.**  
DBA Latham Grand, Latham Select  
Viking Pool, Blue Hawaiian Pools, Trilogy Pools  
ICC Evaluation Report Number (ESR-2014)

Latham, NY Phone: (800) 833-3800  
Jane Lew, WV Phone: (304) 884-6954 Fax: (304) 884-7198  
Midland, TX Phone: (432) 561-9933 Fax: (432) 561-9934  
Williams, CA Phone: (530) 473-5319 Fax: (530) 473-5393  
Zephyrhills, FL Phone: (813) 783-7439 Fax: (813) 783-7214