

OTHER

79 5/16"

MAX

BLANK TOP
4-PANEL

OTHER

79 3/16"

MAX

SL-10

PD-1

PD-2

PD-18

PD-19










PD-35

PD-36

43

PD-43A

PD-43B



SL-25

SL-55

SL-30B

SL-40

SL-90A

SL-90B

SL-90C

SL-30B

SL-30C

SL-70

SL-80

PD-10

PD-11

PD-12

PD-13

PD-14

PD-15

PD-16

PD-17

PD-27

PD-28

PD-29






















PD-30

PD-31

PD-32

PD-33

PD-34




APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE JUN 05 2000
BY Manuel S. Reyes
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-0314.24



LIMITS: UNLESS NOTED, FRAC. : DEC. : ANG. :	
EXTENSIONS: UNLESS NOTED, STD. COMPL. 10.5	
ENGINEER:	
DR. BY J.D.	DATE 1/15/01
PREMDDOR ENTRY SYSTEMS	
911 E. JEFFERSON	
PITTSBURG, KS 66762	
31-1029-EW-1	
SHEET 6 OF 6	

REVISIONS	DATE	BY
PART NAME: PREMDDOR DOOR OPTIONS		
SCALE:		


OTHER DOOR CONFIGURATIONS

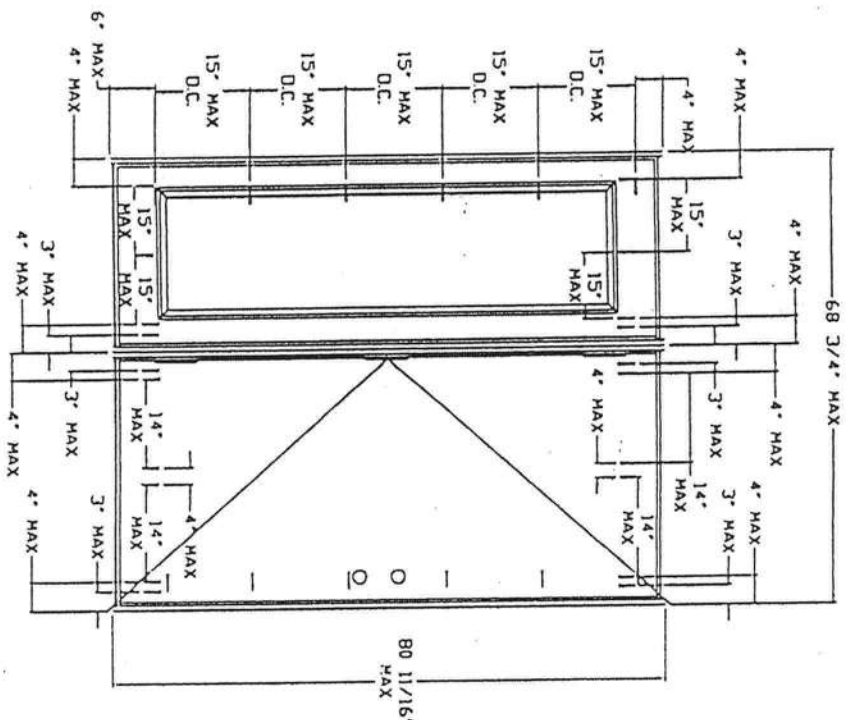

OX

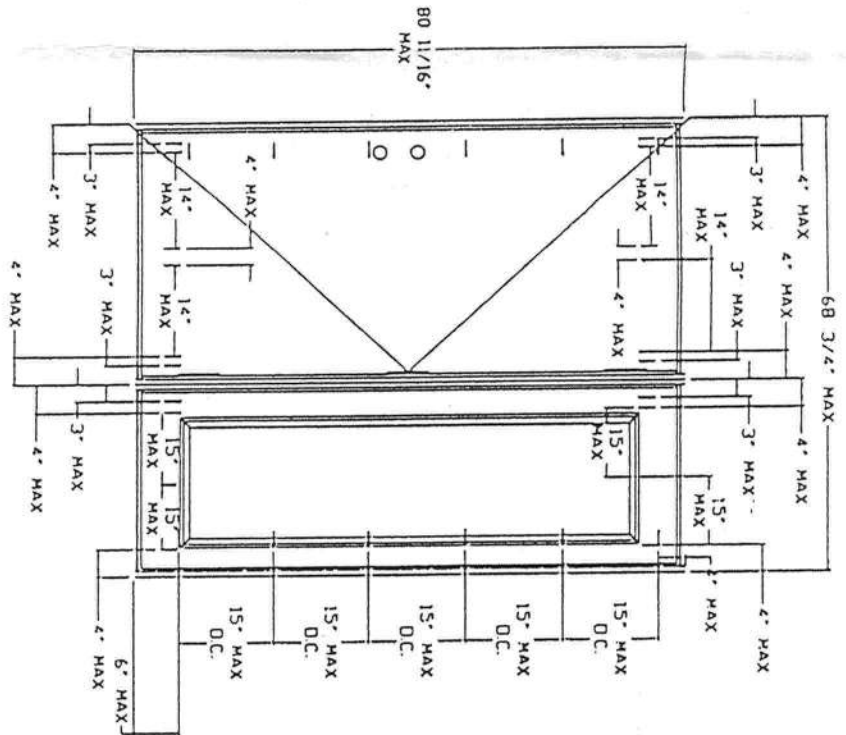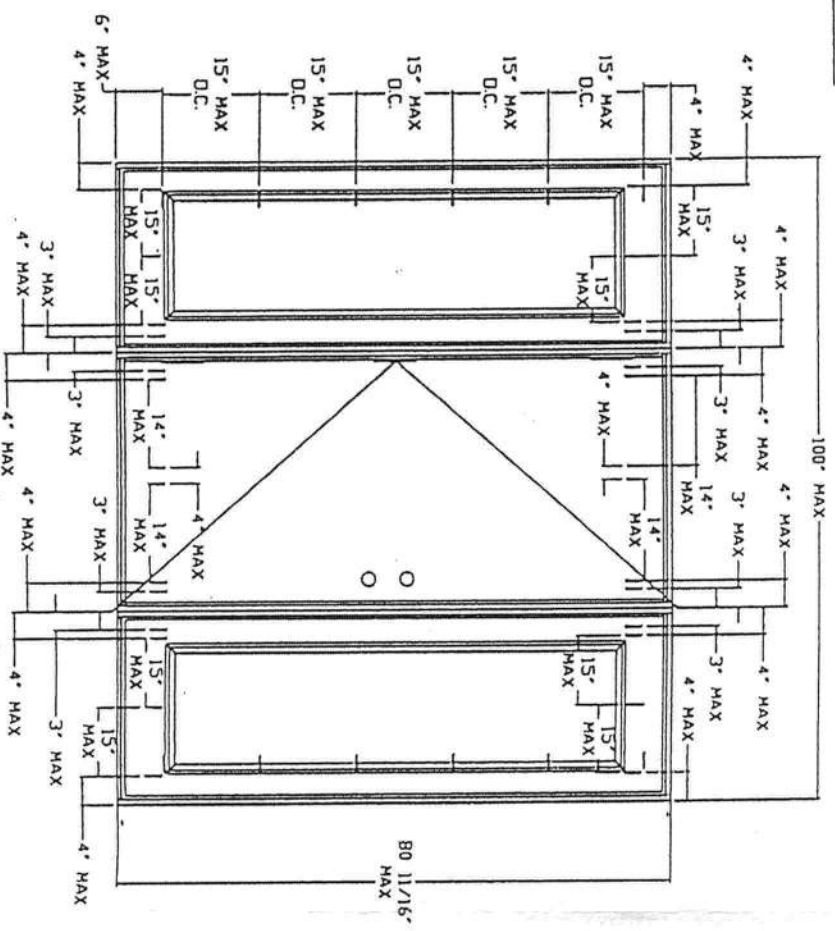


XO

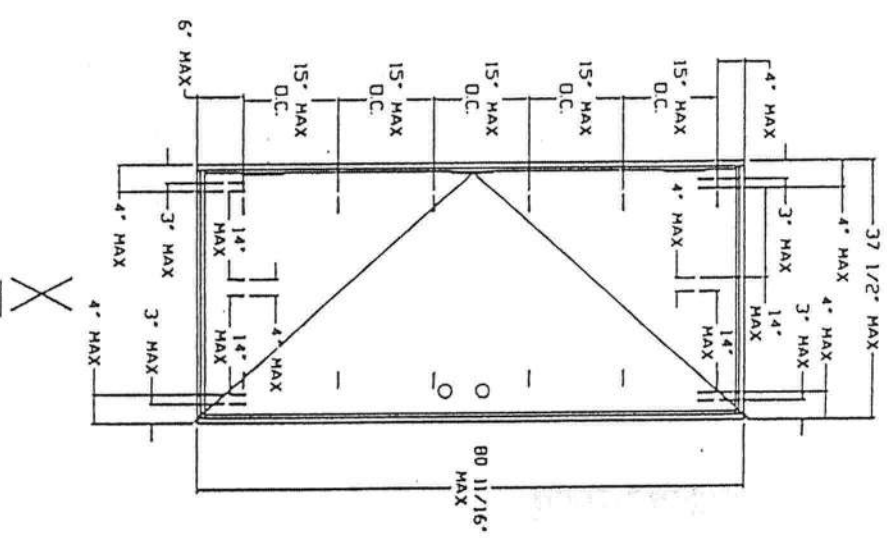

X

AS SHOWN AS COMPETING WITH THE
SOUTH FIRM BUILDING CODE
DATE **JUN 05 2001**
BY *Maureen Sullivan*
PROJECT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-0314.21

LIMITS: UNLESS NOTED, FRAC. : DEC. : ANG. :		LIR. : PART NAME:		REVISIONS		DATE		BY	
EXTENSIONS: UNLESS NOTED, STD. COMPL. 100%.		DATE 1-11-01		SCALE:		31-1020-EW-C		SHEET 5 OF 6	
ENGINEER:		DR. BY J.D.		REVISION LETTER					
PREMDOR ENTRY SYSTEMS									
911 C. JEFFERSON									
PITTSBURG, KS 66762									

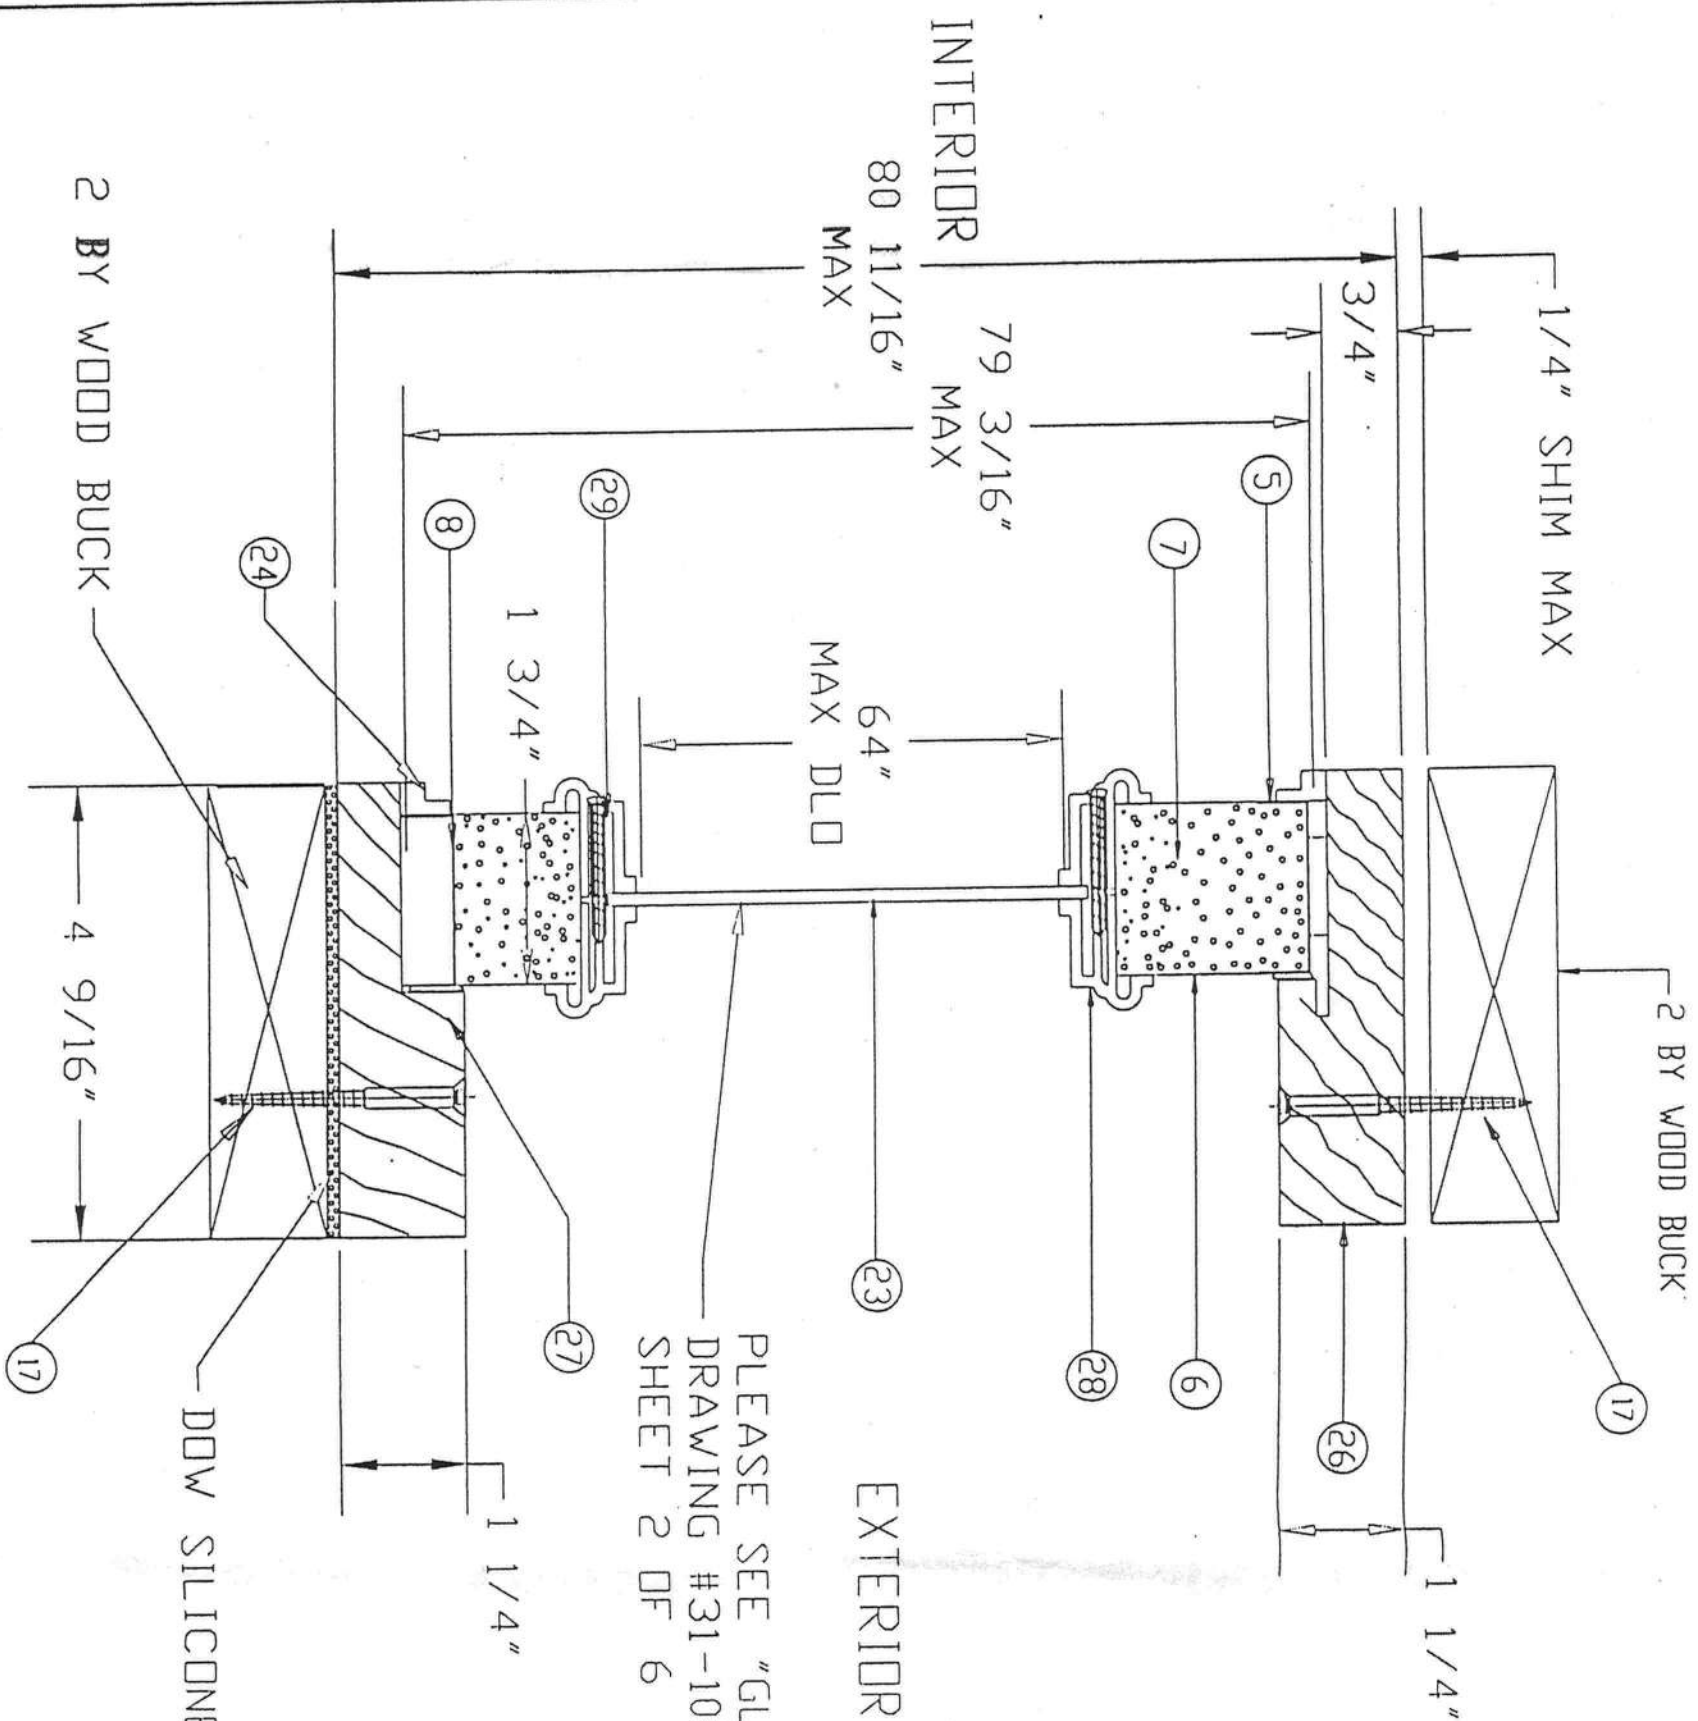

PLEASE SEE "GLAZING DETAIL"
DRAWING #31-1028-EW-D
SHEET 2 OF 6

SECTION C-C

APPROVED AS COMPLYING WITH THE
SCOUT BUILDING CODE
DATE JUN 05 2007
BY *Matthew J. Smith*
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-0314.29

UNITS: UNLESS NOTED, FRAC. :	DEC. :	ANG. :
EXTRUSIONS: UNLESS NOTED, STD. COMPL. TOL'S.		
ENGINEER:		
DR. BY R.S.	DATE 7-29-97	
PART NAME: ENTRY WOOD EDGE Sidelite (C-C)		
SCALE:		
D	DADE COUNTY MODIFICATIONS	1/11/01 JD
C	MATERIAL WAS POLYSTYRENE	6-2-99 RS
B	ADDED PAGE 5 (DOOR OPTIONS)	10-1-98 RS
A	ADD SCREWS TO LITE FRAME & MATERIAL LIST	12-18-97 R.S.
LR	REVISIONS	DATE BY

PREMDOR ENTRY SYSTEMS
911 E. JEFFERSON
PITTSBURG, KS. 66762


31-1028-EW-D
SHEET 4 OF 6

REVISION LETTER D

MATERIALS LIST

ITEM NO.	DESCRIPTION	PART NUMBER	COMMENTS
1	WOOD HEAD JAMB	EW-14	1 1/4" X 4 9/16" MIL. TO BE PINE OR EQUIVALENT
2	COMPRESSION WEATHERSTRIP	EW-25	LOCKSCREEN BRAND LOCKSEAL 9650 (BRONZE)
3	ALUMINUM ASTRAGAL	EW-12	PREMDOR BRAND OR EQUIVALENT - 5/8" ALUMINUM ASTRAGAL
4	ALUMINUM-BUMPER THRESHOLD	EW-15	PREMDOR BRAND OR EQUIVALENT - 1 1/4" X 4 9/16"
5	TOP CHANNEL	EW-08	PREMDOR BRAND - 1 11/16" - 20 GA STEEL
6	STEEL SKIN	26 ga. (40) 1.004 - .000	MAX FIELD STRESS 15,000 PSI MIN THICKNESS PER SECTION 15.000
7	POLYURETHANE FOAM CORE	BASF FOAM - DENSITY 2.0 TO 2.5 lbs./ft ³	
8	BOTTOM CHANNEL	EW-07	PREMDOR BRAND - 1 11/16" - 20 GA STEEL
9	WOOD LOCK BLOCK	EW-09	4" X 9 1/2" MIL. TO BE PINE OR EQUIVALENT
10	STRIKE STILE	EW-06	15/16" X 1 11/16" MIL. TO BE PINE OR EQUIVALENT
11	HINGE STILE	EW-05	15/16" X 1 11/16" MIL. TO BE PINE OR EQUIVALENT
12	LOCK PREP FILLER PLATE	EW-10	PREMDOR BRAND - .050" THICK - MIL. TO BE POLYETHYLENE
13	4"x4" HINGE	EW-16	HAGER BRAND HINGE OR EQUIVALENT - .097 THICK (STEEL)
14	WOOD HINGE JAMB	EW-13	1 1/4" X 4 9/16" MIL. TO BE PINE OR EQUIVALENT
15	#10 X 3/4" F.H.W.S.		(4) SCREWS PER HINGE INTO DOOR
16	#10 X 2" F.H.W.S.		(5) SCREWS THROUGH HINGE JAMB INTO SIDELITE JAMB, 8" DOWN FROM TOP, MAX 18" O.C. THEREAFTER (10) SCREWS THROUGH STRIKE JAMB INTO SIDELITE JAMB, 4" DOWN FROM TOP, MAX 8" O.C. THEREAFTER (6) SCREWS THROUGH EACH SIDELITE JAMB INTO SIDELITE, 4" DOWN FROM TOP, MAX 15" O.C. THEREAFTER
17	#10 F.H.W.S. V/MINIMUM 1 1/2" EMBEDMENT OR 3/16" MIN. TABS ONS V/MINIMUM 1 1/2" EMBEDMENT		REFER TO ELEVATION VIEW, FOR # OF SCREWS USED AND LOCATIONS
18	#10 X 3/4" F.H.W.S.		(2) SCREWS PER HINGE INTO JAMB
19	#8 X 2" F.H.W.S.		(2) SCREWS AT EACH STRIKE PLATE
20	LOCKSET		KWIKSET BRAND 200 LOCK OR HARLOC BRAND 100 LOCK
21	#10 X 1 3/4" F.H.W.S.		(2) SCREWS PER HINGE INTO JAMB
22	WOOD SIDELITE JAMB	EW-19	1 1/4" X 4 9/16" MIL. TO BE PINE OR EQUIVALENT
23	22" X 64" SINGLE PANEL GLASS	EW-20	TEMPERED GLASS IN POLYPROPYLENE FRAME - DC-1643 - (DDL-2) 1/8" CLEAR TEMPERED GLASS
24	SIDELITE TRIM (WOOD)	EW-21	5/16" X 1 1/2" MIL. TO BE PINE OR EQUIVALENT
25	WOOD CASING	EW-22	1/8" X 1" MIL. TO BE PINE OR EQUIVALENT - ITEMS ARE MOLDINGS USED FOR "SIDE BY SIDE JAMBS" AS MULLIONS
26	WOOD SIDELITE HEAD JAMB	EW-23	1 1/4" X 4 9/16" MIL. TO BE PINE OR EQUIVALENT
27	WOOD SIDELITE BASE	EW-24	1 1/4" X 4 9/16" MIL. TO BE PINE OR EQUIVALENT
28	POLYPROPYLENE LITE FRAME	DC-1643, DDL-2	HP Polypropylene by DDL
29	#6 X 1 1/2" PAN HEAD SCREWS		SCREW SPACING TO BE 3" IN FROM EACH CORNER AND NOT 18" PER FRAME TO EXCEED 14" O.C. THEREAFTER.
30	SIDELITE STILES	EW-26	15/16" X 1 11/16" MIL. TO BE PINE OR EQUIVALENT
31	PIN NAIL		3/4" LONG NAIL, 4" IN FROM END, MAX 8" O.C. THEREAFTER, USED ON MULLIONS AND TRIM

DOW SILICONE #995




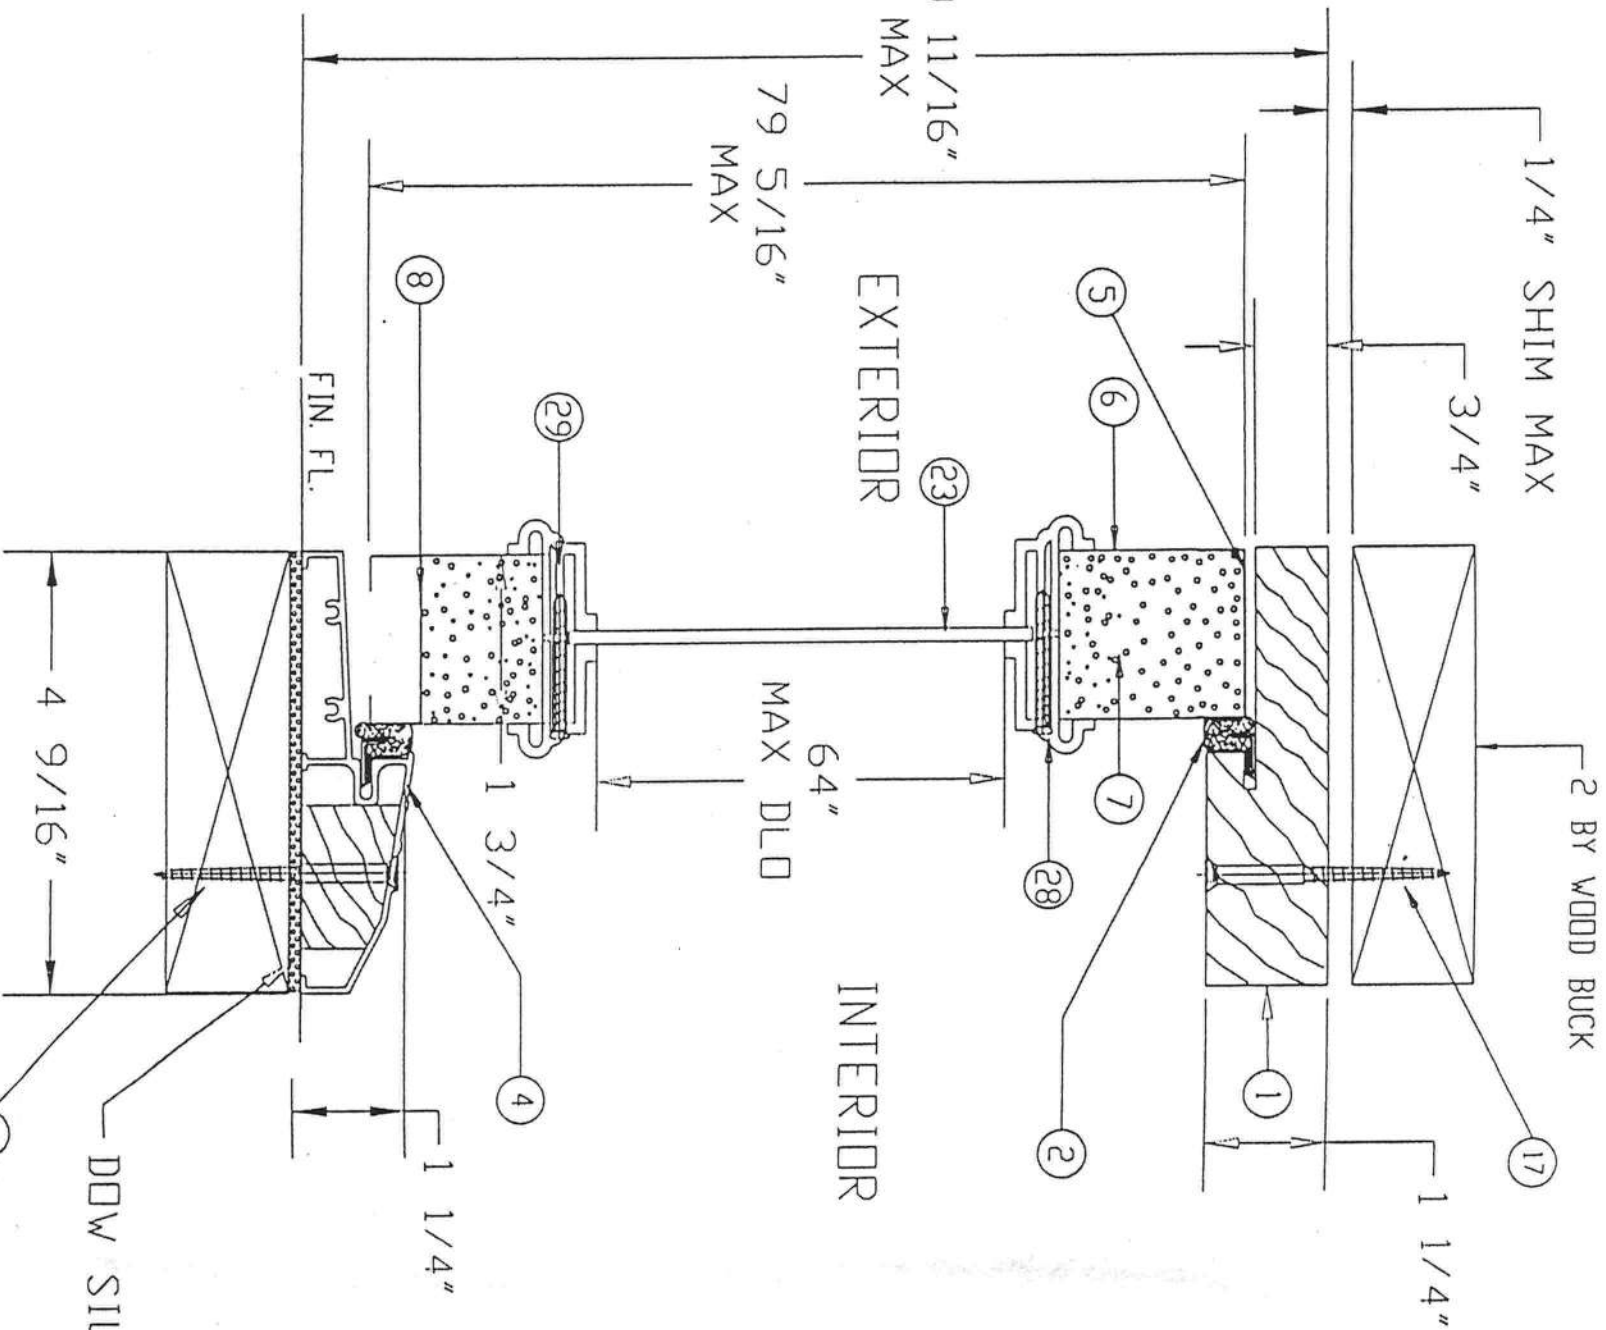


SECTION B-B

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE JUN 05 2001
BY *Jefferson*
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-0344.29

LIMITS: UNLESS NOTED, FRAC. :	DEC :	ANG. :	B :	DADE COUNTY MODIFICATIONS	1/11/01	JD
EXTRUSIONS: UNLESS NOTED, STD. COMPL. TOL'S.			A :	ADDED PAGE 5 (DOOR OPTIONS)	10-1-98	RS
ENGINEER:			LIR :	REVISIONS	DATE	BY
DR. BY R.S.	DATE 7-29-97		PART NAME: ENERGY WOOD EDGE DOOR (B-B)	SCALE:		
PREMDOR ENTRY SYSTEMS				31-1028-EW-D		
911 E. JEFFERSON PITTSBURG, KS. 66762				SHEET 3 OF 6		
				REVISION LETTER B		

OTHER DOOR CONFIGURATIONS

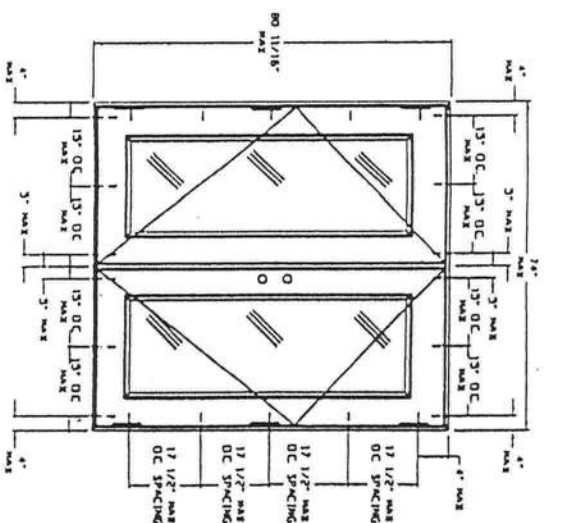
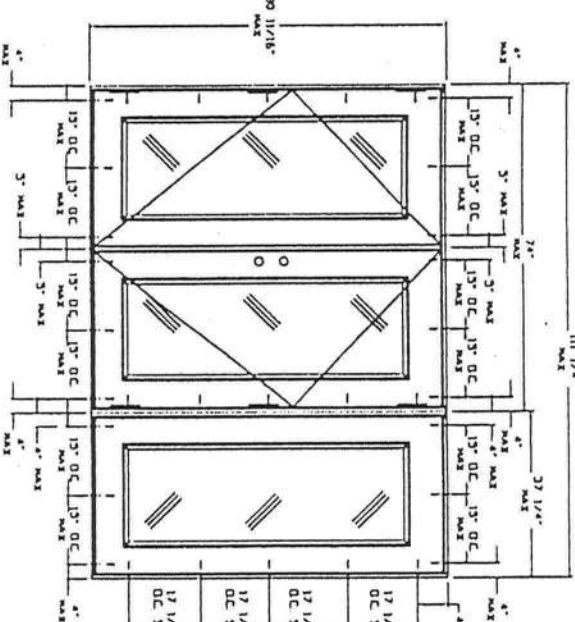
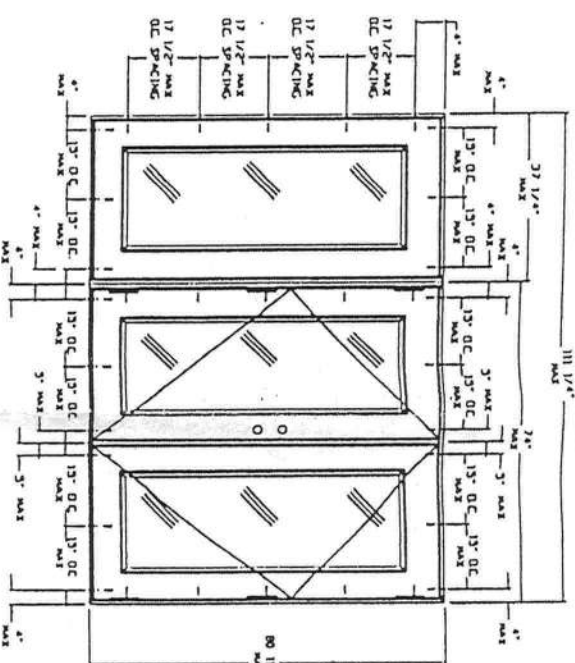
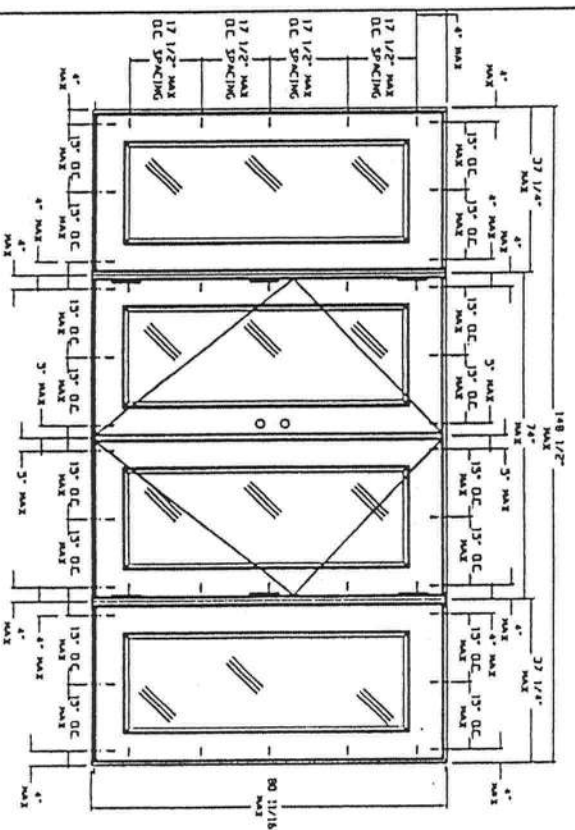


XXXX

XXX

XXD

XX

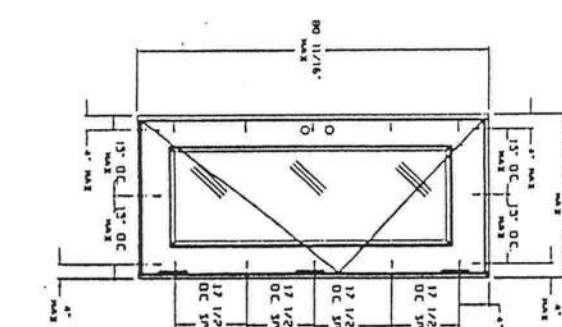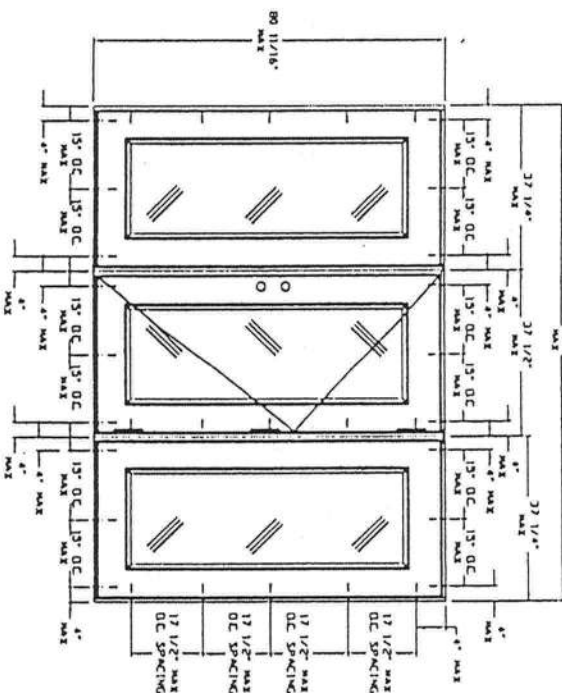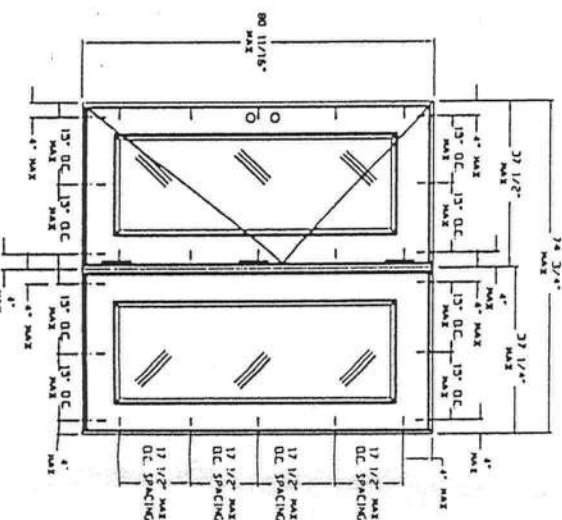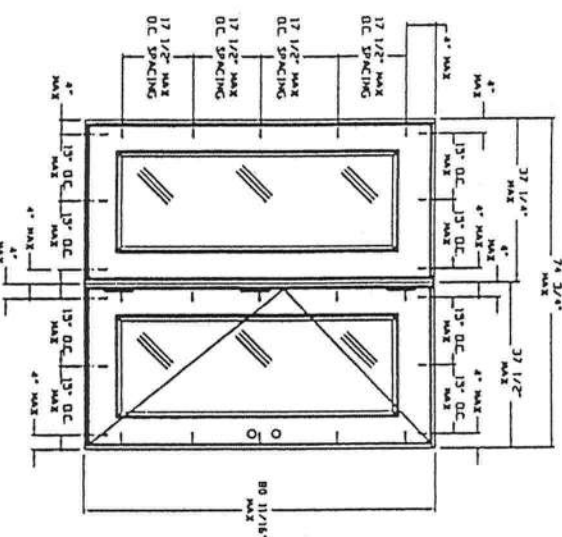

DX

XD


DXD

X

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE JUN 05 2004
BY Maurice
PROJECT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
PITTSBURG, KS 66762
ACCEPTANCE NO. 01-0314.29

LIMITS: UNLESS NOTED, FRAC. : DEC : ANG. :	
EXTENSIONS: UNLESS NOTED, STD. COMPL. 102.3.	
ENGINEER:	
DR. BY J.D.	DATE 1-11-01
PREMIDOR ENTRY SYSTEMS	
911 E. JEFFERSON	
PITTSBURG, KS 66762	
REVISIONS	DATE BY
SCALE:	
31-1028-EW-0	
SHEET 5 OF 6	
REVISION LETTER	

110 x 1 1/2" MINIMUM EMBEDMENT
(14) PER HEAD & SILL, (6) PER JAMB
ALTERNATE: 3/16" PFH TAPCONS
w/ 1 1/2" MINIMUM EMBEDMENT



DESIGN PRESSURE RATINGS		
	WHERE WATER INFILTRATION REQUIREMENT IS NEEDED *	WHERE WATER INFILTRATION REQUIREMENT IS NOT NEEDED
Positive	NOT APPROVED *	+67.0 psf
Negative	NOT APPROVED *	-67.0 psf

* UNITS SHALL BE INSTALLED ONLY AT LOCATIONS PROTECTED BY A CANOPY OR OVERHANG SUCH THAT THE ANGLE BETWEEN THE EDGE OF CANOPY OR OVERHANG TO SILL IS LESS THAN 45 DEGREES. UNLESS UNIT IS INSTALLED IN NON-HABITABLE AREAS WHERE THE UNIT AND THE AREA ARE DESIGNED TO ACCEPT WATER INFILTRATION.

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE JUN 05 2001
BY Manuel Torres
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-0314.18

C	DATE COUNTY MODIFICATIONS	1/25/11	JD
B	ADD RATINGS & REDRAWN	0-26-10	RS
A	ADD SCREWS FROM JAMB TO T-HOLD	11-11-07	RS
A	ADD NOTE 4 FOR STAPLES	11-11-07	RS
12	REVISIONS	DATE	BY

LIMITS: UNLESS NOTED, FRAC : DEC : AND
 EXTENSIONS: UNLESS NOTED, STD COM. 1023
 ENGINEER:
 DE BY RS DATE 4-9-97
 PREMDOR ENTRY SYSTEMS
 910 E. JEFFERSON
 PITTSBURGH, PA 15222

31-1020-EW-I
SHEET 1 OF 6

REVISION LETTER