


[illegible]

AR0007005

REVISIONS	Mar. 24th, 2023

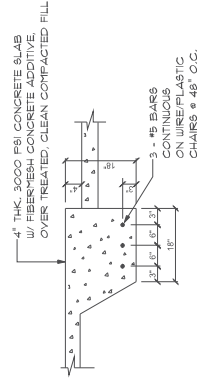

NOT TO SCALE

SCALE: NONE

GENERAL TRUSS NOTES:


- [illegible]

ROOFING METALS for FLASHING/ROOFING			
MINIMUM THICKNESS REQUIREMENTS			
MATERIAL	MINIMUM THICKNESS (in.)	GAGE	WEIGHT (oz.)
COPPER			16
ALUMINUM	0.024		
STAINLESS STEEL		28	
GALVANIZED STEEL	0.0175	36 (ZINC COATED 660)	
ZINC ALLOY	0.021		40
PAINTED TERNE			50


SCALE: NONE

(

AR0007005




SCALE: NONE

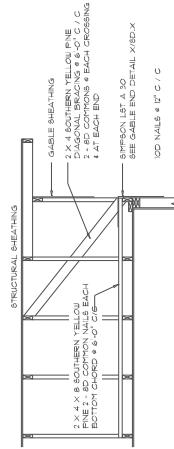


END WALL BRACING FOR
CEILING DIAPHRAGM

NTS
(ALTERNATIVE TO BALLOON FRAMING)
NOTE: ALL WOOD TO BE NUMBER 2 GRADE SOUTHERN YELLOW PINE

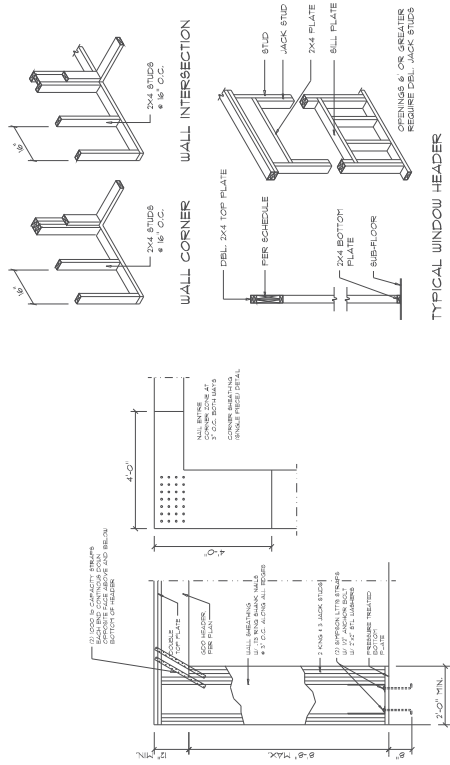


Garage Side Wall Details

SCALE: 1/2" = 1'-0"

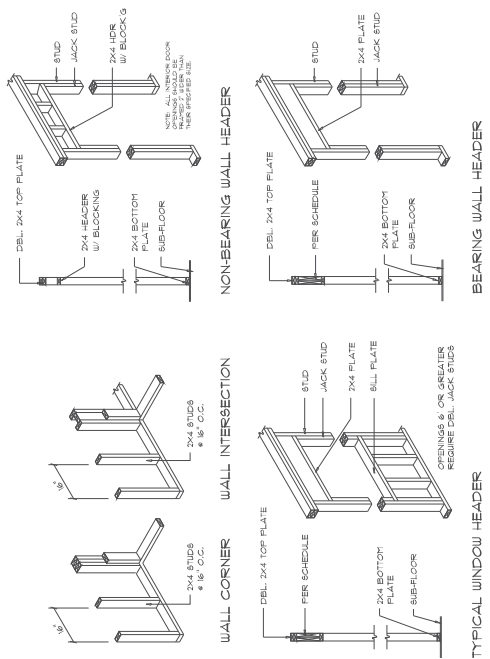


Wall Framing/Header Details

SCALE: NONE

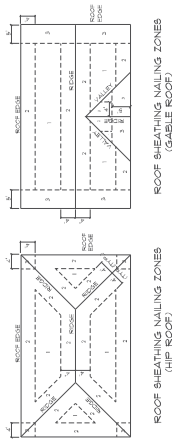


Roof Nail Pattern DET.

SCALE: NONE



Girder Truss Column DET.


SCALE: 1/2" = 1'-0"

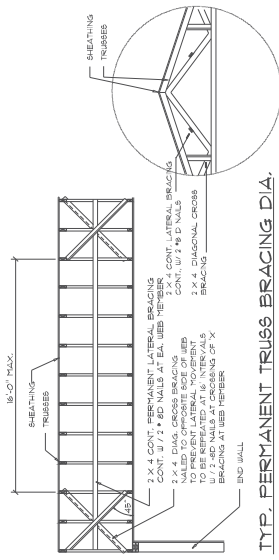

TYP. PERMANENT TRUSS BRACING DIA.

NTS

NOTE: ALL WOOD TO BE NUMBER 2 GRADE SOUTHERN YELLOW PINE

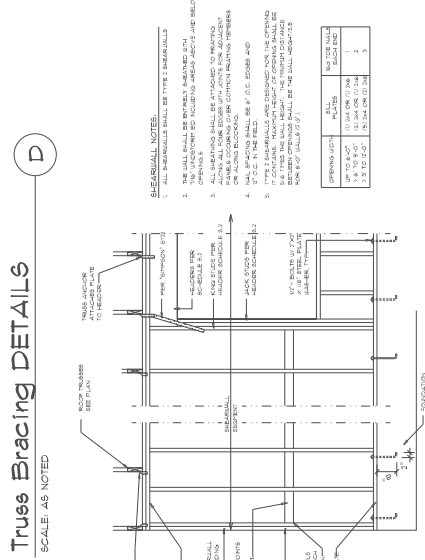

Truss Bracing Details

SCALE: AS NOTED

REMARKS (NOTES):

ALL SUBWALLS SHALL BE TYPE 2 SUBWALLS.

THE WALL SHALL BE ENTIRELY GRADED UP TO THE UNDISTURBED FILLING AREA ABOVE AND BELOW OPENING.

ALL BRACING SHALL BE ATTACHED TO FRAMING OR TO THE WALL. BRACING SHALL BE LOCATED WITHIN PANELS OCCURRING OVER OTHER COMMON BRACING MEMBERS OR ALONG BRACING.

NAIL SPACING SHALL BE 6" O.C. EDGES AND 12" O.C. IN THE FIELD.

TYPE 2 SUBWALLS ARE DESIGNED FOR THE OPENING IT CONTAINS. MINIMUM HEIGHT OF OPENING SHALL BE 5 TIMES THE WALL HEIGHT, THE MINIMUM HEIGHT BETWEEN OPENINGS SHALL BE THE WALL HEIGHT + 2.5

OPENING WIDTH	ALL PLATES	MAX TCE NAILS EACH END
UP TO 6'-0"	(1) 2x4 OR (1) 2x6	1
> 6' TO 9'-0"	(2) 2x4 OR (1) 2x6	2
> 9' TO 12'-0"	(3) 2x4 OR (2) 2x6	3

Shear Wall Details

SCALE: NONE

A SOLID MEMBER OF EQUAL OR GREATER SIZE THAN MULTIPLE MEMBERS MAY BE USED

REVISIONS	Mar. 24th, 2023
-----------	-----------------

LOT 3 Spec House

**NICHOLAS
GEISLER
ARCHITECT**
NICKEL CENTER
LAKE CITY, FL 32055

SHEET NUMBER
S.4
OF 4 SHEETS

AR0007005